



Basic Rules in E2E Testing

- Let your test fail
- Use resilient selectors
 - o data-*
 - text
 - o role
- Multiple Matchers are allowed
- Stay with locator, not do direct fetching



test: useful methods

- test.describe
 - Suite: Defines a collection of tests
 - Can apply generic commands on test cases
- test.only
 - Runs only this test (relative to the suite)
- test.skip
 - Doesn't run this test
- beforeEach, beforeAll
 - o setup Code
- test.use
 - o override some configuration values



Playwright's workhorse: page.locator

- Returns a promise of a DOM query
- Chainable for actions
- Argument for assertions (expect)
- Different selectors (not just CSS)
 - Text selectors
 - Data-testid
 - Location-based
 - XPath
 - React/Vue experimental
- Nestable
- Shadow DOM "piercing"



Text selectors

```
await page.locator("text=Welcome to Eternal").waitFor(); // partial match
await page.locator("text='Welcome to Eternal'").waitFor(); // exact match
await page.locator("'Welcome to Eternal'").waitFor(); // exact match
await page.locator("*", { hasText: "Welcome to Eternal" }).waitFor(); // fails on strict mode
await page.locator("h2", { hasText: "Welcome to Eternal" }).waitFor(); // right approach
await page.locator("h2:has-text('Welcome to Eternal')").waitFor(); // 
await page.locator(":has-text('Welcome to Eternal')").waitFor(); //
```



Selectors via data-testid

```
await page.locator("data-testid=greeting").waitFor();

await page.locator("[data-testid=greeting]").waitFor();

await page.locator("css=[data-testid=greeting]").waitFor();


await page.getByTestId("greeting").waitFor();
```




Engines, combinations & nested selection

page.locator("data-testid=holiday-card");



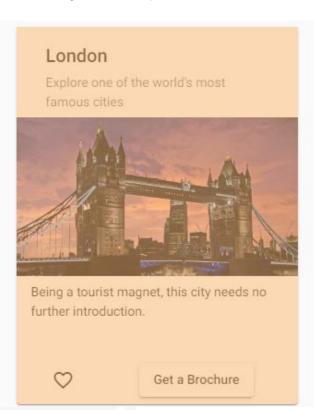

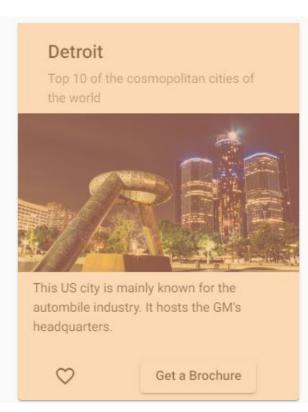

page.locator("data-testid=holiday-card >> text=Vienna");



London

Explore one of the world's most famous cities



Being a tourist magnet, this city needs no further introduction.



Get a Brochure

Detroit

Top 10 of the cosmopolitan cities of the world



This US city is mainly known for the autombile industry. It hosts the GM's headquarters.



Get a Brochure



NSIDE KNOWLEDGE

page.locator("*data-testid=holiday-card >> text=Vienna");



Dive into the capital of the Habsburg empire



With a population of almost 2 million, Vienna is the second largest Germanspeaking city and breathes history in every

0

Get a Brochure

London

Explore one of the world's most famous cities



Being a tourist magnet, this city needs no further introduction.



Get a Brochure

Detroit

Top 10 of the cosmopolitan cities of the world



This US city is mainly known for the autombile industry. It hosts the GM's headquarters.



page.locator("data-testid=holiday-card", {hasText: "Vienna"});

Vienna / Wien With a population of almost 2 million, Vienna is the second largest Germanspeaking city and breathes history in every

Get a Brochure

London

Explore one of the world's most famous cities



Being a tourist magnet, this city needs no further introduction.



Get a Brochure

Detroit

Top 10 of the cosmopolitan cities of the world



This US city is mainly known for the autombile industry. It hosts the GM's headquarters.



page.locator("data-testid=holiday-card", { has: page.locator("text=Vienna") })



London

Explore one of the world's most famous cities



Being a tourist magnet, this city needs no further introduction.



Get a Brochure

Detroit

Top 10 of the cosmopolitan cities of the world




This US city is mainly known for the autombile industry. It hosts the GM's headquarters.



Going down - v1

page

- .locator("data-testid=holiday-card", { has: page.locator("text=Vienna") })
- .locator("data-testid=btn-brochure")

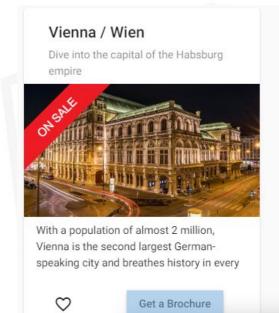



Explore one of the world's most famous cities



Being a tourist magnet, this city needs no further introduction.



Get a Brochure

Detroit

Top 10 of the cosmopolitan cities of the world




This US city is mainly known for the autombile industry. It hosts the GM's headquarters.





Going down - v2

page.locator("data-testid=btn-brochure >> nth=0")



London

Explore one of the world's most famous cities



Being a tourist magnet, this city needs no further introduction.



Get a Brochure

Detroit

Top 10 of the cosmopolitan cities of the world



This US city is mainly known for the autombile industry. It hosts the GM's headquarters.





Going down - v3 🏆

page

```
.locator(`data-testid=holiday-card`, {
  has: page.locator("mat-card-title", { hasText: "Vienna" })
})
.locator("data-testid=btn-brochure")
```



Dive into the capital of the Habsburg empire



With a population of almost 2 million, Vienna is the second largest Germanspeaking city and breathes history in every

Get a Brochure

London

Explore one of the world's most famous cities



Being a tourist magnet, this city needs no further introduction.



Get a Brochure

Detroit

Top 10 of the cosmopolitan cities of the world




This US city is mainly known for the autombile industry. It hosts the GM's headquarters.







Relative Navigation

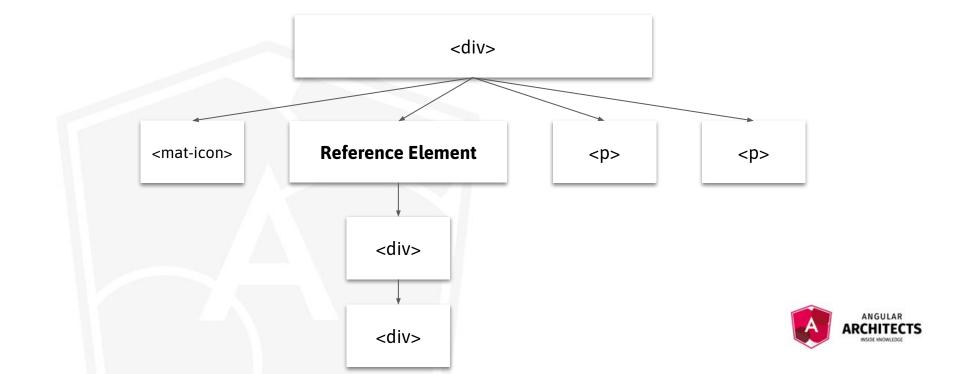


Relative Navigation: Direct Child data-testid=reference >> >div

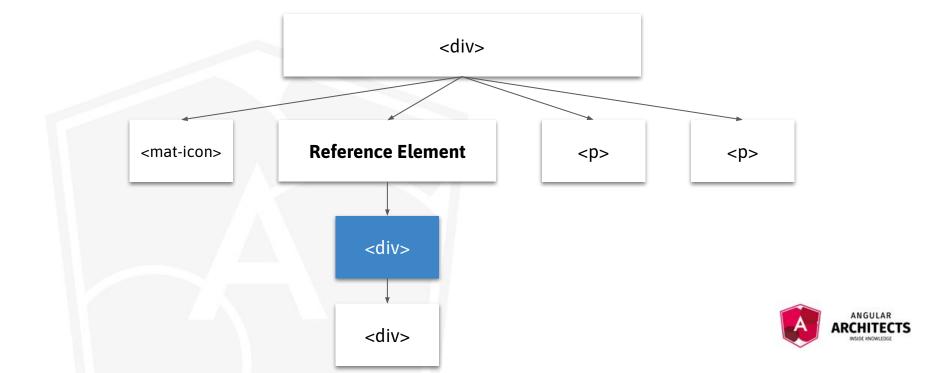


Relative Navigation: Parent data-testid=reference >> ...

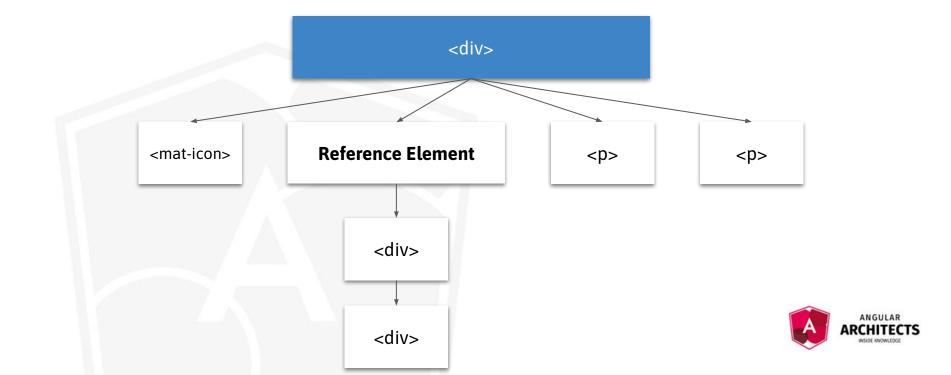

Relative Navigation: Adjacent (Right) Sibling [data-testid=reference] + p

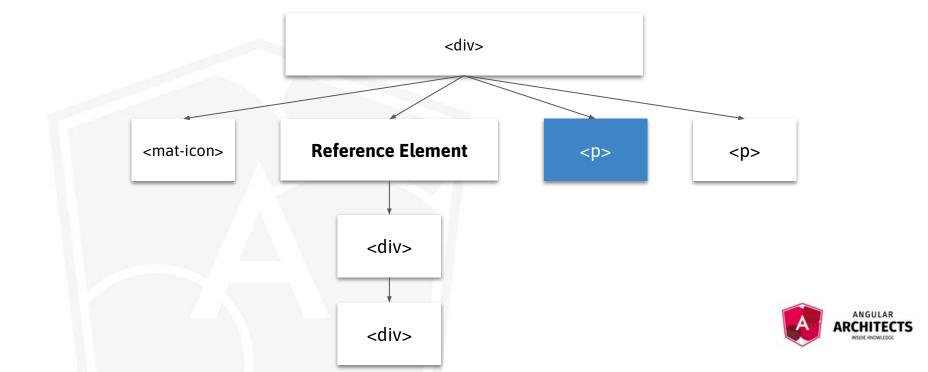

Relative Navigation: Sibling [data-testid=reference] ~ p

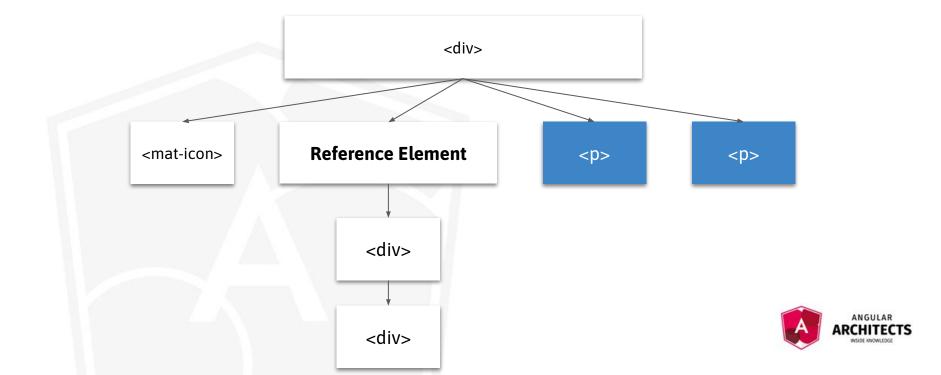

Relative Navigation: Preceding Sibling data-testid=reference >> .. > mat-icon

<div>

<div> **Reference Element** <mat-icon> > > <div>

Selector Strategies

DOM-Based

- id Attribute
 - Must be unique
 - Browser-internal meaning
 - Consensus not to use it
- CSS Classes
 - Should be used for Layout
 - Don't deal with functionality
- Text
 - o page.locator(text='')
 - Better to go with User-Facing Selectors
- data-testid
 - Best Practices
 - Recommended by Cypress

User-Facing

- Use text and/or roles
- Includes partially a11y
- "Testing Library Style"
 - No dependencies in Playwright
- Careful when text changes often
 - Fallback to data-testid




User-Facing Selectors

- 1. page.getByRole
- 2. page.getByLabel

- 3. page.getByPlaceholder
- 4. page.getByText
- 5. page.getByAltText
- 6. page.getByTitle
- 7. page.getByTestId



A11y Tooling

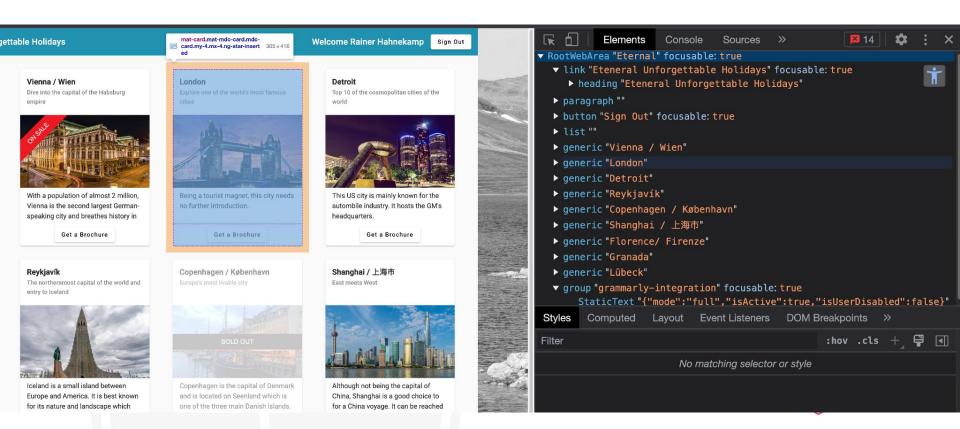

Examples

```
page.getByRole('link', { name: 'Holidays', exact: true })
.click();

page.getByRole('button', { name: /Save/ })
.click();

page.getByLabel(/Firenze/i);

page.getByLabel(/Latitia/)
.getByRole('link', { name: 'Edit Customer', exact: true });
```



Layout-specific tests

```
test("layout selectors", async ({ page }) => {
  await expect(
    page.locator("p:right-of(:has-text('Logout'))")
  ).not.toBeVisible();
  await expect(
    page.locator("p:left-of(:has-text('Logout'))")
  ).not.toBeVisible();
  await expect(page.locator("p:below(:has-text('Logout'))")).toContainText(
    "Welcome"
  );
});
```



Actions

- click
- fill
- waitFor
 - o can be used instead of matcher
- first
 - Required for strict mode



Actionability built-in

- Based on action, Playwright runs checks before the action
- Checks
 - Attached
 - Visible
 - Stable
 - Receive Events (no overlay)
 - Enabled
 - Editable



Assertions

await expect([locator]).[matcher]



Assertions 1/2

- Assertions are build-in (Part of Playwright)
- Apply matchers to element
 - Always use locator
 - Don't forget about the await
- Verify that element(s) can be found
 - use waitFor() instead expect



Assertions 2/2 - Common Matchers

- toBeVisible
- toHaveCount
- toHaveText
- toContainText
- not.[otherMatcher]

