
FRONT END DESIGN AND TESTING

NAME: K MAGDIEL JAINSON

REG. NO: 24MIC0041


OUTPUT:

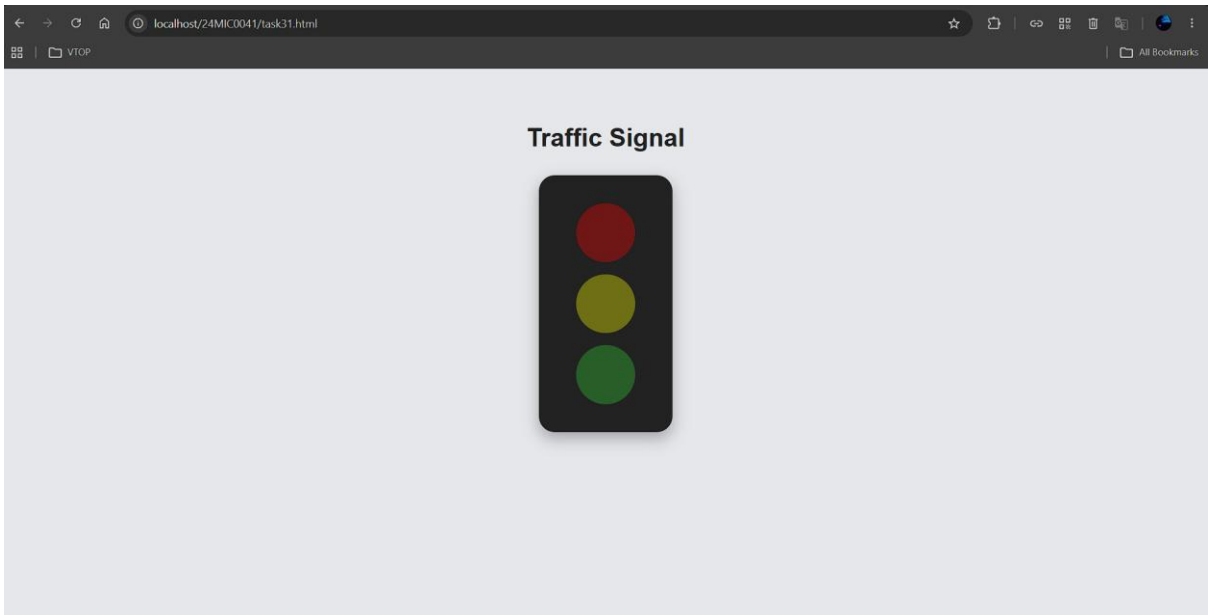


Onmouseover on each colors




localhost/24MIC0041/task31.html
VTOP
All Bookmarks
Traffic Signal
READY

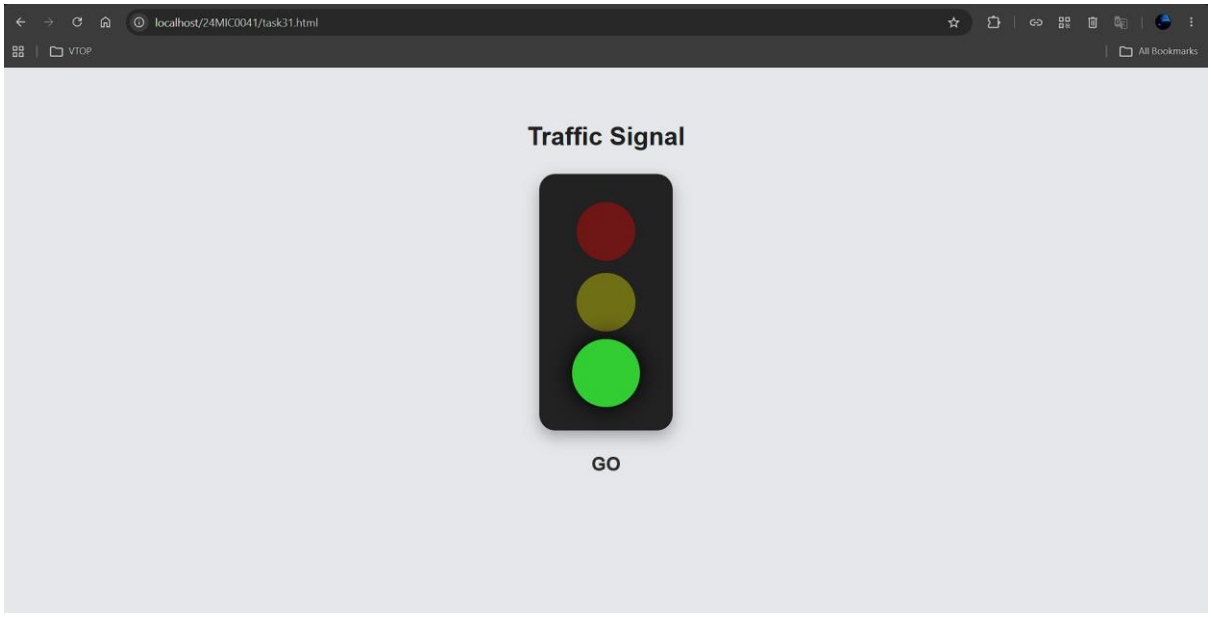
localhost/24MIC0041/task31.html
VTOP
All Bookmarks
Traffic Signal
GO

CODE:

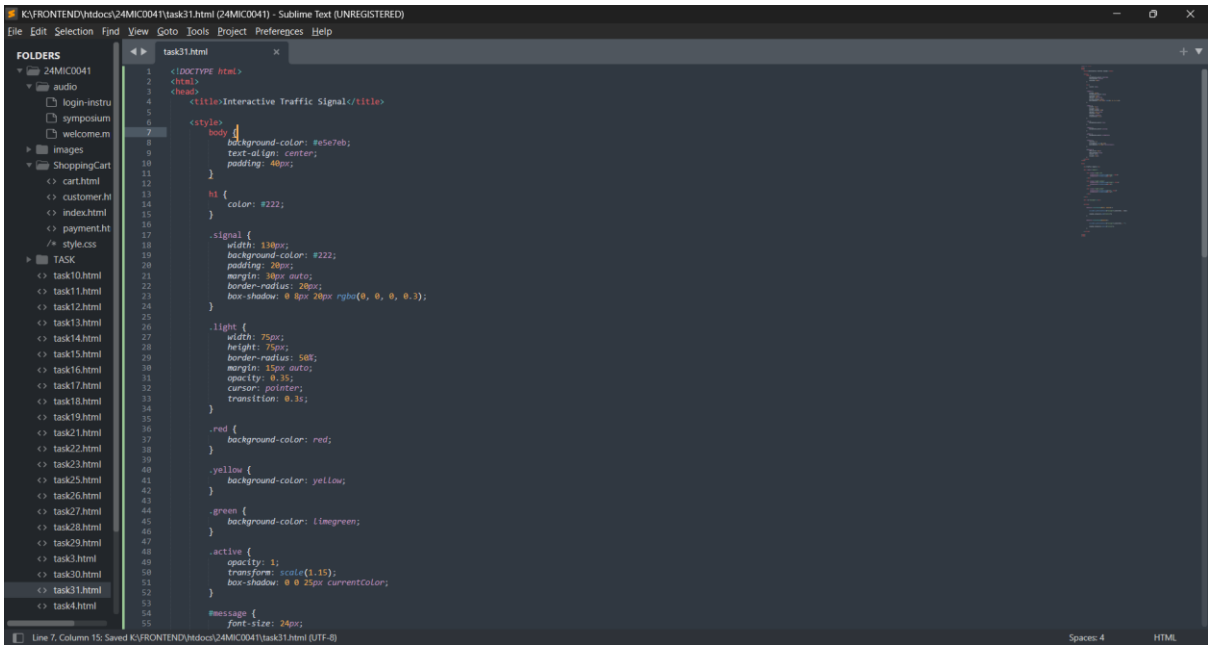

```
<!DOCTYPE html>
<html>
<head>
    <title>Interactive Traffic Signal</title>

    <style>
        body {
            background-color: #e5e7eb;
            text-align: center;
            padding: 40px;
        }

        h1 {
            color: #222;
        }

        .signal {
            width: 130px;
            background-color: #222;
            padding: 20px;
            margin: 30px auto;
            border-radius: 20px;
            box-shadow: 0 8px 20px rgba(0, 0, 0, 0.3);
        }

        .light {
            width: 75px;
            height: 75px;
            border-radius: 50%;
            margin: 15px auto;
            opacity: 0.35;
            cursor: pointer;
            transition: 0.3s;
        }


        .red {
            background-color: red;
        }

        .yellow {
            background-color: yellow;
        }

        .green {
            background-color: limegreen;
        }

        .active {
            opacity: 1;
            transform: scale(1.15);
            box-shadow: 0 0 25px currentColor;
        }

        #message {
            font-size: 24px;
```

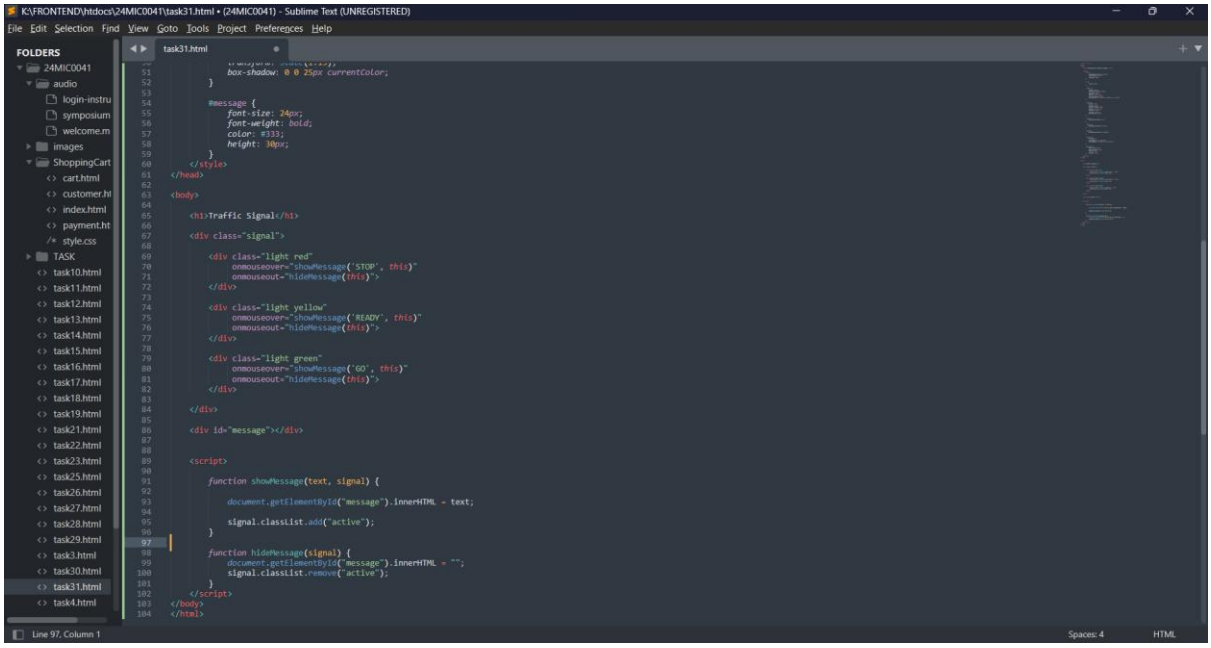

```
            box-shadow: 0 0 25px currentColor;
        }

        #message {
            font-size: 24px;
            font-weight: bold;
            color: #333;
            height: 30px;
        }
    </style>
</head>

<body>

    <h1>Traffic Signal</h1>

    <div class="signal">

        <div class="light red"
             onmouseover="showMessage('STOP', this)"
             onmouseout="hideMessage(this)">
        </div>

        <div class="light yellow"
             onmouseover="showMessage('READY', this)"
             onmouseout="hideMessage(this)">
        </div>

        <div class="light green"
             onmouseover="showMessage('GO', this)"
             onmouseout="hideMessage(this)">
        </div>

    </div>

    <div id="message"></div>


    <script>

        function showMessage(text, signal) {

            document.getElementById("message").innerHTML = text;

            signal.classList.add("active");
        }

        function hideMessage(signal) {
            document.getElementById("message").innerHTML = "";
            signal.classList.remove("active");
        }
    </script>
</body>
</html>
```