

Magensa RemoteService V3

EMVConfig / Key Programmer's Reference Manual

June 15, 2021

Document Number:
D998200481-10

REGISTERED TO ISO 9001:2015

INFORMATION IN THIS PUBLICATION IS SUBJECT TO CHANGE WITHOUT NOTICE AND MAY CONTAIN TECHNICAL INACCURACIES OR GRAPHICAL DISCREPANCIES. CHANGES OR IMPROVEMENTS MADE TO THIS PRODUCT WILL BE UPDATED IN THE NEXT PUBLICATION RELEASE. NO PART OF THIS DOCUMENT MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, FOR ANY PURPOSE, WITHOUT THE EXPRESS WRITTEN PERMISSION OF MAGTEK, INC.

MagTek®, MagnePrint®, and MagneSafe® are registered trademarks of MagTek, Inc.

Magensa™ is a trademark of MagTek, Inc.

DynaPro™ and DynaPro Mini™, are trademarks of MagTek, Inc.

ExpressCard 2000™ is a trademark of MagTek, Inc.

IPAD® is a trademark of MagTek, Inc.

IntelliStripe® is a registered trademark of MagTek, Inc.

AAMVA™ is a trademark of AAMVA.

American Express® and EXPRESSPAY FROM AMERICAN EXPRESS® are registered trademarks of American Express Marketing & Development Corp.

D-PAYMENT APPLICATION SPECIFICATION® is a registered trademark to Discover Financial Services CORPORATION

MasterCard® is a registered trademark and PayPass™ and Tap & Go™ are trademarks of MasterCard International Incorporated.

Visa® and Visa payWave® are registered trademarks of Visa International Service Association.

MAS-CON® is a registered trademark of Pancon Corporation.

Molex® is a registered trademark and PicoBlade™ is a trademark of Molex, its affiliates, related companies, licensors, and/or joint venture partners.

ANSI®, the ANSI logo, and numerous other identifiers containing "ANSI" are registered trademarks, service marks, and accreditation marks of the American National Standards Institute (ANSI).

ISO® is a registered trademark of the International Organization for Standardization.

UL™ and the UL logo are trademarks of UL LLC.

PCI Security Standards Council® is a registered trademark of the PCI Security Standards Council, LLC.

EMV® is a registered trademark in the U.S. and other countries and an unregistered trademark elsewhere.

The EMV trademark is owned by EMVCo, LLC. The Contactless Indicator mark, consisting of four graduating arcs, is a trademark owned by and used with permission of EMVCo, LLC.

The *Bluetooth*® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by MagTek is under license.

Google Play™ store, Google Wallet™ payment service, and Android™ platform are trademarks of Google Inc.

Apple Pay®, iPhone®, iPod®, Mac®, and OS X® are registered trademarks of Apple Inc., registered in the U.S. and other countries. iPad™ is a trademark of Apple, Inc. App Store™ is a service mark of Apple Inc., registered in the U.S. and other countries. IOS is a trademark or registered trademark of Cisco in the U.S. and other countries and is used by Apple Inc. under license.

Microsoft®, Windows®, and .NET® are registered trademarks of Microsoft Corporation.

All other system names and product names are the property of their respective owners.

Table 0-1 - Revisions

Rev Number	Date	Notes
10	June 2021	Initial Release. This version of document is compatible with RemoteServices V3 API version 1.0.0

Table of Contents

Table of Contents	4
1 Introduction	5
2 RemoteServices V3 Operations.....	6
2.1 /api/EmvConfig/token.....	6
2.1.1 HEADER PROPERTIES	6
2.1.2 INPUT PROPERTIES	6
2.1.3 OUTPUT PROPERTIES	6
2.2 /api/EmvConfig/transform	8
2.2.1 HEADER PROPERTIES	8
2.2.2 INPUT PROPERTIES	8
2.2.3 OUTPUT PROPERTIES	8
2.3 /api/Key	12
2.3.1 HEADER PROPERTIES	12
2.3.2 INPUT PROPERTIES	12
2.3.3 OUTPUT PROPERTIES	12
2.4 /api/Key/token	14
2.4.1 HEADER PROPERTIES	14
2.4.2 INPUT PROPERTIES	14
2.4.3 OUTPUT PROPERTIES	14
3 Error Codes and Reasons	17
3.1 Sample Error Response.....	17
3.2 Error Codes and Reasons.....	18
3.3 HTTP Status Codes.....	20
3.3.1 200 OK.....	20
3.3.2 400 Bad Request	20
3.3.3 401 Unauthorized	20
3.3.4 500 Internal Server Error	20
Appendix A Postman	21
Appendix B Example Flow of changing EMV Configurations.....	23
Appendix C Example Flow of Key Load.....	25

1 Introduction

The purpose of this document is to describe the main operations available in Magensa RemoteServices V3 Web service and their required & optional input/output parameters. It also provides sample REST requests & responses as reference for client developers. It also includes error codes, reasons, and a sample error response.

RemoteServices V3 Web service enables clients to generate a EMV Configuration Update Token, to transform a EMV Configuration, to get a list of a given device protocol and to generate a token for initial DUKPT TR31 Key Block via Basic Authentication.

To change EMV configurations, a configuration excel file should be base64 encoded and this encoded value should be sent to /api/EmvConfig/transform as fileBase64 field. /api/EmvConfig/transform will transform the config file to a list of configuration data. Config value in the response is base64encoded so it must be base64 decoded and then it should be converted to Hex string. This hex string will be sent to /api/EmvConfig/token as emvConfigData field.

To do a key load, /api/Key needs to be called first to retrieve list of available keys and then a key will be selected and ksi value under the key will be sent to /api/Key/token as targetKSI along with other values which is read from the device.

RemoteServices V3 Web service end point provides swagger documentation and swagger.json which can be imported to Postman program. Please refer to Appendix for how to import swagger.json to Postman.

The authentication for all RemoteServices V3 service calls require an “Authorization” HTTP header set as per HTTP BasicAuthentication scheme. The value should be the Base64 encoding of your Magensa credentials in the string format “CustomerCode/Username:Password”. In the sample request packet, base64 encoded value was replaced by {AUTHORIZATION HEADER VALUE}

In the header, two parameters, TransactionID and BillingLabel can be added and TransactionID will be returned to a client as customerTransactionID.

2 RemoteServices V3 Operations

2.1 /api/EmvConfig/token

2.1.1 HEADER PROPERTIES

Property	Value	Description
Authorization *	string	The value should be the Base64 encoding of your Magensa credentials in the string format "CustomerCode/Username:Password". Ex) Basic Q3VzdG9tZXJDb2RlL1VzZXJuYW11OI Bhc3N3b3Jk
TransactionID	string	Up to 256 characters. This will be returned to a client as customerTransactionID.
BillingLabel	string	Up to 64 characters.

Note: * = Required

2.1.2 INPUT PROPERTIES

Property	Value	Description
protocol *	string	The protocol/class for the device. Currently support MMS only
ksi *	string	The KSI of the base key to be updated
keyDerivationData *	string	Key derivation data. 32 Hex value.
keyDerivationAlgorithm *	string	Key Derivation Algorithm Currently support AES-SP800-108 only
deviceSN	string	Device Serial Number
emvConfigData	string	Configuration in HEX.

Note: * = Required

2.1.3 OUTPUT PROPERTIES

Property	Value	Description
magTranID	string	Magensa Transaction ID
customerTransactionID	string	Customer TransactionID will be returned to a client.
token	string	Generated EMV Configuration token

Request JSON

```
{
  "protocol": "<string>",
  "ksi": "<string>",
  "keyDerivationData": "<string>",
  "keyDerivationAlgorithm": "<string>",
  "deviceSN": "<string>",
  "emvConfigData": "<string>"
}
```


2.2 /api/EmvConfig/transform

2.2.1 HEADER PROPERTIES

Property	Value	Description
Authorization *	string	The value should be the Base64 encoding of your Magensa credentials in the string format "CustomerCode/Username:Password". Ex) Basic Q3VzdG9tZXJDb2RIL1VzZXJuYW11OiBhc3N3b3Jk
TransactionID	string	Up to 256 characters. This will be returned to a client as customerTransactionID.
BillingLabel	string	Up to 64 characters.

Note: * = Required

2.2.2 INPUT PROPERTIES

Property	Value	Description
protocol *	string	The protocol/class for the device. Currently support MMS only
fileBase64 *	string	Base64 encoded configuration from an excel file
isLegacyExcel *	boolean	Flag to indicate whether the input is from legacy excel (.XLS) or latest version (.XLSX)

Note: * = Required

2.2.3 OUTPUT PROPERTIES

Property	Value	Description
magTranID	string	Magensa Transaction ID
customerTransactionID	string	Customer TransactionID will be returned to a client.
configName	string	Configuration Name.
bins	json	configId
		string
		hashId
		string
		timeStamp
		string
		config
		string. base64 encoded value

Request JSON

```
{
  "panData": "<string>",
  "panDataType": "<string>",
  "pinDataType": "<string>",
  "pinData": "<string>",
  "refID": "<string>",
  "refPINOffset": "<string>"
}
```


Sample Request:

```
POST /RemoteServicesV3/api/EmvConfig/token HTTP/1.1
Host: devgw.magensa.dev
TransactionID: 11111111-2222-3333-4444-555555555555
BillingLabel: Billing Label
Content-Type: application/json
Authorization: Basic {AUTHORIZATION HEADER VALUE}
Content-Length: {LENGTH}

{
  "protocol": "MMS",
  "fileBase64": "{BASE64 ENCODED EXCEL FILE}"
  "IsLegacyExcel": false
}
```

Sample Response:

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=utf-8
Server: Microsoft-IIS/10.0
X-Powered-By: ASP.NET
Date: Wed, 09 Jun 2021 21:50:08 GMT
Content-Length: {LENGTH}

{
  "magTranID": "2656d8be-6b22-4d8a-824f-ee3e046c7f5f",
  "customerTransactionID": "11111111-2222-3333-4444-555555555555",
  "configName": "30129d8d",
  "version": "X01",
  "bins": [
    {
      "configId": "00000000",
      "hashId": "4",
      "timeStamp": "60C14E92",
      "config":
"TuUdUS0FQMTDBBAAAAADogYaqJuObN6NsoSW80L72uEy1krsRwbGfGgIIQN95AQGfNQEh3
woBAZ8zA+AoAJ9ABf+A8LAB31UBAd8LAQHfJwEK3wYBAd8IAQDfegEB3w0BAN8QAwAAAN9
7AQDfBwEB3wkBAd9zBQAAAAAA33QFAAAAAADfdQUAAAAAAN9TAQDfVAEA33wBAA=="
    },
    {
      "configId": "00000100",
      "hashId": "4",
      "timeStamp": "60C14E92",
      "config":
"TuUdUS0FQMTDBBAAAAQDOggSjqhwnyzl30/MbLskG2voRgcEVuj42/zNtnwEG8gAAAAAAT
wegAAAAABBAQ334BAZ8JAgAA3xEBAN8SAQDfEwEA3xQBAN8VAQDfIAUAAAAAAN8hBQAAAAA
A3yIFAAAAAACfGwQAAAAA33ABAN9uAwAAAN9vAQDfAQEA3wIBAF8qAgAAXzYBAP8zbZ8BB
vIAAAAAAE8HoAAAAAQiA99+AQGfCQIAAN8RAQDfEgEA3xMBAN8UAQDfFQEA3yAFAAAAAAD
fIQUAAAAAAN8iBQAAAAAAnxsEAAAAAN9wAQDfbgMAAADfbwEA3wEBAN8CAQBfKgIAAF82A
QD/M22fAQbyAAAAAABPB6AAAAAEMGDffgEBnwkcAADfEQEA3xIBAN8TAQDfFAEA3xUBAN8
gBQAAAAAA3yEFAAAAAADfIgUAAAAAAJ8bBAAAAADfCAEA324DAAAA328BAN8BAQDfAgEAX
```

```

yoCAABfNgEA/zNsnwEG9AAAAAAATwagAAAAJQHffgEBnwKCAADfEQEA3xIBAN8TAQDfFAE
A3xUBAN8gBQAAAAAA3yEFAAAAAADfIgUAAAAAAJ8bBAAAAADfCAEA324DAAA328BAN8BA
QDfAgEAXyoCAABfNgEA/zNtnwEG8wAAAAAAATwegAAAAAxAQ334BAZ8JAgAA3xEBAN8SAQD
fEwEA3xQBAN8VAQDfIAUAAAAAAN8hBQAAAAAA3yIFAAAAAACfGwQAAAAA33ABAN9uAwAAA
N9vAQDfAQEA3wIBAF8qAgAAXzYBAP8zbZ8BBvYAAAAAAE8HoAAAAVIwEN9+AQGfCQIAAN8
RAQDfEgEA3xMBAN8UAQDfFQEA3yAFAAAAAADfIQUAAAAAAN8iBQAAAAAAnxsEAAAAAN9wA
QDfbgMAAADfbwEA3wEBAN8CAQBfKgIAAF82AQD/M3mfAQYAAAAAABPB6AAAAAEEBdfgE
BnwKCAALfEQEB3xIBAN8TAQDfFAEB3xUBAd8gBQAAAAAA3yEFAAAAAADfIgUAAAAAAJ8bB
AAAAADfCAEA324DAAA328BAN8BAQHfcQOfNwTfAgEB33IDnwgCXyoCCEBfNgEC/zN5nwE
GAAAAAAATwegAAAAAxAQ334BAZ8JAgCW3xEBAd8SAQDfEwEA3xQBAd8VAQHfIAUAAAAA
N8hBQAAAAAA3yIFAAAAAACfGwQAAAAA33ABAN9uAwAAAN9vAQDfAQEB33EDnzCE3wIBAd9
yA58IA18qAghAXzYBAv8zeJ8BBgAAAAAAE8GoAAAACUB334BAZ8JAgAB3xEBAd8SAQDfE
wEA3xQBAd8VAQHfIAUAAAAAAN8hBQAAAAAA3yIFAAAAAACfGwQAAAAA33ABAN9uAwAAAN9
vAQDfAQEB33EDnzCE3wIBAd9yA58IA18qAghAXzYBAv8zeZ8BBgAAAAAAE8HoAAAAVIwE
N9+AQGfCQIAAd8RAQHfEgEA3xMBAN8UAQHfFQEB3yAFAAAAAADfIQUAAAAAAN8iBQAAAA
AnxsEAAAAAN9wAQDfbgMAAADfbwEA3wEBAd9xA583BN8CAQDfcgOfCAJfKgIIQF82AQI="
    },
    {
        "configId": "00000200",
        "hashId": "4",
        "timeStamp": "60C14E92",
        "config":
        "TUdUS0FQMTDBBAAAAGDOggqsqjlpUW/DdvB6AQtkiH8xMehhv0lk/zWCAQ/fDgMCAQDfD
        4IBBJ8aAghAnzUBIZ9ABQAAAAAAn34BAd8MAQLfGwEg3y0DAAANn20CAAHfGgOfagTfHgE
        A3ywBAJ8JAgAC3wMBCN8XAWDFGAEo3xkBCN8cAgEs3x0BAN8gBQAAAAAA3yEFAAAAAADfI
        gUAAAAAAN8jBgAAAAEAAN8kBgAAAAAAN8lBgAAAAUAAN8mBgAAAAAQAN8nAhOI3zABDd8
        yAgAU3zMCADLfNAIAET8lAgAY3zYCASzfNwEyX1cAnwEAnxUCAAGfFgCfTgCfMwCfHABfK
        gIIQJ8dCCxoAAAAAAN0UCAACfTAGAAAAAAN8J9OFE1BR1RFSwAAAAAAN8J9OFE1BR1RFSw
        A/zWB1980AwIBAd8Pgc2fGgIIQJ81ASGfQAUAUAAAAAJ9+AQHfDAEC3xsBIN8tAwAADZ9tA
        gAB3xoDn2oE3x4BAN8sAQCFcQIAAt8DAQj fFwFg3xgBKN8ZAQj fHAIBLN8dAQDfIAUAAA
        AAN8hBQAAAAAA3yIFAAAAADfIwYAAAABAADfJAYAAAADAADfJQYAAAAFAADfJgYAAAAACA
        AdfJwITiN8wAQ3fMgIAFN8zAgAy3zQCABLfNQUIAGN82AgEs3zcBM19XAJ8BAJ8VAgEwnxY
        An04AnzMAnxwA/zWB1980AwIBAt8Pgc2fGgIIQJ81ASGfQAUAUAAAAAJ9+AQHfDAEC3xsBI
        N8tAwAADZ9tAgAB3xoDn2oE3x4BAN8sAQCFcQIAAt8DAQj fFwFg3xgBKN8ZAQj fHAIBLN8
        dAQDfIAUAAAAAAN8hBQAAAAAA3yIFAAAAADfIwYAAAABAADfJAYAAAADAADfJQYAAAAFA
        AdfJgYAAAAACAAdfJwITiN8wAQ3fMgIAFN8zAgAy3zQCABLfNQUIAGN82AgEs3zcBM19XAJ8
        BAJ8VAgEwnxYAn04AnzMAnxwA/zWB1980AwIBA98Pgc2fGgIIQJ81ASGfQAUAUAAAAAJ9+A
        QHfDAEC3xsBIN8tAwAADZ9tAgAB3xoDn2oE3x4BAN8sAQCFcQIAAt8DAQj fFwFg3xgBKN8
        ZAQj fHAIBLN8dAQDfIAUAAAAAAN8hBQAAAAAA3yIFAAAAADfIwYAAAABAADfJAYAAAADA
        AdfJQYAAAAFAADfJgYAAAAACAAdfJwITiN8wAQ3fMgIAFN8zAgAy3zQCABLfNQUIAGN82AgE
        s3zcBM19XAJ8BAJ8VAgEwnxYAn04AnzMAnxwA/zWB1980AwICAN8Pgc2fGgIIQJ81ASGfQ
        AUAAAAAJ9+AQHfDAEC3xsBoN8tAwAADZ9tAgAB3xoDn2oE3x4BAN8sAQCFcQIAAt8DAQj
        fFwFg3xgBKN8ZAQj fHAIBLN8dAQDfIAUAAAAAAN8hBQAAAAAA3yIFAAAAADfIwYAAAABA
        AdfJAYAAAADAADfJQYAAAAFAADfJgYAAAAADAADfJwITiN8wAQ3fMgIAFN8zAgAy3zQCABL
        fNQUIAGN82AgEs3zcBM19XAJ8BAJ8VAgEwnxYAn04AnzMAnxwA/zWB1980AwICAd8Pgc2fG
        gIIQJ81ASGfQAUAUAAAAAJ9+AQHfDAEC3xsBoN8tAwAADZ9tAgAB3xoDn2oE3x4BAN8sAQ
        CFcQIAAt8DAQj fFwFg3xgBKN8ZAQj fHAIBLN8dAQDfIAUAAAAAAN8hBQAAAAAA3yIFAAAA
        AdfIwYAAAABAADfJAYAAAADAADfJQYAAAAFAADfJgYAAAAADAADfJwITiN8wAQ3fMgIAFN8
        zAgAy3zQCABLfNQUIAGN82AgEs3zcBM19XAJ8BAJ8VAgEwnxYAn04AnzMAnxwA/zWB1980A
        wICAt8Pgc2fGgIIQJ81ASGfQAUAUAAAAAJ9+AQHfDAEC3xsBoN8tAwAADZ9tAgAB3xoDn2o
        E3x4BAN8sAQCFcQIAAt8DAQj fFwFg3xgBKN8ZAQj fHAIBLN8dAQDfIAUAAAAAAN8hBQAAA
        AAA3yIFAAAAADfIwYAAAABAADfJAYAAAADAADfJQYAAAAFAADfJgYAAAAADAADfJwITiN8

```

```

wAQ3fMgIAFN8zAgAy3zQCABLfNQIAGN82AgEs3zcBM19XAJ8BAJ8VAgEwnxYAn04AnzMAnxwA/zWB1980AwICA98Pgc2fGgIIQJ81ASGfQAUAAAAAAJ9+AQHfDAEC3xsBoN8tAwAADZ9
tAgAB3xoDn2oE3x4BAN8sAQCFcQIAAt8DAQj fFwFg3xgBKN8ZAQj fHAI8BLN8dAQDfIAUAA
AAAAAN8hBQAAAAAA3yIFAAAAAADfIwYAAAAABAADfJAYAAAAADAADfJQYAAAAFAADfJgYAAAA
DAADfJwITiN8wAQ3fMgIAFN8zAgAy3zQCABLfNQIAGN82AgEs3zcBM19XAJ8BAJ8VAgEwn
xYAn04AnzMAnxwA/zWCAQ/fDgMCAwDfD4IBBJ8aAghAnzUBIZ9ABQAAAAAAAn34BAd8MAQL
fGwEg3y0DAAANn20CAAHfGgOfagTfHgEA3ywBAJ8JAgAC3wMBCN8XAWDfGAEo3xkBCN8cA
gEs3x0BAN8gBQAAAAAA3yEFAAAAAADfIgUAAAAAAN8jBgAAAAEAAN8kBgAAAAAAN8lBgA
AAAUAAAN8mBgAAAAAQAN8nAhOI3zABDd8yAgAU3zMCADLfNAIAEt81AgAY3zYCASzfNwEyX
1cAnwEAnxUCAAGfFgCfTgCfMwCfHABfKgIIQJ8dCCxoAAAAAAAn0UCAACfTAgAAAAAA
AAJ90FE1BR1RFSwAAAAAAN8hBQAAAAAA3yIFAAAAAADfIwYAAAAABAADfJAYAAAAADAADfJQYAAAAFAADfJgYAAAA
AAAAJ9+AQHfDAEC3xsBIN8tAwAADZ9tAgAB3xoDn2oE3x4BAN8sAQCFcQIAAt8DAQj fFwF
g3xgBKN8ZAQj fHAI8BLN8dAQDfIAUAAAAAAN8hBQAAAAAA3yIFAAAAAADfIwYAAAAABAADfJ
AYAAAAADAADfJQYAAAAFAADfJgYAAAAACAADfJwITiN8wAQ3fMgIAFN8zAgAy3zQCABLfNQI
AGN82AgEs3zcBM19XAJ8BAJ8VAgEwnxYAn04AnzMAnxwA/zWBmd80AwQEAN8PgY+fCQIAA
Z8aAghAnzMDYCgAnzUBIZ9ABQAAAAAAAn20BwN8bJEBAAAAAAN8nASDfLQMAAA/fMAH03zI
BAd8gBQAAAAAA3yEFAAAAAADfIgUAAAAAAN8jBgAAAAAgAN8kBgAAAAEAAN8mBgAAAAEA
J8WDxESExQVFhcYGSaHiImKJZ8eCDYwMjMzMjEy3zEBAf81Yt80AwMFAN8PWZ81ASGfGgI
IQJ8zAwAAAJ9ABQAAAAAAAn2YEIgbAAN8bAwAABt8tAwAAD58JAgAB3zAB+N8yAQKfGwQAA
AAA3yMGAAAAACAA3yQGAAAAAFAA3yYGAAAAABAA/zWBkd80AwYGAN8PgYefCQIAAZ8aAgh
AnzMdAAAAAnzUBIZ9mBLYAwADfGwFg3zAB+N8yAQGfGwQAAAAA3yMGAAAAAVAA3yQGAAAA
wAA3yYGAAAAACAAnxwIMTIzNDU2NzifTg9BQkNERUZHSE1KS0xNTk+fAQYBAGMEBQbfIAU
AAAAAAN8hBQAAAAAA3yIFAAAAAA="
    },
    {
        "configId": "00000300",
        "hashId": "4",
        "timeStamp": "60C14E92",
        "config":
        "TUdUS0FQMTDBBAAAawDOggKH0AAAAAQFABADuASKvDDJDZdjNlQ+P9cJHI/kgA34IO1V5
+1IE+0AVvtXP+yj2Er2ExplHWbP9ChPsTtjXt0O5AF22L8Et/0ce6z5rHMn36qKpy0Q2zu
OcLLd2BHLQZSZSXqOGrMM8DZ1FdZFkacTk9T6OHJESxhjLit3nw1a0kAIua7p3AgLkUi0t1
iPRgOIVvR0VB/49yQyJENJ7PvzNj4PeMFLK0eSJOMaNCVqskbXzfii7Sex+1ZegAAAABAY
B+APLJvyDC0N4WYvON8ge0zRiL5Yi9MiarmQQRrI1NDOIPzB/t8l0Fi2nL3p0x12dZXM2h
luNMCPT1kVmdiXJoHprehn88MZBmK44/COABvsMA/QfTzu52hNHJw8vXYxgbkIJWMX31Qp
x3jAUL3DeRoiJteOghpW5OKUPyYA5Opy85ErS1k9jC7M60/X1/UldMfN4GMHZQHE0Lgfvv
sIZT2Alul3tOTZQDrgt/abor7ZVse89DX6/hrZt2fKfax0yT+iybOOKsgE90T9hHnpZTWd
cRDI1dQJEzDTzhzy6Blkph6HX6FKtwi71ou4oEyAx5I90A347Nkt0f6AAAAAE8QGWA6Dc9
L3hnDVGtLbwQU0XTd4pSqu7goxag01zquJ8mbCwU6kCeABYObZFfn/C7zXtLnGxQrALOkTa
Nob0hqurbx1N8H32Jto9cmaCdBb4C3R+MW6IOLxP7KifEHT+FytXPZmjnWFHsZu2/mIUf1
OQsRMHVnlmEcDsn1bnyG4+g2TJ5+79p4JBkKQnJ6if4mJWVQapnV/X2JBBPbh06lTLypuU
VFA6tG0Oz14NQiKL6+nvnjh3kgJTBvxOacAwToLTBjBex3/8="
    }
]
}

```

2.3 /api/Key

2.3.1 HEADER PROPERTIES

Property	Value	Description
Authorization *	string	The value should be the Base64 encoding of your Magensa credentials in the string format "CustomerCode/Username:Password". Ex) Basic Q3VzdG9tZXJDb2RIL1VzZXJuYW11OiBhc3N3b3Jk
TransactionID	string	Up to 256 characters. This will be returned to a client as customerTransactionID.
BillingLabel	string	Up to 64 characters.

Note: * = Required

2.3.2 INPUT PROPERTIES

Property	Value	Description
protocol	string	The protocol/class for the device. Currently support MMS only

Note: * = Required

2.3.3 OUTPUT PROPERTIES

Property	Value	Description
magTranID	string	Magensa Transaction ID
customerTransactionID	string	Customer TransactionID will be returned to a client.
Keys	json	id
		string
		keyName
		string
		description
		string
		keySlotNamePrefix
		string, base64 encoded value
		ksi
		string
		protocol
		string
		hsm
		string
		derivedKeyType
		string
		keyTypeRestrictionBitmask
		string
		dukptDataTypeRestrictionBitmask
		string
		dateCreated
		string
		dateModified
		string

Request JSON

```
{{baseUrl}}/api/Key?protocol=MMS
```

Sample Request:

```
GET /RemoteServicesV3/api/Key?protocol=MMS HTTP/1.1
Host: devgw.magensa.dev
TransactionID: 11111111-2222-3333-4444-555555555555
BillingLabel: billing label
Authorization: Basic {AUTHORIZATION HEADER VALUE}
```

Sample Response:

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=utf-8
Server: Microsoft-IIS/10.0
X-Powered-By: ASP.NET
Date: Wed, 09 Jun 2021 21:53:08 GMT
Content-Length: {LENGTH}

{
  "magTranID": "b25844cb-20c2-4011-9cfd-1df25aae9129",
  "customerTransactionID": "11111111-2222-3333-4444-555555555555",
  "keys": [
    {
      "id": 51,
      "keyName": "Apollo Key3",
      "description": "Apollo Test Key 3",
      "keySlotNamePrefix": "PROD_DYNA_SCRA_MAGTEK",
      "ksi": "9070030",
      "protocol": "MMS",
      "hsm": "HSMCoreV2",
      "derivedKeyType": "3DES-DUKPT",
      "keyTypeRestrictionBitmask": null,
      "dukptDataTypeRestrictionBitmask": "003F",
      "dateCreated": "2020-09-30T21:32:49.417",
      "dateModified": "2020-09-30T21:32:49.417"
    },
    {
      "id": 1097,
      "keyName": "Apollo Key6",
      "description": "Apollo Test key 6",
      "keySlotNamePrefix": "PROD_DYNA_SCRA_MAGTEK",
      "ksi": "20000002",
      "protocol": "MMS",
      "hsm": "HSMCoreV2",
      "derivedKeyType": "3DES-DUKPT",
      "keyTypeRestrictionBitmask": null,
      "dukptDataTypeRestrictionBitmask": "003F",
      "dateCreated": "2020-11-02T20:18:20.797",
      "dateModified": "2020-11-02T20:18:47.04"
    }
  ]
}
```

2.4 /api/Key/token

2.4.1 HEADER PROPERTIES

Property	Value	Description
Authorization *	string	The value should be the Base64 encoding of your Magensa credentials in the string format "CustomerCode/Username:Password". Ex) Basic Q3VzdG9tZXJDb2RIL1VzZXJuYW11OiBhc3N3b3Jk
TransactionID	string	Up to 256 characters. This will be returned to a client as customerTransactionID.
BillingLabel	string	Up to 64 characters.

Note: * = Required

2.4.2 INPUT PROPERTIES

Property	Value	Description
protocol *	string	The protocol/class for the device. Currently support MMS only
productName *	string	Product Name
keyDerivationData *	string	Key derivation data. 32 hex value.
keyRestriction *	string	Key restriction 4 hex value.
transportKeyID *	string	ID of the transport key. 4 digits
deviceChallenge *	string	The challenge from device. 16 hex value
deviceSN *	string	Device serial number. 7 hex value
keySlotID *	string	ID of the key slot for the injected key. 4 digits
currentKSN *	string	Key Serial Number. 20 hex for 3DES-DUKPT, 24 hex for AES128-DUKPT
targetKSI *	string	The target KSI of the base key.

Note: * = Required

2.4.3 OUTPUT PROPERTIES

Property	Value	Description
magTranID	string	Magensa Transaction ID
customerTransactionID	string	Customer TransactionID will be returned to a client.
updateToken	string	Generated key update token
isRawCommand	boolean	Flag to indicate whether the Key updateToken is raw command or not

Request JSON

```
{
  "protocol": "<string>",
  "productName": "<string>",
  "keyDerivationData": "<string>",
  "keyRestriction": "<string>",
  "transportKeyID": "<string>",
  "deviceChallenge": "<string>",
  "deviceSN": "<string>",
  "keySlotID": "<string>",
  "currentKSN": "<string>",
  "targetKSI": "<string>"
}
```

Sample Request:

```
POST /RemoteServicesV3/api/Key/token HTTP/1.1
Host: devgw.magensa.dev
TransactionID: 11111111-2222-3333-4444-555555555555
BillingLabel: magensa billing
Content-Type: application/json
Authorization: Basic {AUTHORIZATION HEADER VALUE}
Content-Length: 343

{
  "protocol": "MMS",
  "productName": "DYNAFLEX",
  "keyDerivationData": "01010404108102002000000155667788",
  "keyRestriction": "0000",
  "transportKeyID": "1081",
  "deviceChallenge": "B8254994B8EF0CC3",
  "deviceSN": "B008C21",
  "keySlotID": "2007",
  "currentKSN": "9010010B008C21E00001",
  "targetKSI": "9010010"
}
```

Sample Response:

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=utf-8
Server: Microsoft-IIS/10.0
X-Powered-By: ASP.NET
Date: Wed, 09 Jun 2021 19:14:25 GMT
Content-Length: 473

{
  "magTranID": "01c722c6-bb3c-427e-87dc-5ea7a1655dcd",
  "customerTransactionID": "11111111-2222-3333-4444-555555555555",
}
```

```
    "updateToken":  
    "D0320B1TX00N0600IK189010010B008C210000002158MGTK1001T1104200712041081  
2104003F3107B008C213210B8254994B8EF0CC3331020210609T191426ZKP0E0153CE3  
16FKC0C00431B28TS1420210609T191426ZPB12RWESFQSQYZKZPYEEDCEF59EDCA964D6  
3B17B0663CEF65577247AD2A83F41E98261E86A05F1AECDD0C0CDAA3F09335181F85F31  
24440D6E1C332FCB6647C6B6B6C2B6FAC23C897A2",  
    "isRawCommand": false  
}
```


3 Error Codes and Reasons

3.1 Sample Error Response

```
HTTP/1.1 400 Bad Request
Content-Type: application/json; charset=utf-8
Server: Microsoft-IIS/10.0
X-Powered-By: ASP.NET
Date: Mon, 14 Jun 2021 22:22:21 GMT
Content-Length: 132

{
  "magTranID": "78bf8299-a19c-405d-9ecb-a635e838480d",
  "customerTransactionID": null,
  "code": "631",
  "message": "Protocol is not supported"
}
```

Error code is returned as specific number with the error message. Please refer to 3.2 for all error codes and 3.3 for Http Status Code

3.2 Error Codes and Reasons

Error Code	Reason
601	DeviceSN is required
602	KSN is required
603	401 Unauthorized. Customer Code is required
604	401 Unauthorized. Username is required
605	401 Unauthorized. Password is required
606	KSI is required
607	Invalid KSN
608	DeviceCert is required
609	KeyName is required
610	Challenge is required
611	Invalid KeyType
612	Command Data Error
613	Invalid Config
614	Invalid KeyType
615	Invalid CustomerTransactionID
616	Invalid BillingLabel
617	Invalid KeyID
618	Invalid UpdateToken
619	UpdateToken is required
620	Invalid CommandID
621	XMLString is required
622	SerialNumber is required
623	Invalid SerialNumber
624	Invalid ConfigCommand
625	Invalid KSI
626	Invalid DeviceCert
627	Invalid Challenge
628	Invalid DeviceSN
629	Invalid ExecutionType
630	Invalid PAN
631	Invalid Protocol

Error Code	Reason
632	Invalid FileBase64
633	Invalid KeyDerivationData
634	Invalid KeyDerivationAlgorithm
635	Invalid EMVConfigData
636	Invalid ProductName
637	Invalid KeyRestriction
638	Invalid KeySlotID
639	Invalid TransportKeyID
699	Invalid Input
701	401 Unauthorized. Access Denied
702	500 Internal Server Error. Device Not Allowed
703	500 Internal Server Error. HP Error
704	Invalid Command Type
705	500 Internal Server Error. No Records Found
706	500 Internal Server Error. KSID Access Denied
707	500 Internal Server Error. KCV Mismatch
708	500 Internal Server Error. iCFG Error
709	Invalid DeviceType
710	500 Internal Server Error. KSN Error
711	500 Internal Server Error. Keyload Not Allowed
1010	401 Unauthorized. UserLockedOut
1011	401 Unauthorized. UserNotActive
1012	401 Unauthorized. User is blocked
1013	401 Unauthorized. User Credential Failure
1201	500 Internal Server Error. Internal Error
1301	500 Internal Server Error. System Error
1302	500 Internal Server Error. Database Error
5000	500 Internal Server Error. Unknown Error

3.3 HTTP Status Codes

3.3.1 200 OK

The request has been succeeded.

3.3.2 400 Bad Request

The service cannot or will not process the request due to an input error. In this case, the service returns error code and error message.

3.3.3 401 Unauthorized



If the credential for Basic Auth is not correct, 401 Unauthorized will be sent with error code and error message. Please look for 401 Unauthorized in the error code list. For example, 1013.

3.3.4 500 Internal Server Error


when an unexpected condition was encountered, 500 Internal Server will be sent with error code and error message. Please look for 500 Internal Server Error in the error code list. For example, 1302.

Appendix A Postman

If Postman is used to import swagger.json to APIs,
Copy and paste the full path of swagger.json from the swagger page.

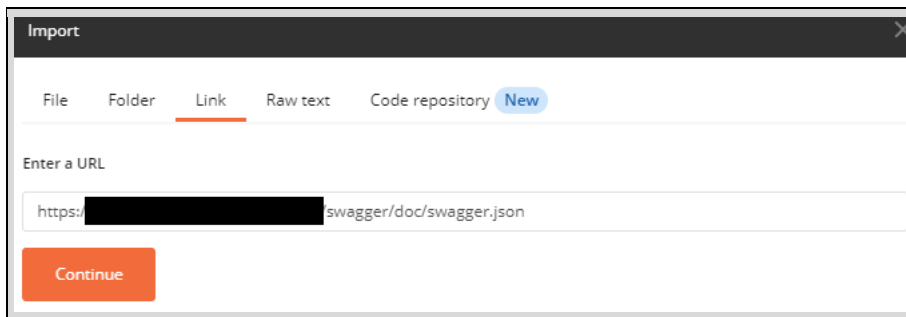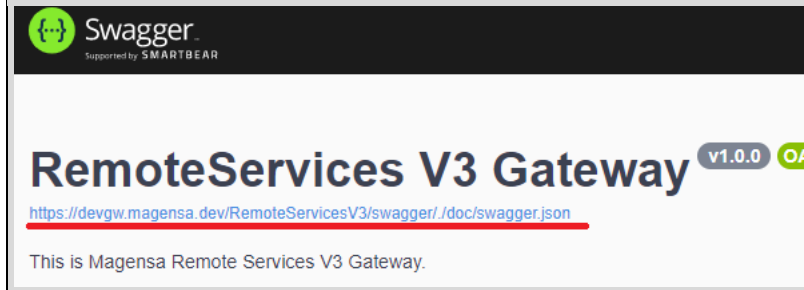

Two POST APIs will be added to your Postman.

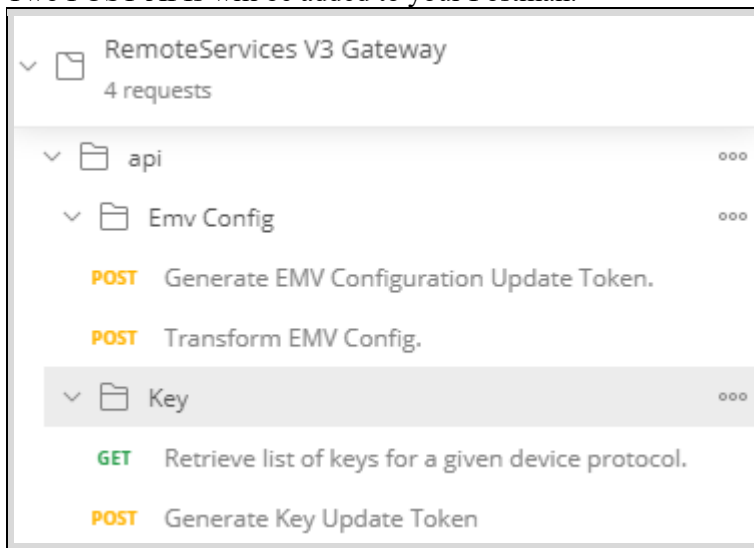

Setup your Basic Auth with CustomerCode/Username and Password provided by MagTek.
If necessary, TransactionID and BillingLabel need to be filled in the Header.

Params Auth Headers (11) Body Pre-req. Tests Settings

TYPE

Basic Auth

The authorization header will be automatically generated when you send the request. [Learn more about authorization](#)

Username: {CustomerCode}/{Username}

Password:

☐ Show Password

! Heads up! These parameters hold sensitive data. To keep this working in a collaborative environment, we recommend using [more about variables](#)

POST {{baseUrl}}/api/EmvConfig/token Send Save

Params Authorization Headers (13) Body Pre-request Script Tests Settings Cookies Code

Key	Value	Description
TransactionID	11111111-2222-3333-4444-555555555555	Transaction ID from customer, up to 256 characters
BillingLabel	billing label	The billing label from customer, up to 64 characters

Replace “<string>” with your JSON input strings. Refer to the samples Chapter #2.

Params Authorization Headers (13) Body Pre-req. Script Tests Settings

none form-data x-www-form-urlencoded raw

```

1 {
2   "protocol": "MMS",
3   "ksi": "20000001",
4   "deviceSN": "B50AFB2",
5   "keyDerivationData": "010104041111020011223344",
6   "keyDerivationAlgorithm": "AES_SP800_108",
7   "emvConfigData":
8     "EEEEA1198105030306020884008500A80A8102110850101890DE108E209F007E105C1032001"

```

And the token value is sent from RemoteServices V3 with customerTransactionID and magTranID

Body Cookies Headers (5) Test Results Status: 200 OK

Pretty Raw Preview Visualize JSON

```

1 {
2   "magTranID": "35c016b1-067b-46f8-a17a-a60315f1057f",
3   "customerTransactionID": "11111111-2222-3333-4444-555555555555",
4   "token": "BDAE24BCE56CB7D4888F15B688DCB375"
5 }

```

Appendix B Example Flow of changing EMV Configurations

A EMV configuration excel file needs to be converted to Base64String and sent to /api/EmvConfig/transform as fileBase64 field.

Request:

```
{
  "protocol": "MMS",
  "fileBase64": "{BASE64 ENCODED EXCEL FILE}"
  "IsLegacyExcel": false
}
```

Response from /api/EmvConfig/transform:

```
{
  "magTranID": "faed4221-4842-48b3-be63-3d196e2c547b",
  "customerTransactionID": "11111111-2222-3333-4444-555555555555",
  "configName": "a3906b40",
  "version": "X01",
  "bins": [
    {
      "configId": "00000000",
      "hashId": "4",
      "timeStamp": "60C7BBC2",
      "config":
      "TUDUS0FQMTDBBAAAAADogYaqJuObN6NsoSW80L72uEy1krsRwbGfGgIIQN95AQGfNQEH3
      woBAZ8zA+AoAJ9ABf+A8LAB31UBAd8LAQHfJwEK3wYBAd8IAQDfegEB3w0BAN8QAwAAAN9
      7AQDfBwEB3wkBAd9zBQAAAAAA33QFAAAAAADfdQUAAAAAAN9TAQDfVAEA33wBAA=="
    },
    {
      "configId": "00000100",
      "hashId": "4",
      "timeStamp": "60C7BBC2",
      "config":
      "TUDUS0FQMTDBBAAAAQDOggSjqhwnyzl30/MbLskG2voRgcEVuj42/zNtnwEG8gAAAAAAT
      wegAAAABBAQ334BAZ8JAgAA3xEBAN8SAQDfEwEA3xBAN8VAQDfIAUAAAAAAN8hBQAAAAA
      A3yIFAAAAAACfGwQAAAAA33ABAN9uAwAAAN9vAQDfAQEA3wIBAF8qAgAAXzYBAP8zbZ8BB
      vIAAAAAAE8HoAAAAAQia99...
    }
  ],
  :
  :
  :
  {
    "configId": "00000300",
    "hashId": "4",
    "timeStamp": "60C7BBC2",
    "config":
    "TUDUS0FQMTDBBAAAAwDOggKHoAAAAAQFABADuASKvDDJDZdjNlQ+P9cJHI/kgA34IO1V5
    +lIE+0AVVtXP+yj2Er2ExplHWbP9ChPsTtjXt0O5AF22L8Et/0ce6z5rHMn36qKpy0Q2zu
  }
```

```
OcLLd2BHLQZZSXqOGrMM8DZ1FdZFkacTk9T6OHJEsxhjLit3nw1aOkAIua7p3AgLkUiot1
iPRgOIVvR0VB/...
    }
}
```

Convert

TUdUS0FQMTDBBAAAAADogYaqJuObN6NsoSW80L72uEy1krsRwbGfGgIIQN95AQGfNQEH3wo
BAZ8zA+AoAJ9ABf+.....

To Hex String.

And send it to /api/EmvConfig/Token as emvConfigData field.

```
{
  "protocol": "MMS",
  "ksi": "20000001",
  "deviceSN": "B50AFB2",
  "keyDerivationData": "01010404111102001122334455667788",
  "keyDerivationAlgorithm": "AES_SP800_108",
  "emvConfigData":
  "4D47544B41503130C10400000000CE8186AA26E39B37A36CA125BCD0BEF6B84CB592B
B11C1B19F1A020840DF7901019F350121DF0A01019F3303E028009F4005FF80F0B001D
F550101DF0B0101DF27010ADF060101DF080100DF7A0101DF0D0100DF1003000000DF7
B0100DF070101DF090101DF73050000000000DF740500000000000DF7505000000000D
F530100DF540100DF7C0100"
}
```


Appendix C Example Flow of Key Load

Call /api/Key?Protocol=MMS to get a list of available keys

Response from /api/Key:

```
{
  "magTranID": "03fd0857-a34c-49a1-9ab3-b21427329088",
  "customerTransactionID": "11111111-2222-3333-4444-555555555555",
  "keys": [
    {
      "id": 1046,
      "keyName": "Apollo Key1",
      "description": "Apollo Test Key 1",
      "keySlotNamePrefix": "PROD_DYNA_SCRA_MAGTEK",
      "ksi": "9010010",
      "protocol": "MMS",
      "hsm": "HSMCoreV2",
      "derivedKeyType": "3DES-DUKPT",
      "keyTypeRestrictionBitmask": null,
      "dukptDataTypeRestrictionBitmask": "003F",
      "dateCreated": "2020-10-02T17:42:58.077",
      "dateModified": "2020-10-02T17:42:58.077"
    },
    {
      "id": 1047,
      "keyName": "Apollo Key2",
      "description": "Apollo Test Key 2",
      "keySlotNamePrefix": "PROD_DYNA_SCRA_MAGTEK",
      "ksi": "9011400",
      "protocol": "MMS",
      "hsm": "HSMCoreV2",
      "derivedKeyType": "3DES-DUKPT",
      "keyTypeRestrictionBitmask": null,
      "dukptDataTypeRestrictionBitmask": "003F",
      "dateCreated": "2020-10-02T17:42:58.077",
      "dateModified": "2020-10-02T17:42:58.077"
    },
    {
      "id": 1097,
      "keyName": "Apollo Key6",
      "description": "Apollo Test key 6",
      "keySlotNamePrefix": "PROD_DYNA_SCRA_MAGTEK",
      "ksi": "20000002",
      "protocol": "MMS",
      "hsm": "HSMCoreV2",
      "derivedKeyType": "3DES-DUKPT",
      "keyTypeRestrictionBitmask": null,
      "dukptDataTypeRestrictionBitmask": "003F",
      "dateCreated": "2020-11-02T20:18:20.797",
      "dateModified": "2020-11-02T20:18:47.04"
    }
  ]
}
```

```
  ] }
```

If Apollo Key1 is selected from the list above, ksi 9010010 will be sent to /api/Key/token as targetKSI.

Request:

```
{
  "protocol": "MMS",
  "productName": "DYNAFLEX",
  "keyDerivationData": "01010404108102002000000155667788",
  "keyRestriction": "0000",
  "transportKeyID": "1081",
  "deviceChallenge": "B8254994B8EF0CC3",
  "deviceSN": "B008C21",
  "keySlotID": "2007",
  "currentKSN": "9010010B008C21E00001",
  "targetKSI": "9010010"
}
```