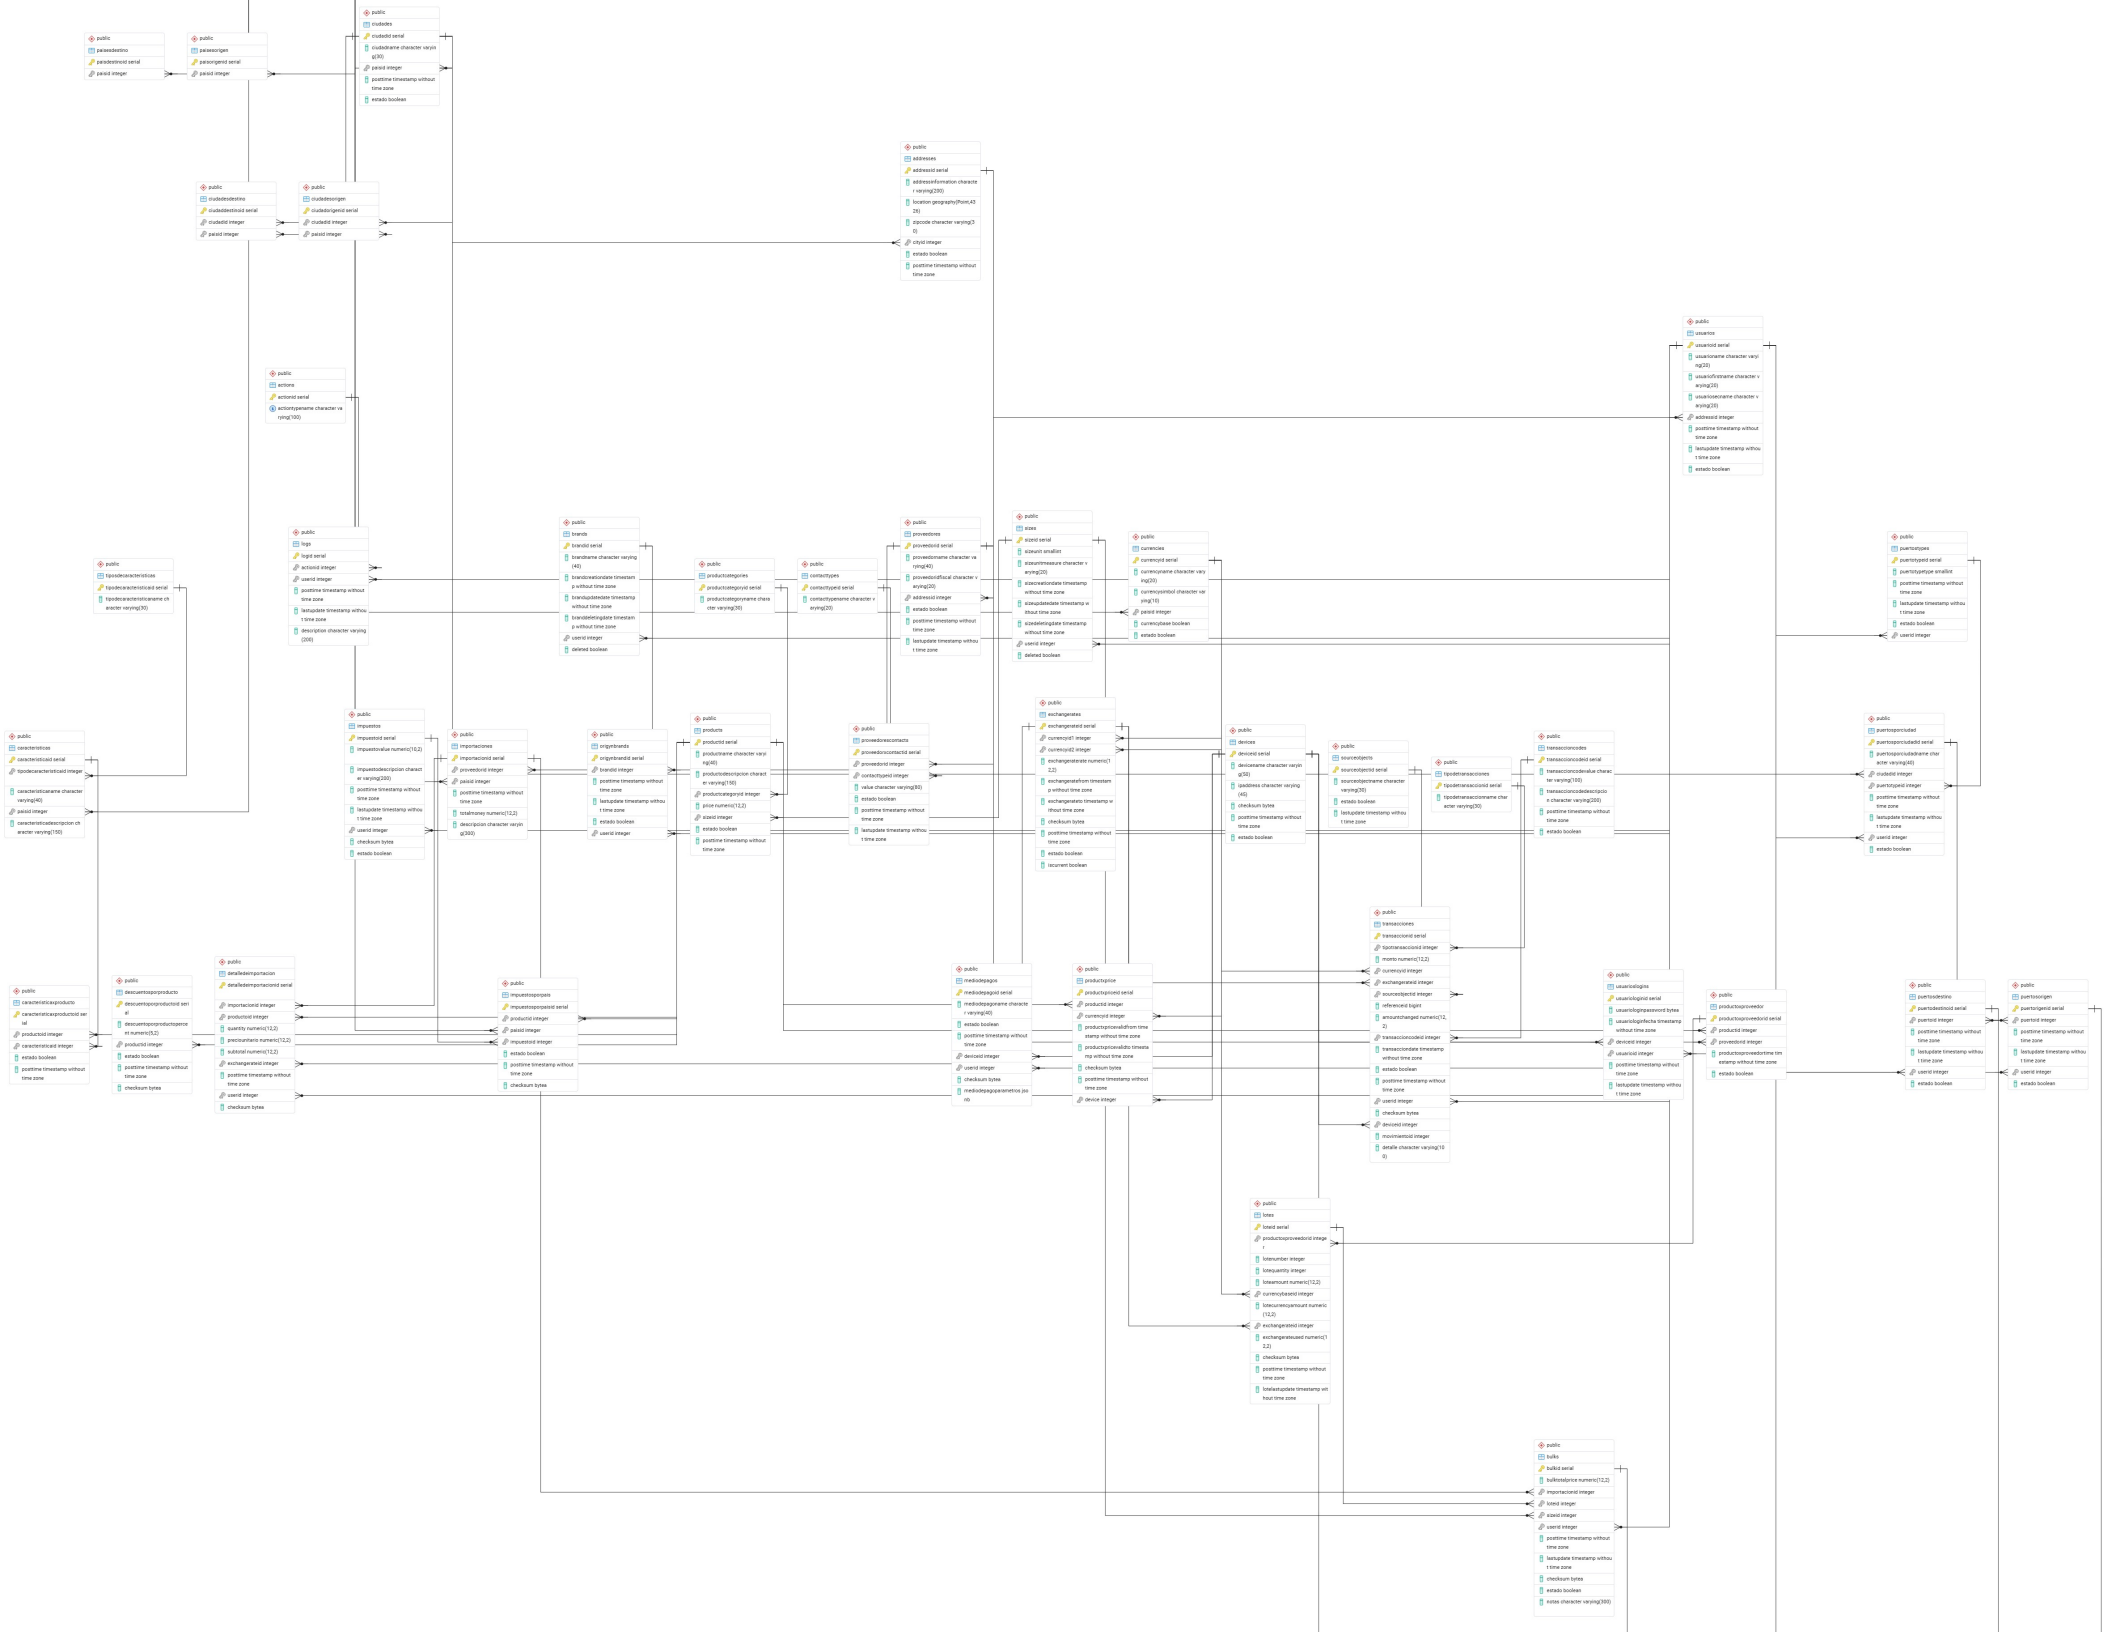
public
paisesdestino
paisdestinoid serial
paisid integer
public
paisesorigen
paisorigenid serial
paisid integer
public
ciudades
ciudadid serial
ciudadname character varying(30)
paisid integer
postime timestamp without time zone
estado boolean
public
ciudadesdestino
ciudaddestinoid serial
ciudadid integer
paisid integer
public
ciudadesorigen
ciudadorigenid serial
ciudadid integer
paisid integer
public
addresses
addressid serial
addressformation character varying(200)
location geography(Point,4326)
zipcode character varying(30)
cityid integer
estado boolean
postime timestamp without time zone
public
actions
actionid serial
actionnpename character varying(100)
public
logs
logid serial
actionid integer
postime timestamp without time zone
userid integer
lastupdate timestamp without time zone
description character varying(200)
public
tipodecaracteristicas
tipodecaracteristicaid serial
tipodecaracteristicaname character varying(30)
public
brands
brandid serial
brandname character varying(40)
brandcreationdate timestamp without time zone
brandupdatedate timestamp without time zone
brandeletingdate timestamp without time zone
userid integer
deleted boolean
public
productcategories
productcategoryid serial
productcategoryname character varying(30)
public
contacttypes
contacttypeid serial
contacttypename character varying(20)
public
proveedores
proveedorid serial
provedorname character varying(40)
provedorfiscal character varying(20)
addressid integer
estado boolean
postime timestamp without time zone
lastupdate timestamp without time zone
public
sizes
sizeid serial
sizeuni smallint
sizeunitmeasure character varying(20)
sizecreationdate timestamp without time zone
sizeupdatedate timestamp without time zone
sizedeletingdate timestamp without time zone
userid integer
deleted boolean
public
currencies
currencyid serial
currencyname character varying(20)
currencysimbol character varying(10)
paisid integer
currencybase boolean
estado boolean
public
usuarios
usuarioid serial
usuariolname character varying(20)
usuariofirstname character varying(20)
usuariolosecname character varying(20)
addressid integer
postime timestamp without time zone
lastupdate timestamp without time zone
estado boolean
public
puertostypes
puertotypeid serial
puertotypetype smallint
postime timestamp without time zone
lastupdate timestamp without time zone
estado booleee
userid integer
public
impuestos
impuestoid serial
impuestovalue numeric(10,2)
impuestodescripcion character varying(200)
postime timestamp without time zone
lastupdate timestamp without time zone
userid integer
checksum bytes
estado boolean
public
importaciones
importacionid serial
proveedorid integer
paisid integer
postime timestamp without time zone
totalmoney numeric(12,2)
descripcion character varying(300)
public
origenbrands
origenbrandid serial
brandid integer
postime timestamp without time zone
lastupdate timestamp without time zone
estado boolean
userid integer
public
productos
productid serial
productname character varying(40)
productodescripcion character varying(150)
productcategoryid integer
price numeric(12,2)
sizeid integer
estado boolean
postime timestamp without time zone
public
proveedorescontacts
proveedorscontactid serial
proveedorid integer
contacttypeid integer
value character varying(80)
estado boolean
postime timestamp without time zone
lastupdate timestamp without time zone
public
exchangerates
exchangerateid serial
currencyid1 integer
currencyid2 integer
exchangeraterate numeric(12,2)
exchangeratefrom timestamp without time zone
exchangeratio timestamp without time zone
checksum bytes
postime timestamp without time zone
estado boolean
iscurrent boolean
public
devices
deviceid serial
devicename character varying(50)
ipaddress character varying(45)
checksum bytes
postime timestamp without time zone
estado boolean
public
sourceobjects
sourceobjectid serial
sourceobjectname character varying(50)
estado boolean
lastupdate timestamp without time zone
public
tipodetransacciones
tipodetransaccionid serial
tipodetransaccionname character varying(30)
public
transaccioncodes
transaccioncodeid serial
transaccioncodevalue character varying(100)
transaccioncodedescripcion character varying(200)
postime timestamp without time zone
estado boolean
public
puertosporciudad
puertosporciudadid serial
puertosporciudadname character varying(40)
ciudadid integer
puertotypeid integer
postime timestamp without time zone
lastupdate timestamp without time zone
userid integer
estado boolean
public
caracteristicas
caracteristicaid serial
tipodecaracteristicaid integer
caracteristicaname character varying(40)
paisid integer
caracteristicadescripcion character varying(150)
public
caracteristicasxproducto
caracteristicasxproductoid serial
productoid integer
caracteristicaid integer
estado boolean
postime timestamp without time zone
public
descuentosporproducto
descuentosporproductoid serial
descuentoporproductoporcent numeric(5,2)
productoid integer
estado boolean
postime timestamp without time zone
checksum bytes
public
detalledeimportacion
detalledeimportacionid serial
importacionid integer
productoid integer
quantity numeric(12,2)
precionuntario numeric(12,2)
subtotal numeric(12,2)
exchangerateid integer
postime timestamp without time zone
userid integer
checksum bytes
public
impuestosporpais
impuestosporpaisid serial
productid integer
paisid integer
impuestoid integer
estado boolean
postime timestamp without time zone
checksum bytes
public
mediodepagos
mediodepagoid serial
mediodepagoname character varying(40)
estado boolean
postime timestamp without time zone
deviceid integer
userid integer
checksum bytes
mediodepagoparametros jsono
public
productsprice
productspriceid serial
productid integer
currencyid integer
productspriceadditem timestamp without time zone
productspriceaddto timestamp without time zone
checksum bytes
postime timestamp without time zone
device integer
public
transacciones
transaccionid serial
tipotransaccionid integer
monto numeric(12,2)
currencyid integer
exchangerateid integer
sourceobjectid integer
referenceid bigint
amountchanged numeric(12,2)
transaccioncodeid integer
transaccioncodetime timestamp without time zone
estado boolean
postime timestamp without time zone
userid integer
checksum bytes
deviceid integer
movimientoid integer
detalle character varying(10)
public
usuariologins
usuariologinid serial
usuariologinpassword bytea
usuariologinfechatime timestamp without time zone
deviceid integer
usuarioid integer
postime timestamp without time zone
lastupdate timestamp without time zone
public
productosproveedor
productosproveedorid serial
productoid integer
proveedorid integer
productosproveedortime timestamp without time zone
estado boolean
public
puertosdestino
puertodestinoid serial
puertoid integer
postime timestamp without time zone
lastupdate timestamp without time zone
userid integer
estado boolean
public
puertosorigen
puertoorigenid serial
puertoid integer
postime timestamp without time zone
lastupdate timestamp without time zone
userid integer
estado boolean
public
lotes
loteid serial
productosproveedorid integer
lotenumber integer
lotequantity integer
loteamount numeric(12,2)
currencybaseid integer
lotecurrencyamount numeric(12,2)
exchangerateid integer
exchangerateused numeric(12,2)
checksum bytes
postime timestamp without time zone
lotelastupdate timestamp without time zone
public
bulks
bulkid serial
bulkretailprice numeric(12,2)
importacionid integer
loteid integer
sizeid integer
userid integer
postime timestamp without time zone
lastupdate timestamp without time zone
checksum bytes
estado boolean
notas character varying(300)