

# Lecture 3: Loss Functions and Optimization

# Recall from last time: Linear Classifier



airplane	-3.45	-0.51	3.42
automobile	-8.87	<b>6.04</b>	4.64
bird	0.09	5.31	2.65
cat	<b>2.9</b>	-4.22	5.1
deer	4.48	-4.19	2.64
dog	8.02	3.58	5.55
frog	3.78	4.49	<b>-4.34</b>
horse	1.06	-4.37	-1.5
ship	-0.36	-2.09	-4.79
truck	-0.72	-2.93	6.14

TODO:

1. Define a **loss function** that quantifies our unhappiness with the scores across the training data.
2. Come up with a way of efficiently finding the parameters that minimize the loss function.  
**(optimization)**

Cat image by Nikita is licensed under CC-BY 2.0; Car image is CC0 1.0 public domain; Frog image is in the public domain

Suppose: 3 training examples, 3 classes.

With some  $W$  the scores  $f(x, W) = Wx$  are:



cat	<b>3.2</b>	1.3	2.2
car	<b>5.1</b>	<b>4.9</b>	2.5
frog	-1.7	2.0	<b>-3.1</b>

Suppose: 3 training examples, 3 classes.  
With some  $W$  the scores  $f(x, W) = Wx$  are:

A **loss function** tells how good our current classifier is



cat	<b>3.2</b>	1.3	2.2
car	<b>5.1</b>	<b>4.9</b>	2.5
frog	-1.7	2.0	<b>-3.1</b>

Suppose: 3 training examples, 3 classes.  
With some  $W$  the scores  $f(x, W) = Wx$  are:



cat	<b>3.2</b>	1.3	2.2
car	5.1	<b>4.9</b>	2.5
frog	-1.7	2.0	<b>-3.1</b>

A **loss function** tells how good our current classifier is

Given a dataset of examples

$$\{(x_i, y_i)\}_{i=1}^N$$

Where  $x_i$  s image and  
 $y_i$  s (integer) label

Suppose: 3 training examples, 3 classes.  
With some  $W$  the scores  $f(x, W) = Wx$  are:



cat	<b>3.2</b>	1.3	2.2
car	5.1	<b>4.9</b>	2.5
frog	-1.7	2.0	<b>-3.1</b>

A **loss function** tells how good our current classifier is

Given a dataset of examples

$$\{(x_i, y_i)\}_{i=1}^N$$

Where  $x_i$  s image and  
 $y_i$  s (integer) label

Loss over the dataset is a average of loss over examples:

$$L = \frac{1}{N} \sum_i L_i(f(x_i, W), y_i)$$

Suppose: 3 training examples, 3 classes.  
With some  $W$  the scores  $f(x, W) = Wx$  are:



cat	<b>3.2</b>	1.3	2.2
car	5.1	<b>4.9</b>	2.5
frog	-1.7	2.0	<b>-3.1</b>

## Multiclass SVM loss:

Given an example  $(x_i, y_i)$  where  $x_i$  is the image and where  $y_i$  is the (integer) label,

and using the shorthand for the scores vector:  $s = f(x_i, W)$

the SVM loss has the form:


$$L_i = \sum_{j \neq y_i} \begin{cases} 0 & \text{if } s_{y_i} \geq s_j + 1 \\ s_j - s_{y_i} + 1 & \text{otherwise} \end{cases}$$
$$= \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1)$$

Suppose: 3 training examples, 3 classes.  
With some  $W$  the scores  $f(x, W) = Wx$  are:



cat	<b>3.2</b>	1.3	2.2
car	5.1	<b>4.9</b>	2.5
frog	-1.7	2.0	<b>-3.1</b>

## Multiclass SVM loss:

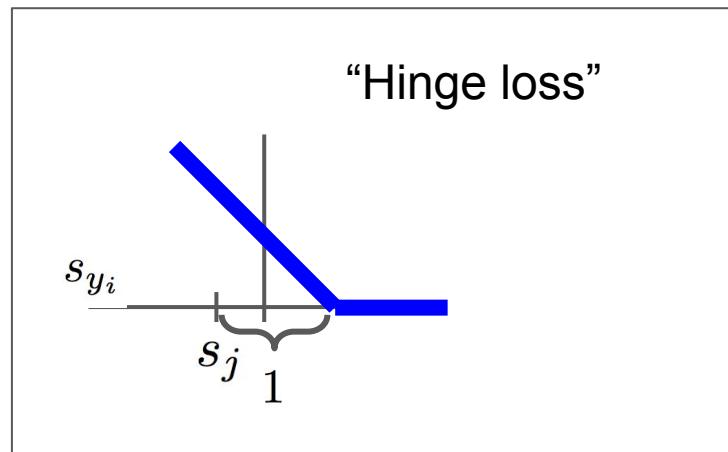

$$\begin{aligned}
 L_i &= \sum_{j \neq y_i} \begin{cases} 0 & \text{if } s_{y_i} \geq s_j + 1 \\ s_j - s_{y_i} + 1 & \text{otherwise} \end{cases} \\
 &= \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1)
 \end{aligned}$$

Suppose: 3 training examples, 3 classes.  
With some  $W$  the scores  $f(x, W) = Wx$  are:



cat	<b>3.2</b>	1.3	2.2
car	5.1	<b>4.9</b>	2.5
frog	-1.7	2.0	<b>-3.1</b>

## Multiclass SVM loss:

Given an example  $(x_i, y_i)$  where  $x_i$  is the image and where  $y_i$  is the (integer) label,

and using the shorthand for the scores vector:  $s = f(x_i, W)$

the SVM loss has the form:

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1)$$

Suppose: 3 training examples, 3 classes.  
With some  $W$  the scores  $f(x, W) = Wx$  are:



cat	<b>3.2</b>	1.3	2.2
car	<b>5.1</b>	<b>4.9</b>	2.5
frog	-1.7	2.0	<b>-3.1</b>
Losses:	<b>2.9</b>		

## Multiclass SVM loss:

Given an example  $(x_i, y_i)$  where  $x_i$  is the image and where  $y_i$  is the (integer) label,

and using the shorthand for the scores vector:  $s = f(x_i, W)$

the SVM loss has the form:

$$\begin{aligned} L_i &= \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1) \\ &= \max(0, 5.1 - 3.2 + 1) \\ &\quad + \max(0, -1.7 - 3.2 + 1) \\ &= \max(0, 2.9) + \max(0, -3.9) \\ &= 2.9 + 0 \\ &= 2.9 \end{aligned}$$

Suppose: 3 training examples, 3 classes.  
With some  $W$  the scores  $f(x, W) = Wx$  are:



cat	<b>3.2</b>	1.3	2.2
car	5.1	<b>4.9</b>	2.5
frog	-1.7	2.0	<b>-3.1</b>
Losses:	2.9	0	

## Multiclass SVM loss:

Given an example  $(x_i, y_i)$  where  $x_i$  is the image and where  $y_i$  is the (integer) label,

and using the shorthand for the scores vector:  $s = f(x_i, W)$

the SVM loss has the form:

$$\begin{aligned}
 L_i &= \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1) \\
 &= \max(0, 1.3 - 4.9 + 1) \\
 &\quad + \max(0, 2.0 - 4.9 + 1) \\
 &= \max(0, -2.6) + \max(0, -1.9) \\
 &= 0 + 0 \\
 &= 0
 \end{aligned}$$

Suppose: 3 training examples, 3 classes.  
With some  $W$  the scores  $f(x, W) = Wx$  are:



cat	<b>3.2</b>	1.3	2.2
car	5.1	<b>4.9</b>	2.5
frog	-1.7	2.0	<b>-3.1</b>
Losses:	2.9	0	<b>12.9</b>

## Multiclass SVM loss:

Given an example  $(x_i, y_i)$  where  $x_i$  is the image and where  $y_i$  is the (integer) label,

and using the shorthand for the scores vector:  $s = f(x_i, W)$

the SVM loss has the form:

$$\begin{aligned}
 L_i &= \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1) \\
 &= \max(0, 2.2 - (-3.1) + 1) \\
 &\quad + \max(0, 2.5 - (-3.1) + 1) \\
 &= \max(0, 6.3) + \max(0, 6.6) \\
 &= 6.3 + 6.6 \\
 &= 12.9
 \end{aligned}$$

Suppose: 3 training examples, 3 classes.  
With some  $W$  the scores  $f(x, W) = Wx$  are:



cat	<b>3.2</b>	1.3	2.2
car	5.1	<b>4.9</b>	2.5
frog	-1.7	2.0	<b>-3.1</b>
Losses:	<b>2.9</b>	0	<b>12.9</b>

## Multiclass SVM loss:

Given an example  $(x_i, y_i)$  where  $x_i$  is the image and where  $y_i$  is the (integer) label,

and using the shorthand for the scores vector:  $s = f(x_i, W)$

the SVM loss has the form:

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1)$$

Loss over full dataset is average:

$$L = \frac{1}{N} \sum_{i=1}^N L_i$$

$$\begin{aligned} L &= (2.9 + 0 + 12.9)/3 \\ &= 5.27 \end{aligned}$$

Suppose: 3 training examples, 3 classes.  
With some  $W$  the scores  $f(x, W) = Wx$  are:



cat	<b>3.2</b>	1.3	2.2
car	5.1	<b>4.9</b>	2.5
frog	-1.7	2.0	<b>-3.1</b>
Losses:	<b>2.9</b>	0	<b>12.9</b>

## Multiclass SVM loss:

Given an example  $(x_i, y_i)$  where  $x_i$  is the image and where  $y_i$  is the (integer) label,

and using the shorthand for the scores vector:  $s = f(x_i, W)$

the SVM loss has the form:

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1)$$

Q: What happens to loss if car scores change a bit?

Suppose: 3 training examples, 3 classes.  
With some  $W$  the scores  $f(x, W) = Wx$  are:



cat	<b>3.2</b>	1.3	2.2
car	5.1	<b>4.9</b>	2.5
frog	-1.7	2.0	<b>-3.1</b>
Losses:	<b>2.9</b>	0	<b>12.9</b>

## Multiclass SVM loss:

Given an example  $(x_i, y_i)$  where  $x_i$  is the image and where  $y_i$  is the (integer) label,

and using the shorthand for the scores vector:  $s = f(x_i, W)$

the SVM loss has the form:

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1)$$

Q2: what is the min/max possible loss?

Suppose: 3 training examples, 3 classes.  
With some  $W$  the scores  $f(x, W) = Wx$  are:



cat	<b>3.2</b>	1.3	2.2
car	5.1	<b>4.9</b>	2.5
frog	-1.7	2.0	<b>-3.1</b>
Losses:	<b>2.9</b>	0	<b>12.9</b>

## Multiclass SVM loss:

Given an example  $(x_i, y_i)$  where  $x_i$  is the image and where  $y_i$  is the (integer) label,

and using the shorthand for the scores vector:  $s = f(x_i, W)$

the SVM loss has the form:

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1)$$

Q3: At initialization  $W$  is small so all  $s \approx 0$ . What is the loss?

Suppose: 3 training examples, 3 classes.  
With some  $W$  the scores  $f(x, W) = Wx$  are:



cat	<b>3.2</b>	1.3	2.2
car	5.1	<b>4.9</b>	2.5
frog	-1.7	2.0	<b>-3.1</b>
Losses:	<b>2.9</b>	0	<b>12.9</b>

## Multiclass SVM loss:

Given an example  $(x_i, y_i)$  where  $x_i$  is the image and where  $y_i$  is the (integer) label,

and using the shorthand for the scores vector:  $s = f(x_i, W)$

the SVM loss has the form:

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1)$$

Q4: What if the sum was over all classes?  
(including  $j = y_i$ )

Suppose: 3 training examples, 3 classes.  
With some  $W$  the scores  $f(x, W) = Wx$  are:



cat	<b>3.2</b>	1.3	2.2
car	5.1	<b>4.9</b>	2.5
frog	-1.7	2.0	<b>-3.1</b>
Losses:	<b>2.9</b>	0	<b>12.9</b>

## Multiclass SVM loss:

Given an example  $(x_i, y_i)$  where  $x_i$  is the image and where  $y_i$  is the (integer) label,

and using the shorthand for the scores vector:  $s = f(x_i, W)$

the SVM loss has the form:

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1)$$

Q5: What if we used mean instead of sum?

Suppose: 3 training examples, 3 classes.  
With some  $W$  the scores  $f(x, W) = Wx$  are:



cat	<b>3.2</b>	1.3	2.2
car	5.1	<b>4.9</b>	2.5
frog	-1.7	2.0	<b>-3.1</b>
Losses:	<b>2.9</b>	0	<b>12.9</b>

## Multiclass SVM loss:

Given an example  $(x_i, y_i)$  where  $x_i$  is the image and where  $y_i$  is the (integer) label,

and using the shorthand for the scores vector:  $s = f(x_i, W)$

the SVM loss has the form:

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1)$$

Q6: What if we used

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1)^2$$

# Multiclass SVM Loss: Example code

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1)$$

```
def L_i_vectorized(x, y, W):
    scores = W.dot(x)
    margins = np.maximum(0, scores - scores[y] + 1)
    margins[y] = 0
    loss_i = np.sum(margins)
    return loss_i
```

$$f(x, W) = Wx$$

$$L = \frac{1}{N} \sum_{i=1}^N \sum_{j \neq y_i} \max(0, f(x_i; W)_j - f(x_i; W)_{y_i} + 1)$$

E.g. Suppose that we found a  $W$  such that  $L = 0$ .  
Is this  $W$  unique?

$$f(x, W) = Wx$$

$$L = \frac{1}{N} \sum_{i=1}^N \sum_{j \neq y_i} \max(0, f(x_i; W)_j - f(x_i; W)_{y_i} + 1)$$

E.g. Suppose that we found a  $W$  such that  $L = 0$ .  
Is this  $W$  unique?

**No!  $2W$  is also has  $L = 0!$**

Suppose: 3 training examples, 3 classes.

With some  $W$  the scores  $f(x, W) = Wx$  are:



cat	3.2	1.3	2.2	
car	5.1	4.9	2.5	
frog	-1.7	2.0	-3.1	
Losses:	2.9	0		

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1)$$

**Before:**

$$\begin{aligned} &= \max(0, 1.3 - 4.9 + 1) \\ &\quad + \max(0, 2.0 - 4.9 + 1) \\ &= \max(0, -2.6) + \max(0, -1.9) \\ &= 0 + 0 \\ &= 0 \end{aligned}$$

**With  $W$  twice as large:**

$$\begin{aligned} &= \max(0, 2.6 - 9.8 + 1) \\ &\quad + \max(0, 4.0 - 9.8 + 1) \\ &= \max(0, -6.2) + \max(0, -4.8) \\ &= 0 + 0 \\ &= 0 \end{aligned}$$

$$f(x, W) = Wx$$

$$L = \frac{1}{N} \sum_{i=1}^N \sum_{j \neq y_i} \max(0, f(x_i; W)_j - f(x_i; W)_{y_i} + 1)$$

E.g. Suppose that we found a  $W$  such that  $L = 0$ .  
Is this  $W$  unique?

**No!  $2W$  is also has  $L = 0$ !**

**How do we choose between  $W$  and  $2W$ ?**

# Regularization

$$L(W) = \underbrace{\frac{1}{N} \sum_{i=1}^N L_i(f(x_i, W), y_i)}_{\text{Data loss}}$$

**Data loss:** Model predictions  
should match training data

# Regularization

$$L(W) = \underbrace{\frac{1}{N} \sum_{i=1}^N L_i(f(x_i, W), y_i)}_{\text{Data loss: Model predictions should match training data}} + \lambda R(W)$$


**Data loss:** Model predictions should match training data

**Regularization:** Prevent the model from doing *too well* on training data

# Regularization

$\lambda$  = regularization strength  
(hyperparameter)

$$L(W) = \underbrace{\frac{1}{N} \sum_{i=1}^N L_i(f(x_i, W), y_i)}_{\text{Data loss: Model predictions should match training data}} + \underbrace{\lambda R(W)}_{\text{Regularization: Prevent the model from doing } \textit{too well} \text{ on training data}}$$

**Data loss:** Model predictions should match training data

**Regularization:** Prevent the model from doing *too well* on training data

# Regularization

$\lambda$  = regularization strength  
(hyperparameter)

$$L(W) = \underbrace{\frac{1}{N} \sum_{i=1}^N L_i(f(x_i, W), y_i)}_{\text{Data loss: Model predictions should match training data}} + \lambda R(W)$$



**Data loss:** Model predictions should match training data

**Regularization:** Prevent the model from doing *too well* on training data

## Simple examples

L2 regularization:  $R(W) = \sum_k \sum_l W_{k,l}^2$

L1 regularization:  $R(W) = \sum_k \sum_l |W_{k,l}|$

Elastic net (L1 + L2):  $R(W) = \sum_k \sum_l \beta W_{k,l}^2 + |W_{k,l}|$

# Regularization

$\lambda$  = regularization strength  
(hyperparameter)

$$L(W) = \underbrace{\frac{1}{N} \sum_{i=1}^N L_i(f(x_i, W), y_i)}_{\text{Data loss: Model predictions should match training data}} + \lambda R(W)$$



**Data loss:** Model predictions should match training data

**Regularization:** Prevent the model from doing *too well* on training data

## Simple examples

L2 regularization:  $R(W) = \sum_k \sum_l W_{k,l}^2$

L1 regularization:  $R(W) = \sum_k \sum_l |W_{k,l}|$

Elastic net (L1 + L2):  $R(W) = \sum_k \sum_l \beta W_{k,l}^2 + |W_{k,l}|$

## More complex:

Dropout

Batch normalization

Stochastic depth, fractional pooling, etc

# Regularization

$\lambda$  = regularization strength  
(hyperparameter)

$$L(W) = \underbrace{\frac{1}{N} \sum_{i=1}^N L_i(f(x_i, W), y_i)}_{\text{Data loss: Model predictions should match training data}} + \lambda R(W)$$



**Data loss:** Model predictions should match training data

**Regularization:** Prevent the model from doing *too well* on training data

Why regularize?

- Express preferences over weights
- Make the model *simple* so it works on test data
- Improve optimization by adding curvature

# Regularization: Expressing Preferences

$$x = [1, 1, 1, 1]$$

L2 Regularization

$$R(W) = \sum_k \sum_l W_{k,l}^2$$

$$w_1 = [1, 0, 0, 0]$$

$$w_2 = [0.25, 0.25, 0.25, 0.25]$$

$$w_1^T x = w_2^T x = 1$$

# Regularization: Expressing Preferences

$$x = [1, 1, 1, 1]$$

$$w_1 = [1, 0, 0, 0]$$

$$w_2 = [0.25, 0.25, 0.25, 0.25]$$


L2 Regularization

$$R(W) = \sum_k \sum_l W_{k,l}^2$$


L2 regularization likes to  
“spread out” the weights

$$w_1^T x = w_2^T x = 1$$


# Regularization: Prefer Simpler Models

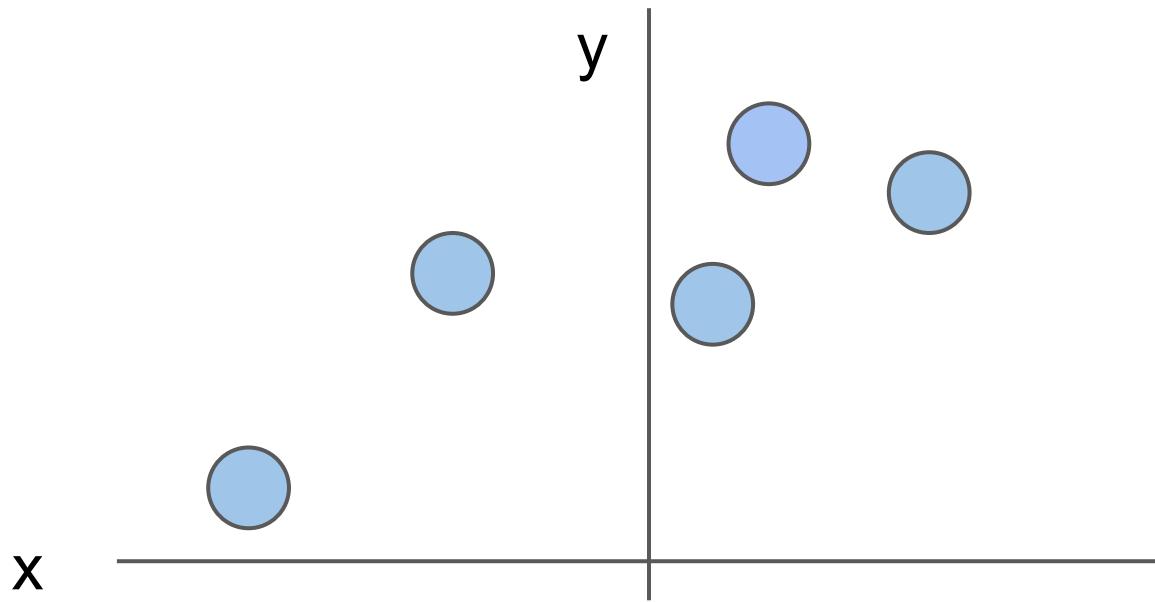

# Regularization: Prefer Simpler Models

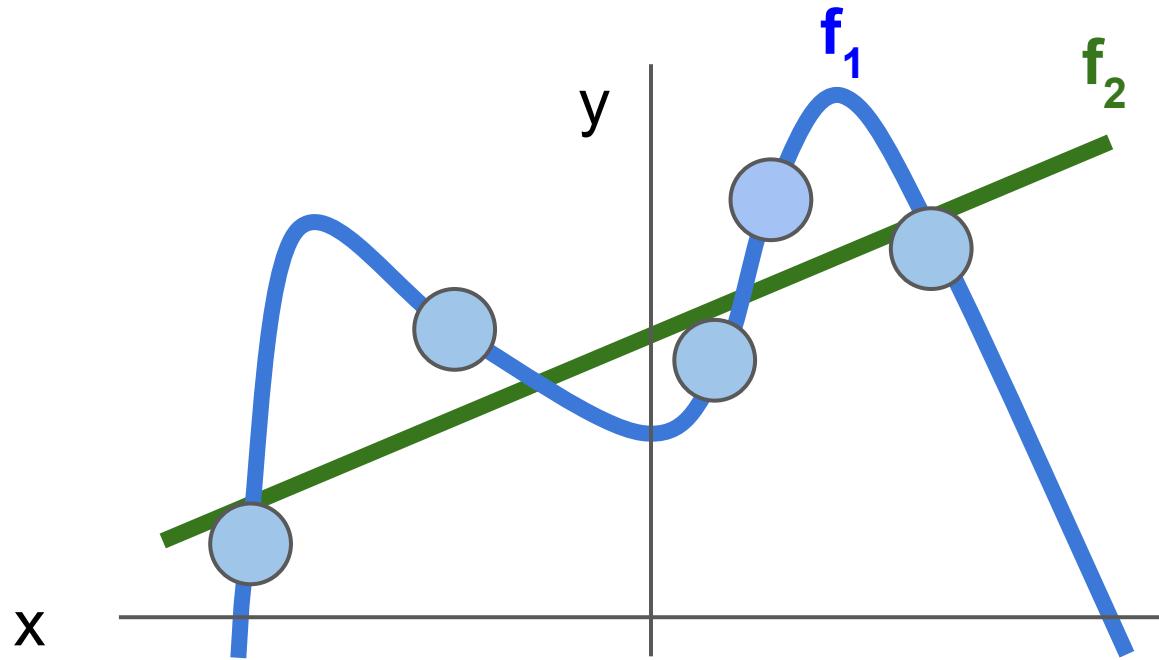

# Regularization: Prefer Simpler Models

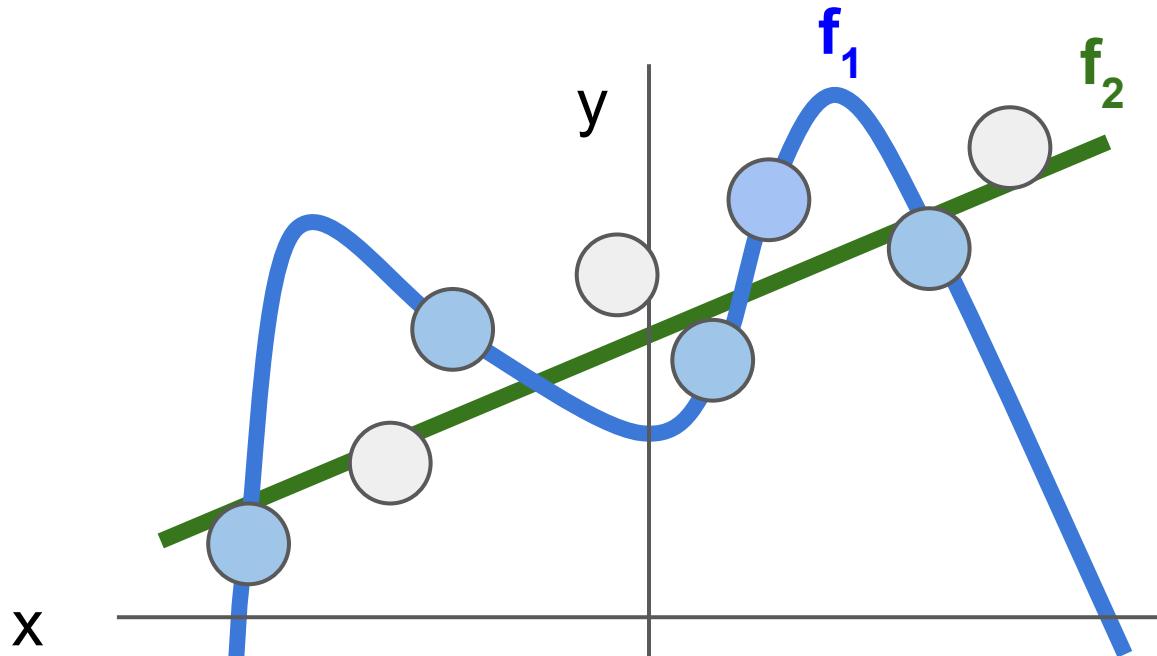

Regularization pushes against fitting the data  
too well so we don't fit noise in the data

# Softmax Classifier (Multinomial Logistic Regression)

Want to interpret raw classifier scores as **probabilities**



cat	<b>3.2</b>
car	5.1
frog	-1.7

# Softmax Classifier (Multinomial Logistic Regression)

Want to interpret raw classifier scores as **probabilities**



$$s = f(x_i; W)$$

$$P(Y = k | X = x_i) = \frac{e^{s_k}}{\sum_j e^{s_j}}$$

Softmax  
Function

cat	<b>3.2</b>
car	5.1
frog	-1.7

# Softmax Classifier (Multinomial Logistic Regression)



Want to interpret raw classifier scores as **probabilities**


$$s = f(x_i; W)$$

$$P(Y = k|X = x_i) = \frac{e^{s_k}}{\sum_j e^{s_j}}$$

Softmax  
Function

Probabilities  
must be  $\geq 0$

cat	3.2
car	5.1
frog	-1.7

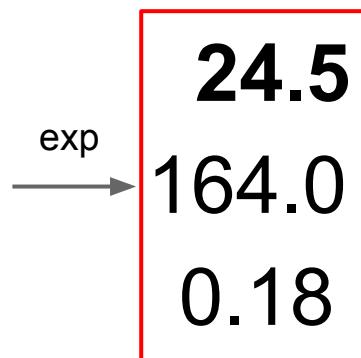

unnormalized  
probabilities

# Softmax Classifier (Multinomial Logistic Regression)

Want to interpret raw classifier scores as **probabilities**



$$s = f(x_i; W)$$

Probabilities  
must be  $\geq 0$

$$P(Y = k|X = x_i) = \frac{e^{s_k}}{\sum_j e^{s_j}}$$

Softmax  
Function

cat	3.2
car	5.1
frog	-1.7

exp

24.5
164.0
0.18

unnormalized  
probabilities

normalize

0.13
0.87
0.00

probabilities

# Softmax Classifier (Multinomial Logistic Regression)

Want to interpret raw classifier scores as **probabilities**



$$s = f(x_i; W)$$

$$P(Y = k|X = x_i) = \frac{e^{s_k}}{\sum_j e^{s_j}}$$

Softmax Function

cat  
car  
frog

3.2
5.1
-1.7

Unnormalized  
log-probabilities / logits

exp

24.5
164.0
0.18

unnormalized  
probabilities

normalize

0.13
0.87
0.00

probabilities

# Softmax Classifier (Multinomial Logistic Regression)

Want to interpret raw classifier scores as **probabilities**



$$s = f(x_i; W)$$

$$P(Y = k|X = x_i) = \frac{e^{s_k}}{\sum_j e^{s_j}}$$
 Softmax Function

Probabilities  
must be  $\geq 0$

Probabilities  
must sum to 1

cat  
car  
frog

3.2
5.1
-1.7

Unnormalized  
log-probabilities / logits

exp

24.5
164.0
0.18

unnormalized  
probabilities

normalize

0.13
0.87
0.00

probabilities

$$L_i = -\log P(Y = y_i|X = x_i)$$

$$\rightarrow L_i = -\log(0.13) \\ = 2.04$$

# Softmax Classifier (Multinomial Logistic Regression)

Want to interpret raw classifier scores as **probabilities**



$$s = f(x_i; W)$$

$$P(Y = k|X = x_i) = \frac{e^{s_k}}{\sum_j e^{s_j}}$$

Softmax Function

Probabilities  
must be  $\geq 0$

Probabilities  
must sum to 1

cat  
car  
frog

3.2
5.1
-1.7

Unnormalized  
log-probabilities / logits

exp

24.5
164.0
0.18

unnormalized  
probabilities

normalize

0.13
0.87
0.00

probabilities

$$L_i = -\log P(Y = y_i|X = x_i)$$

$$\rightarrow L_i = -\log(0.13) \\ = 2.04$$

Maximum Likelihood Estimation  
Choose weights to maximize the likelihood of the observed data  
(See CS 229 for details)

# Softmax Classifier (Multinomial Logistic Regression)



Want to interpret raw classifier scores as **probabilities**

$$s = f(x_i; W)$$

$$P(Y = k|X = x_i) = \frac{e^{s_k}}{\sum_j e^{s_j}}$$

Softmax Function

Probabilities  
must be  $\geq 0$

Probabilities  
must sum to 1

cat  
car  
frog

3.2
5.1
-1.7

Unnormalized  
log-probabilities / logits

exp

24.5
164.0
0.18

unnormalized  
probabilities

normalize

0.13
0.87
0.00

probabilities

compare

1.00
0.00
0.00

Correct  
probs

# Softmax Classifier (Multinomial Logistic Regression)



Want to interpret raw classifier scores as **probabilities**

$$s = f(x_i; W)$$

$$P(Y = k|X = x_i) = \frac{e^{s_k}}{\sum_j e^{s_j}}$$

Softmax Function

cat  
car  
frog

3.2
5.1
-1.7

Unnormalized  
log-probabilities / logits

exp

24.5
164.0
0.18

unnormalized  
probabilities

Probabilities  
must sum to 1

0.13
0.87
0.00

probabilities

normalize

$$L_i = -\log P(Y = y_i|X = x_i)$$

compare

Kullback–Leibler  
divergence

$$D_{KL}(P||Q) = \sum_y P(y) \log \frac{P(y)}{Q(y)}$$

1.00

0.00

0.00

Correct  
probs

# Softmax Classifier (Multinomial Logistic Regression)



Want to interpret raw classifier scores as **probabilities**

$$s = f(x_i; W)$$

Probabilities  
must be  $\geq 0$

cat  
car  
frog

3.2
5.1
-1.7

Unnormalized  
log-probabilities / logits

exp

24.5
164.0
0.18

unnormalized  
probabilities

$$P(Y = k|X = x_i) = \frac{e^{s_k}}{\sum_j e^{s_j}}$$

Softmax  
Function

Probabilities  
must sum to 1

0.13
0.87
0.00

probabilities

$$L_i = -\log P(Y = y_i|X = x_i)$$

compare

1.00

0.00

0.00

Cross Entropy

$$H(P, Q) = H(p) + D_{KL}(P||Q)$$

Correct  
probs

# Softmax Classifier (Multinomial Logistic Regression)

Want to interpret raw classifier scores as **probabilities**



$$s = f(x_i; W)$$

$$P(Y = k|X = x_i) = \frac{e^{s_k}}{\sum_j e^{s_j}}$$

Softmax  
Function

Maximize probability of correct class

cat	3.2
car	5.1
frog	-1.7

Putting it all together:

$$L_i = -\log P(Y = y_i|X = x_i)$$

$$L_i = -\log\left(\frac{e^{s_{y_i}}}{\sum_j e^{s_j}}\right)$$

# Softmax Classifier (Multinomial Logistic Regression)



Want to interpret raw classifier scores as **probabilities**

$$s = f(x_i; W)$$

$$P(Y = k|X = x_i) = \frac{e^{s_k}}{\sum_j e^{s_j}}$$

Softmax  
Function

Maximize probability of correct class

cat	3.2
car	5.1
frog	-1.7

Putting it all together:

$$L_i = -\log P(Y = y_i|X = x_i)$$

$$L_i = -\log\left(\frac{e^{s_{y_i}}}{\sum_j e^{s_j}}\right)$$

Q: What is the min/max possible loss  $L_i$ ?

# Softmax Classifier (Multinomial Logistic Regression)



Want to interpret raw classifier scores as **probabilities**

$$s = f(x_i; W)$$

$$P(Y = k|X = x_i) = \frac{e^{s_k}}{\sum_j e^{s_j}}$$

Softmax Function

Maximize probability of correct class

$$L_i = -\log P(Y = y_i|X = x_i)$$

Putting it all together:

$$L_i = -\log\left(\frac{e^{s_{y_i}}}{\sum_j e^{s_j}}\right)$$

cat	<b>3.2</b>
car	5.1
frog	-1.7

Q: What is the min/max possible loss  $L_i$ ?  
A: min 0, max infinity

# Softmax Classifier (Multinomial Logistic Regression)

Want to interpret raw classifier scores as **probabilities**



$$s = f(x_i; W)$$

$$P(Y = k|X = x_i) = \frac{e^{s_k}}{\sum_j e^{s_j}}$$

Softmax  
Function

Maximize probability of correct class

Putting it all together:

$$L_i = -\log P(Y = y_i|X = x_i)$$

$$L_i = -\log\left(\frac{e^{s_{y_i}}}{\sum_j e^{s_j}}\right)$$

cat	3.2
car	5.1
frog	-1.7

Q2: At initialization all  $s$  will be approximately equal; what is the loss?

# Softmax Classifier (Multinomial Logistic Regression)



Want to interpret raw classifier scores as **probabilities**

$$s = f(x_i; W)$$

$$P(Y = k|X = x_i) = \frac{e^{s_k}}{\sum_j e^{s_j}}$$

Softmax Function

Maximize probability of correct class

cat	3.2
car	5.1
frog	-1.7

Putting it all together:




$$L_i = -\log P(Y = y_i|X = x_i)$$

$$L_i = -\log\left(\frac{e^{s_{y_i}}}{\sum_j e^{s_j}}\right)$$

Q2: At initialization all  $s$  will be approximately equal; what is the loss?  
A:  $\log(C)$ , eg  $\log(10) \approx 2.3$

# Softmax vs. SVM

matrix multiply + bias offset

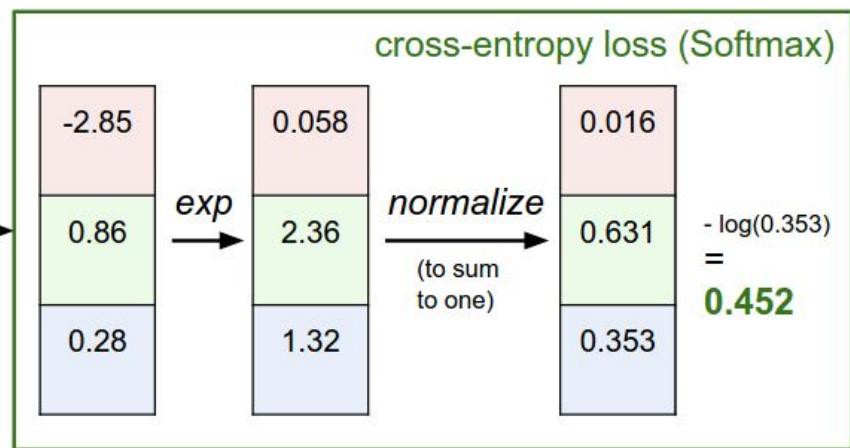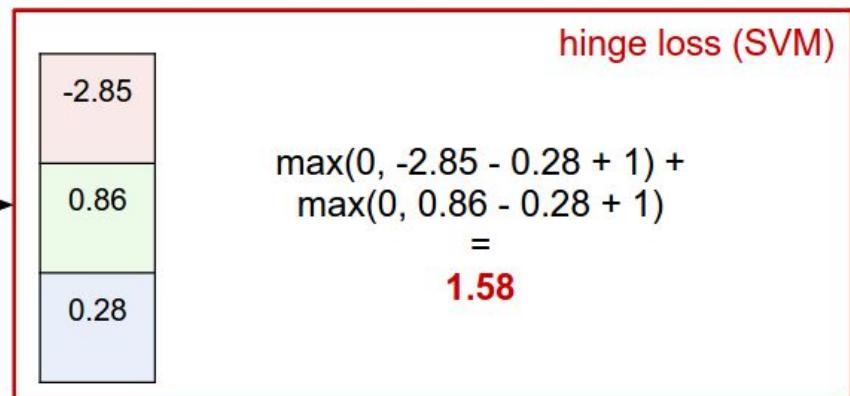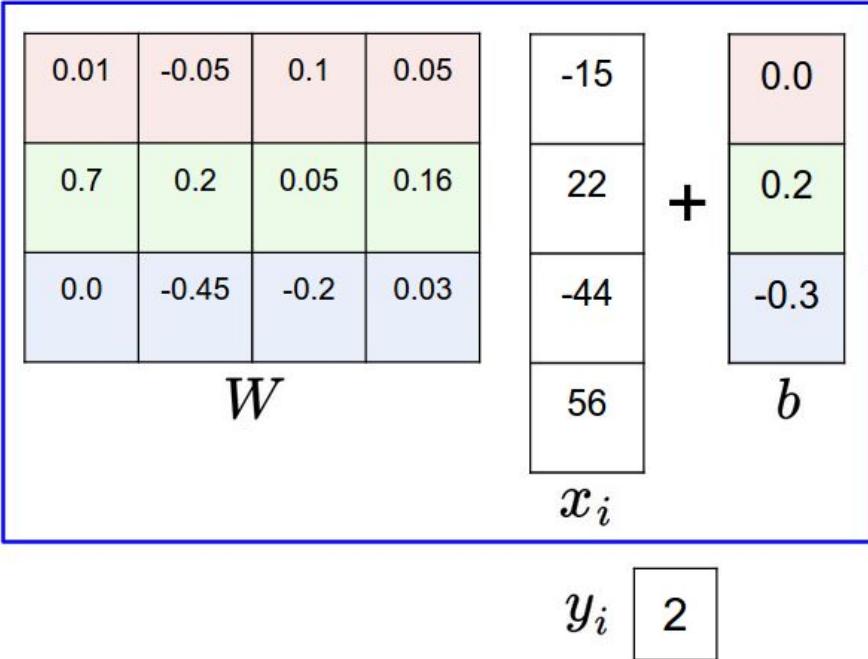

# Softmax vs. SVM

$$L_i = -\log\left(\frac{e^{s_{y_i}}}{\sum_j e^{s_j}}\right)$$

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1)$$

assume scores:

[10, -2, 3]

[10, 9, 9]

[10, -100, -100]

and

$y_i = 0$

Q: Suppose I take a datapoint and I jiggle a bit (changing its score slightly). What happens to the loss in both cases?


# Recap

- We have some dataset of  $(x, y)$
- We have a **score function**:  $s = f(x; W) = Wx$  e.g.
- We have a **loss function**:

$$L_i = -\log\left(\frac{e^{sy_i}}{\sum_j e^{sj}}\right) \quad \text{Softmax}$$

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1) \quad \text{SVM}$$

$$L = \frac{1}{N} \sum_{i=1}^N L_i + R(W) \quad \text{Full loss}$$

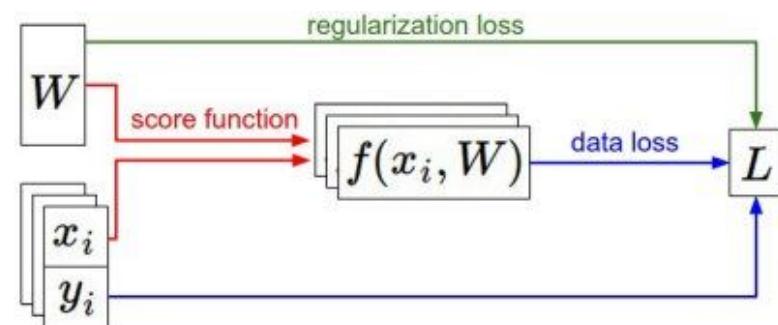

# Optimization



[This image](#) is CC0 1.0 public domain



[Walking man image is CC0 1.0 public domain](#)

# Strategy #1: A first very bad idea solution: Random search

```
# assume X_train is the data where each column is an example (e.g. 3073 x 50,000)
# assume Y_train are the labels (e.g. 1D array of 50,000)
# assume the function L evaluates the loss function

bestloss = float("inf") # Python assigns the highest possible float value
for num in xrange(1000):
    W = np.random.randn(10, 3073) * 0.0001 # generate random parameters
    loss = L(X_train, Y_train, W) # get the loss over the entire training set
    if loss < bestloss: # keep track of the best solution
        bestloss = loss
        bestW = W
    print 'in attempt %d the loss was %f, best %f' % (num, loss, bestloss)

# prints:
# in attempt 0 the loss was 9.401632, best 9.401632
# in attempt 1 the loss was 8.959668, best 8.959668
# in attempt 2 the loss was 9.044034, best 8.959668
# in attempt 3 the loss was 9.278948, best 8.959668
# in attempt 4 the loss was 8.857370, best 8.857370
# in attempt 5 the loss was 8.943151, best 8.857370
# in attempt 6 the loss was 8.605604, best 8.605604
# ... (truncated: continues for 1000 lines)
```

# Lets see how well this works on the test set...

```
# Assume X_test is [3073 x 10000], Y_test [10000 x 1]
scores = Wbest.dot(Xte_cols) # 10 x 10000, the class scores for all test examples
# find the index with max score in each column (the predicted class)
Yte_predict = np.argmax(scores, axis = 0)
# and calculate accuracy (fraction of predictions that are correct)
np.mean(Yte_predict == Yte)
# returns 0.1555
```

15.5% accuracy! not bad!  
(SOTA is ~95%)

## Strategy #2: Follow the slope



## Strategy #2: Follow the slope

In 1-dimension, the derivative of a function:

$$\frac{df(x)}{dx} = \lim_{h \rightarrow 0} \frac{f(x + h) - f(x)}{h}$$

In multiple dimensions, the **gradient** is the vector of (partial derivatives) along each dimension

The slope in any direction is the **dot product** of the direction with the gradient  
The direction of steepest descent is the **negative gradient**

**current W:**

[0.34,  
-1.11,  
0.78,  
0.12,  
0.55,  
2.81,  
-3.1,  
-1.5,  
0.33,...]

**loss 1.25347**

**gradient dW:**

[?,  
?,  
?,  
?,  
?,  
?,  
?,  
?,  
?,  
?,...]

current W:	W + h (first dim):	gradient dW:
[0.34, -1.11, 0.78, 0.12, 0.55, 2.81, -3.1, -1.5, 0.33,...] <b>loss 1.25347</b>	[0.34 + 0.0001, -1.11, 0.78, 0.12, 0.55, 2.81, -3.1, -1.5, 0.33,...] <b>loss 1.25322</b>	[?, , , , , , , , ,...]

**current W:**

[0.34,  
-1.11,  
0.78,  
0.12,  
0.55,  
2.81,  
-3.1,  
-1.5,  
0.33,...]

**loss 1.25347**

**W + h (first dim):**

[0.34 + 0.0001,  
-1.11,  
0.78,  
0.12,  
0.55,  
2.81,  
-3.1,  
-1.5,  
0.33,...]

**loss 1.25322**

**gradient dW:**

**[-2.5,**

**?,**

**?,**

$$\begin{aligned} & (1.25322 - 1.25347) / 0.0001 \\ & = -2.5 \end{aligned}$$

$$\frac{df(x)}{dx} = \lim_{h \rightarrow 0} \frac{f(x + h) - f(x)}{h}$$

**?,**

**?,...]**

current W:	W + h (second dim):	gradient dW:
[0.34, -1.11, 0.78, 0.12, 0.55, 2.81, -3.1, -1.5, 0.33,...]	[0.34, -1.11 + <b>0.0001</b> , 0.78, 0.12, 0.55, 2.81, -3.1, -1.5, 0.33,...]	[-2.5, ?, ?, ?, ?, ?, ?, ?, ?, ?,...]

**loss 1.25347**      **loss 1.25353**

current W:

[0.34,  
-1.11,  
0.78,  
0.12,  
0.55,  
2.81,  
-3.1,  
-1.5,  
0.33,...]

loss **1.25347**

W + h (second dim):

[0.34,  
-1.11 + **0.0001**,  
0.78,  
0.12,  
0.55,  
2.81,  
-3.1,  
-1.5,  
0.33,...]

loss **1.25353**

gradient dW:

**[-2.5,**  
**0.6,**  
?,  
?]

$$\frac{(1.25353 - 1.25347)}{0.0001} = 0.6$$

$$\frac{df(x)}{dx} = \lim_{h \rightarrow 0} \frac{f(x + h) - f(x)}{h}$$

?,...]

current W:	W + h (third dim):	gradient dW:
[0.34, -1.11, 0.78, 0.12, 0.55, 2.81, -3.1, -1.5, 0.33,...]	[0.34, -1.11, 0.78 + <b>0.0001</b> , 0.12, 0.55, 2.81, -3.1, -1.5, 0.33,...]	[-2.5, 0.6, ?, ?, ?, ?, ?, ?, ?, ?,...]

**loss 1.25347**      **loss 1.25347**

current W:

[0.34,  
-1.11,  
0.78,  
0.12,  
0.55,  
2.81,  
-3.1,  
-1.5,  
0.33,...]

loss **1.25347**

W + h (third dim):

[0.34,  
-1.11,  
0.78 + **0.0001**,  
0.12,  
0.55,  
2.81,  
-3.1,  
-1.5,  
0.33,...]

loss **1.25347**

gradient dW:

[-2.5,  
0.6,  
**0**,  
?,  
?]

$$\frac{(1.25347 - 1.25347)}{0.0001} = 0$$

$$\frac{df(x)}{dx} = \lim_{h \rightarrow 0} \frac{f(x + h) - f(x)}{h}$$

?, ...]

**current W:**

[0.34,  
-1.11,  
0.78,  
0.12,  
0.55,  
2.81,  
-3.1,  
-1.5,  
0.33,...]

**loss 1.25347**

**W + h (third dim):**

[0.34,  
-1.11,  
0.78 + **0.0001**,  
0.12,  
0.55,  
2.81,  
-3.1,  
-1.5,  
0.33,...]

**loss 1.25347**

**gradient dW:**

[-2.5,  
0.6,  
**0**,  
?,  
?]

[...,]

### Numeric Gradient

- Slow! Need to loop over all dimensions
- Approximate

This is silly. The loss is just a function of  $W$ :

$$L = \frac{1}{N} \sum_{i=1}^N L_i + \sum_k W_k^2$$

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1)$$

$$s = f(x; W) = Wx$$

want  $\nabla_W L$

This is silly. The loss is just a function of W:


$$L = \frac{1}{N} \sum_{i=1}^N L_i + \sum_k W_k^2$$

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1)$$

$$s = f(x; W) = Wx$$

want  $\nabla_W L$

Use calculus to compute an analytic gradient

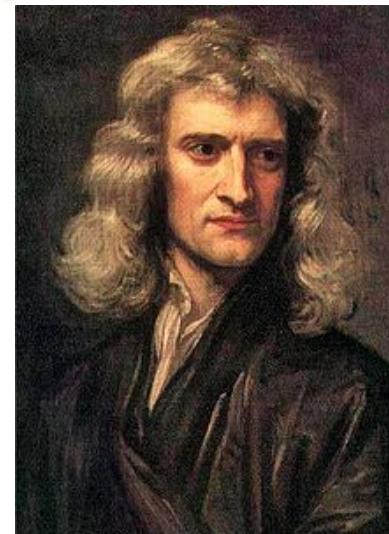

[This image](#) is in the public domain



[This image](#) is in the public domain

**current W:**

[0.34,  
-1.11,  
0.78,  
0.12,  
0.55,  
2.81,  
-3.1,  
-1.5,  
0.33,...]

**loss 1.25347**

**gradient dW:**

[-2.5,  
0.6,  
0,  
0.2,  
0.7,  
-0.5,  
1.1,  
1.3,  
-2.1,...]

dW = ...  
(some function  
data and W)



# In summary:

- Numerical gradient: approximate, slow, easy to write
- Analytic gradient: exact, fast, error-prone


=>

In practice: Always use analytic gradient, but check implementation with numerical gradient. This is called a **gradient check**.


# Gradient Descent

```
# Vanilla Gradient Descent

while True:
    weights_grad = evaluate_gradient(loss_fun, data, weights)
    weights += - step_size * weights_grad # perform parameter update
```

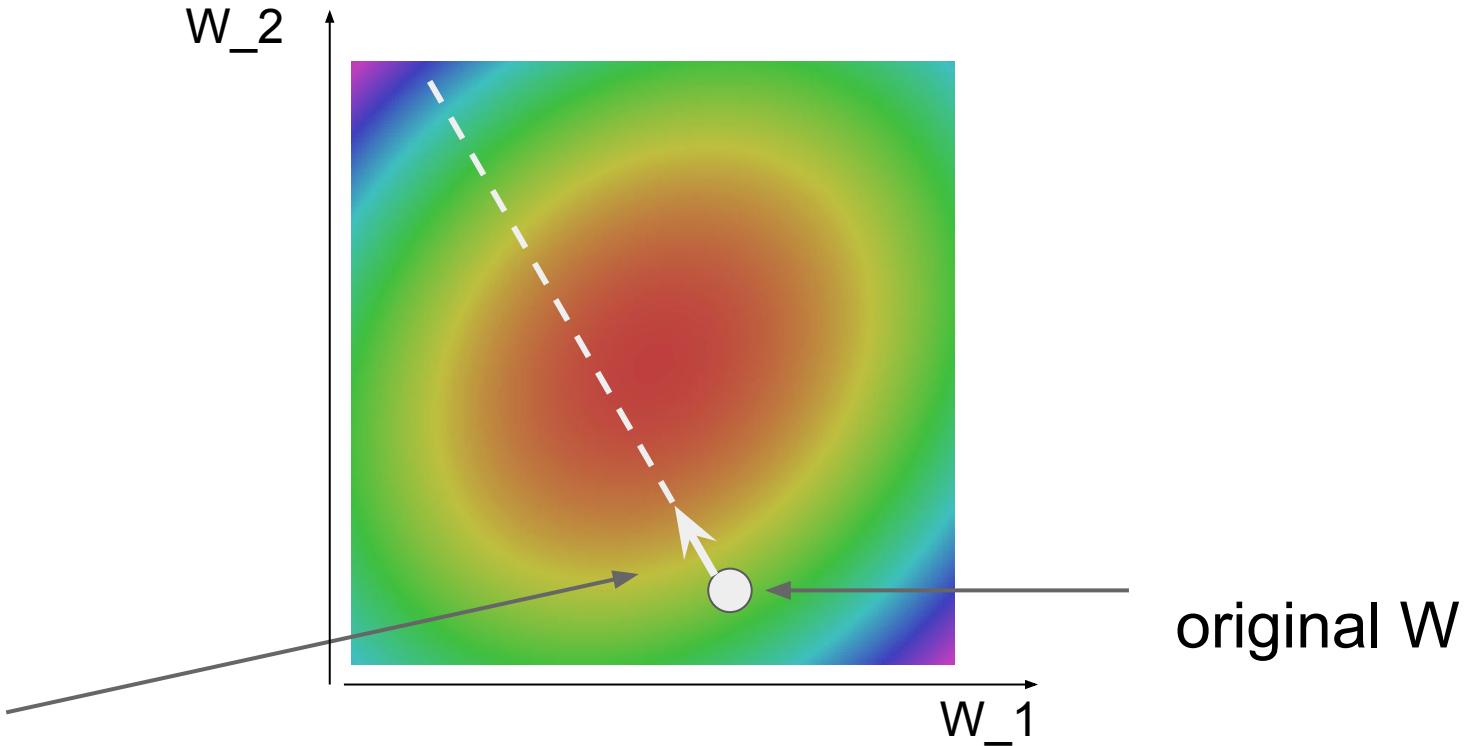

negative gradient direction



# Stochastic Gradient Descent (SGD)

$$L(W) = \frac{1}{N} \sum_{i=1}^N L_i(x_i, y_i, W) + \lambda R(W)$$

$$\nabla_W L(W) = \frac{1}{N} \sum_{i=1}^N \nabla_W L_i(x_i, y_i, W) + \lambda \nabla_W R(W)$$


Full sum expensive  
when N is large!

Approximate sum  
using a **minibatch** of  
examples  
32 / 64 / 128 common

```
# Vanilla Minibatch Gradient Descent
```

```
while True:  
    data_batch = sample_training_data(data, 256) # sample 256 examples  
    weights_grad = evaluate_gradient(loss_fun, data_batch, weights)  
    weights += - step_size * weights_grad # perform parameter update
```

# Interactive Web Demo

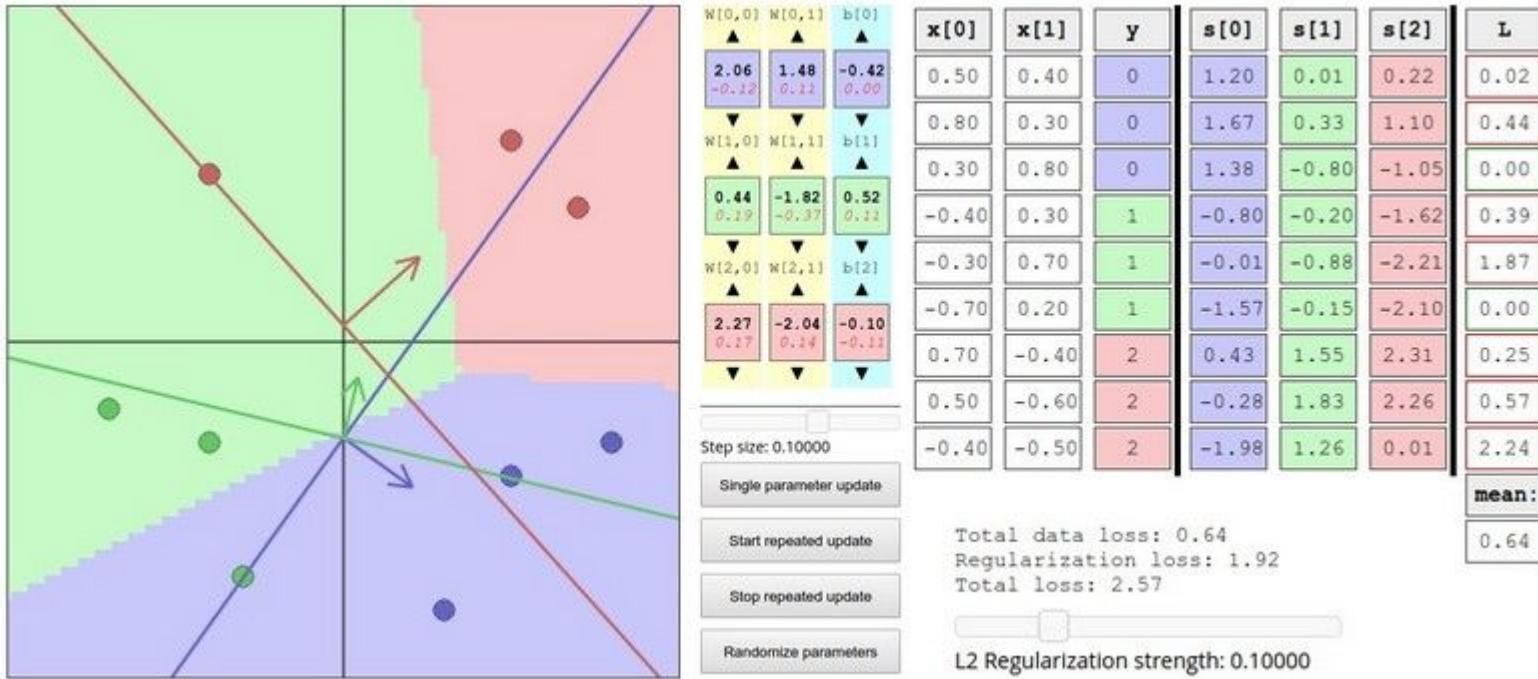

<http://vision.stanford.edu/teaching/cs231n-demos/linear-classify/>