

Today: Neural Networks

Neural networks: without the brain stuff

(**Before**) Linear score function: $f = Wx$
 $x \in \mathbb{R}^D, W \in \mathbb{R}^{C \times D}$

Neural networks: without the brain stuff

(**Before**) Linear score function: $f = Wx$

(**Now**) 2-layer Neural Network $f = W_2 \max(0, W_1 x)$

$$x \in \mathbb{R}^D, W_1 \in \mathbb{R}^{H \times D}, W_2 \in \mathbb{R}^{C \times H}$$

(In practice we will usually add a learnable bias at each layer as well)

Neural networks: without the brain stuff

(**Before**) Linear score function: $f = Wx$

(**Now**) 2-layer Neural Network $f = W_2 \max(0, W_1 x)$

$$x \in \mathbb{R}^D, W_1 \in \mathbb{R}^{H \times D}, W_2 \in \mathbb{R}^{C \times H}$$

“Neural Network” is a very broad term; these are more accurately called “fully-connected networks” or sometimes “multi-layer perceptrons” (MLP)

(In practice we will usually add a learnable bias at each layer as well)

Neural networks: without the brain stuff

(**Before**) Linear score function: $f = Wx$

(**Now**) 2-layer Neural Network
or 3-layer Neural Network $f = W_2 \max(0, W_1 x)$

$$f = W_3 \max(0, W_2 \max(0, W_1 x))$$


$$x \in \mathbb{R}^D, W_1 \in \mathbb{R}^{H_1 \times D}, W_2 \in \mathbb{R}^{H_2 \times H_1}, W_3 \in \mathbb{R}^{C \times H_2}$$

(In practice we will usually add a learnable bias at each layer as well)

Neural networks: without the brain stuff

(**Before**) Linear score function: $f = Wx$

(**Now**) 2-layer Neural Network $f = W_2 \max(0, W_1 x)$

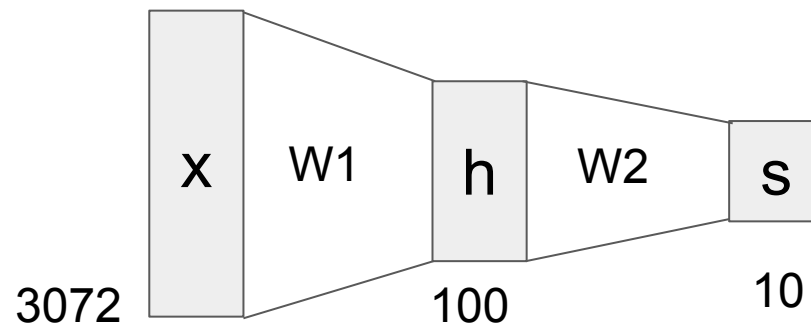


$$x \in \mathbb{R}^D, W_1 \in \mathbb{R}^{H \times D}, W_2 \in \mathbb{R}^{C \times H}$$

Neural networks: without the brain stuff

(**Before**) Linear score function: $f = Wx$

(**Now**) 2-layer Neural Network $f = W_2 \max(0, W_1 x)$

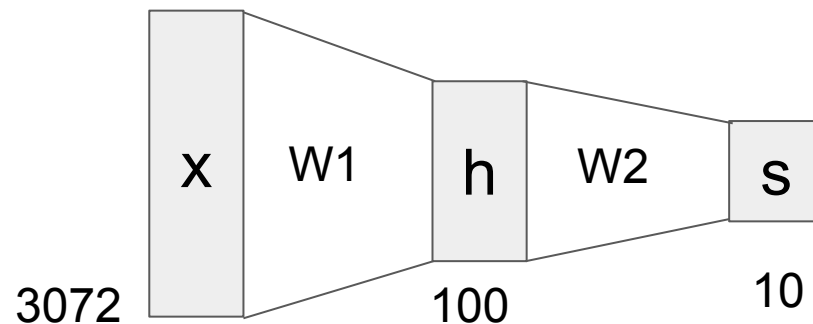

Neural networks: without the brain stuff

(**Before**) Linear score function: $f = Wx$

(**Now**) 2-layer Neural Network $f = W_2 \max(0, W_1 x)$

The function $\max(0, z)$ is called the **activation function**.

Q: What if we try to build a neural network without one?

$$f = W_2 W_1 x$$

Neural networks: without the brain stuff

(**Before**) Linear score function: $f = Wx$

(**Now**) 2-layer Neural Network $f = W_2 \max(0, W_1 x)$

The function $\max(0, z)$ is called the **activation function**.

Q: What if we try to build a neural network without one?


$$f = W_2 W_1 x \quad W_3 = W_2 W_1 \in \mathbb{R}^{C \times H}, f = W_3 x$$

A: We end up with a linear classifier again!

Activation functions


Sigmoid

$$\sigma(x) = \frac{1}{1+e^{-x}}$$




tanh

$$\tanh(x)$$




ReLU

$$\max(0, x)$$



Leaky ReLU

$$\max(0.1x, x)$$




Maxout

$$\max(w_1^T x + b_1, w_2^T x + b_2)$$

ELU


$$\begin{cases} x & x \geq 0 \\ \alpha(e^x - 1) & x < 0 \end{cases}$$



Activation functions


Sigmoid

$$\sigma(x) = \frac{1}{1+e^{-x}}$$




tanh

$$\tanh(x)$$



ReLU


$$\max(0, x)$$



ReLU is a good default choice for most problems

Leaky ReLU

$$\max(0.1x, x)$$




Maxout


$$\max(w_1^T x + b_1, w_2^T x + b_2)$$

ELU


$$\begin{cases} x & x \geq 0 \\ \alpha(e^x - 1) & x < 0 \end{cases}$$



Neural networks: Architectures

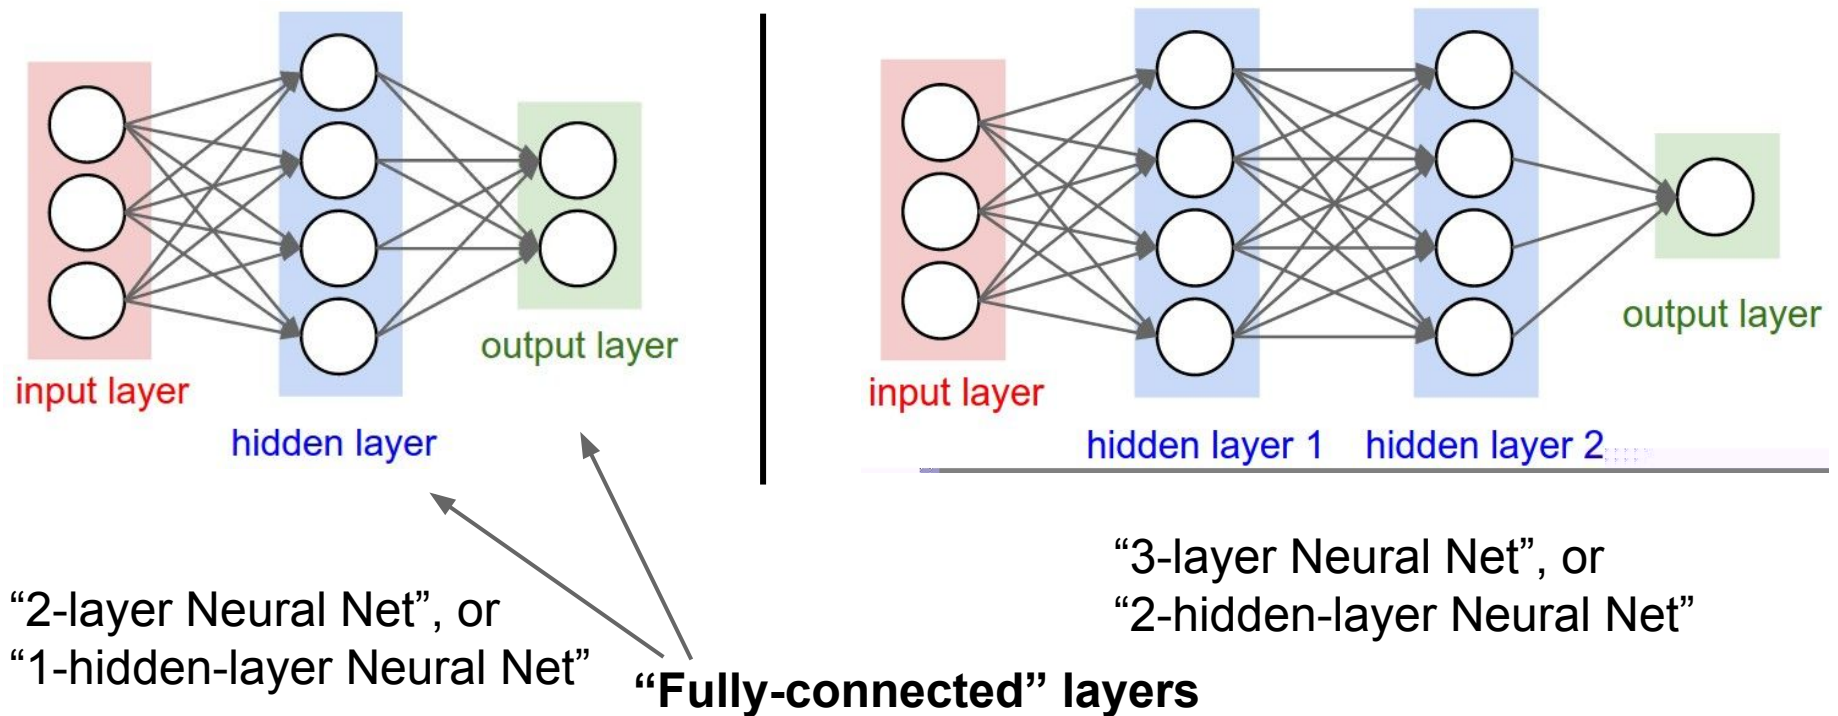

Example feed-forward computation of a neural network

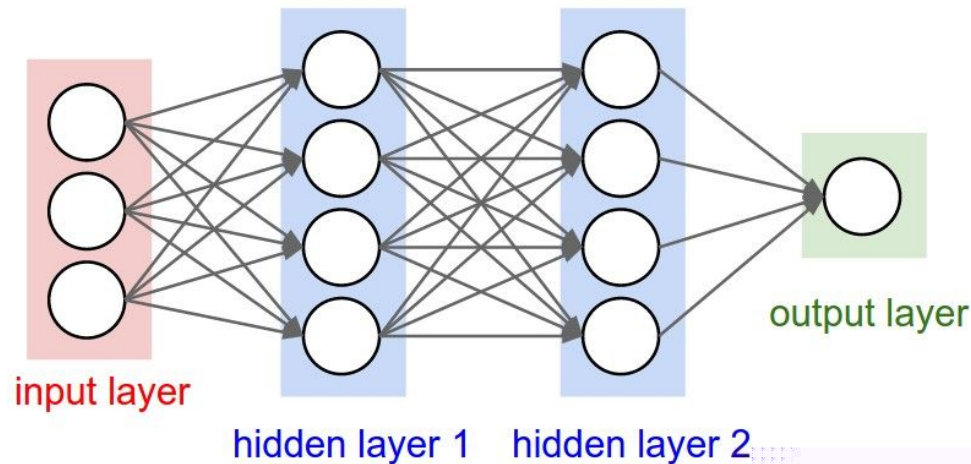

```
# forward-pass of a 3-layer neural network:  
f = lambda x: 1.0/(1.0 + np.exp(-x)) # activation function (use sigmoid)  
x = np.random.randn(3, 1) # random input vector of three numbers (3x1)  
h1 = f(np.dot(W1, x) + b1) # calculate first hidden layer activations (4x1)  
h2 = f(np.dot(W2, h1) + b2) # calculate second hidden layer activations (4x1)  
out = np.dot(W3, h2) + b3 # output neuron (1x1)
```


Full implementation of training a 2-layer Neural Network needs ~20 lines:

```
1 import numpy as np
2 from numpy.random import randn
3
4 # Dimensions
5 INPUT_DIM = 64
6 HIDDEN_DIM = 100
7 OUTPUT_DIM = 10
8
9 # Initialize weights and biases
10 W1 = np.random.randn(INPUT_DIM, HIDDEN_DIM)
11 W2 = np.random.randn(HIDDEN_DIM, OUTPUT_DIM)
12 b1 = np.zeros(HIDDEN_DIM)
13 b2 = np.zeros(OUTPUT_DIM)
14
15 # Training loop
16 for i in range(2000):
17     # Generate random input
18     x = randn(INPUT_DIM)
19     # Forward pass
20     z1 = np.dot(x, W1) + b1
21     a1 = sigmoid(z1)
22     z2 = np.dot(a1, W2) + b2
23     a2 = softmax(z2)
24     # Loss calculation
25     loss = -np.sum(np.log(a2))
26     # Backward pass (simplified)
27     # ... (omitted for brevity) ...
```

Setting the number of layers and their sizes

↑
more neurons = more capacity

Do not use size of neural network as a regularizer. Use stronger regularization instead:

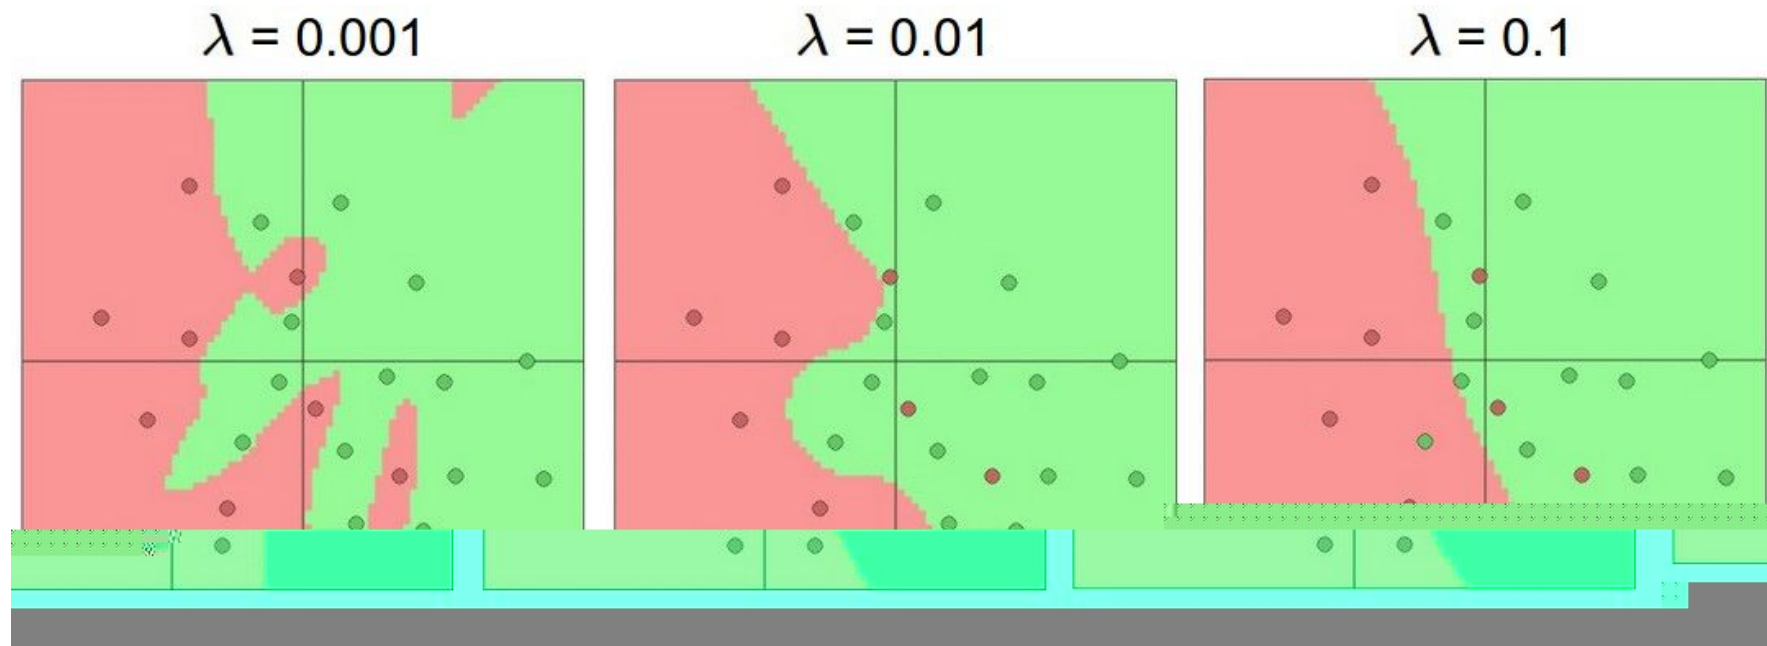


(Web demo with ConvNetJS:


<http://cs.stanford.edu/people/karpathy/convnetjs/demo/classify2d.html>)




[This image](#) by [Fotis Bobolas](#) is
licensed under [CC-BY 2.0](#)

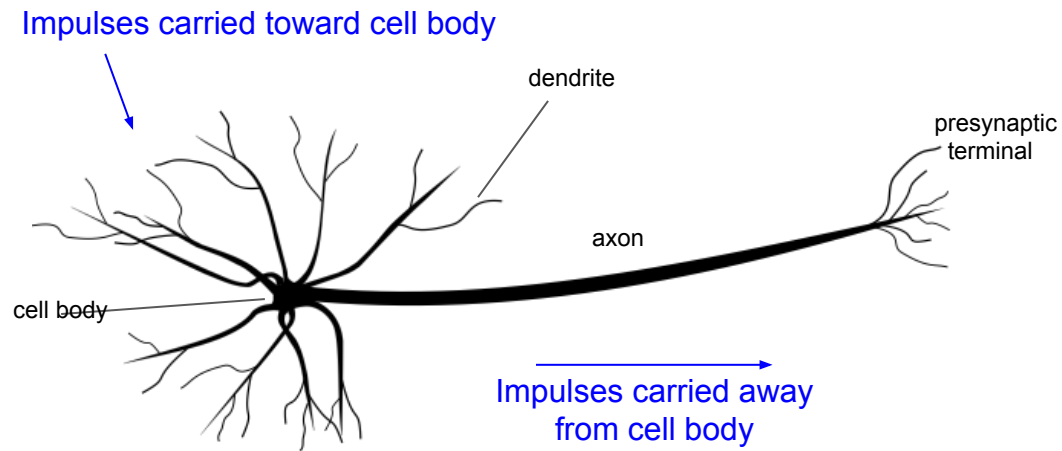


This image by Felipe Perucho
is licensed under [CC-BY 3.0](#)

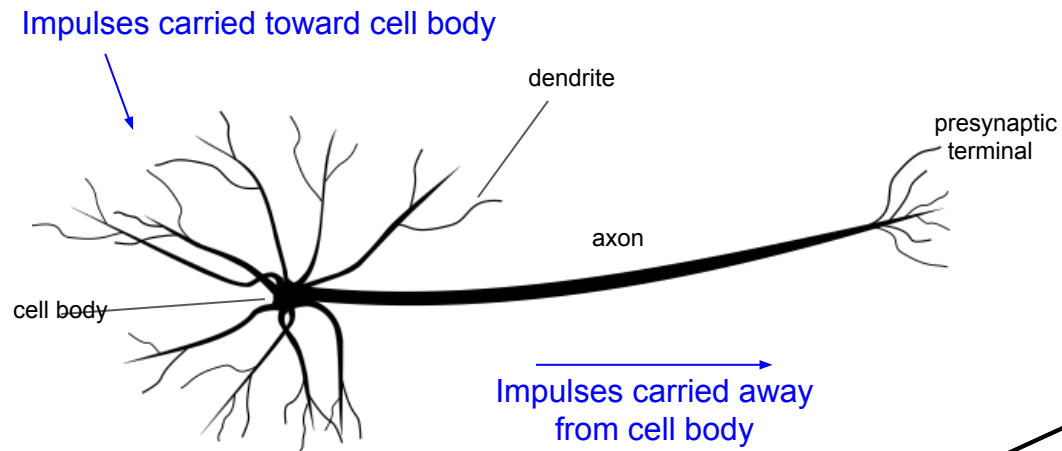


This image by Felipe Perucho is licensed under [CC-BY 3.0](https://creativecommons.org/licenses/by/3.0/)

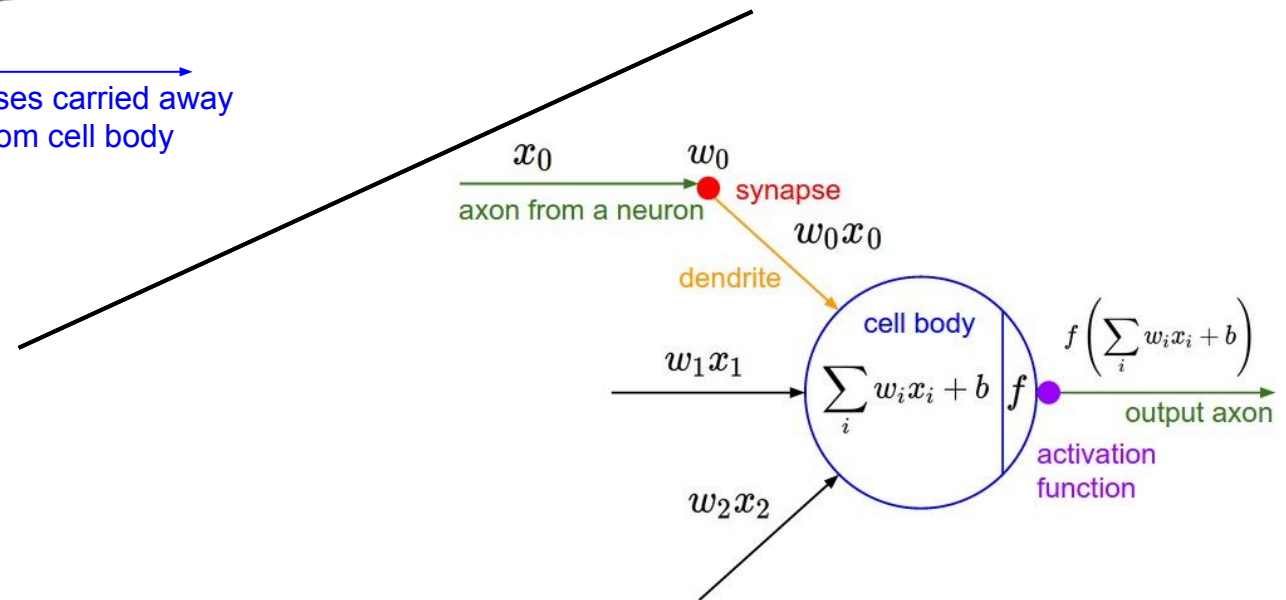

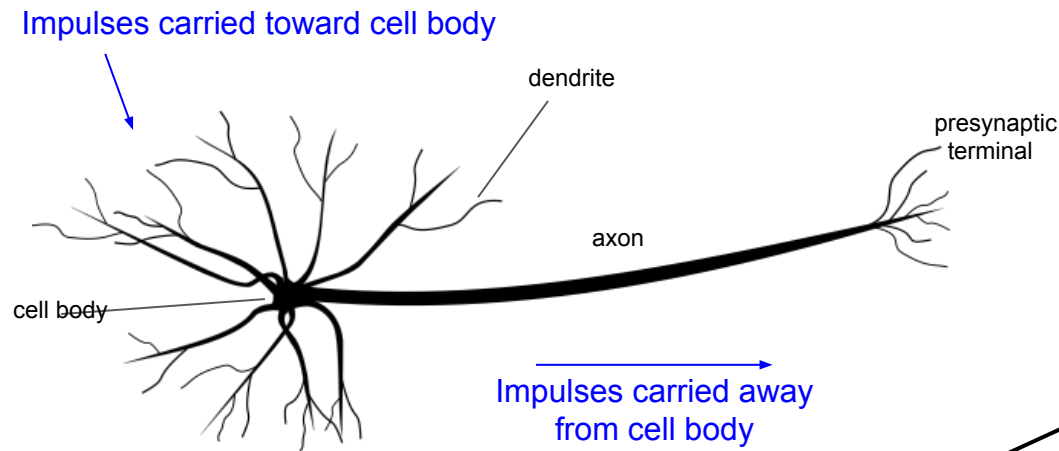



This image by Felipe Peruchio is licensed under [CC-BY 3.0](#)

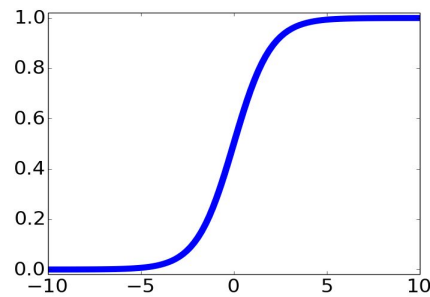

sigmoid activation function


$$\frac{1}{1 + e^{-x}}$$

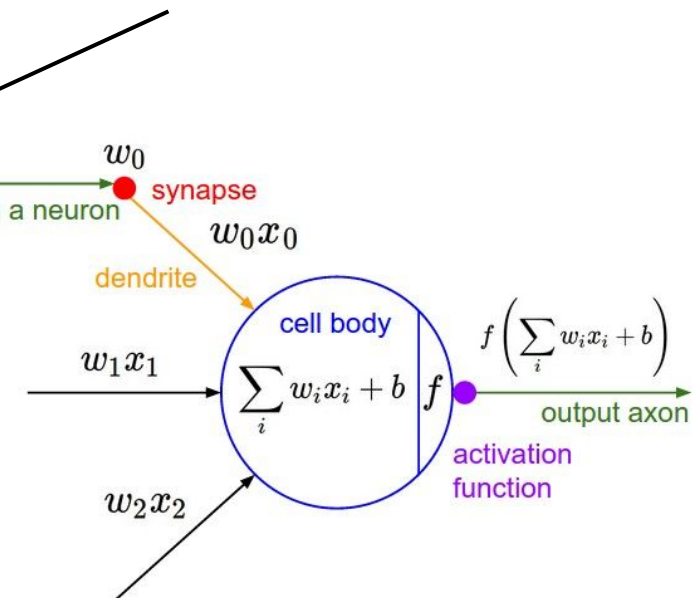

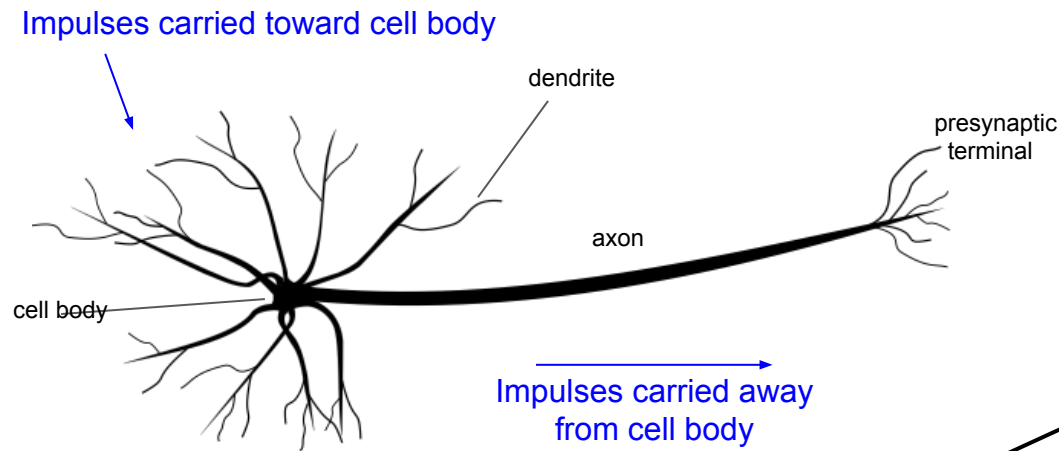


This image by Felipe Perucho is licensed under [CC-BY 3.0](https://creativecommons.org/licenses/by/3.0/)

```
class Neuron:
    # ...
    def neuron_tick(inputs):
        """ assume inputs and weights are 1-D numpy arrays and bias is a number """
        cell_body_sum = np.sum(inputs * self.weights) + self.bias
        firing_rate = 1.0 / (1.0 + math.exp(-cell_body_sum)) # sigmoid activation function
        return firing_rate
```

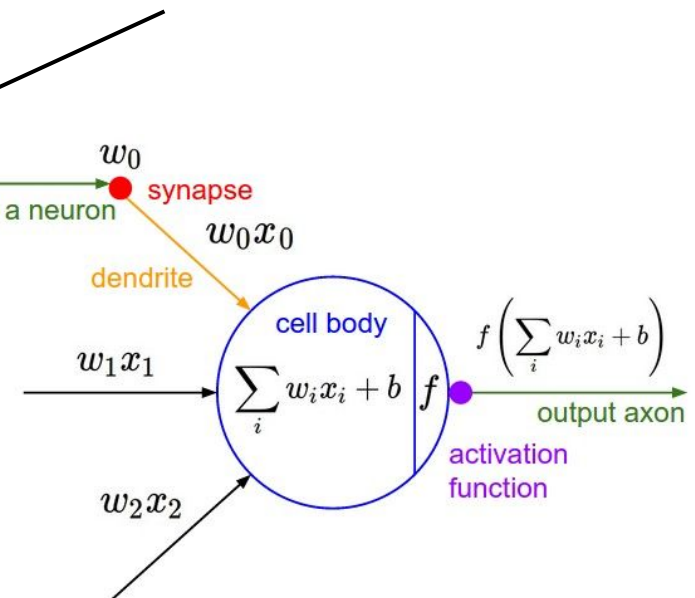


Biological Neurons: Complex connectivity patterns

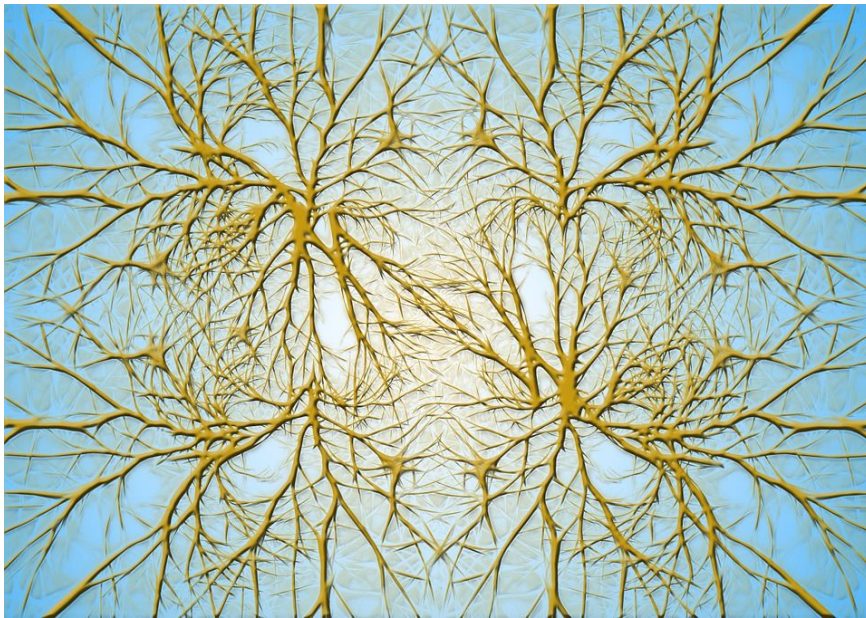


[This image](#) is [CC0 Public Domain](#)

Neurons in a neural network: Organized into regular layers for computational efficiency

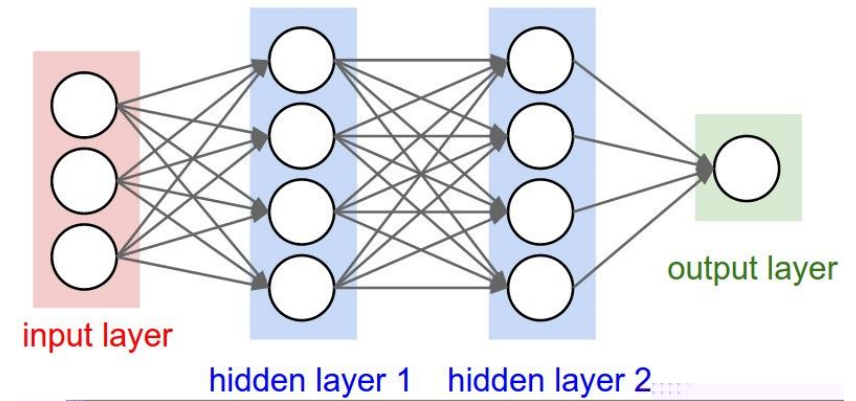


Biological Neurons: Complex connectivity patterns

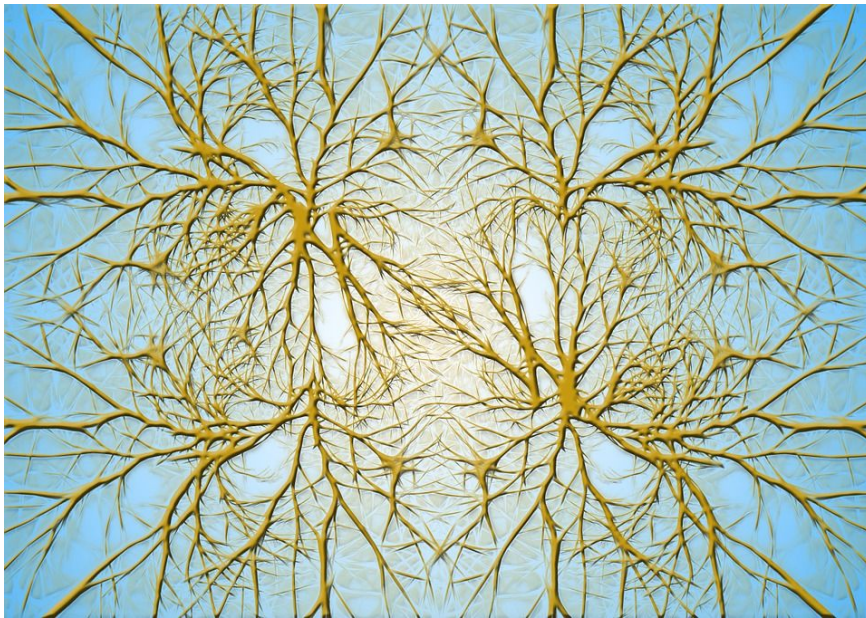

[This image](#) is [CC0 Public Domain](#)

But neural networks with random connections can work too!

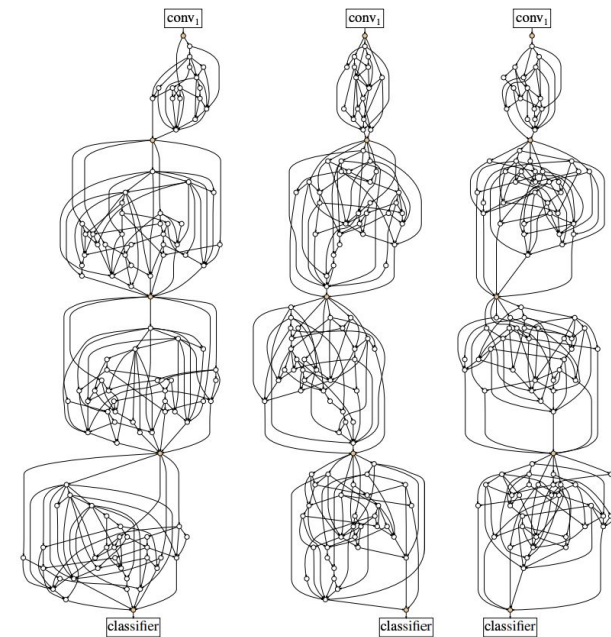

Xie et al, "Exploring Randomly Wired Neural Networks for Image Recognition", arXiv 2019

Be very careful with your brain analogies!

Biological Neurons:

- Many different types
- Dendrites can perform complex non-linear computations
- Synapses are not a single weight but a complex non-linear dynamical system
- Rate code may not be adequate

[Dendritic Computation. London and Hausser]

Problem: How to compute gradients?

$$s = f(x; W_1, W_2) = W_2 \max(0, W_1 x) \quad \text{Nonlinear score function}$$

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1) \quad \text{SVM Loss on predictions}$$

$$R(W) = \sum_k W_k^2 \quad \text{Regularization}$$

$$L = \frac{1}{N} \sum_{i=1}^N L_i + \lambda R(W_1) + \lambda R(W_2) \quad \text{Total loss: data loss + regularization}$$

If we can compute $\frac{\partial L}{\partial W_1}, \frac{\partial L}{\partial W_2}$ then we can learn W_1 and W_2

(Bad) Idea: Derive $\nabla_W L$ on paper

$$s = f(x; W) = Wx$$

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1)$$

$$= \sum_{j \neq y_i} \max(0, W_{j,:} \cdot x + W_{y_i,:} \cdot x + 1)$$

$$L = \frac{1}{N} \sum_{i=1}^N L_i + \lambda \sum_k W_k^2$$

$$= \frac{1}{N} \sum_{i=1}^N \sum_{j \neq y_i} \max(0, W_{j,:} \cdot x + W_{y_i,:} \cdot x + 1) + \lambda \sum_k W_k^2$$


$$\nabla_W L = \nabla_W \left(\frac{1}{N} \sum_{i=1}^N \sum_{j \neq y_i} \max(0, W_{j,:} \cdot x + W_{y_i,:} \cdot x + 1) + \lambda \sum_k W_k^2 \right)$$

Problem: Very tedious: Lots of matrix calculus, need lots of paper

Problem: What if we want to change loss? E.g. use softmax instead of SVM? Need to re-derive from scratch =(

Problem: Not feasible for very complex models!

Better Idea: Computational graphs + Backpropagation

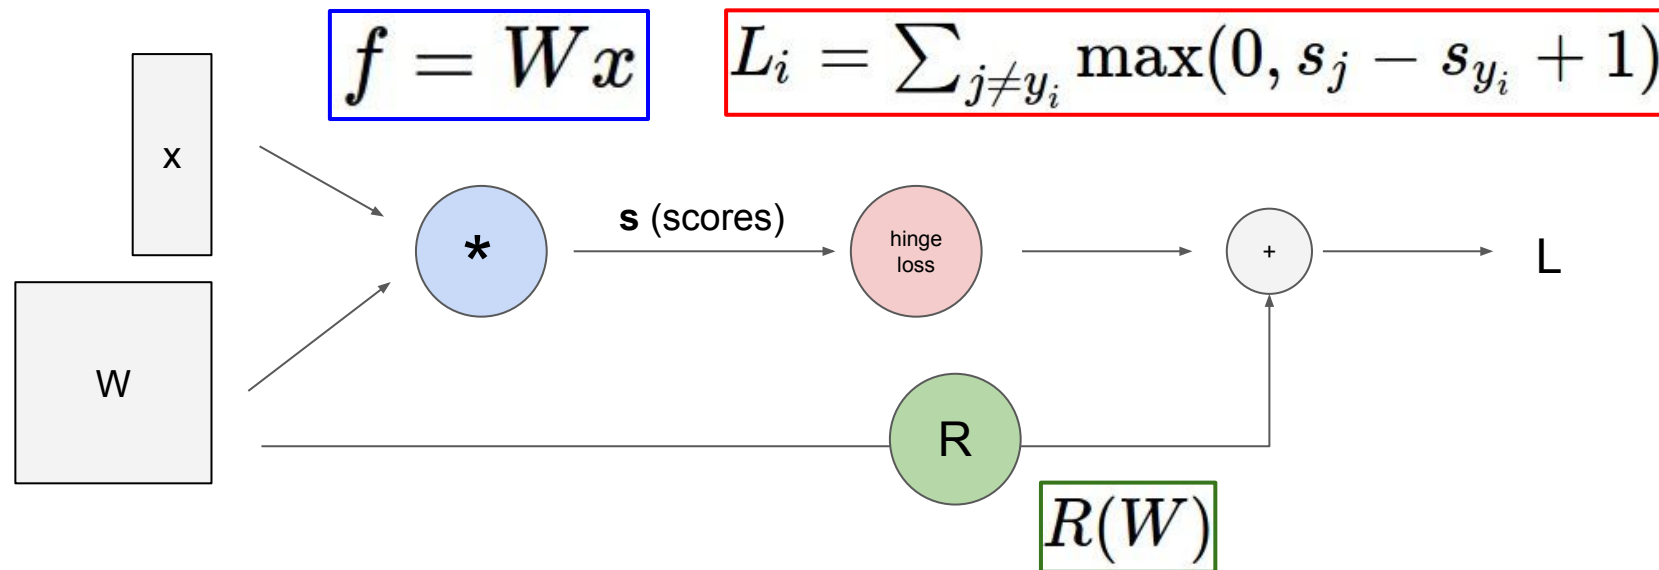

Convolutional network (AlexNet)

input image

weights

loss

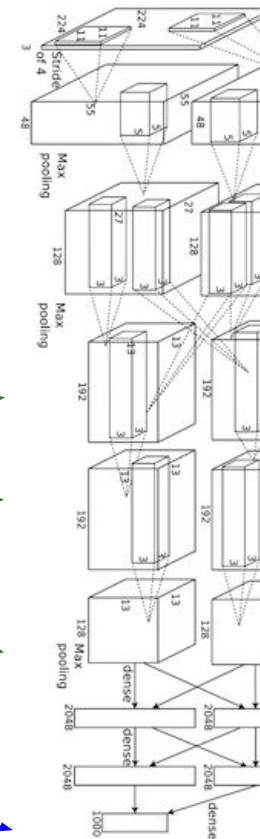


Figure copyright Alex Krizhevsky, Ilya Sutskever, and Geoffrey Hinton, 2012. Reproduced with permission.

Neural Turing Machine

input image

loss

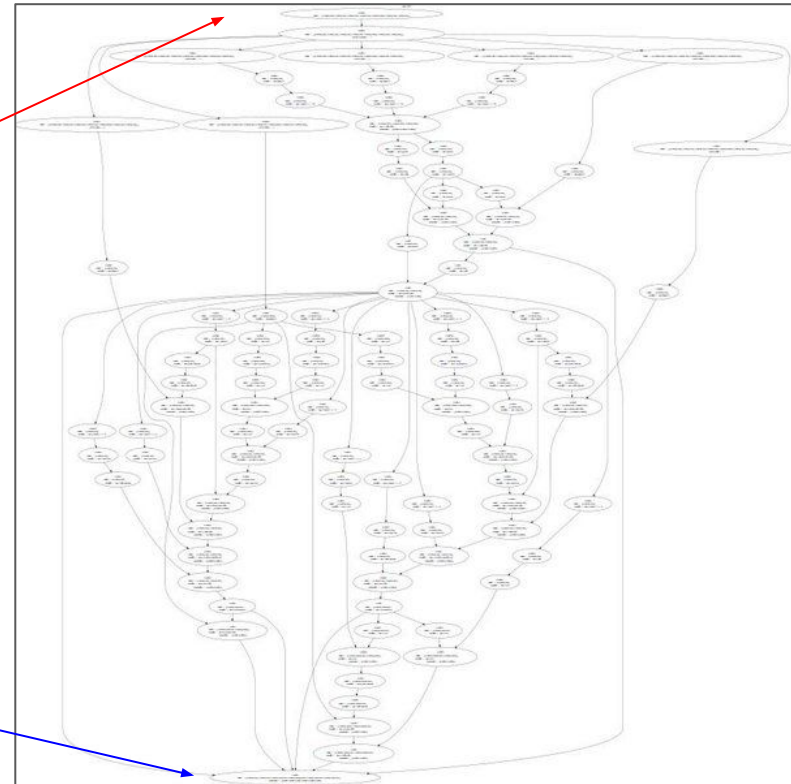


Figure reproduced with permission from a [Twitter post](#) by Andrej Karpathy.

Neural Turing Machine

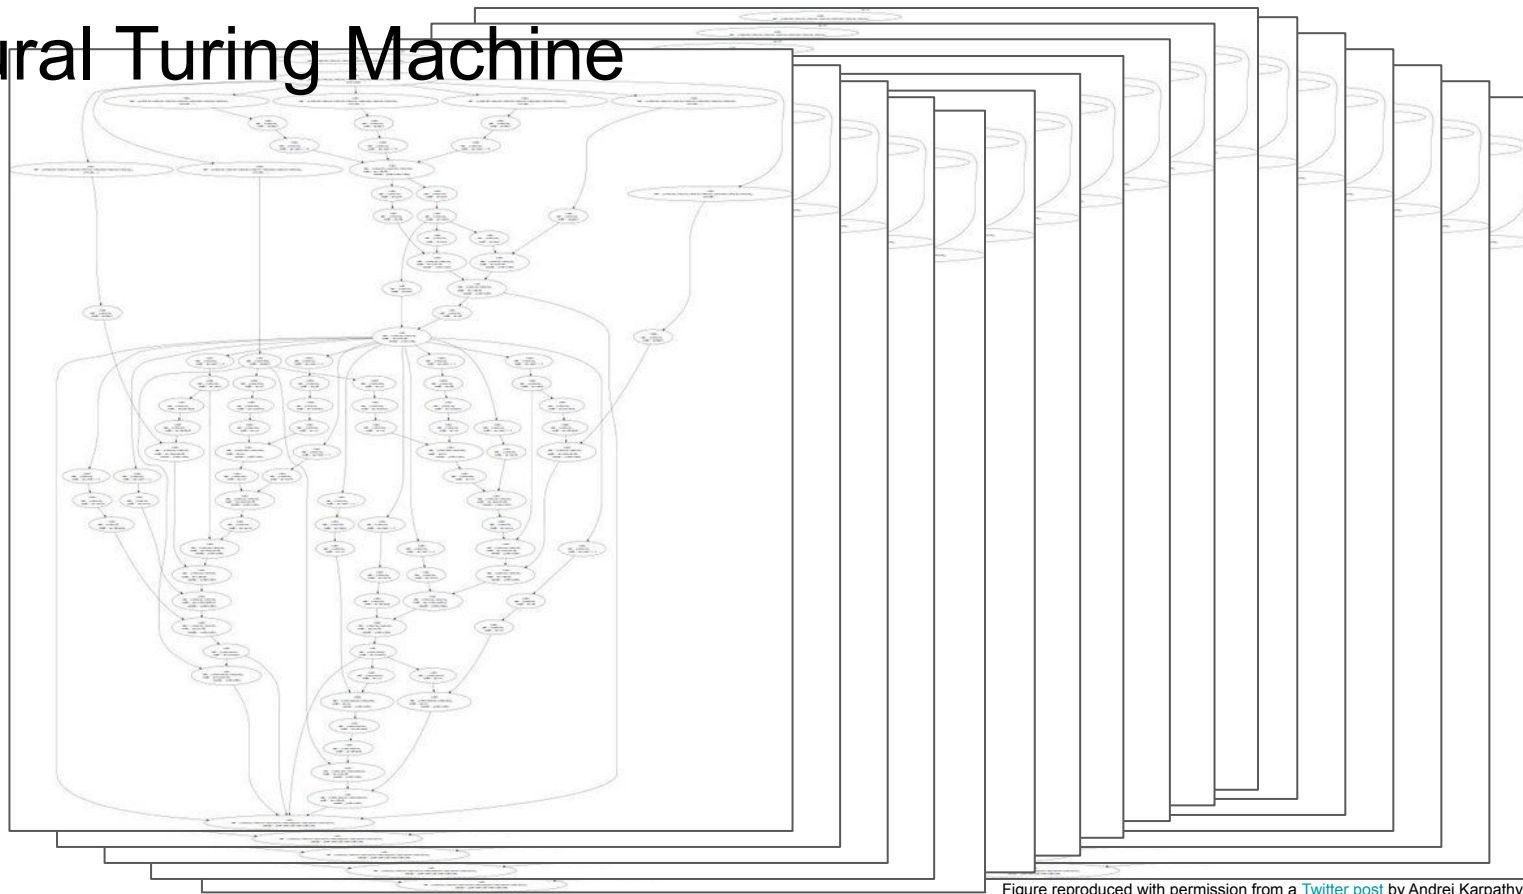



Figure reproduced with permission from a [Twitter post](#) by Andrej Karpathy.

Backpropagation: a simple example

$$f(x, y, z) = (x + y)z$$

Backpropagation: a simple example


$$f(x, y, z) = (x + y)z$$

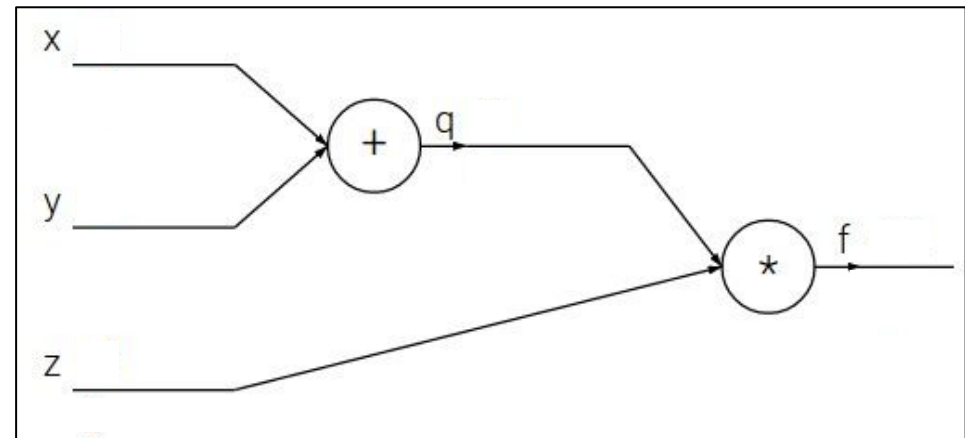

Backpropagation: a simple example

$$f(x, y, z) = (x + y)z$$

e.g. $x = -2$, $y = 5$, $z = -4$

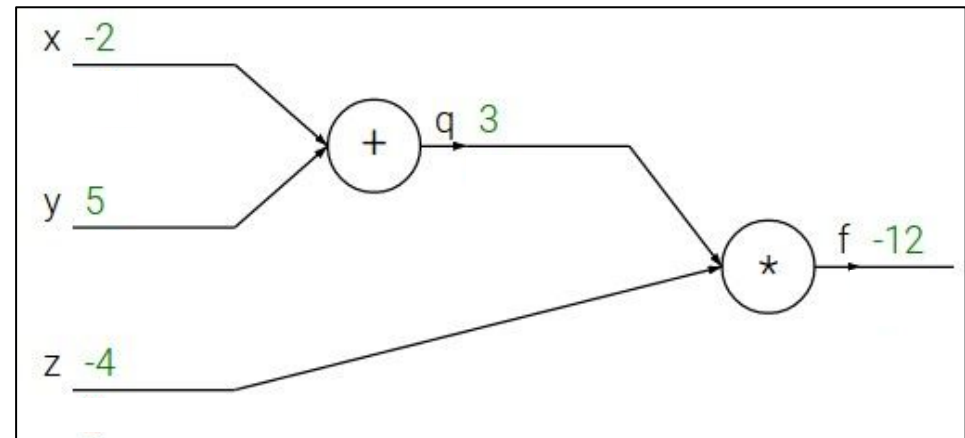

Backpropagation: a simple example


$$f(x, y, z) = (x + y)z$$

e.g. $x = -2, y = 5, z = -4$

$$q = x + y \quad \frac{\partial q}{\partial x} = 1, \frac{\partial q}{\partial y} = 1$$

$$f = qz \quad \frac{\partial f}{\partial q} = z, \frac{\partial f}{\partial z} = q$$

Want: $\frac{\partial f}{\partial x}, \frac{\partial f}{\partial y}, \frac{\partial f}{\partial z}$

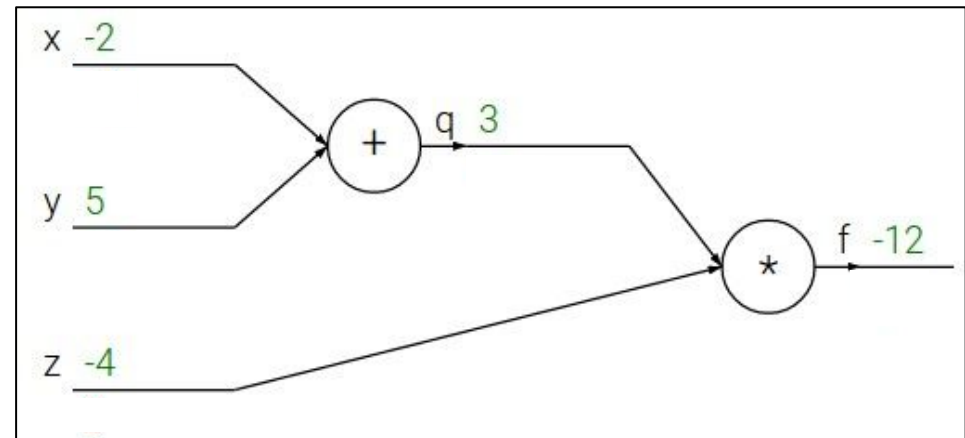

Backpropagation: a simple example


$$f(x, y, z) = (x + y)z$$

e.g. $x = -2, y = 5, z = -4$

$$q = x + y \quad \frac{\partial q}{\partial x} = 1, \frac{\partial q}{\partial y} = 1$$

$$f = qz \quad \frac{\partial f}{\partial q} = z, \frac{\partial f}{\partial z} = q$$

Want: $\frac{\partial f}{\partial x}, \frac{\partial f}{\partial y}, \frac{\partial f}{\partial z}$

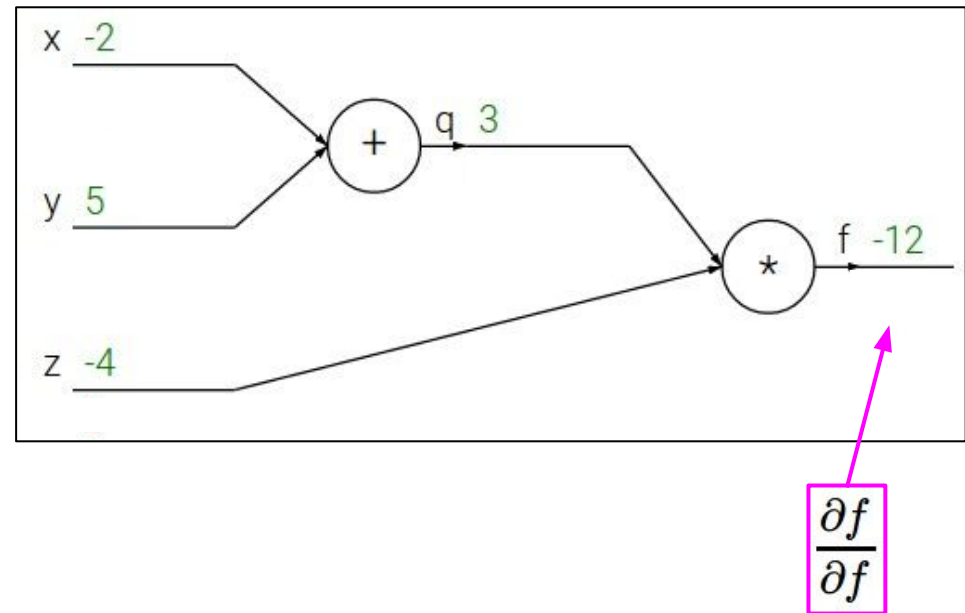

Backpropagation: a simple example


$$f(x, y, z) = (x + y)z$$

e.g. $x = -2, y = 5, z = -4$

$$q = x + y \quad \frac{\partial q}{\partial x} = 1, \frac{\partial q}{\partial y} = 1$$

$$f = qz \quad \frac{\partial f}{\partial q} = z, \frac{\partial f}{\partial z} = q$$

Want: $\frac{\partial f}{\partial x}, \frac{\partial f}{\partial y}, \frac{\partial f}{\partial z}$

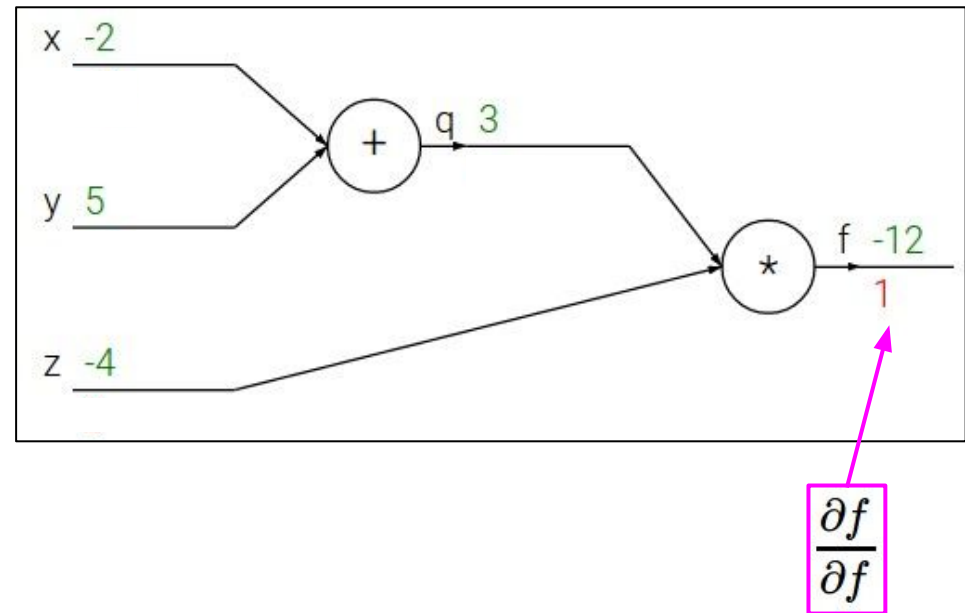

Backpropagation: a simple example


$$f(x, y, z) = (x + y)z$$

e.g. $x = -2, y = 5, z = -4$

$$q = x + y \quad \frac{\partial q}{\partial x} = 1, \frac{\partial q}{\partial y} = 1$$

$$f = qz \quad \frac{\partial f}{\partial q} = z, \frac{\partial f}{\partial z} = q$$

Want: $\frac{\partial f}{\partial x}, \frac{\partial f}{\partial y}, \frac{\partial f}{\partial z}$

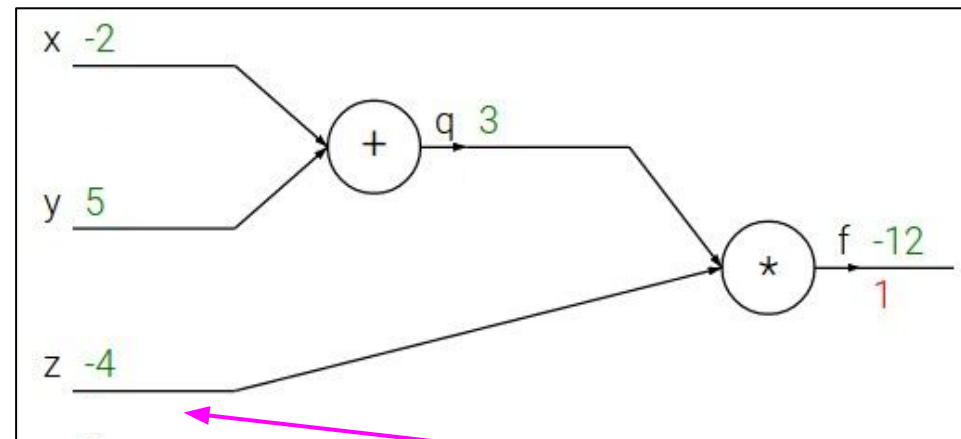

$$\frac{\partial f}{\partial z}$$

Backpropagation: a simple example


$$f(x, y, z) = (x + y)z$$

e.g. $x = -2, y = 5, z = -4$

$$q = x + y \quad \frac{\partial q}{\partial x} = 1, \frac{\partial q}{\partial y} = 1$$

$$f = qz \quad \frac{\partial f}{\partial q} = z, \frac{\partial f}{\partial z} = q$$

Want: $\frac{\partial f}{\partial x}, \frac{\partial f}{\partial y}, \frac{\partial f}{\partial z}$

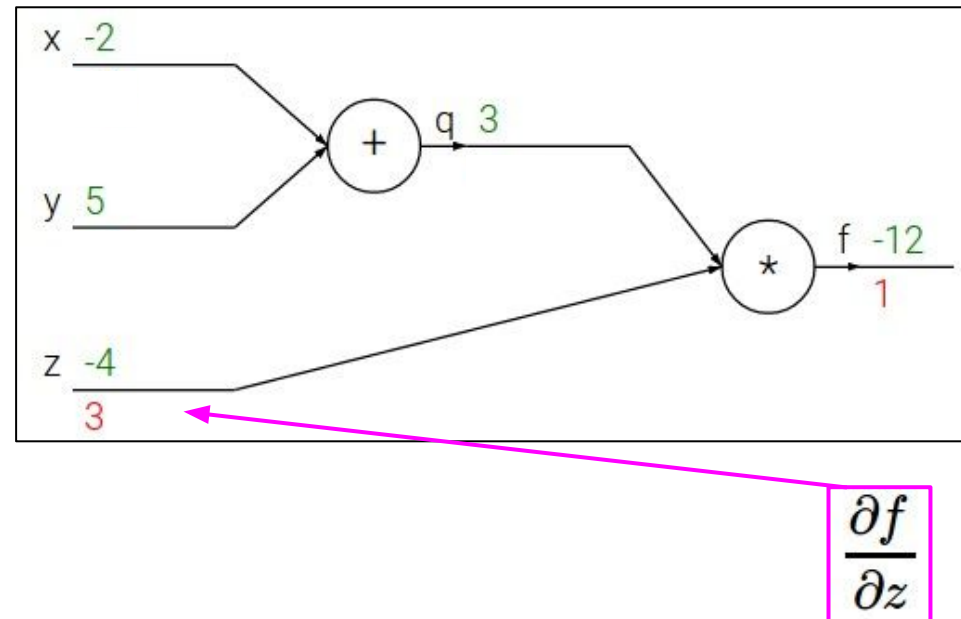

Backpropagation: a simple example


$$f(x, y, z) = (x + y)z$$

e.g. $x = -2, y = 5, z = -4$

$$q = x + y \quad \frac{\partial q}{\partial x} = 1, \frac{\partial q}{\partial y} = 1$$

$$f = qz \quad \frac{\partial f}{\partial q} = z, \frac{\partial f}{\partial z} = q$$

Want: $\frac{\partial f}{\partial x}, \frac{\partial f}{\partial y}, \frac{\partial f}{\partial z}$

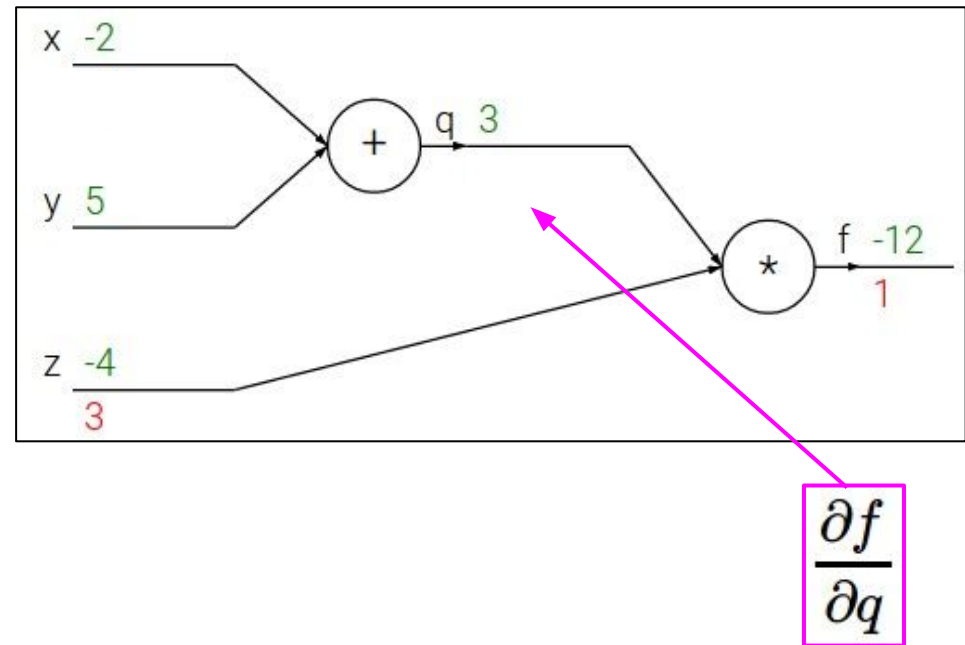

Backpropagation: a simple example


$$f(x, y, z) = (x + y)z$$

e.g. $x = -2, y = 5, z = -4$

$$q = x + y \quad \frac{\partial q}{\partial x} = 1, \frac{\partial q}{\partial y} = 1$$

$$f = qz \quad \frac{\partial f}{\partial q} = z, \frac{\partial f}{\partial z} = q$$

Want: $\frac{\partial f}{\partial x}, \frac{\partial f}{\partial y}, \frac{\partial f}{\partial z}$

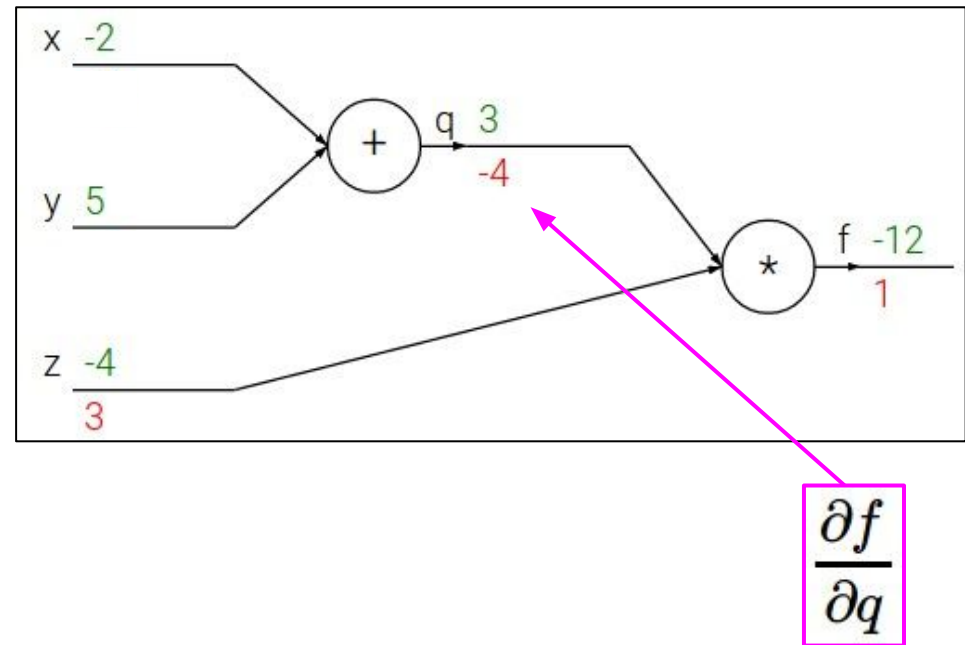

Backpropagation: a simple example


$$f(x, y, z) = (x + y)z$$

e.g. $x = -2, y = 5, z = -4$

$$q = x + y \quad \frac{\partial q}{\partial x} = 1, \frac{\partial q}{\partial y} = 1$$

$$f = qz \quad \frac{\partial f}{\partial q} = z, \frac{\partial f}{\partial z} = q$$

Want: $\frac{\partial f}{\partial x}, \frac{\partial f}{\partial y}, \frac{\partial f}{\partial z}$

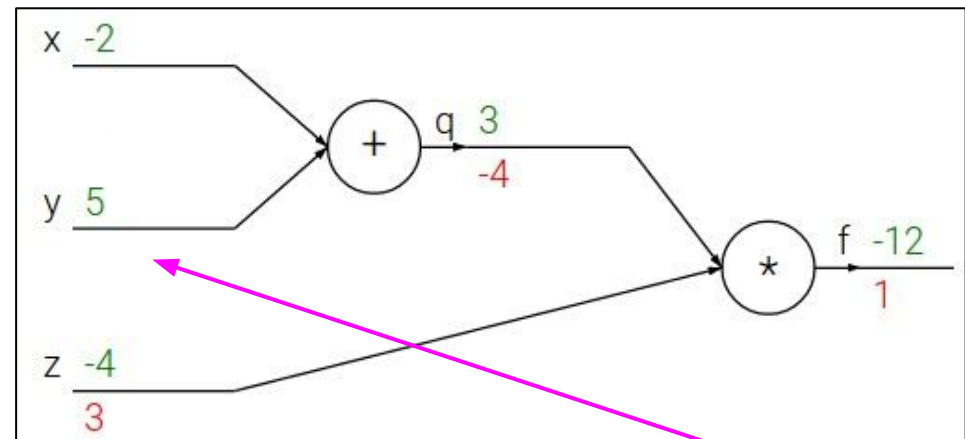

$$\frac{\partial f}{\partial y}$$

Chain rule:

$$\frac{\partial f}{\partial y} = \frac{\partial f}{\partial q} \frac{\partial q}{\partial y}$$

Upstream
gradient

Local
gradient

Backpropagation: a simple example


$$f(x, y, z) = (x + y)z$$

e.g. $x = -2, y = 5, z = -4$

$$q = x + y \quad \frac{\partial q}{\partial x} = 1, \frac{\partial q}{\partial y} = 1$$

$$f = qz \quad \frac{\partial f}{\partial q} = z, \frac{\partial f}{\partial z} = q$$

Want: $\frac{\partial f}{\partial x}, \frac{\partial f}{\partial y}, \frac{\partial f}{\partial z}$

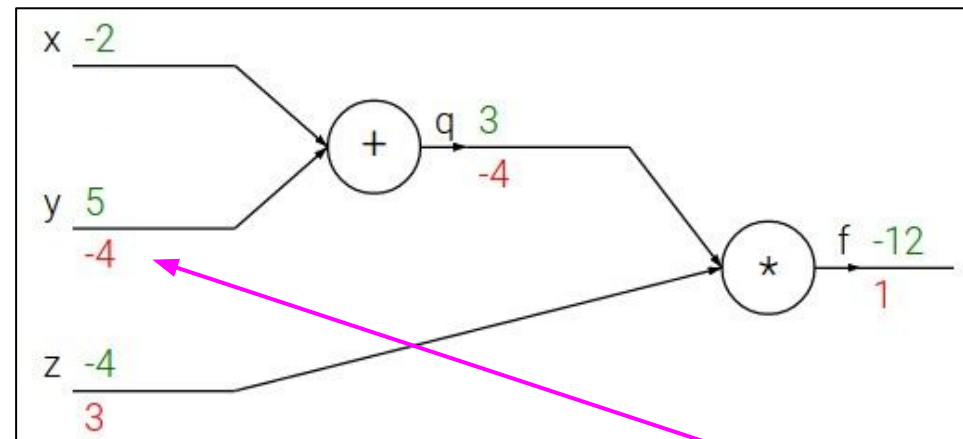

$$\frac{\partial f}{\partial y}$$

Chain rule:

$$\frac{\partial f}{\partial y} = \frac{\partial f}{\partial q} \frac{\partial q}{\partial y}$$

Upstream
gradient

Local
gradient

Backpropagation: a simple example


$$f(x, y, z) = (x + y)z$$

e.g. $x = -2, y = 5, z = -4$

$$q = x + y \quad \frac{\partial q}{\partial x} = 1, \frac{\partial q}{\partial y} = 1$$

$$f = qz \quad \frac{\partial f}{\partial q} = z, \frac{\partial f}{\partial z} = q$$

Want: $\frac{\partial f}{\partial x}, \frac{\partial f}{\partial y}, \frac{\partial f}{\partial z}$

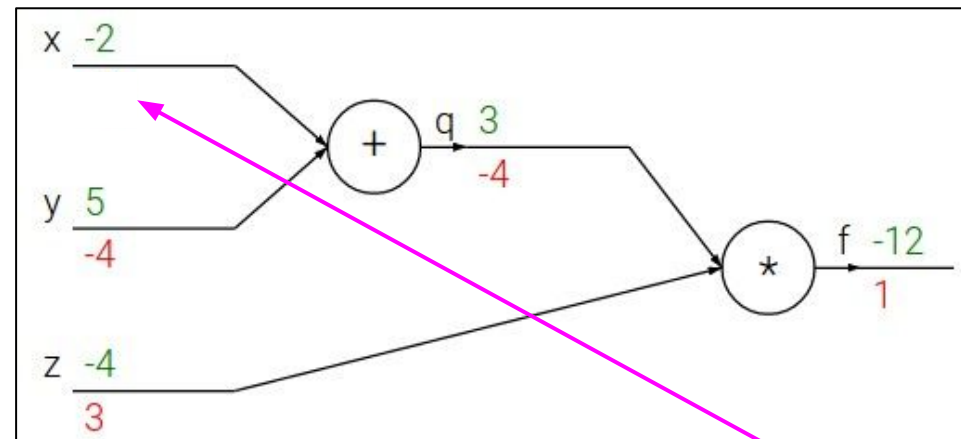

$$\frac{\partial f}{\partial x}$$

Chain rule:

$$\frac{\partial f}{\partial x} = \frac{\partial f}{\partial q} \frac{\partial q}{\partial x}$$

Upstream
gradient

Local
gradient

Backpropagation: a simple example


$$f(x, y, z) = (x + y)z$$

e.g. $x = -2, y = 5, z = -4$

$$q = x + y \quad \frac{\partial q}{\partial x} = 1, \frac{\partial q}{\partial y} = 1$$

$$f = qz \quad \frac{\partial f}{\partial q} = z, \frac{\partial f}{\partial z} = q$$

Want: $\frac{\partial f}{\partial x}, \frac{\partial f}{\partial y}, \frac{\partial f}{\partial z}$

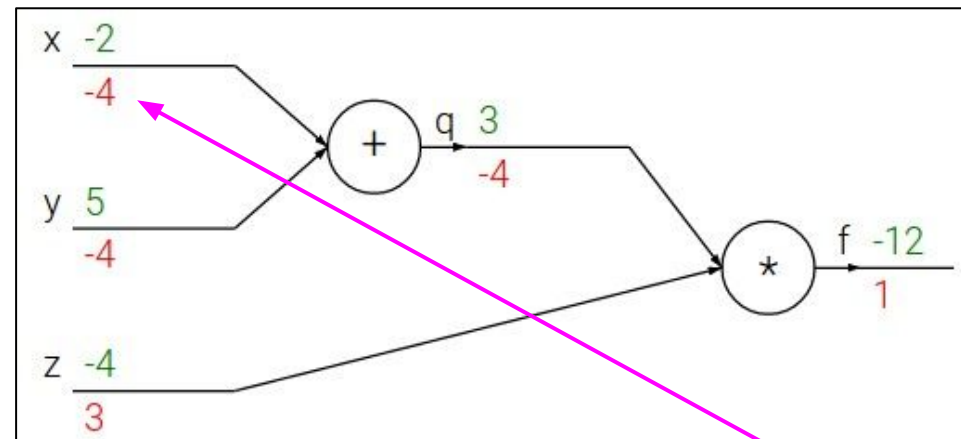



Chain rule:


$$\frac{\partial f}{\partial x} = \frac{\partial f}{\partial q} \frac{\partial q}{\partial x}$$


Upstream
gradient


Local
gradient

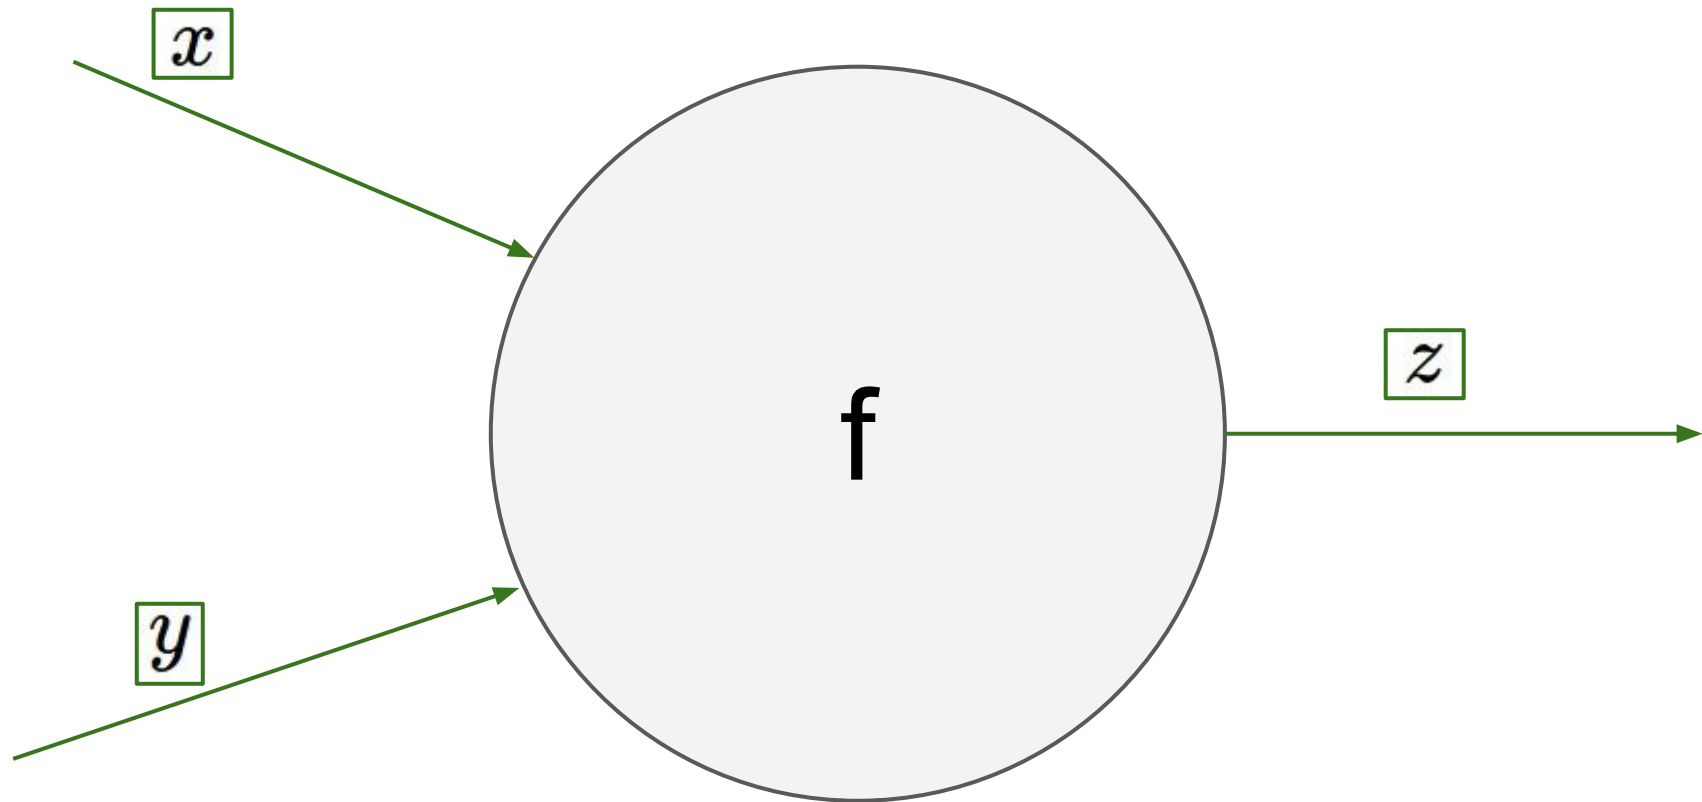


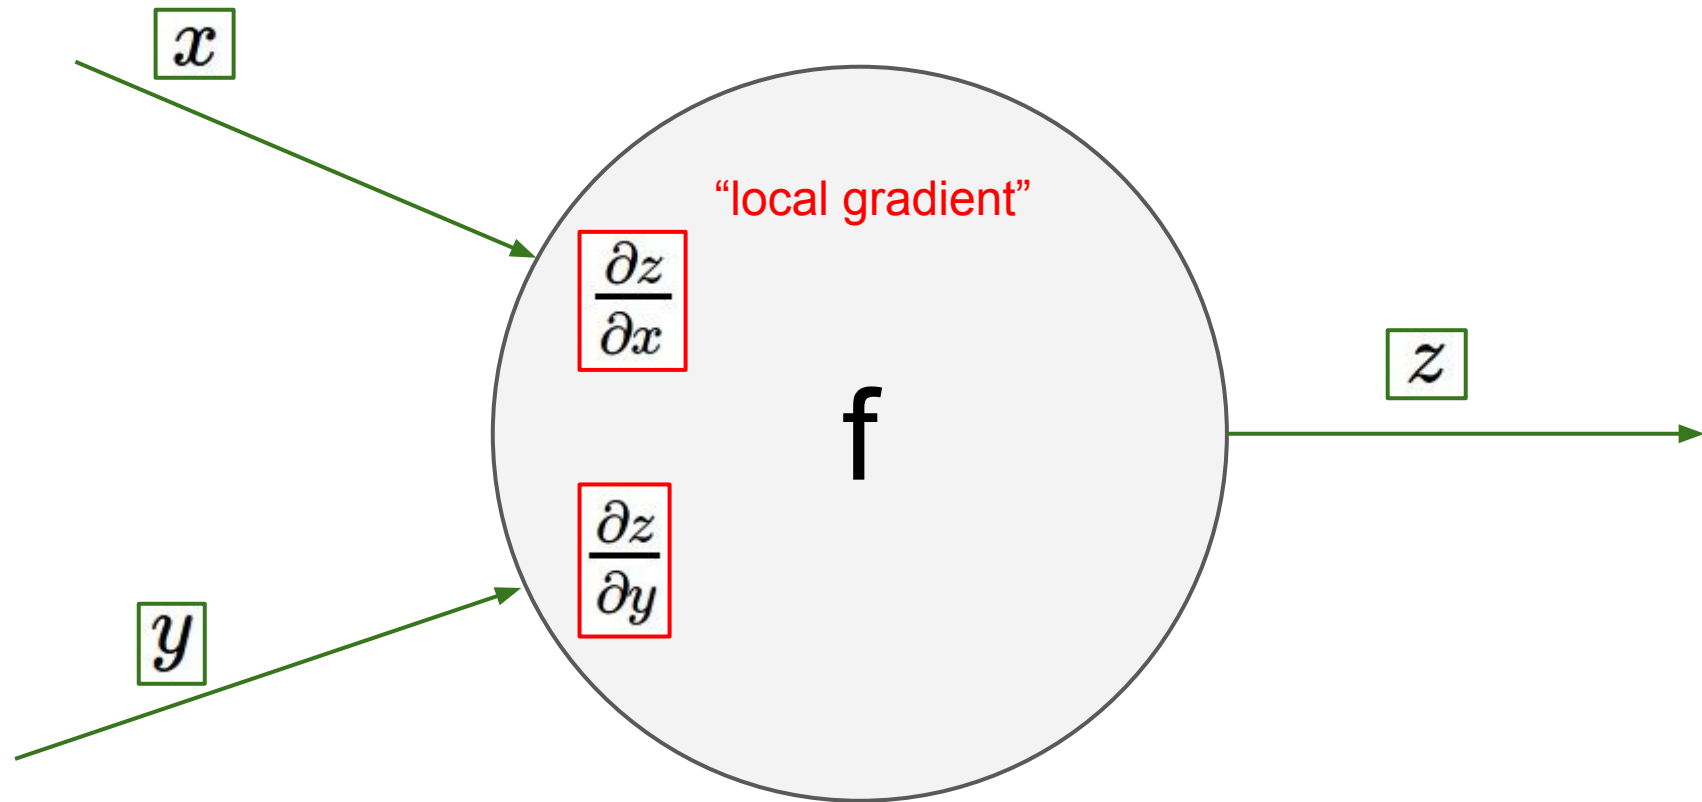

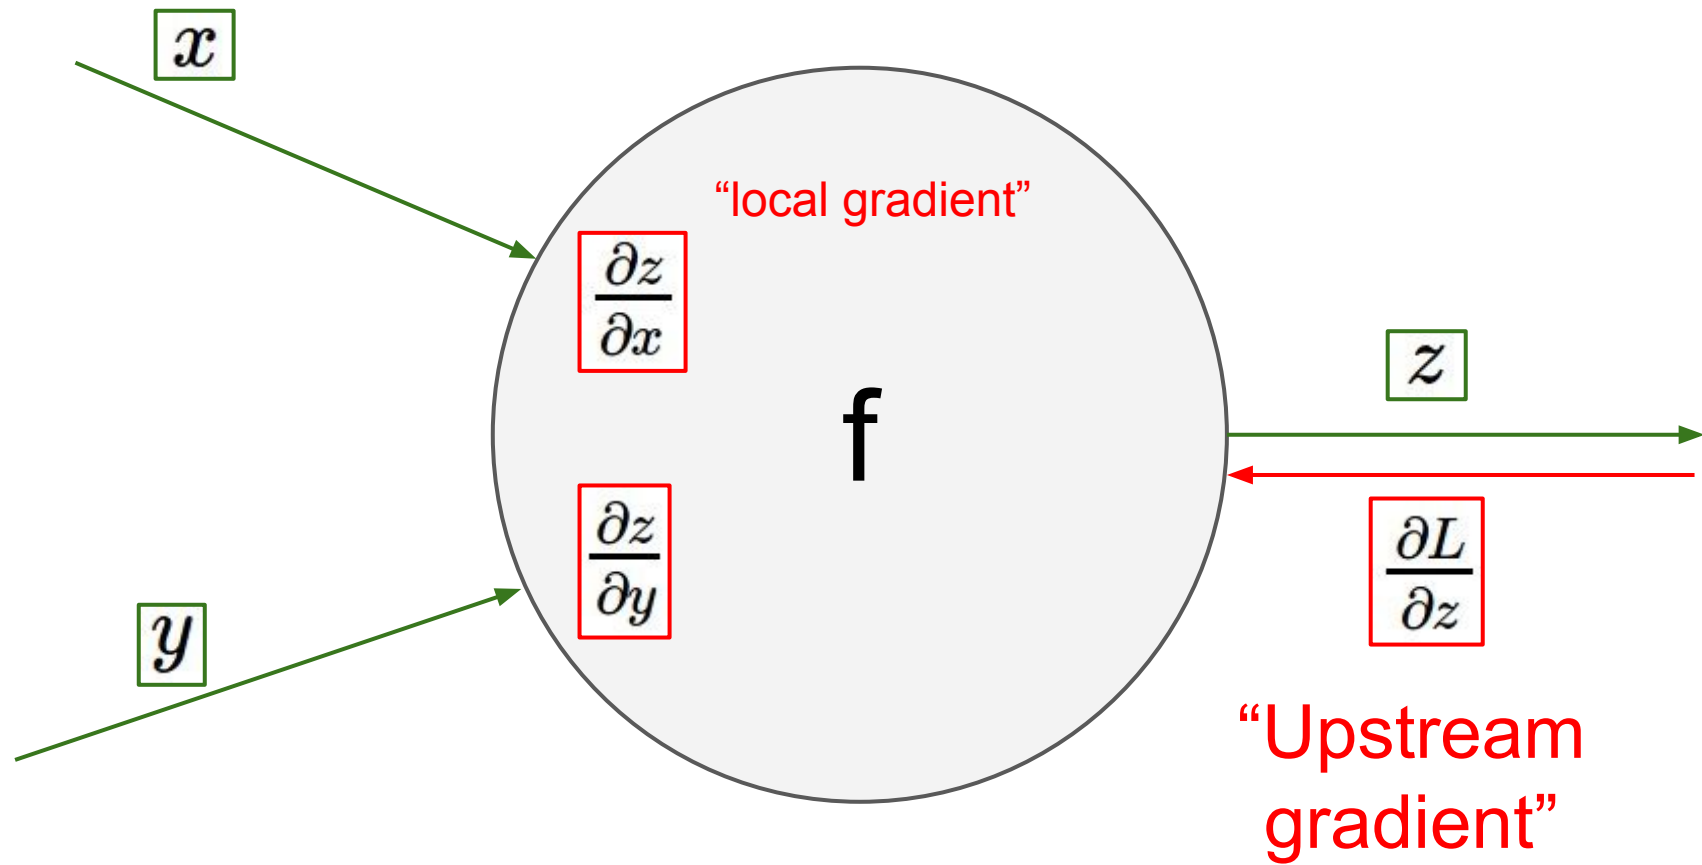


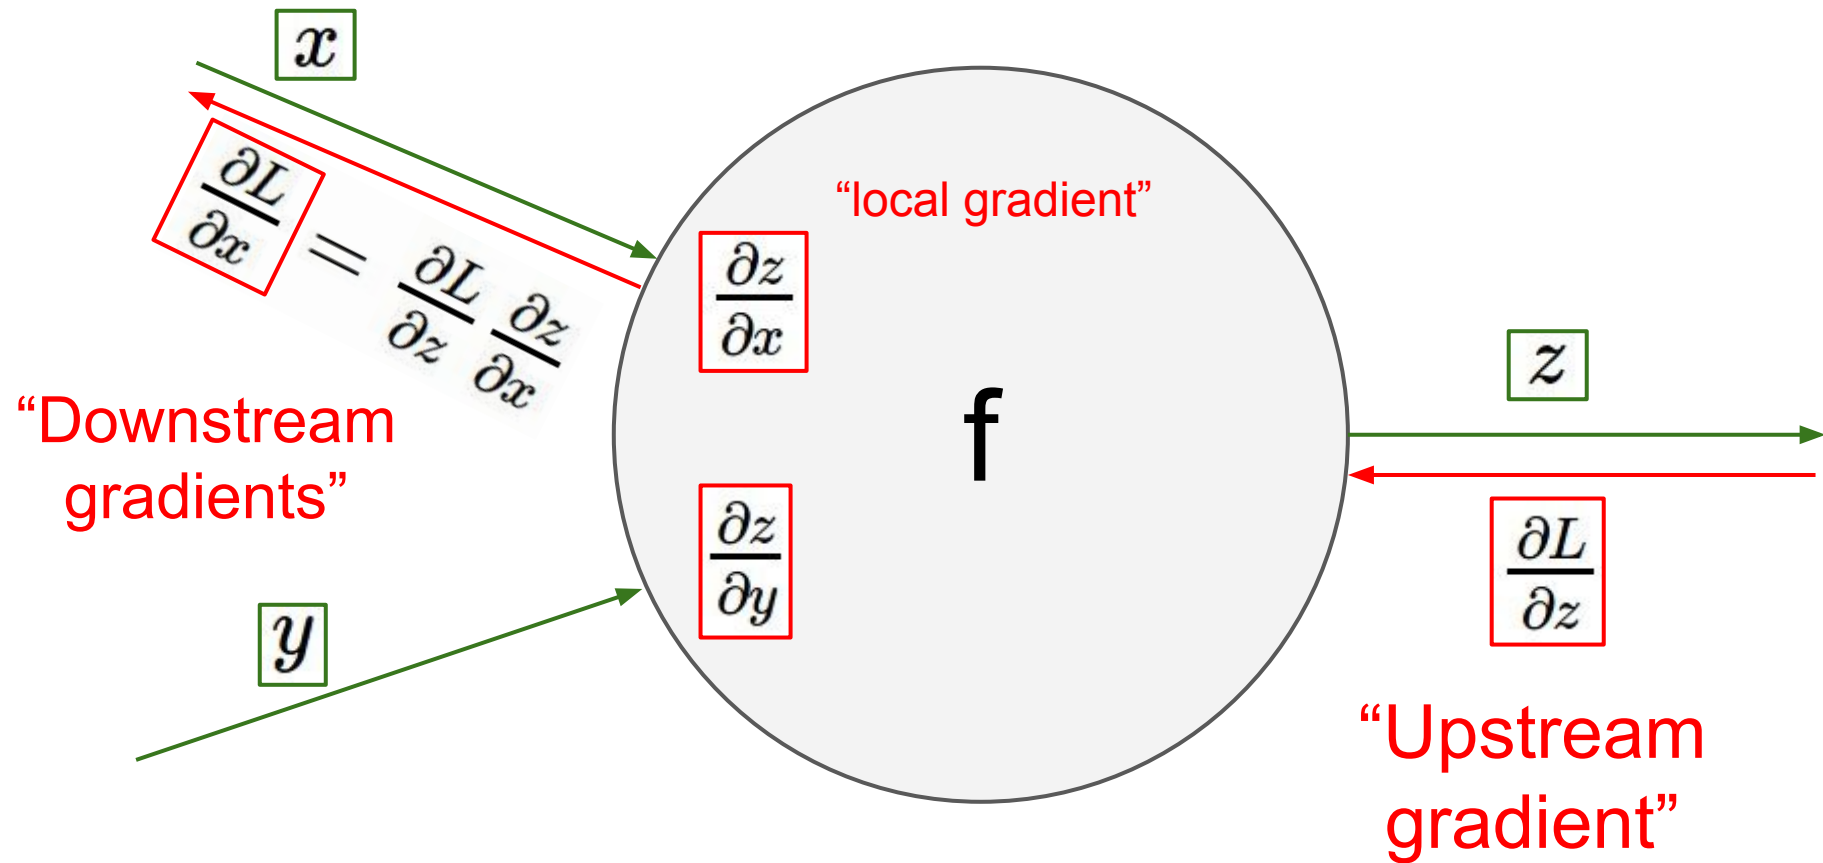

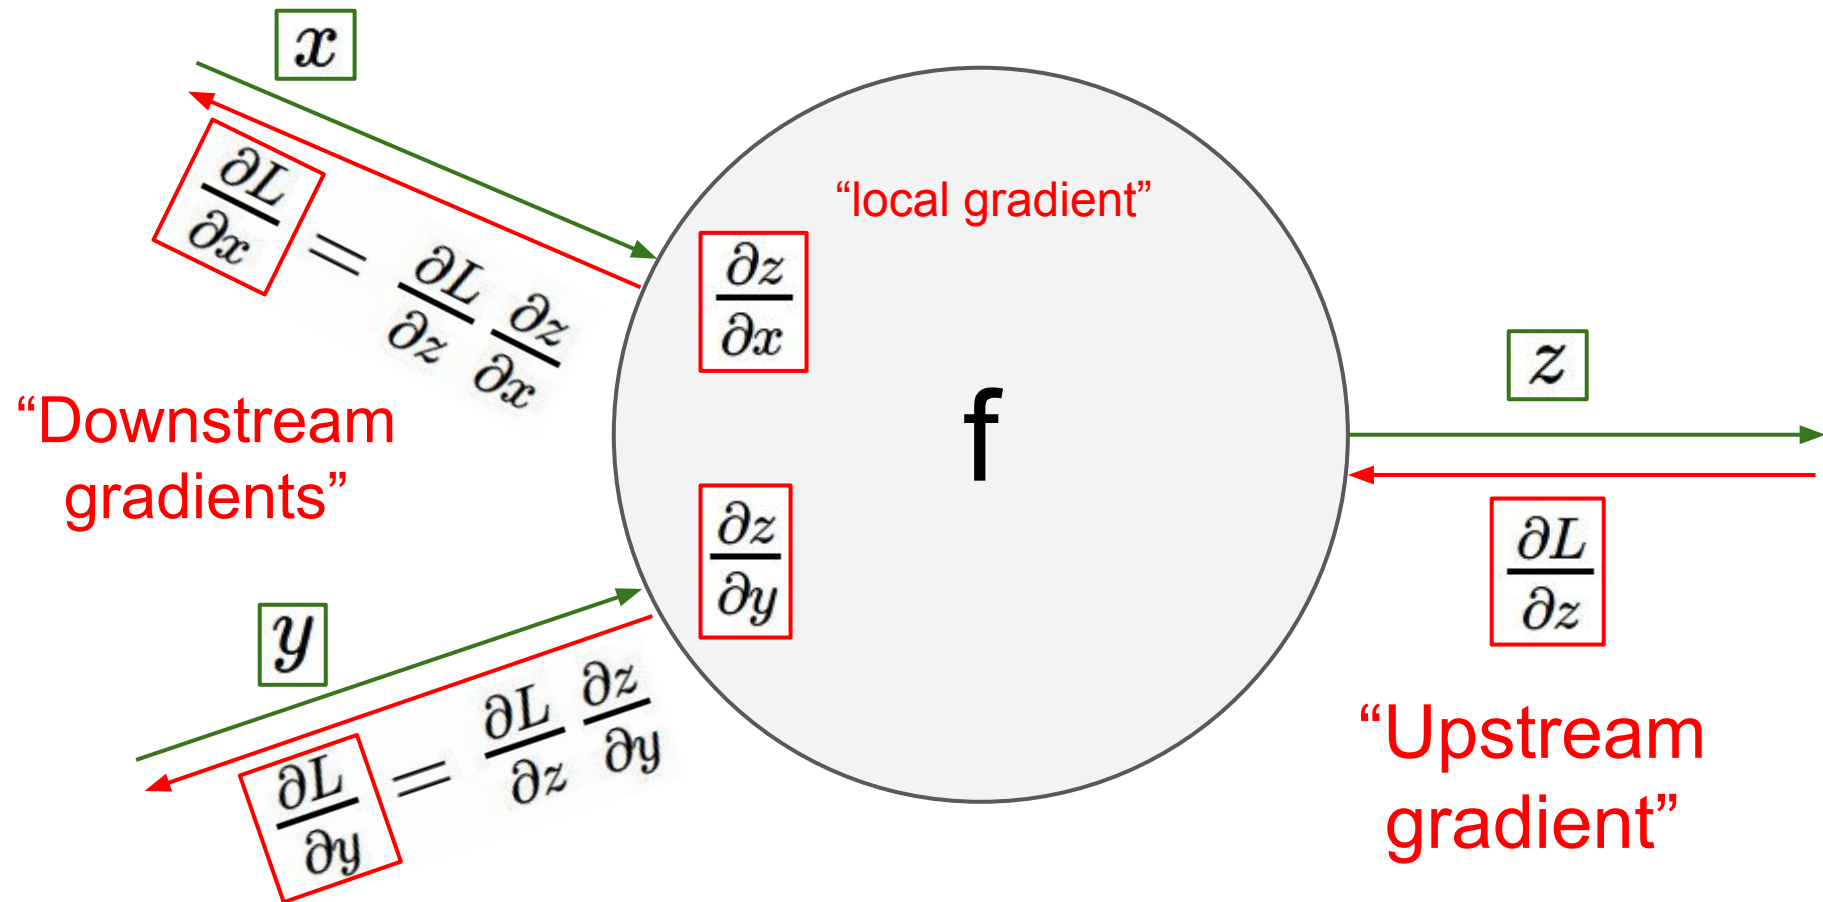


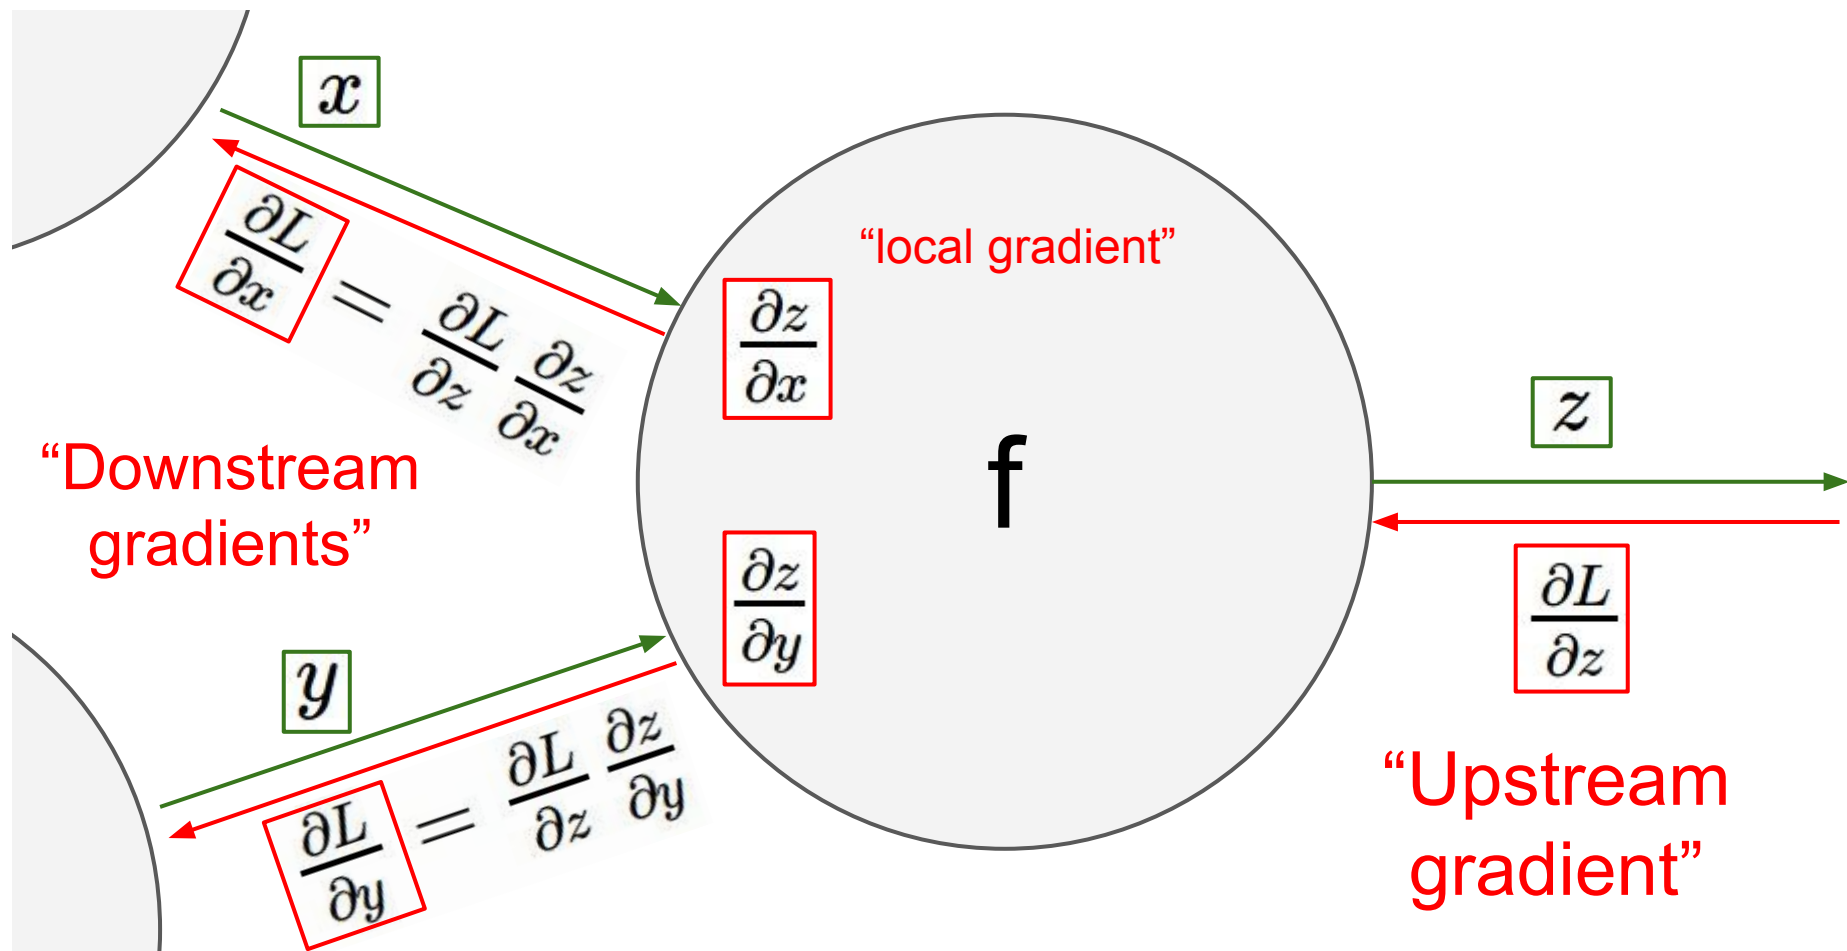


Another example: $f(w, x) = \frac{1}{1 + e^{-(w_0 x_0 + w_1 x_1 + w_2)}}$

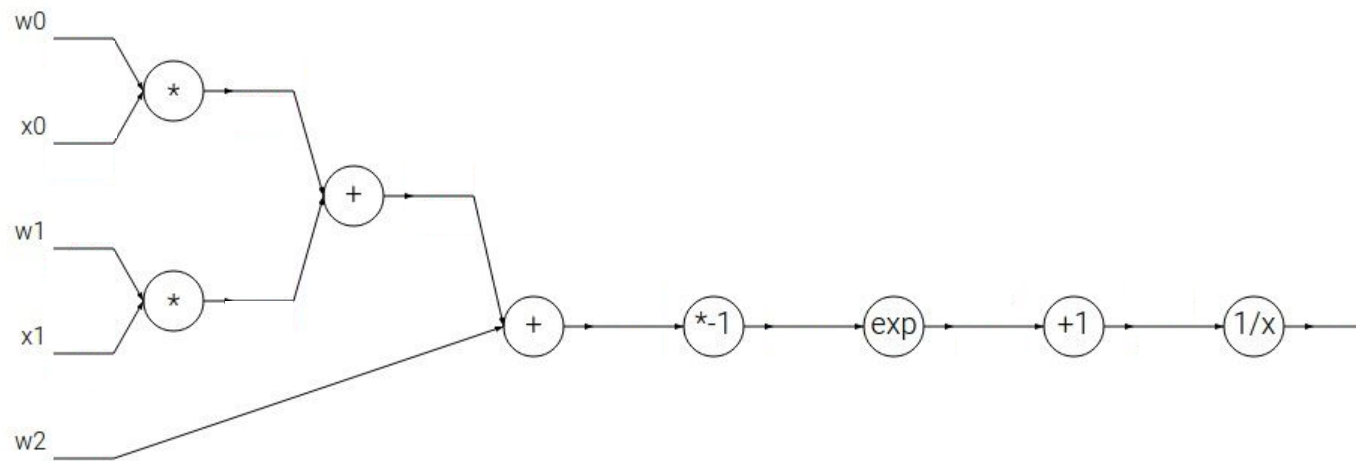

Another example: $f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2)}}$

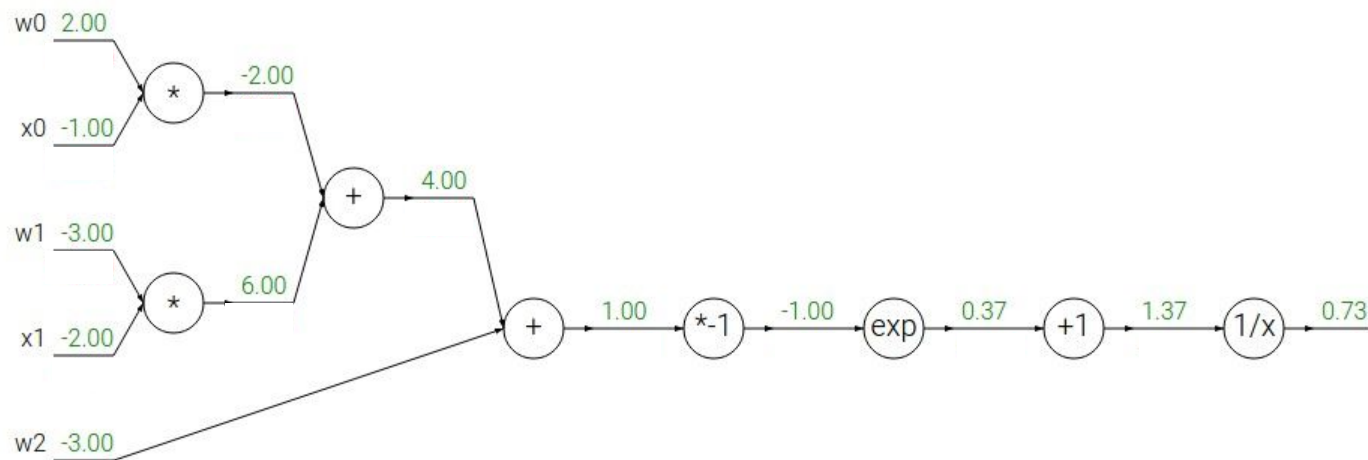


Another example: $f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2)}}$

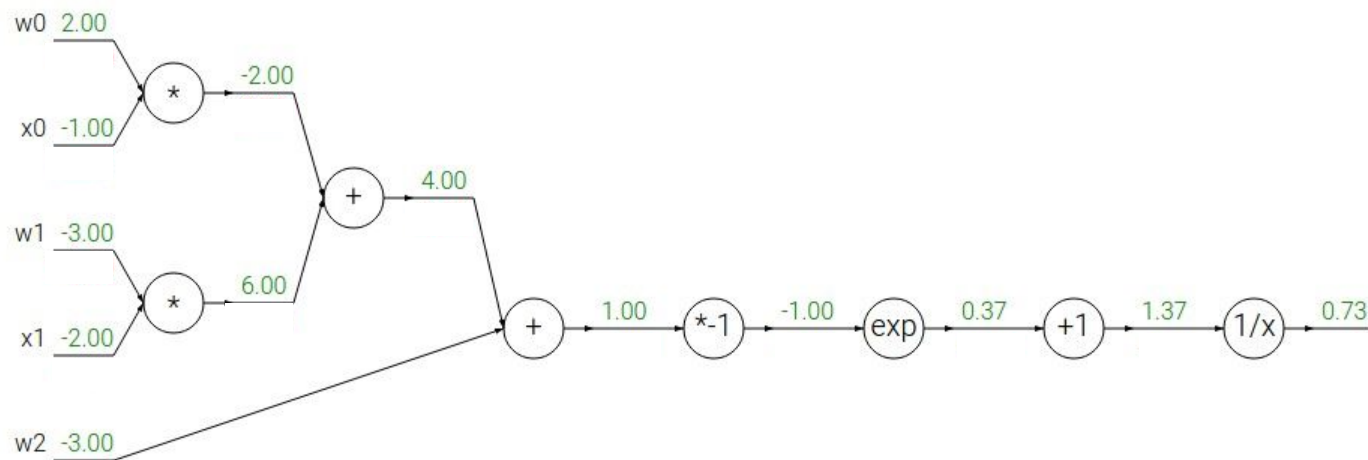

$f(x) = e^x$	→	$\frac{df}{dx} = e^x$		$f(x) = \frac{1}{x}$	→	$\frac{df}{dx} = -1/x^2$
$f_a(x) = ax$	→	$\frac{df}{dx} = a$		$f_c(x) = c + x$	→	$\frac{df}{dx} = 1$

Another example: $f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2)}}$

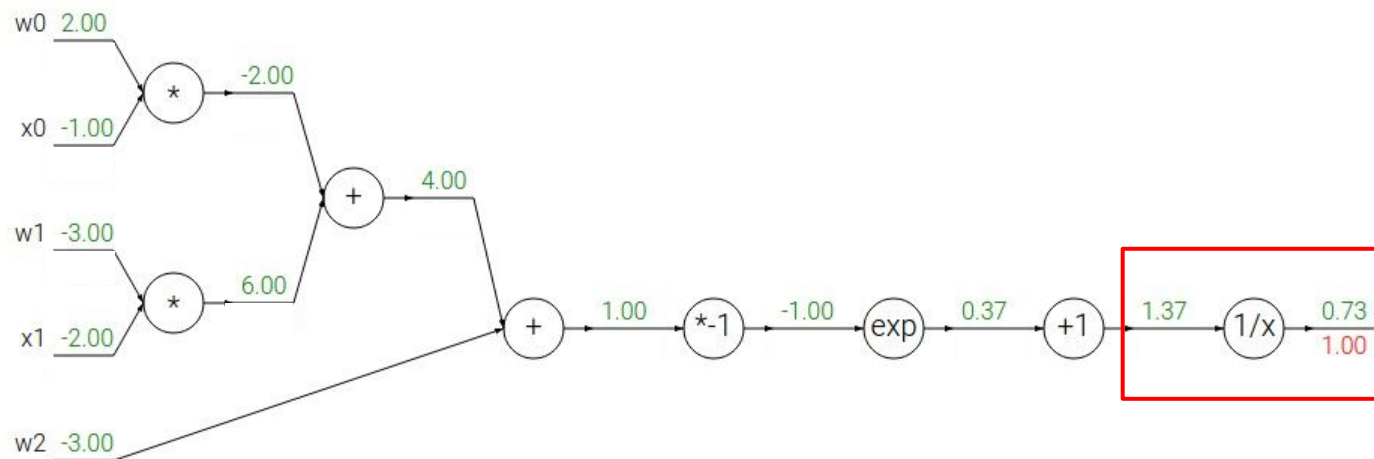


$$f(x) = e^x \rightarrow \frac{df}{dx} = e^x$$

$$f_a(x) = ax \rightarrow \frac{df}{dx} = a$$

$$f(x) = \frac{1}{x} \rightarrow \frac{df}{dx} = -1/x^2$$

$$f_c(x) = c + x \rightarrow \frac{df}{dx} = 1$$


Another example:
$$f(w, x) = \frac{1}{1 + e^{-(w_0 x_0 + w_1 x_1 + w_2)}}$$

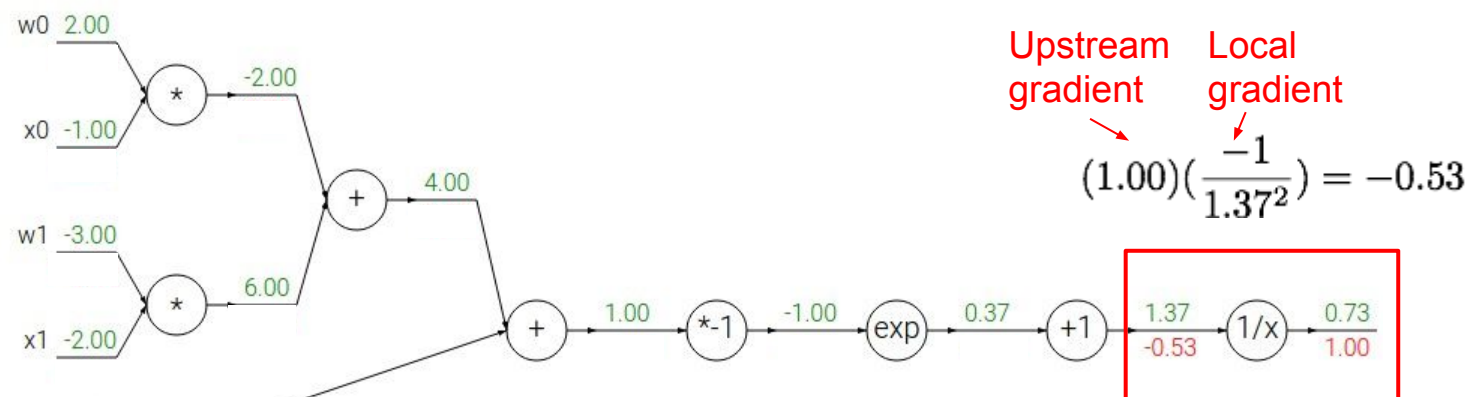

$$\begin{aligned} f(x) &= e^x & \rightarrow & \quad \frac{df}{dx} = e^x \\ f_a(x) &= ax & \rightarrow & \quad \frac{df}{dx} = a \end{aligned}$$


$$\begin{aligned} f(x) &= \frac{1}{x} & \rightarrow & \quad \frac{df}{dx} = -1/x^2 \\ f_c(x) &= c + x & \rightarrow & \quad \frac{df}{dx} = 1 \end{aligned}$$

Another example: $f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2x_2)}}$

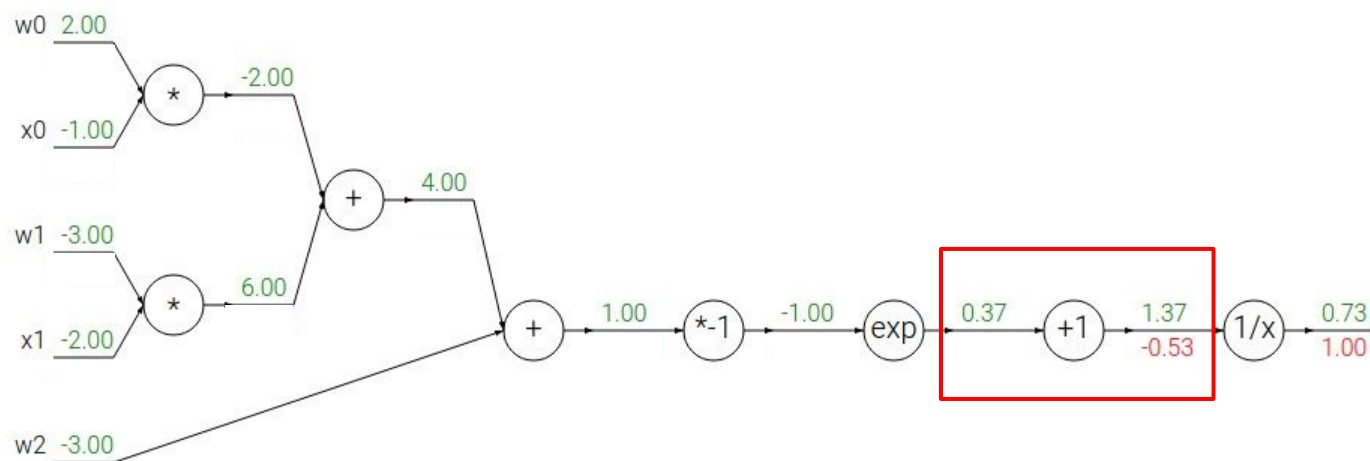


$f(x) = e^x$	\rightarrow	$\frac{df}{dx} = e^x$		$f(x) = \frac{1}{x}$	\rightarrow	$\frac{df}{dx} = -1/x^2$
$f_a(x) = ax$	\rightarrow	$\frac{df}{dx} = a$		$f_c(x) = c + x$	\rightarrow	$\frac{df}{dx} = 1$

Another example: $f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2)}}$

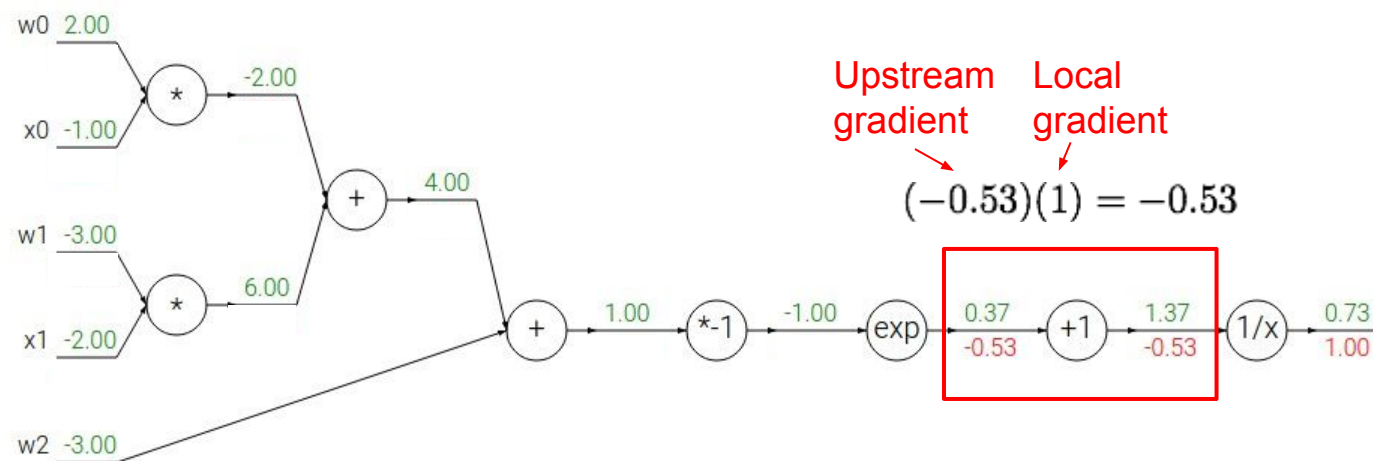


$f(x) = e^x$	\rightarrow	$\frac{df}{dx} = e^x$		$f(x) = \frac{1}{x}$	\rightarrow	$\frac{df}{dx} = -1/x^2$
$f_a(x) = ax$	\rightarrow	$\frac{df}{dx} = a$		$f_c(x) = c + x$	\rightarrow	$\frac{df}{dx} = 1$

Another example: $f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2)}}$

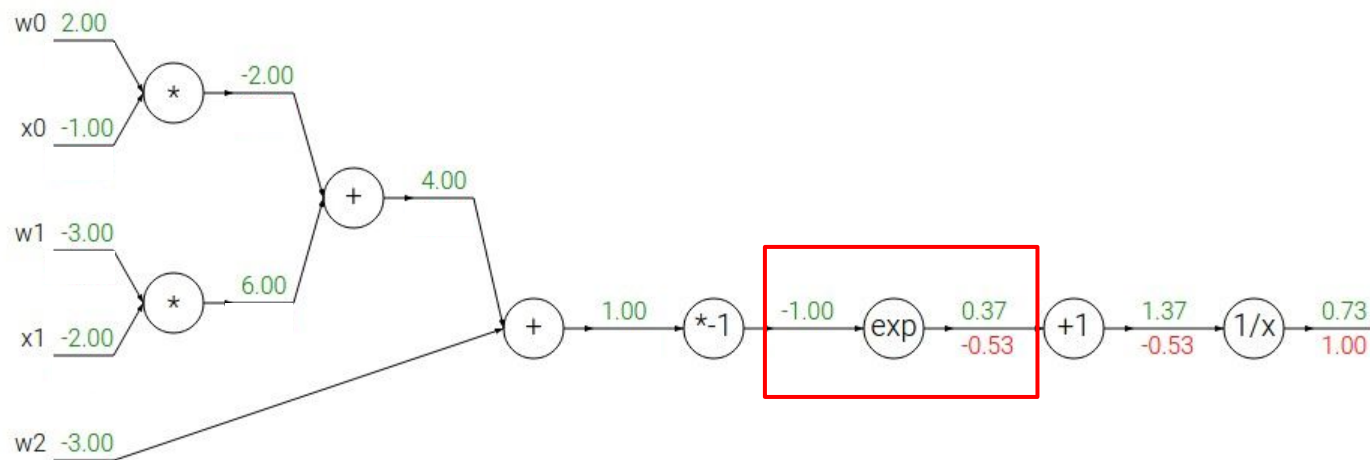


$f(x) = e^x$	\rightarrow	$\frac{df}{dx} = e^x$		$f(x) = \frac{1}{x}$	\rightarrow	$\frac{df}{dx} = -1/x^2$
$f_a(x) = ax$	\rightarrow	$\frac{df}{dx} = a$		$f_c(x) = c + x$	\rightarrow	$\frac{df}{dx} = 1$

Another example: $f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2x_2)}}$

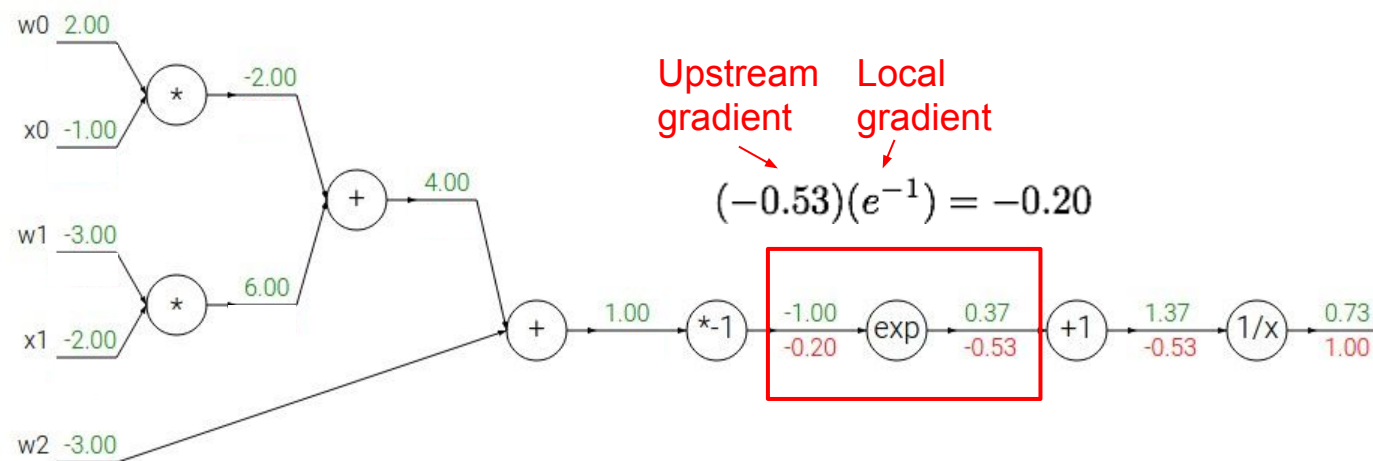

$f(x) = e^x$	\rightarrow	$\frac{df}{dx} = e^x$		$f(x) = \frac{1}{x}$	\rightarrow	$\frac{df}{dx} = -1/x^2$
$f_a(x) = ax$	\rightarrow	$\frac{df}{dx} = a$		$f_c(x) = c + x$	\rightarrow	$\frac{df}{dx} = 1$

Another example: $f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2)}}$

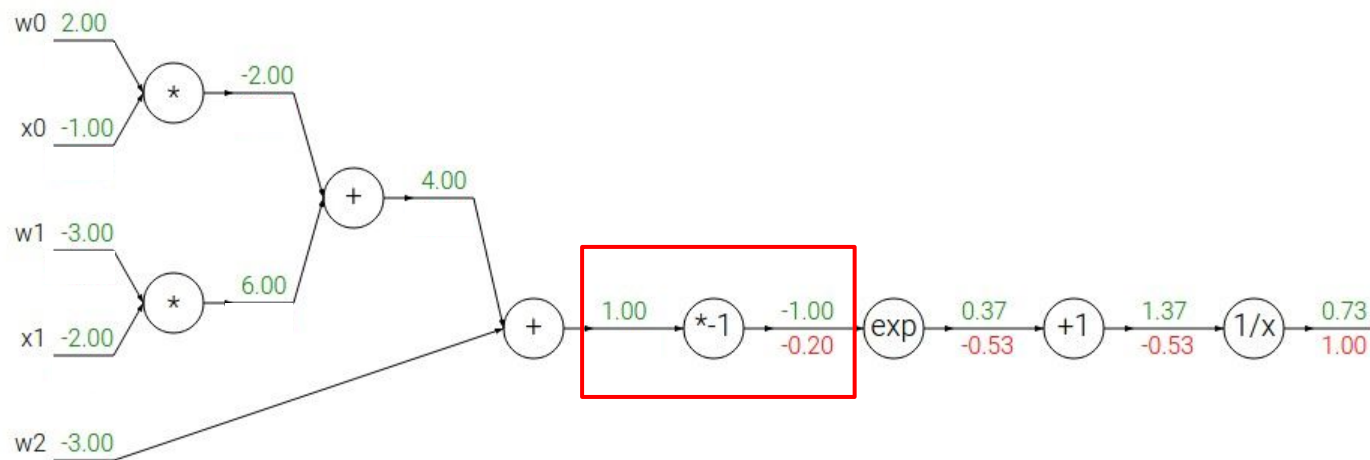


$$f(x) = e^x \rightarrow \frac{df}{dx} = e^x$$

$$f_a(x) = ax \rightarrow \frac{df}{dx} = a$$

$$f(x) = \frac{1}{x} \rightarrow \frac{df}{dx} = -1/x^2$$

$$f_c(x) = c + x \rightarrow \frac{df}{dx} = 1$$

Another example: $f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2)}}$

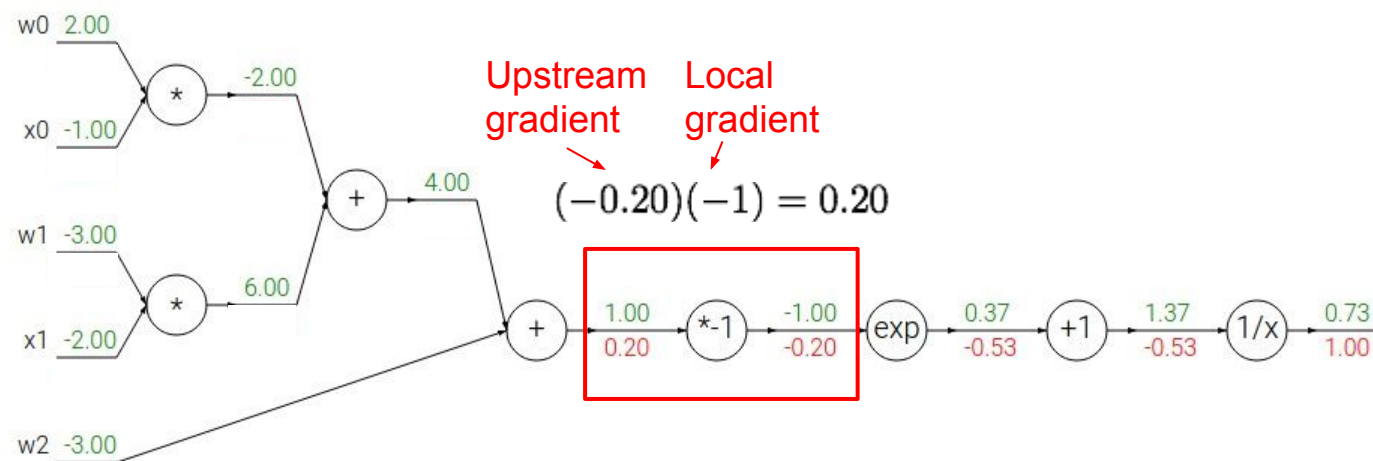


$$f(x) = e^x \rightarrow \frac{df}{dx} = e^x$$

$$f_a(x) = ax \rightarrow \frac{df}{dx} = a$$

$$f(x) = \frac{1}{x} \rightarrow \frac{df}{dx} = -1/x^2$$


$$f_c(x) = c + x \rightarrow \frac{df}{dx} = 1$$

Another example: $f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2)}}$

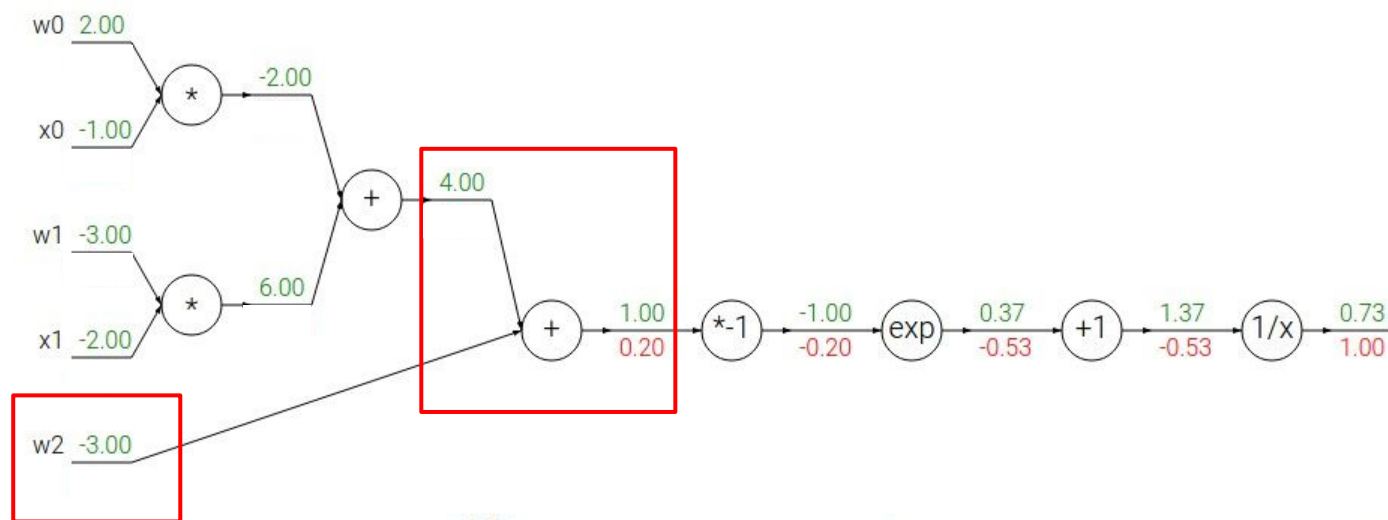


$f(x) = e^x$	\rightarrow	$\frac{df}{dx} = e^x$		$f(x) = \frac{1}{x}$	\rightarrow	$\frac{df}{dx} = -1/x^2$
$f_a(x) = ax$	\rightarrow	$\frac{df}{dx} = a$		$f_c(x) = c + x$	\rightarrow	$\frac{df}{dx} = 1$

Another example: $f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2)}}$

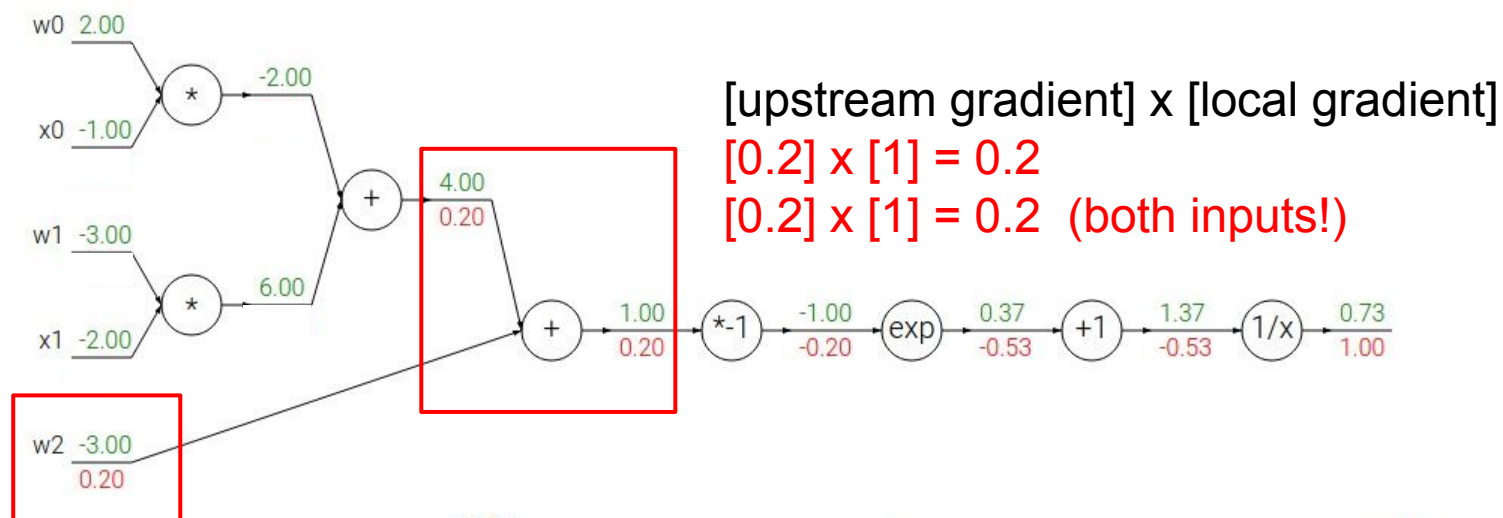

$f(x) = e^x$	\rightarrow	$\frac{df}{dx} = e^x$		$f(x) = \frac{1}{x}$	\rightarrow	$\frac{df}{dx} = -1/x^2$
$f_a(x) = ax$	\rightarrow	$\frac{df}{dx} = a$		$f_c(x) = c + x$	\rightarrow	$\frac{df}{dx} = 1$


Another example: $f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2)}}$

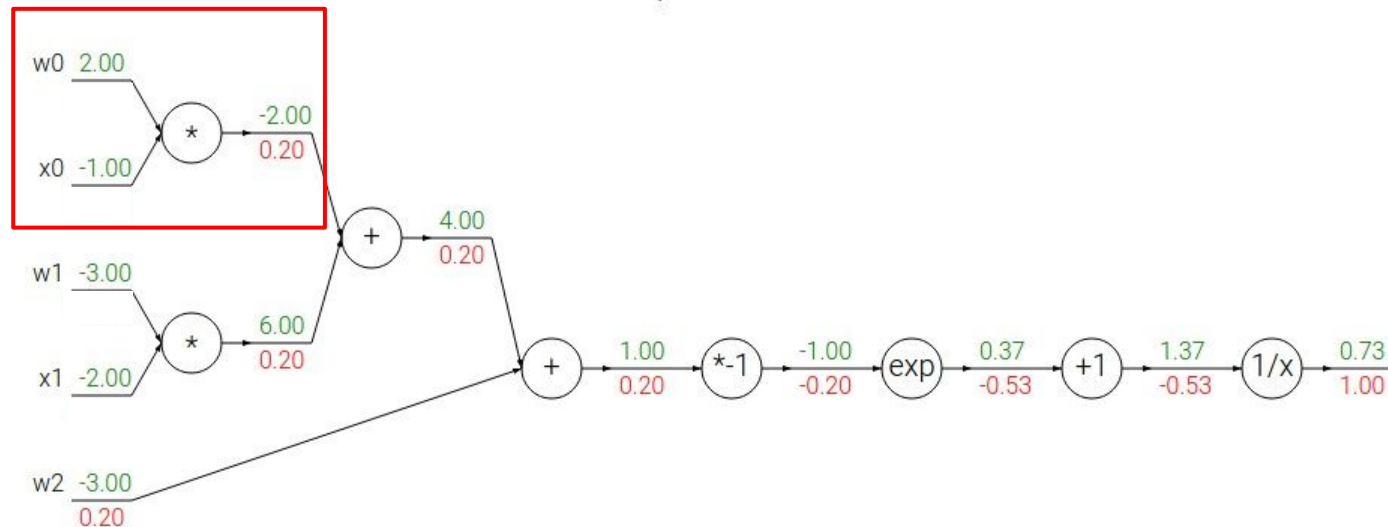

$f(x) = e^x$	\rightarrow	$\frac{df}{dx} = e^x$		$f(x) = \frac{1}{x}$	\rightarrow	$\frac{df}{dx} = -1/x^2$
$f_a(x) = ax$	\rightarrow	$\frac{df}{dx} = a$		$f_c(x) = c + x$	\rightarrow	$\frac{df}{dx} = 1$

Another example:

$$f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2x_2)}}$$

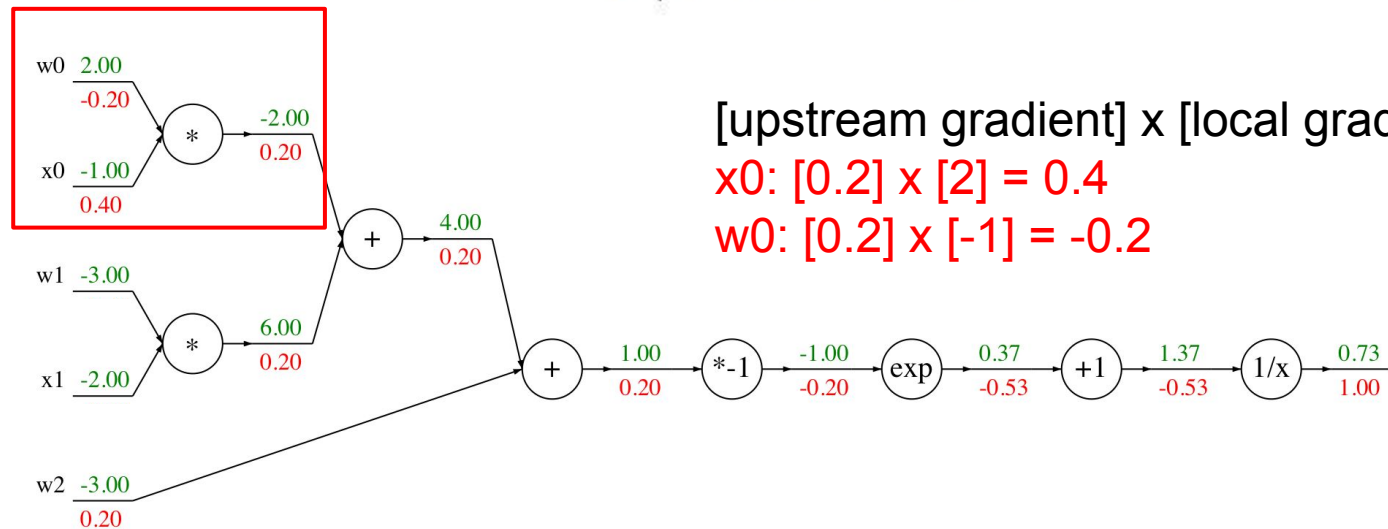

[upstream gradient] x [local gradient]

$$x_0: [0.2] \times [2] = 0.4$$


$$w_0: [0.2] \times [-1] = -0.2$$

$f(x) = e^x$	\rightarrow	$\frac{df}{dx} = e^x$		$f(x) = \frac{1}{x}$	\rightarrow	$\frac{df}{dx} = -1/x^2$
$f_a(x) = ax$	\rightarrow	$\frac{df}{dx} = a$		$f_c(x) = c + x$	\rightarrow	$\frac{df}{dx} = 1$

Another example:

$$f(w, x) = \frac{1}{1 + e^{-(w_0 x_0 + w_1 x_1 + w_2)}}$$


Computational graph representation may not be unique. Choose one where local gradients at each node can be easily expressed!

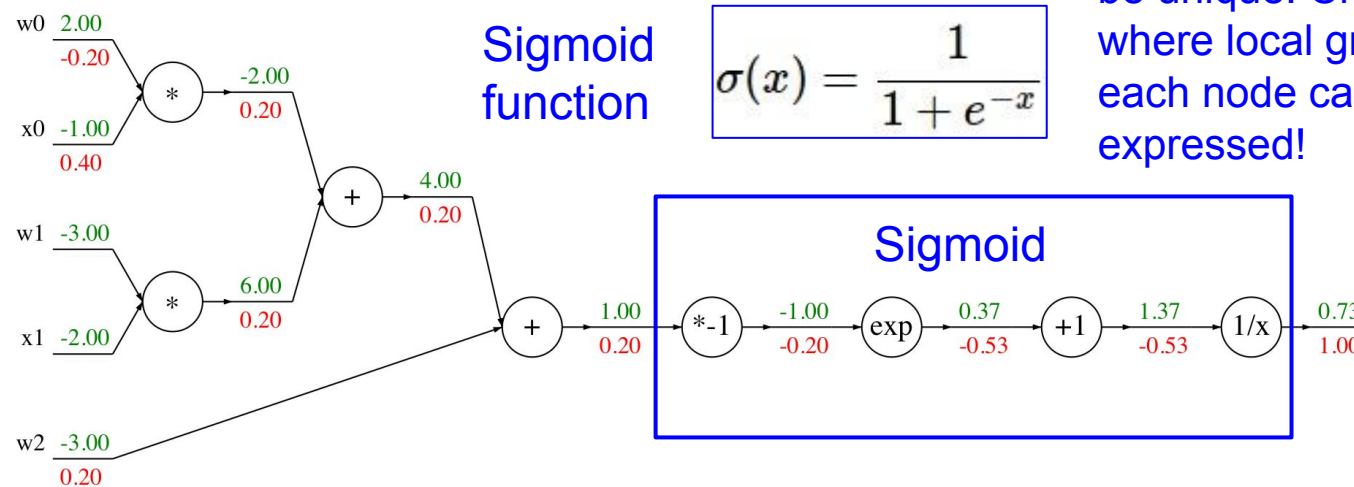

Another example:

$$f(w, x) = \frac{1}{1 + e^{-(w_0 x_0 + w_1 x_1 + w_2)}}$$

Computational graph representation may not be unique. Choose one where local gradients at each node can be easily expressed!

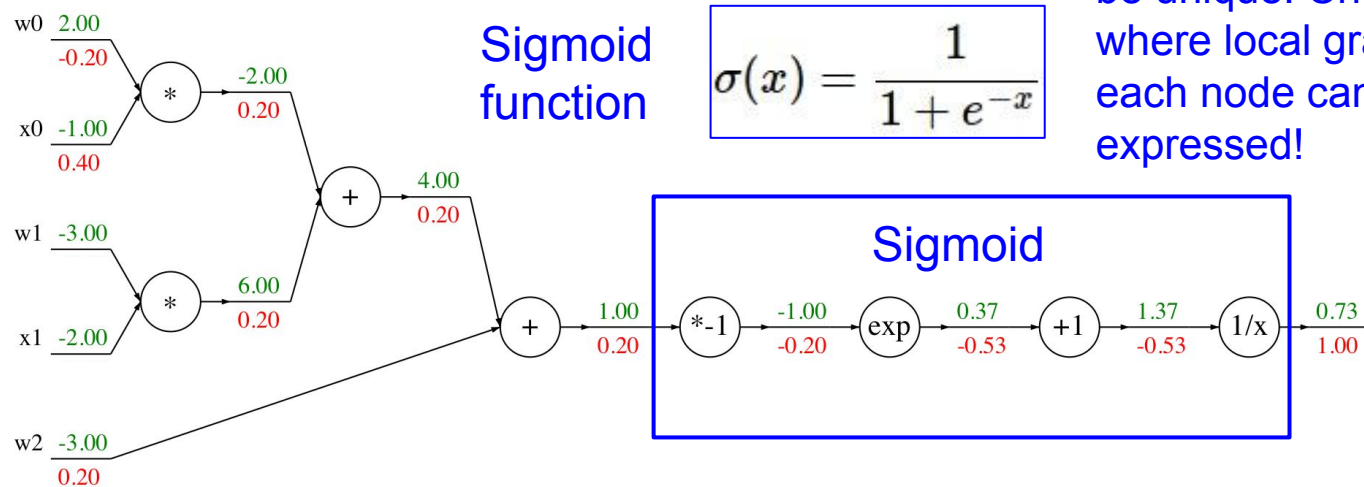


Sigmoid local gradient:

$$\frac{d\sigma(x)}{dx} = \frac{e^{-x}}{(1 + e^{-x})^2} = \left(\frac{1 + e^{-x} - 1}{1 + e^{-x}} \right) \left(\frac{1}{1 + e^{-x}} \right) = (1 - \sigma(x)) \sigma(x)$$

Another example:

$$f(w, x) = \frac{1}{1 + e^{-(w_0 x_0 + w_1 x_1 + w_2)}}$$

Computational graph representation may not be unique. Choose one where local gradients at each node can be easily expressed!

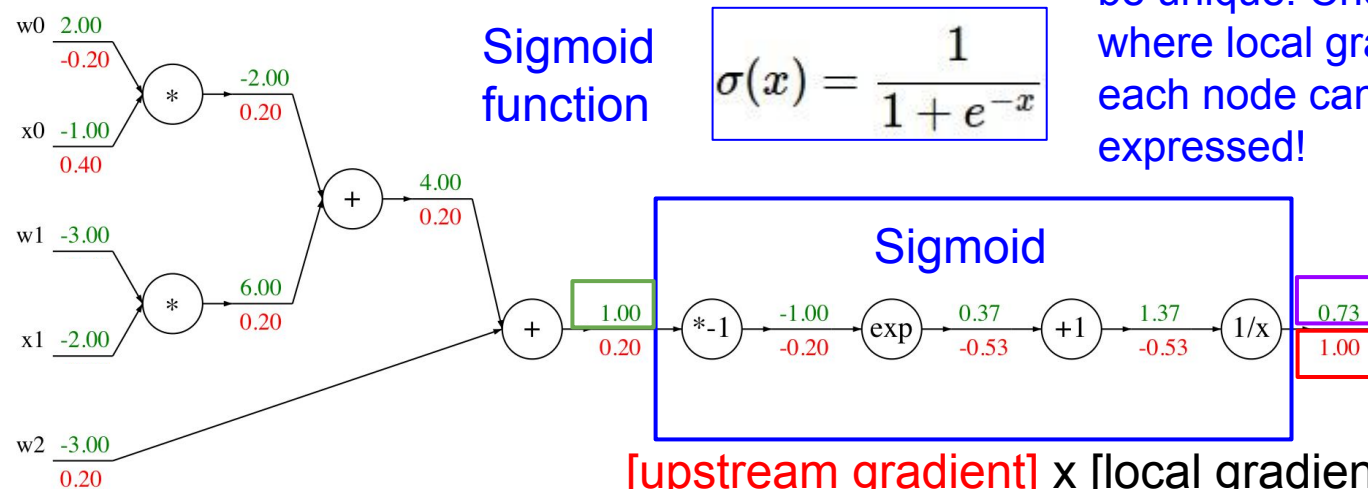


[upstream gradient] x [local gradient]
 $[1.00] \times [(1 - 0.73) (0.73)] = 0.2$

Sigmoid local gradient:

$$\frac{d\sigma(x)}{dx} = \frac{e^{-x}}{(1 + e^{-x})^2} = \left(\frac{1 + e^{-x} - 1}{1 + e^{-x}} \right) \left(\frac{1}{1 + e^{-x}} \right) = (1 - \sigma(x)) \sigma(x)$$


Patterns in gradient flow

add gate: gradient distributor

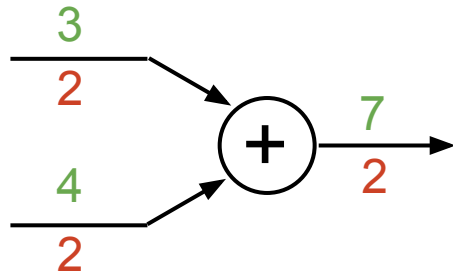


Patterns in gradient flow

add gate: gradient distributor

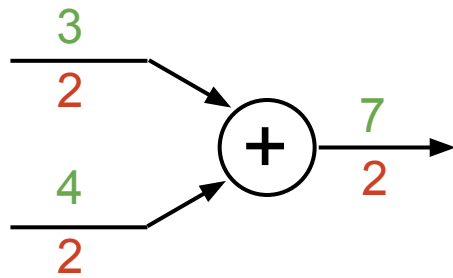


mul gate: “swap multiplier”

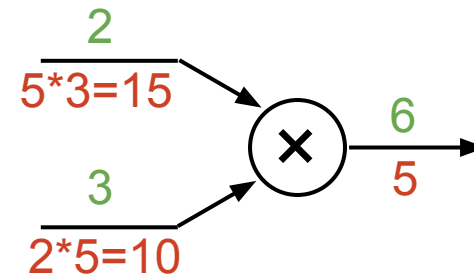


Patterns in gradient flow


add gate: gradient distributor

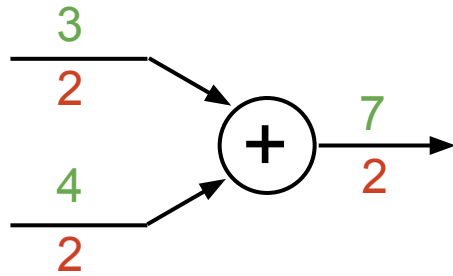

mul gate: “swap multiplier”

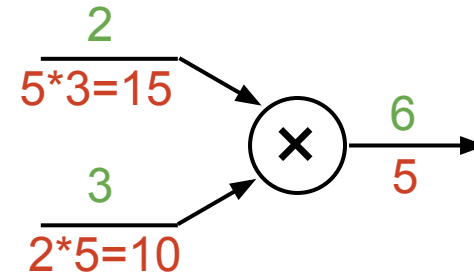


copy gate: gradient adder

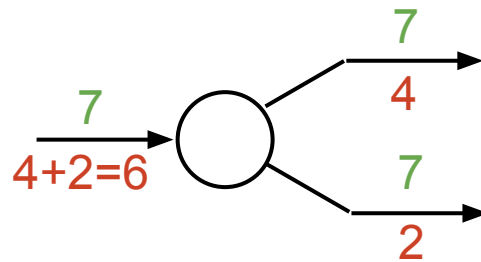


Patterns in gradient flow


add gate: gradient distributor

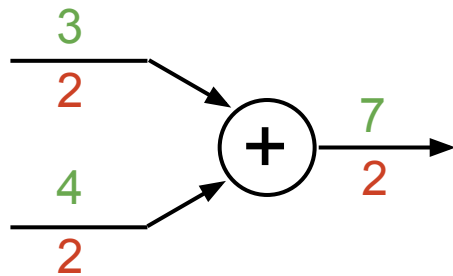


mul gate: “swap multiplier”

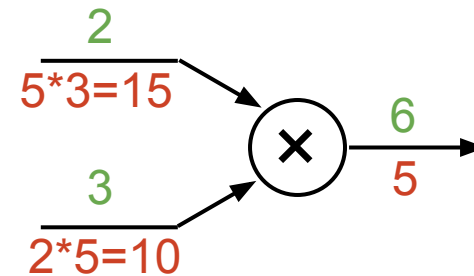


copy gate: gradient adder

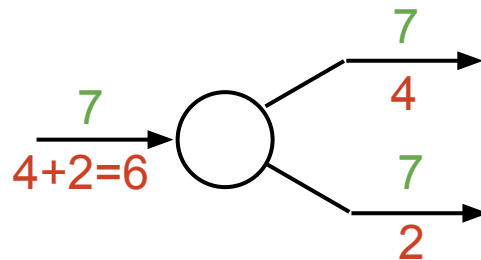

max gate: gradient router

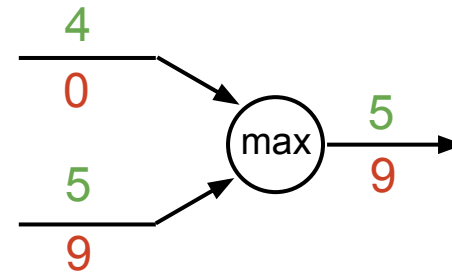

Backprop Implementation: “Flat” code

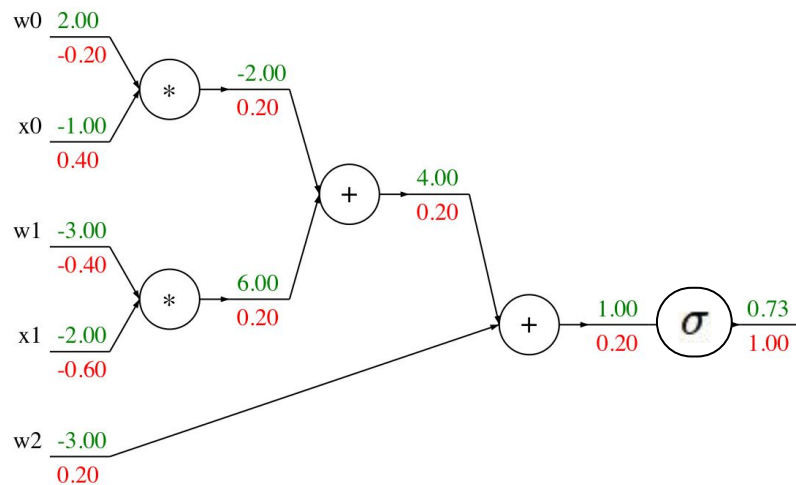

Forward pass:
Compute output


```
def f(w0, x0, w1, x1, w2):
```

```
    s0 = w0 * x0  
    s1 = w1 * x1  
    s2 = s0 + s1  
    s3 = s2 + w2  
    L = sigmoid(s3)
```

Backward pass:
Compute grads

```
    grad_L = 1.0  
    grad_s3 = grad_L * (1 - L) * L  
    grad_w2 = grad_s3  
    grad_s2 = grad_s3  
    grad_s0 = grad_s2  
    grad_s1 = grad_s2  
    grad_w1 = grad_s1 * x1  
    grad_x1 = grad_s1 * w1  
    grad_w0 = grad_s0 * x0  
    grad_x0 = grad_s0 * w0
```

Backprop Implementation: “Flat” code

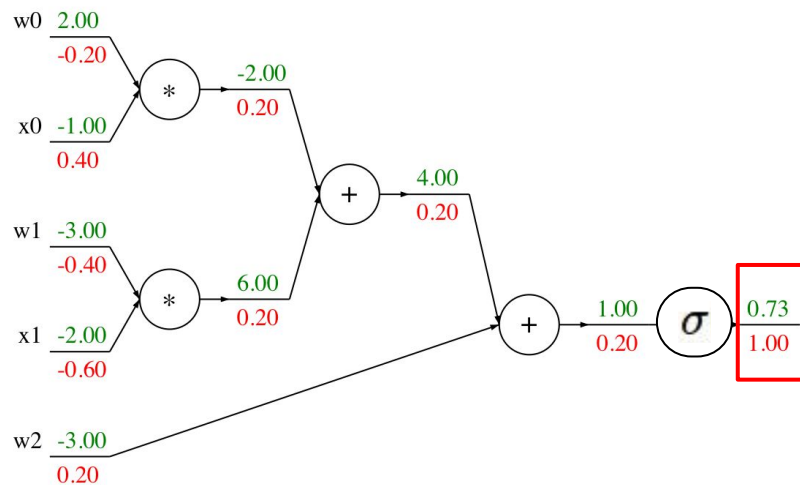

Forward pass:
Compute output

```
def f(w0, x0, w1, x1, w2):
```


```
    s0 = w0 * x0
    s1 = w1 * x1
    s2 = s0 + s1
    s3 = s2 + w2
    L = sigmoid(s3)
```

Base case

```
    grad_L = 1.0
```

```
    grad_s3 = grad_L * (1 - L) * L
    grad_w2 = grad_s3
    grad_s2 = grad_s3
    grad_s0 = grad_s2
    grad_s1 = grad_s2
    grad_w1 = grad_s1 * x1
    grad_x1 = grad_s1 * w1
    grad_w0 = grad_s0 * x0
    grad_x0 = grad_s0 * w0
```

Backprop Implementation: “Flat” code

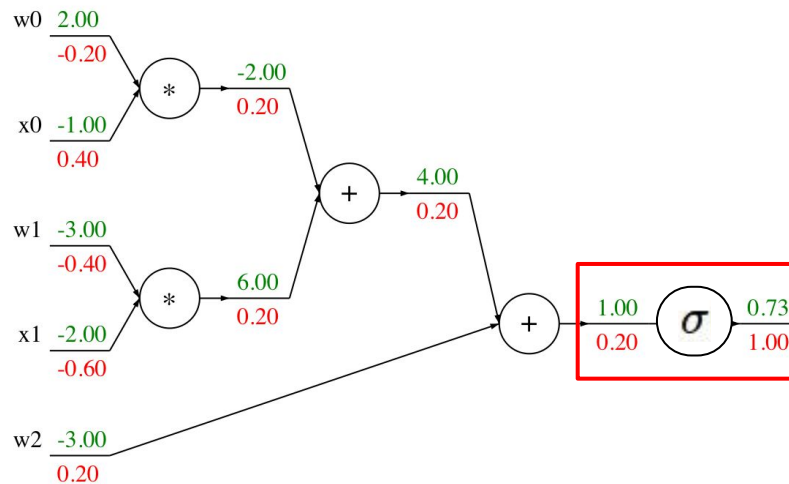

Forward pass:
Compute output

```
def f(w0, x0, w1, x1, w2):
```

```
    s0 = w0 * x0
```

```
    s1 = w1 * x1
```

```
    s2 = s0 + s1
```

```
    s3 = s2 + w2
```

```
    L = sigmoid(s3)
```

Sigmoid

```
    grad_L = 1.0
```

```
    grad_s3 = grad_L * (1 - L) * L
```

```
    grad_w2 = grad_s3
```

```
    grad_s2 = grad_s3
```

```
    grad_s0 = grad_s2
```

```
    grad_s1 = grad_s2
```


```
    grad_w1 = grad_s1 * x1
```

```
    grad_x1 = grad_s1 * w1
```

```
    grad_w0 = grad_s0 * x0
```

```
    grad_x0 = grad_s0 * w0
```

Backprop Implementation: “Flat” code

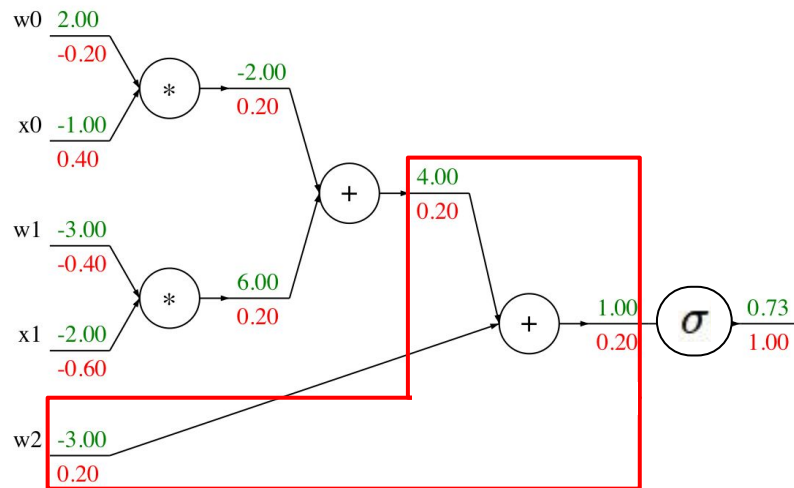

Forward pass:
Compute output

```
def f(w0, x0, w1, x1, w2):
```

```
    s0 = w0 * x0
```

```
    s1 = w1 * x1
```

```
    s2 = s0 + s1
```

```
    s3 = s2 + w2
```

```
    L = sigmoid(s3)
```

```
    grad_L = 1.0
```

```
    grad_s3 = grad_L * (1 - L) * L
```

```
    grad_w2 = grad_s3
```

```
    grad_s2 = grad_s3
```

```
    grad_s0 = grad_s2
```

```
    grad_s1 = grad_s2
```

```
    grad_w1 = grad_s1 * x1
```


```
    grad_x1 = grad_s1 * w1
```

```
    grad_w0 = grad_s0 * x0
```

```
    grad_x0 = grad_s0 * w0
```

Add gate

Backprop Implementation: “Flat” code

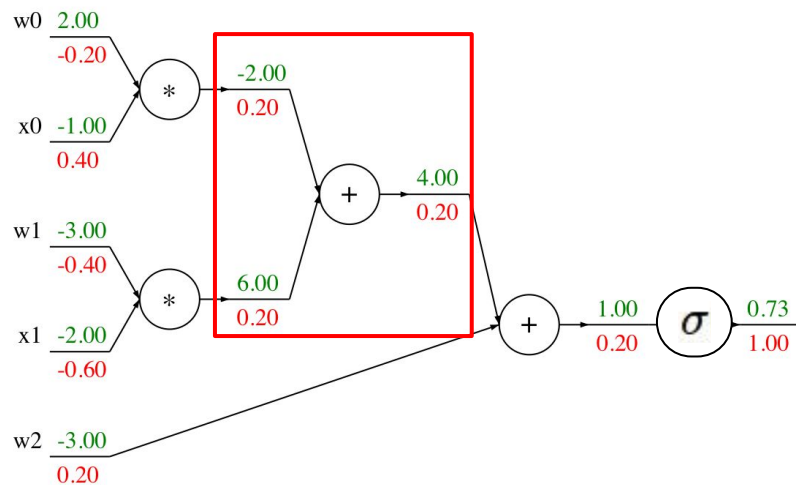


Forward pass:
Compute output

```
def f(w0, x0, w1, x1, w2):
    s0 = w0 * x0
    s1 = w1 * x1
    s2 = s0 + s1
    s3 = s2 + w2
    L = sigmoid(s3)
```

Add gate

```
grad_L = 1.0
grad_s3 = grad_L * (1 - L) * L
grad_w2 = grad_s3
grad_s2 = grad_s3
grad_s0 = grad_s2
grad_s1 = grad_s2
grad_w1 = grad_s1 * x1
grad_x1 = grad_s1 * w1
grad_w0 = grad_s0 * x0
grad_x0 = grad_s0 * w0
```

Backprop Implementation: “Flat” code

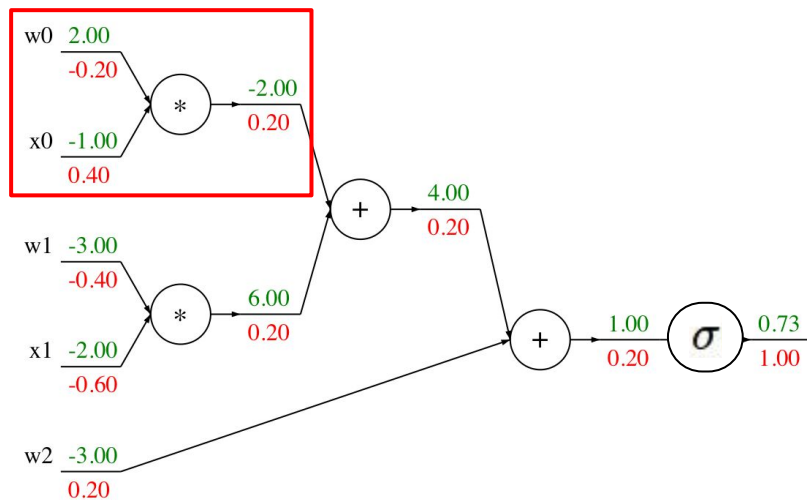

Forward pass:
Compute output

```
def f(w0, x0, w1, x1, w2):
```

```
    s0 = w0 * x0
    s1 = w1 * x1
    s2 = s0 + s1
    s3 = s2 + w2
    L = sigmoid(s3)
```

```
    grad_L = 1.0
```

```
    grad_s3 = grad_L * (1 - L) * L
```

```
    grad_w2 = grad_s3
```

```
    grad_s2 = grad_s3
```

```
    grad_s0 = grad_s2
```

```
    grad_s1 = grad_s2
```

```
    grad_w1 = grad_s1 * x1
```


```
    grad_x1 = grad_s1 * w1
```

```
    grad_w0 = grad_s0 * x0
```

```
    grad_x0 = grad_s0 * w0
```

Multiply gate

Backprop Implementation: “Flat” code

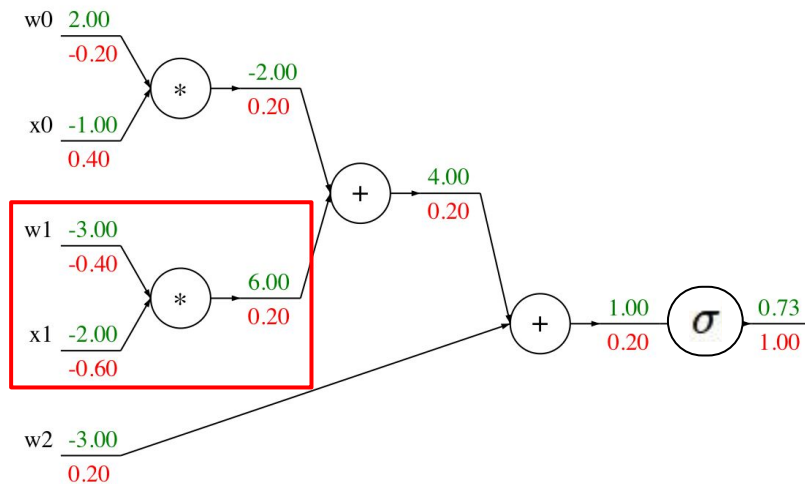

Forward pass:
Compute output

```
def f(w0, x0, w1, x1, w2):
```

```
    s0 = w0 * x0
```

```
    s1 = w1 * x1
```

```
    s2 = s0 + s1
```

```
    s3 = s2 + w2
```

```
    L = sigmoid(s3)
```

```
grad_L = 1.0
```

```
grad_s3 = grad_L * (1 - L) * L
```

```
grad_w2 = grad_s3
```

```
grad_s2 = grad_s3
```

```
grad_s0 = grad_s2
```

```
grad_s1 = grad_s2
```

```
grad_w1 = grad_s1 * x1
```

```
grad_x1 = grad_s1 * w1
```

```
grad_w0 = grad_s0 * x0
```

```
grad_x0 = grad_s0 * w0
```


Multiply gate

“Flat” Backprop: Do this for assignment 1!

Stage your forward/backward computation!

E.g. for the SVM:

```
# receive W (weights), X (data)
# forward pass (we have 8 lines)
scores = #...
margins = #...
data_loss = #...
reg_loss = #...
loss = data_loss + reg_loss
# backward pass (we have 5 lines)
dmargins = # ... (optionally, we go direct to dscores)
dscores = #...
dW = #...
```

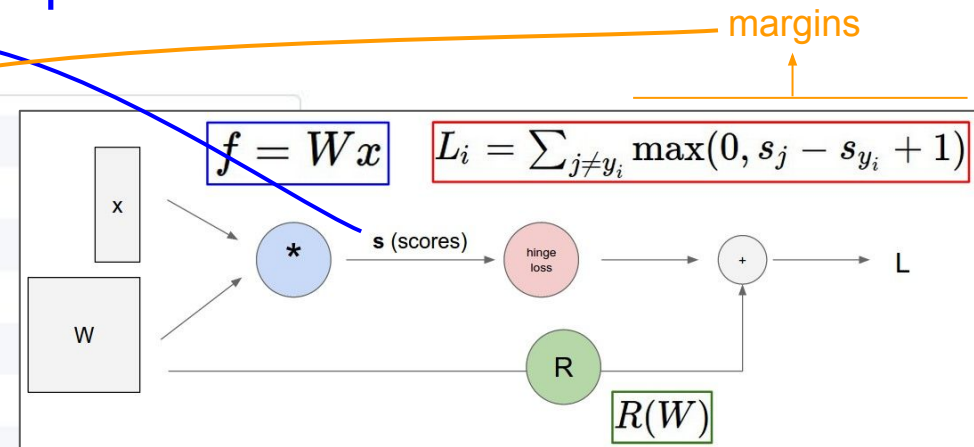

“Flat” Backprop: Do this for assignment 1!

E.g. for two-layer neural net:

```
# receive W1,W2,b1,b2 (weights/biases), X (data)
# forward pass:
h1 = #... function of X,W1,b1
scores = #... function of h1,W2,b2
loss = #... (several lines of code to evaluate Softmax loss)
# backward pass:
dscores = #...
dh1,dW2,db2 = #...
dW1,db1 = #...
```

Recap: Vector derivatives

Scalar to Scalar

$$x \in \mathbb{R}, y \in \mathbb{R}$$

Regular derivative:

$$\frac{\partial y}{\partial x} \in \mathbb{R}$$

If x changes by a small amount, how much will y change?

Vector to Scalar

$$x \in \mathbb{R}^N, y \in \mathbb{R}$$

Derivative is **Gradient**:

$$\frac{\partial y}{\partial x} \in \mathbb{R}^N \quad \left(\frac{\partial y}{\partial x} \right)_n = \frac{\partial y}{\partial x_n}$$

For each element of x , if it changes by a small amount then how much will y change?

Recap: Vector derivatives

Scalar to Scalar

$$x \in \mathbb{R}, y \in \mathbb{R}$$

Regular derivative:

$$\frac{\partial y}{\partial x} \in \mathbb{R}$$

If x changes by a small amount, how much will y change?

Vector to Scalar

$$x \in \mathbb{R}^N, y \in \mathbb{R}$$

Derivative is **Gradient**:

$$\frac{\partial y}{\partial x} \in \mathbb{R}^N \quad \left(\frac{\partial y}{\partial x} \right)_n = \frac{\partial y}{\partial x_n}$$

For each element of x , if it changes by a small amount then how much will y change?

Vector to Vector


$$x \in \mathbb{R}^N, y \in \mathbb{R}^M$$

Derivative is **Jacobian**:


$$\frac{\partial y}{\partial x} \in \mathbb{R}^{N \times M} \quad \left(\frac{\partial y}{\partial x} \right)_{n,m} = \frac{\partial y_m}{\partial x_n}$$

For each element of x , if it changes by a small amount then how much will each element of y change?


Backprop with Vectors

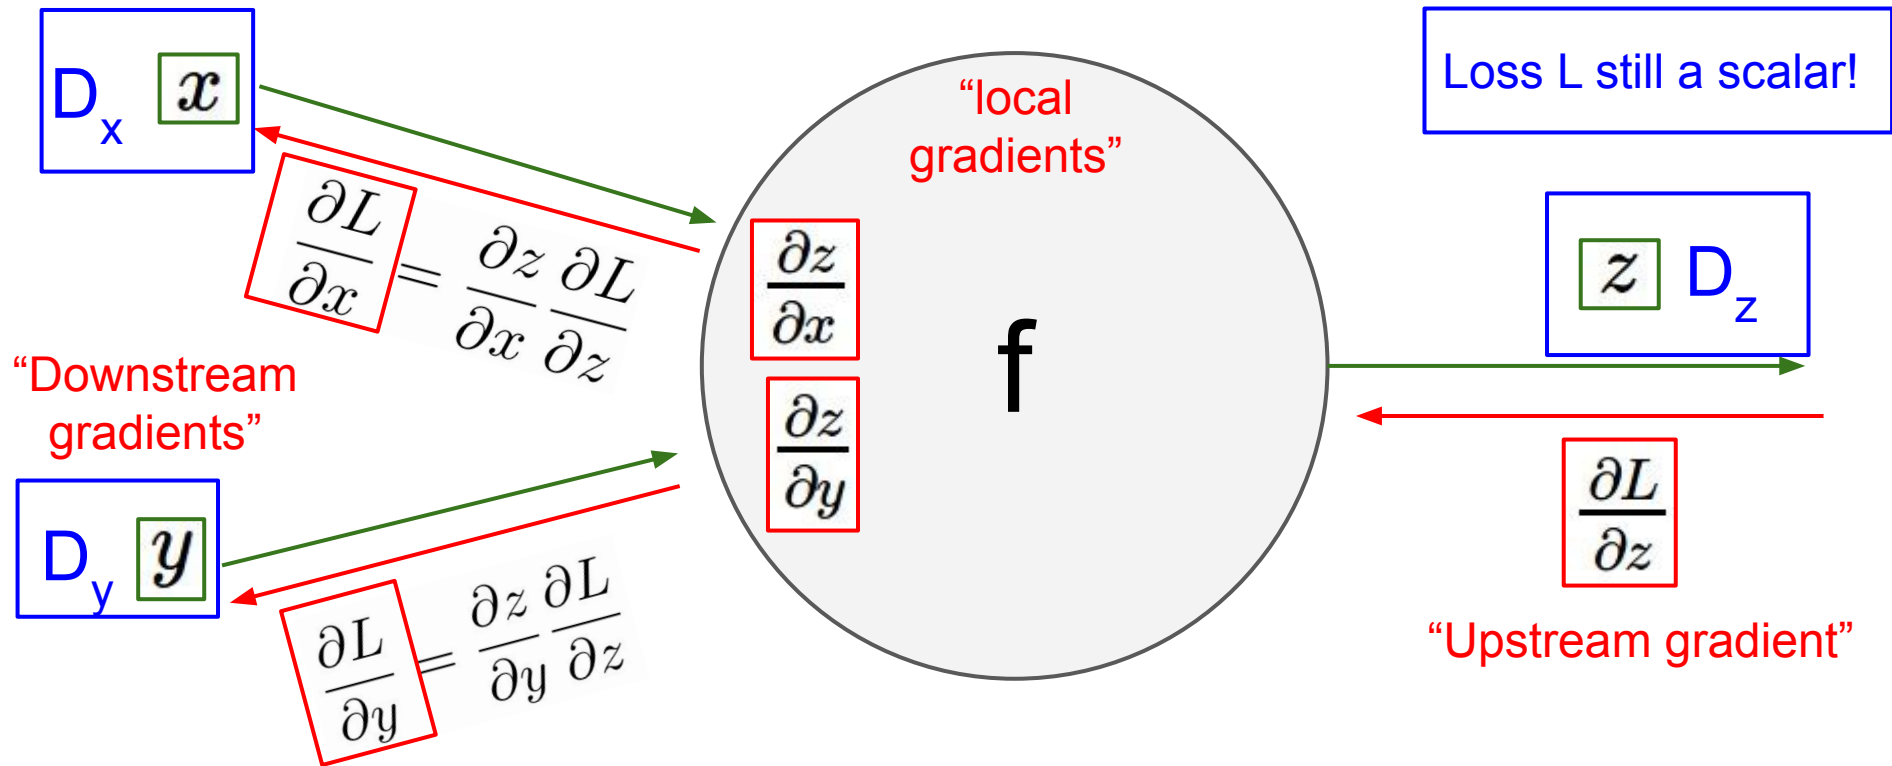


Backprop with Vectors

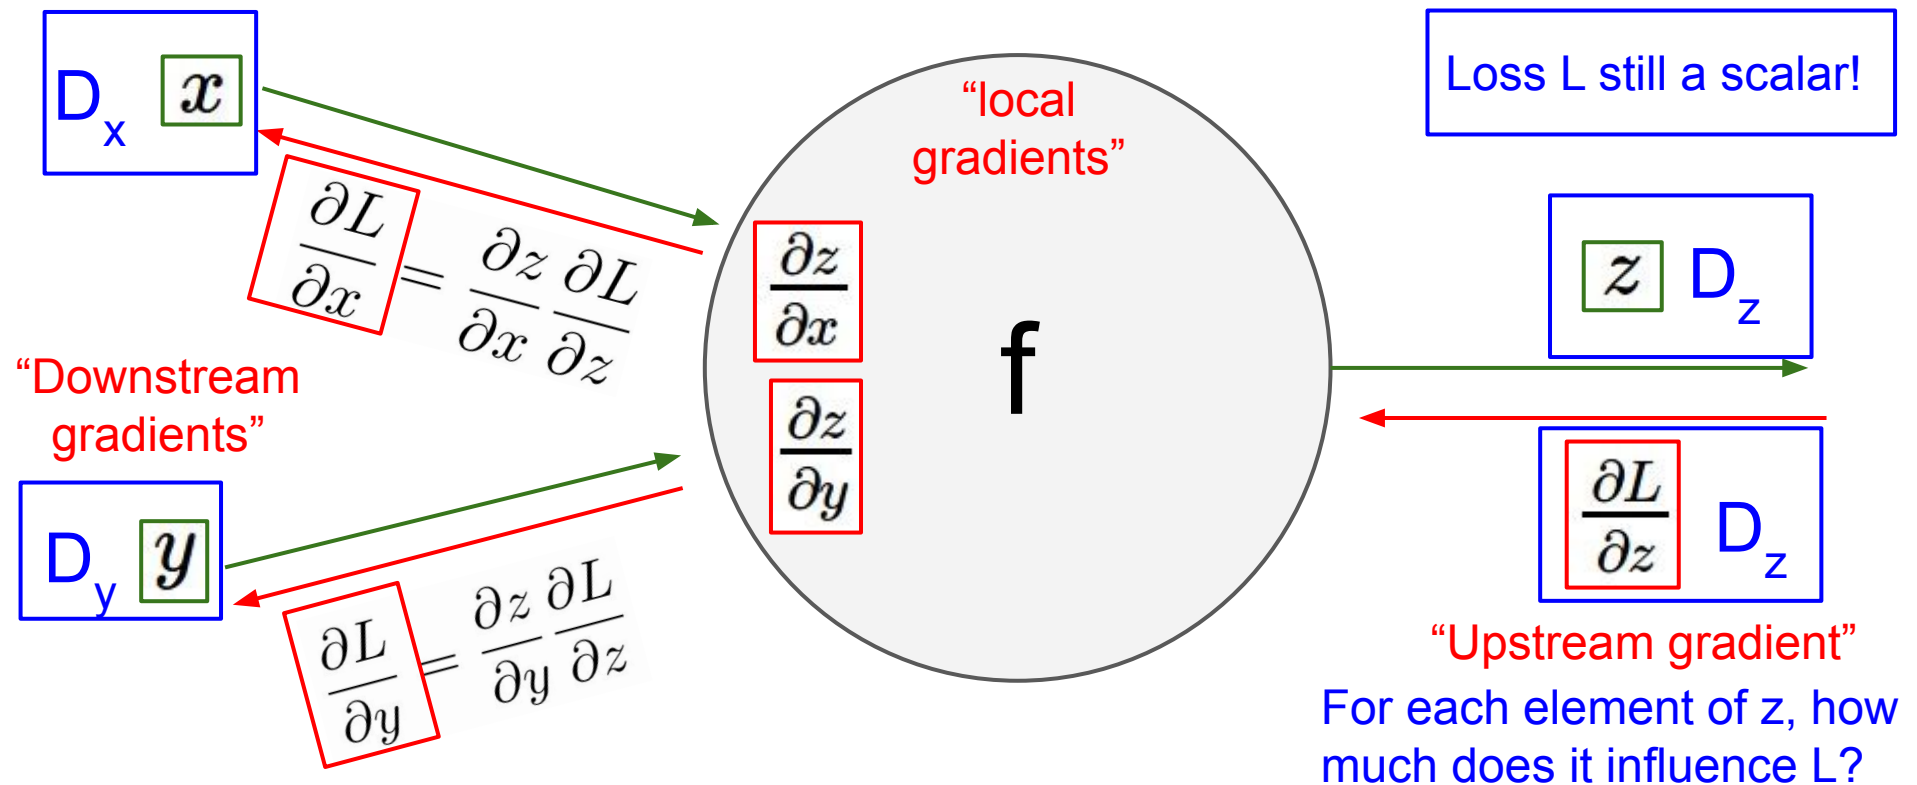


Backprop with Vectors

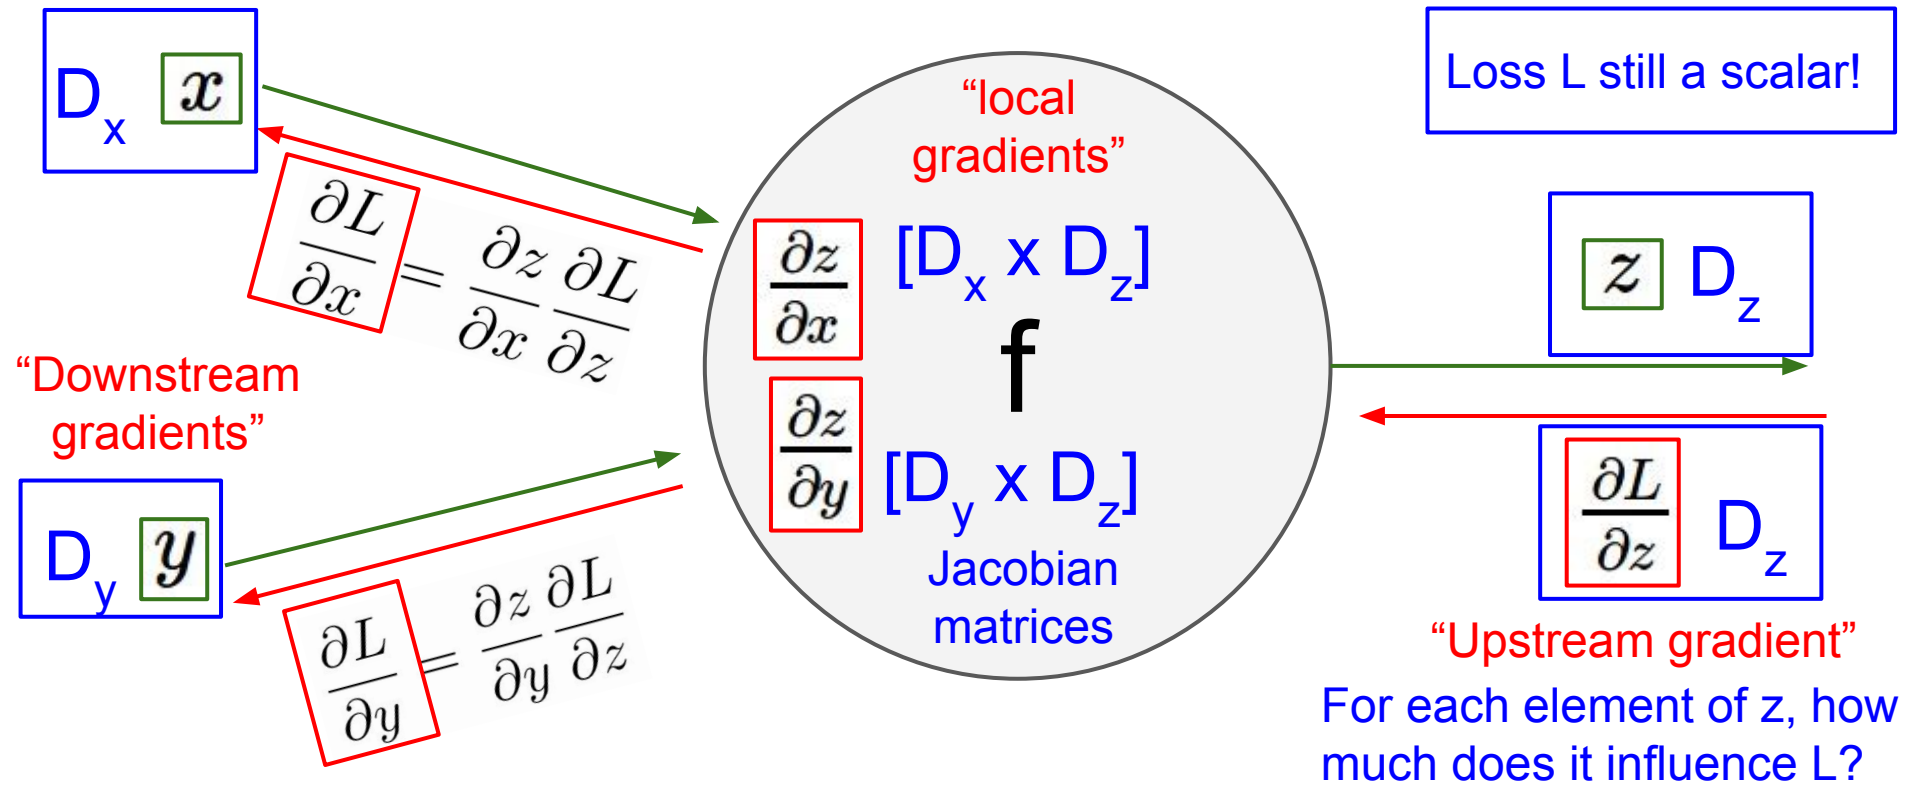

Backprop with Vectors

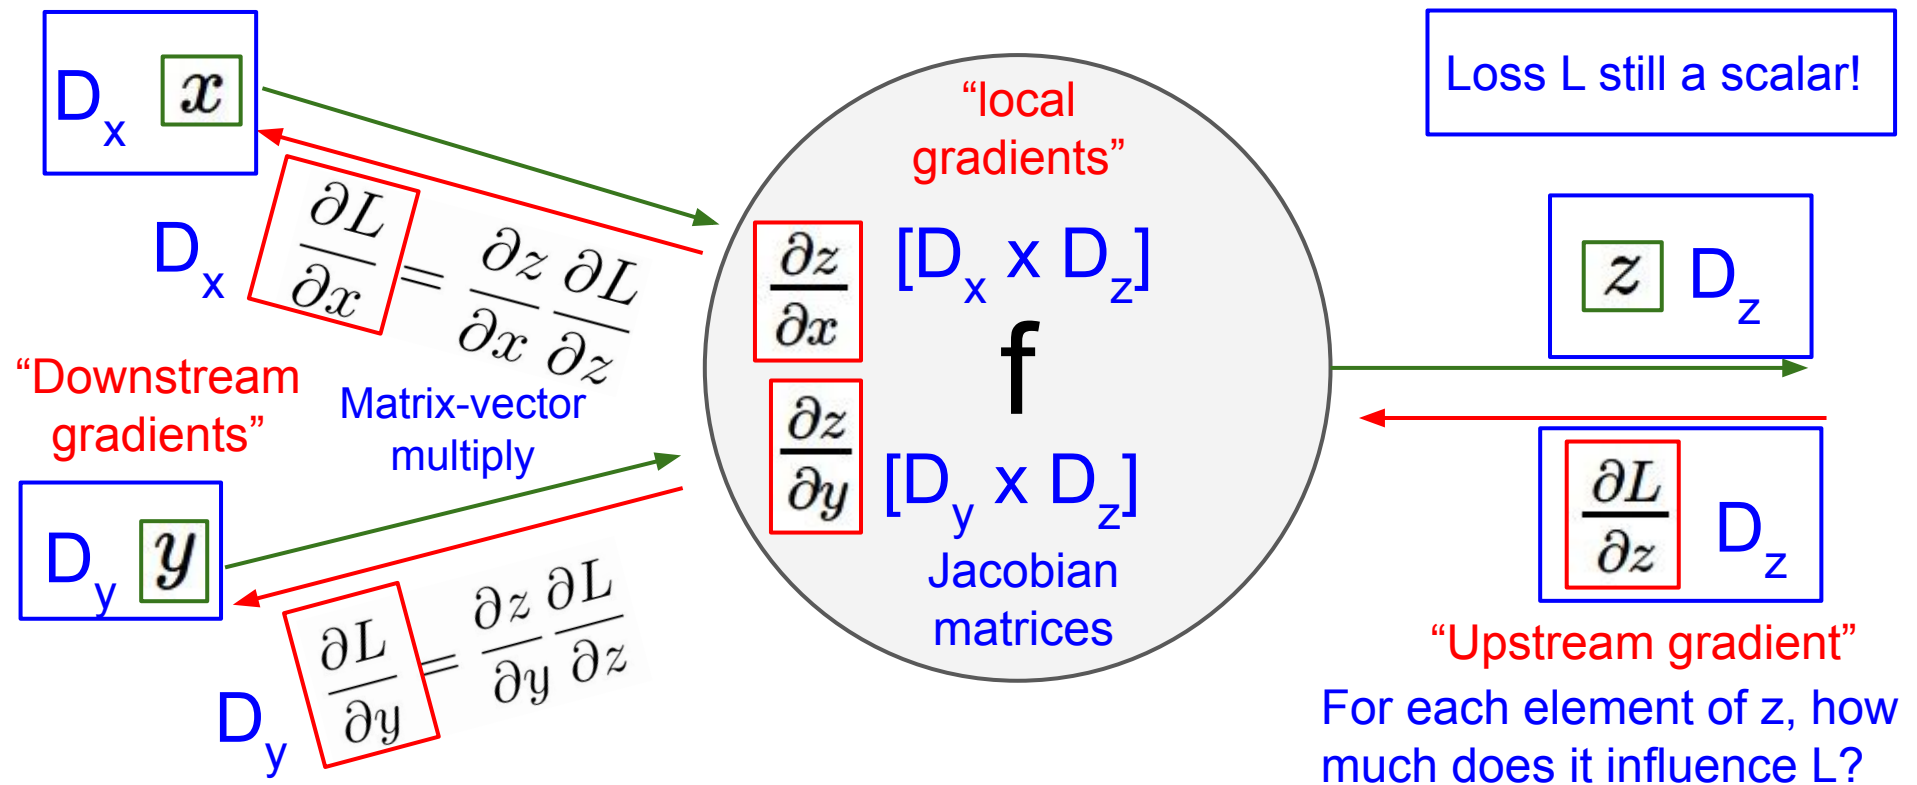


Backprop with Vectors

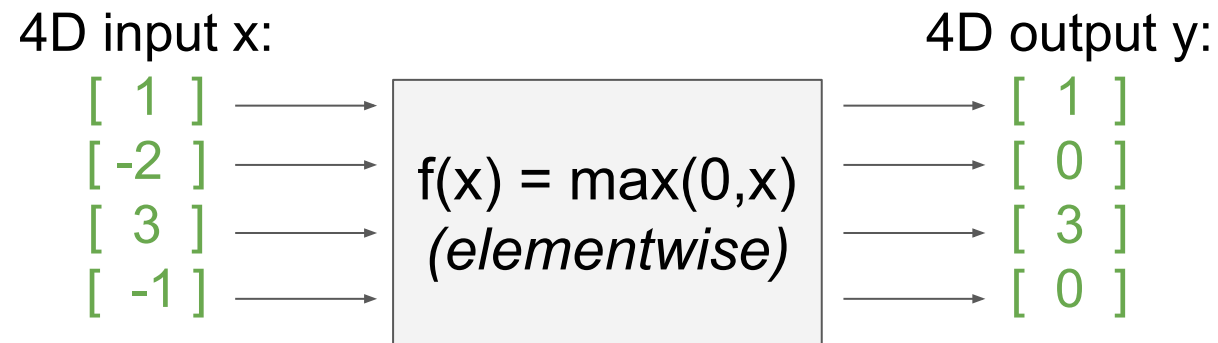

Backprop with Vectors

4D input x:


$\begin{bmatrix} 1 \\ -2 \\ 3 \\ -1 \end{bmatrix}$



$f(x) = \max(0, x)$
(*elementwise*)

4D output y:

$\begin{bmatrix} 1 \\ 0 \\ 3 \\ 0 \end{bmatrix}$




4D dL/dy:

$\begin{bmatrix} 4 \\ -1 \\ 5 \\ 9 \end{bmatrix}$

Upstream
gradient


Backprop with Vectors

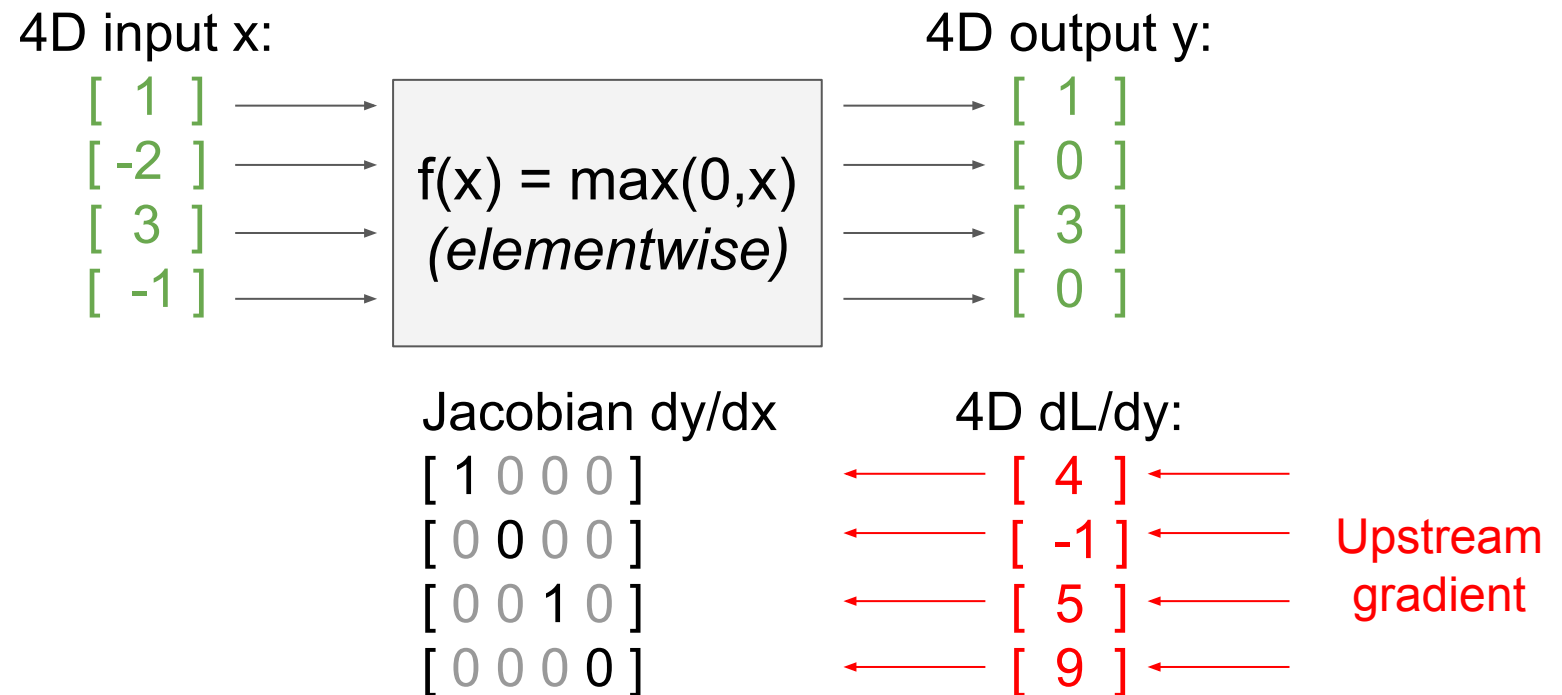

Backprop with Vectors

4D input x:


$\begin{bmatrix} 1 \\ -2 \\ 3 \\ -1 \end{bmatrix}$



$f(x) = \max(0, x)$
(*elementwise*)

4D output y:

$\begin{bmatrix} 1 \\ 0 \\ 3 \\ 0 \end{bmatrix}$



$[dy/dx] \ [dL/dy]$

$\begin{bmatrix} 1 & 0 & 0 & 0 \end{bmatrix} \begin{bmatrix} 4 \end{bmatrix}$

$\begin{bmatrix} 0 & 0 & 0 & 0 \end{bmatrix} \begin{bmatrix} -1 \end{bmatrix}$

$\begin{bmatrix} 0 & 0 & 1 & 0 \end{bmatrix} \begin{bmatrix} 5 \end{bmatrix}$

$\begin{bmatrix} 0 & 0 & 0 & 0 \end{bmatrix} \begin{bmatrix} 9 \end{bmatrix}$


4D dL/dy:

$\begin{bmatrix} 4 \end{bmatrix}$

$\begin{bmatrix} -1 \end{bmatrix}$


$\begin{bmatrix} 5 \end{bmatrix}$

$\begin{bmatrix} 9 \end{bmatrix}$

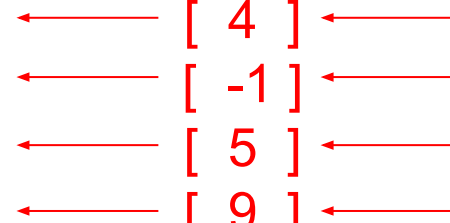


Upstream
gradient


Backprop with Vectors

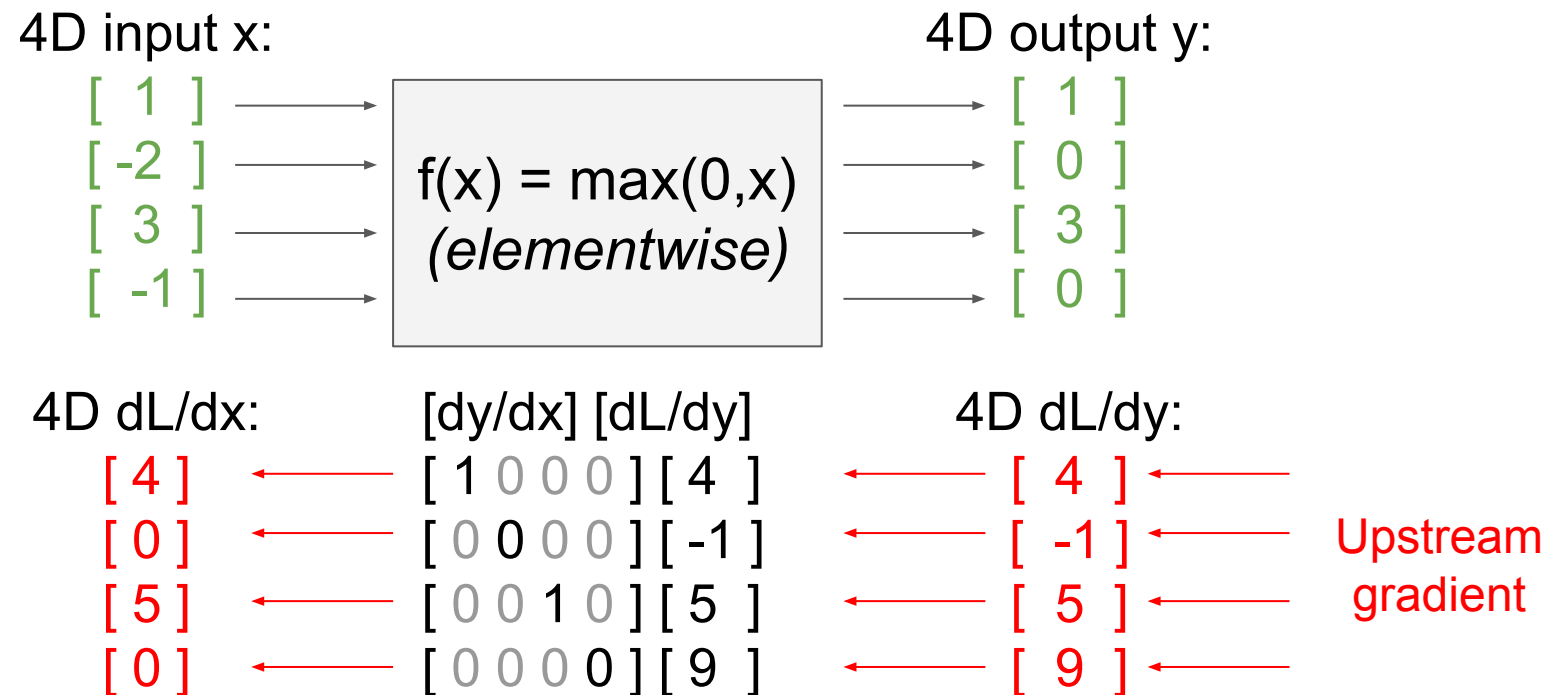

Backprop with Vectors

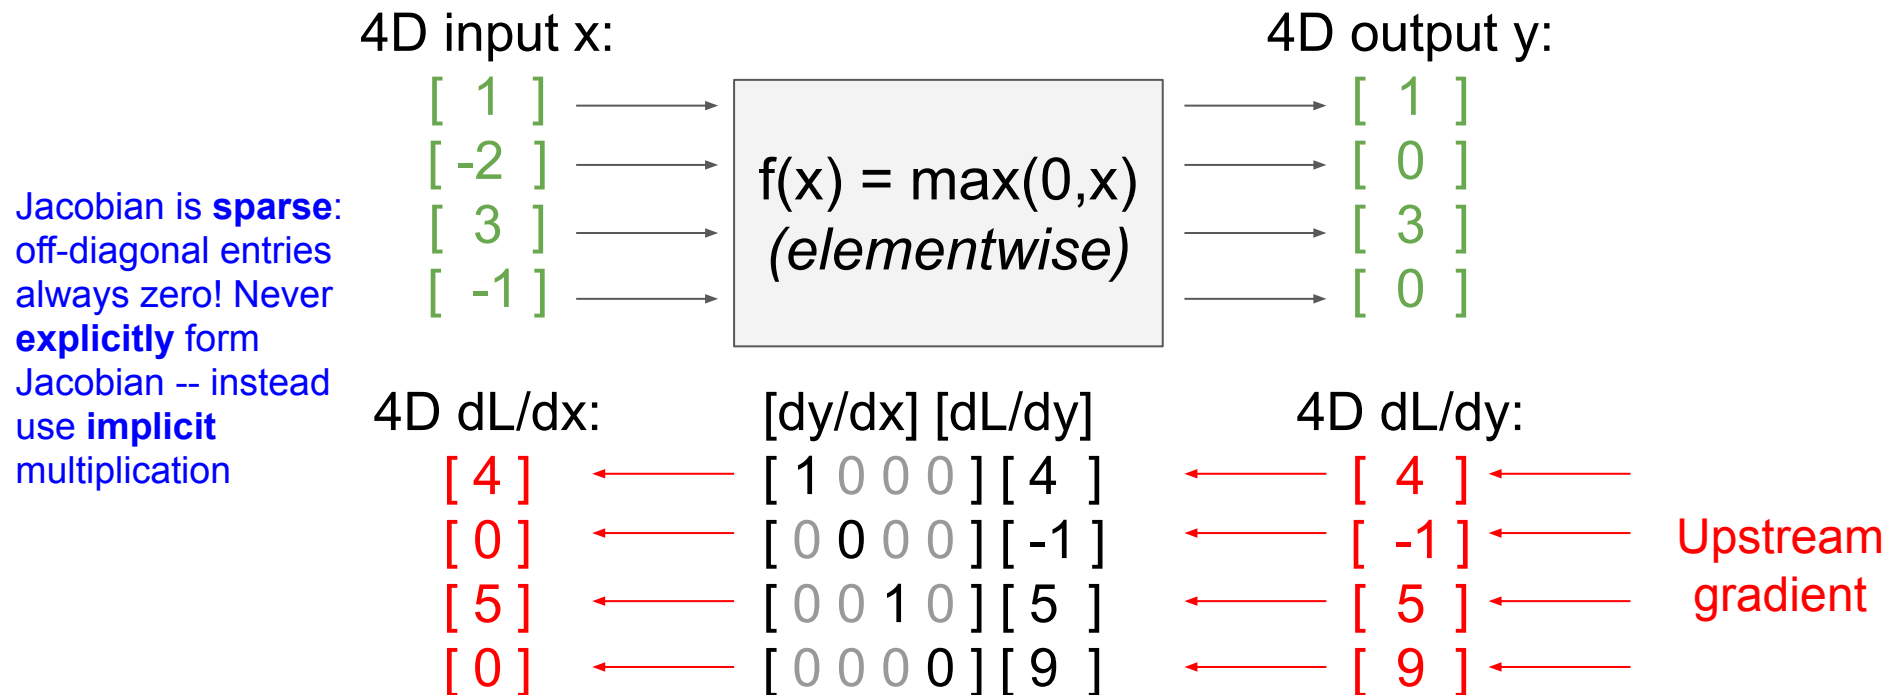


Backprop with Vectors

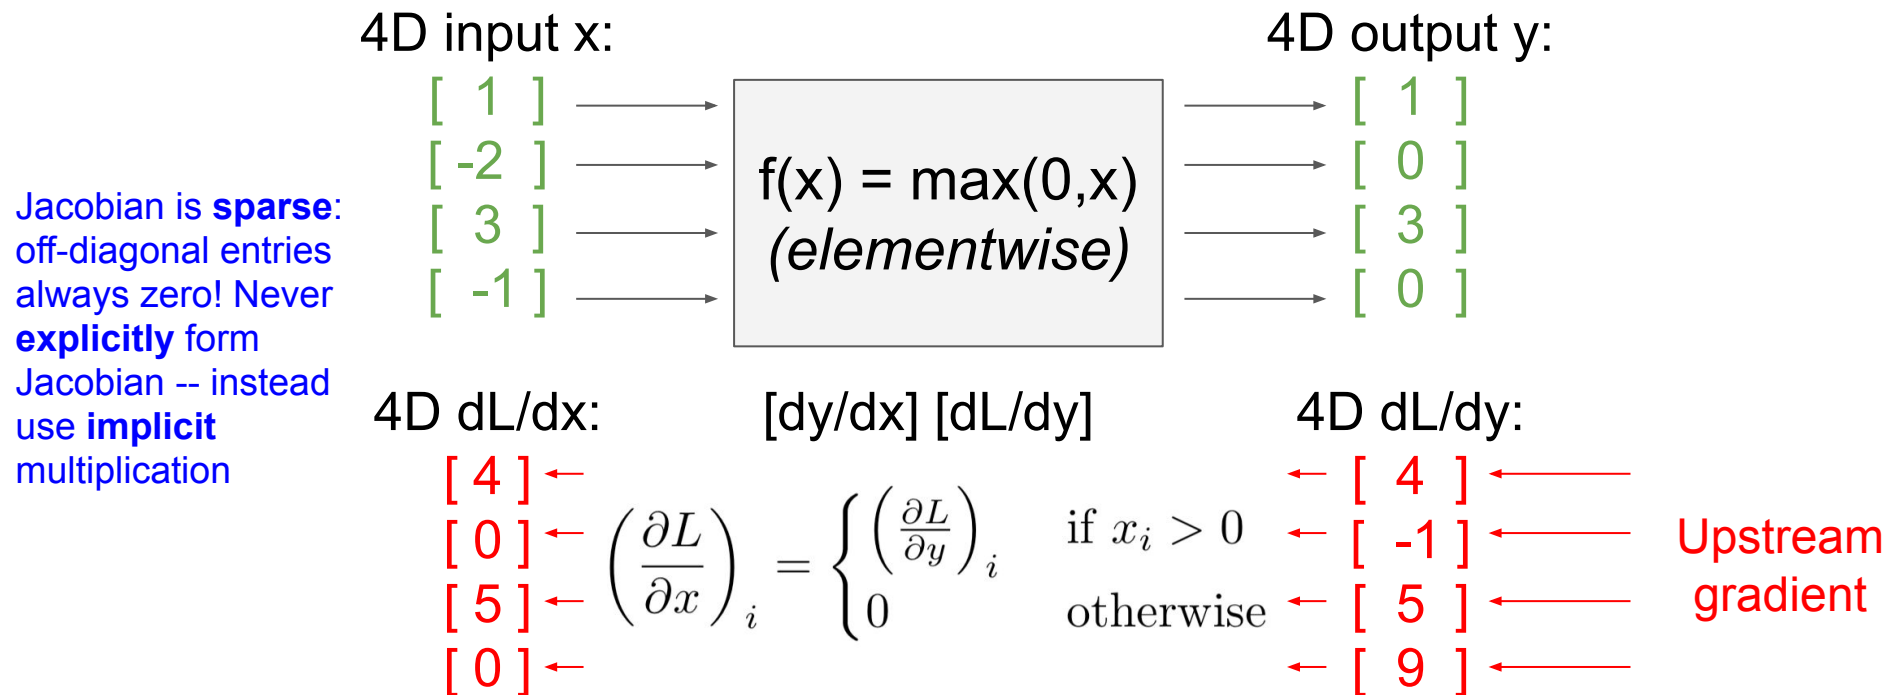

Backprop with Matrices (or Tensors)

Loss L still a scalar!


dL/dx always has the same shape as x !

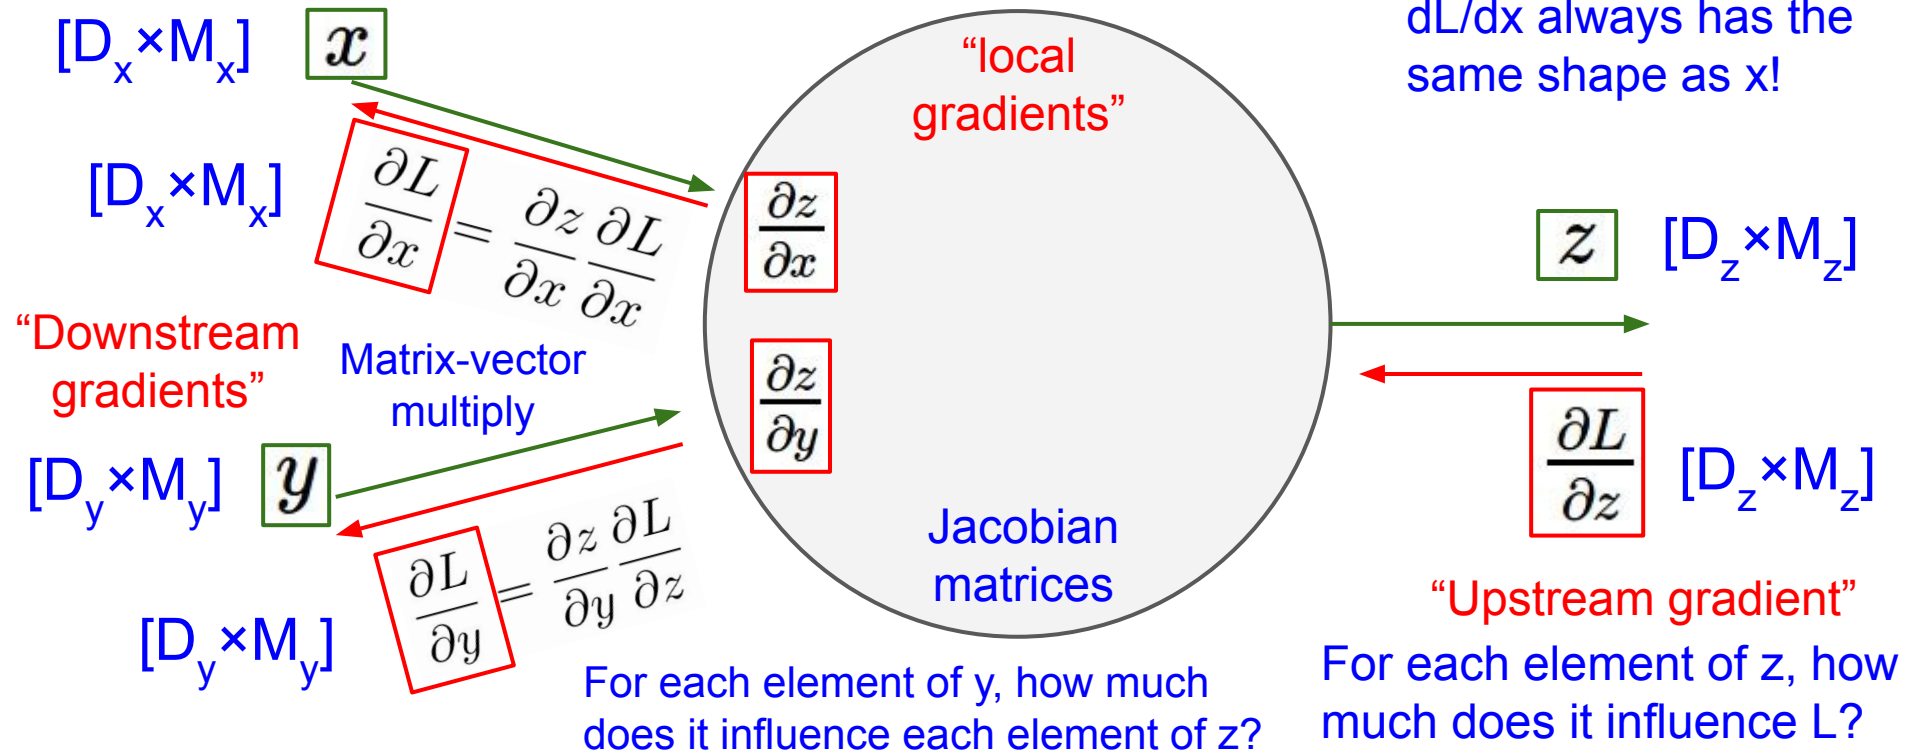

Backprop with Matrices (or Tensors)

Loss L still a scalar!

dL/dx always has the same shape as x !

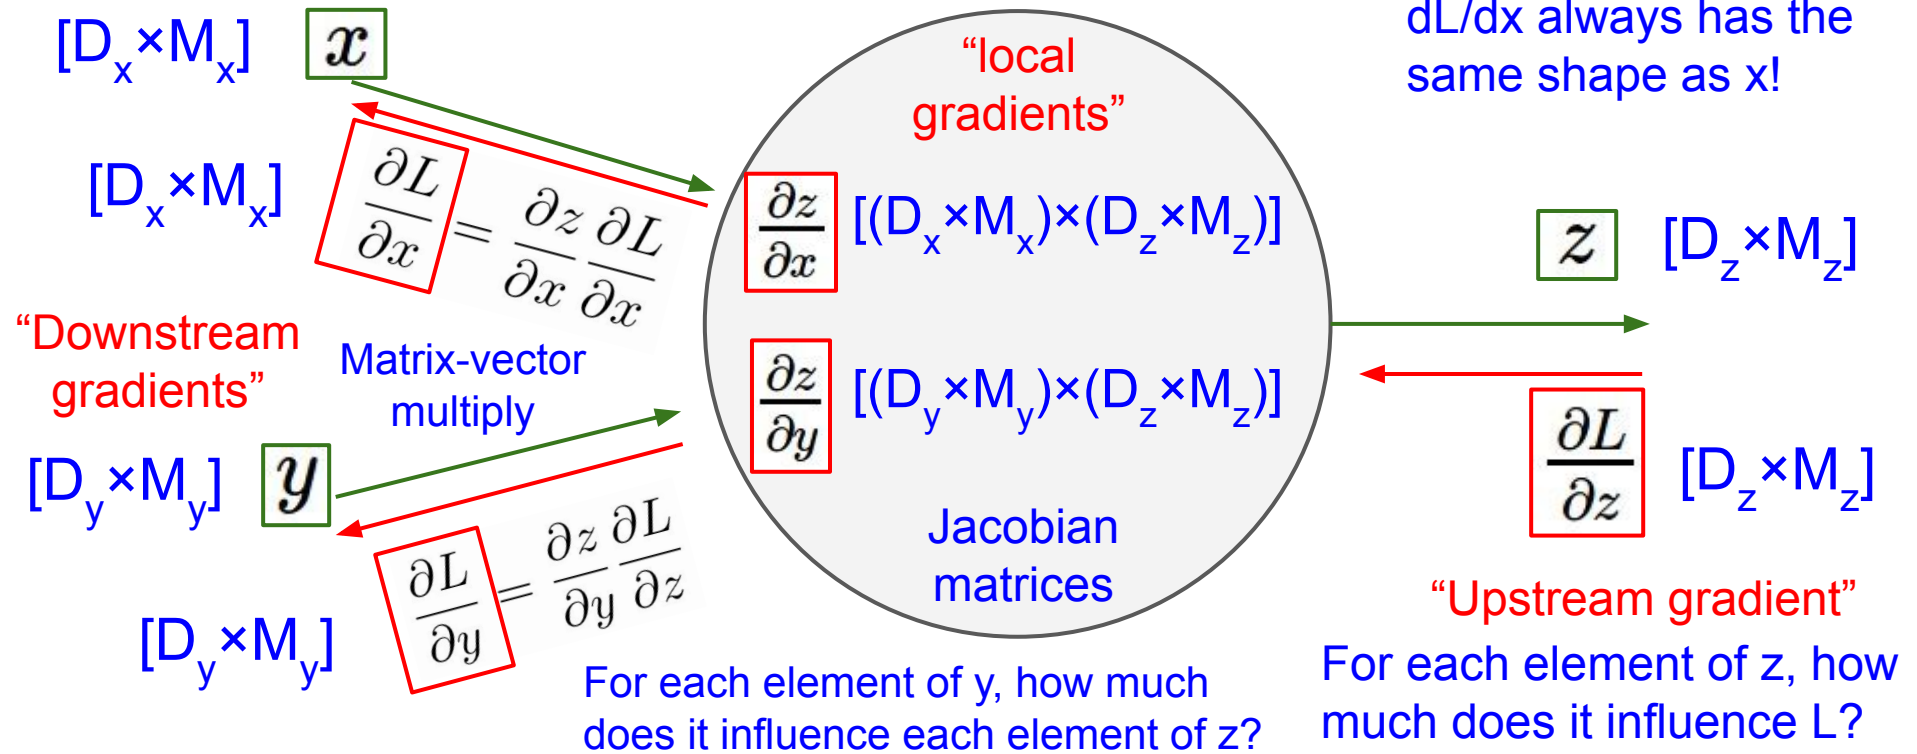

Backprop with Matrices

x: [N×D]

[2 1 -3]

[-3 4 2]

w: [D×M]

[3 2 1 -1]

[2 1 3 2]

[3 2 1 -2]

Matrix Multiply

$$y_{n,m} = \sum_d x_{n,d} w_{d,m}$$

y: [N×M]

[13 9 -2 -6]

[5 2 17 1]

dL/dy: [N×M]

[2 3 -3 9]

[-8 1 4 6]

Also see derivation in the course notes:

<http://cs231n.stanford.edu/handouts/linear-backprop.pdf>

Backprop with Matrices

x: [N×D]
[2 1 -3]
[-3 4 2]

w: [D×M]
[3 2 1 -1]
[2 1 3 2]
[3 2 1 -2]

Matrix Multiply

$$y_{n,m} = \sum_d x_{n,d} w_{d,m}$$

y: [N×M]
[13 9 -2 -6]
[5 2 17 1]

dL/dy: [N×M]
[2 3 -3 9]
[-8 1 4 6]

Jacobians:
dy/dx: [(N×D)×(N×M)]
dy/dw: [(D×M)×(N×M)]

For a neural net we may have
N=64, D=M=4096
Each Jacobian takes 256 GB of memory!
Must work with them implicitly!

Backprop with Matrices

x: [N×D]
[2 1 -3]
[-3 4 2]

w: [D×M]
[3 2 1 -1]
[2 1 3 2]
[3 2 1 -2]

Matrix Multiply

$$y_{n,m} = \sum_d x_{n,d} w_{d,m}$$

Q: What parts of y
are affected by one
element of x?

y: [N×M]
[13 9 -2 -6]
[5 2 17 1]

dL/dy: [N×M]
[2 3 -3 9]
[-8 1 4 6]

Backprop with Matrices

$x: [N \times D]$
 $\begin{bmatrix} 2 & \boxed{1} & -3 \\ -3 & 4 & 2 \end{bmatrix}$
 $w: [D \times M]$
 $\begin{bmatrix} 3 & 2 & 1 & -1 \\ 2 & 1 & 3 & 2 \\ 3 & 2 & 1 & -2 \end{bmatrix}$

Matrix Multiply

$$y_{n,m} = \sum_d x_{n,d} w_{d,m}$$

$y: [N \times M]$
 $\begin{bmatrix} \boxed{13} & \boxed{9} & \boxed{-2} & \boxed{-6} \\ 5 & 2 & 17 & 1 \end{bmatrix}$

$dL/dy: [N \times M]$
 $\begin{bmatrix} \boxed{2} & \boxed{3} & \boxed{-3} & \boxed{9} \\ -8 & 1 & 4 & 6 \end{bmatrix}$

Q: What parts of y are affected by one element of x ?

A: $x_{n,d}$ affects the whole row $y_{n,\cdot}$.

$$\frac{\partial L}{\partial x_{n,d}} = \sum_m \frac{\partial L}{\partial y_{n,m}} \frac{\partial y_{n,m}}{\partial x_{n,d}}$$

Backprop with Matrices

x: [N×D]
 $\begin{bmatrix} 2 & \boxed{1} & -3 \\ -3 & 4 & 2 \end{bmatrix}$

w: [D×M]
 $\begin{bmatrix} 3 & 2 & 1 & -1 \\ 2 & 1 & 3 & 2 \\ 3 & 2 & 1 & -2 \end{bmatrix}$

Matrix Multiply

$$y_{n,m} = \sum_d x_{n,d} w_{d,m}$$

y: [N×M]
 $\begin{bmatrix} \boxed{13} & 9 & \boxed{-2} & -6 \\ 5 & 2 & 17 & 1 \end{bmatrix}$

dL/dy: [N×M]
 $\begin{bmatrix} \boxed{2} & 3 & -3 & 9 \\ -8 & 1 & 4 & 6 \end{bmatrix}$

Q: What parts of y are affected by one element of x?

A: $x_{n,d}$ affects the whole row $y_{n,\cdot}$.

Q: How much does $x_{n,d}$ affect $y_{n,m}$?

$$\frac{\partial L}{\partial x_{n,d}} = \sum_m \frac{\partial L}{\partial y_{n,m}} \frac{\partial y_{n,m}}{\partial x_{n,d}}$$

Backprop with Matrices

x: [N×D]
 $\begin{bmatrix} 2 & \boxed{1} & -3 \\ -3 & 4 & 2 \end{bmatrix}$

w: [D×M]
 $\begin{bmatrix} 3 & 2 & 1 & -1 \\ 2 & 1 & \boxed{3} & 2 \\ 3 & 2 & 1 & -2 \end{bmatrix}$

Matrix Multiply

$$y_{n,m} = \sum_d x_{n,d} w_{d,m}$$

y: [N×M]
 $\begin{bmatrix} \boxed{13} & 9 & \boxed{-2} & -6 \\ 5 & 2 & 17 & 1 \end{bmatrix}$

dL/dy: [N×M]
 $\begin{bmatrix} \boxed{2} & 3 & -3 & 9 \\ -8 & 1 & 4 & 6 \end{bmatrix}$

Q: What parts of y are affected by one element of x?

A: $x_{n,d}$ affects the whole row $y_{n,\cdot}$.

Q: How much does $x_{n,d}$ affect $y_{n,m}$?

A: $w_{d,m}$

$$\frac{\partial L}{\partial x_{n,d}} = \sum_m \frac{\partial L}{\partial y_{n,m}} \frac{\partial y_{n,m}}{\partial x_{n,d}} = \sum_m \frac{\partial L}{\partial y_{n,m}} w_{d,m}$$

Backprop with Matrices

$$x: [N \times D]$$

$$\begin{bmatrix} 2 & \boxed{1} & -3 \\ -3 & 4 & 2 \end{bmatrix}$$

$$w: [D \times M]$$

$$\begin{bmatrix} 3 & 2 & 1 & -1 \\ 2 & 1 & \boxed{3} & 2 \\ 3 & 2 & 1 & -2 \end{bmatrix}$$

$[N \times D]$ $[N \times M]$ $[M \times D]$

$$\boxed{\frac{\partial L}{\partial x} = \left(\frac{\partial L}{\partial y} \right) w^T}$$

Matrix Multiply

$$y_{n,m} = \sum_d x_{n,d} w_{d,m}$$

$$y: [N \times M]$$

$$\begin{bmatrix} \boxed{13} & 9 & \boxed{-2} & -6 \\ 5 & 2 & 17 & 1 \end{bmatrix}$$

$$dL/dy: [N \times M]$$

$$\begin{bmatrix} \boxed{2} & 3 & -3 & 9 \\ -8 & 1 & 4 & 6 \end{bmatrix}$$

Q: What parts of y are affected by one element of x ?

A: $x_{n,d}$ affects the whole row $y_{n,\cdot}$.

Q: How much does $x_{n,d}$ affect $y_{n,m}$?

A: $w_{d,m}$

$$\frac{\partial L}{\partial x_{n,d}} = \sum_m \frac{\partial L}{\partial y_{n,m}} \frac{\partial y_{n,m}}{\partial x_{n,d}} = \sum_m \frac{\partial L}{\partial y_{n,m}} w_{d,m}$$

Backprop with Matrices

$x: [N \times D]$
 $\begin{bmatrix} 2 & \boxed{1} & -3 \\ -3 & 4 & 2 \end{bmatrix}$
 $w: [D \times M]$
 $\begin{bmatrix} 3 & 2 & 1 & -1 \\ 2 & 1 & \boxed{3} & 2 \\ 3 & 2 & 1 & -2 \end{bmatrix}$

Matrix Multiply

$$y_{n,m} = \sum_d x_{n,d} w_{d,m}$$

$y: [N \times M]$
 $\begin{bmatrix} \boxed{13} & 9 & \boxed{-2} & -6 \\ 5 & 2 & 17 & 1 \end{bmatrix}$

$dL/dy: [N \times M]$
 $\begin{bmatrix} \boxed{2} & 3 & -3 & 9 \\ -8 & 1 & 4 & 6 \end{bmatrix}$

By similar logic:

$[N \times D] \quad [N \times M] \quad [M \times D]$

$$\frac{\partial L}{\partial x} = \left(\frac{\partial L}{\partial y} \right) w^T$$

$[D \times M] \quad [D \times N] \quad [N \times M]$


$$\frac{\partial L}{\partial w} = x^T \left(\frac{\partial L}{\partial y} \right)$$

These formulas are easy to remember: they are the only way to make shapes match up!

Summary for today:


- **(Fully-connected) Neural Networks** are stacks of linear functions and nonlinear activation functions; they have much more representational power than linear classifiers
- **backpropagation** = recursive application of the chain rule along a computational graph to compute the gradients of all inputs/parameters/intermediates
- implementations maintain a graph structure, where the nodes implement the **forward()** / **backward()** API
- **forward**: compute result of an operation and save any intermediates needed for gradient computation in memory
- **backward**: apply the chain rule to compute the gradient of the loss function with respect to the inputs

Next Time: Convolutional Networks!

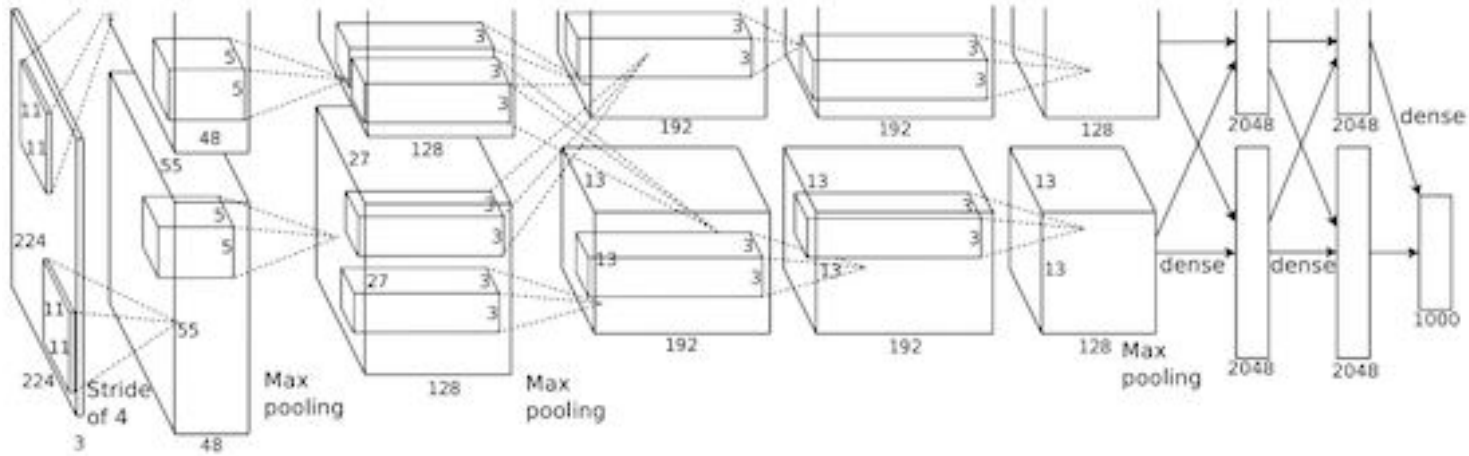


A vectorized example: $f(x, W) = ||W \cdot x||^2 = \sum_{i=1}^n (W \cdot x)_i^2$

A vectorized example: $f(x, W) = ||W \cdot x||^2 = \sum_{i=1}^n (W \cdot x)_i^2$



$\in \mathbb{R}^n \quad \in \mathbb{R}^{n \times n}$


A vectorized example: $f(x, W) = ||W \cdot x||^2 = \sum_{i=1}^n (W \cdot x)_i^2$

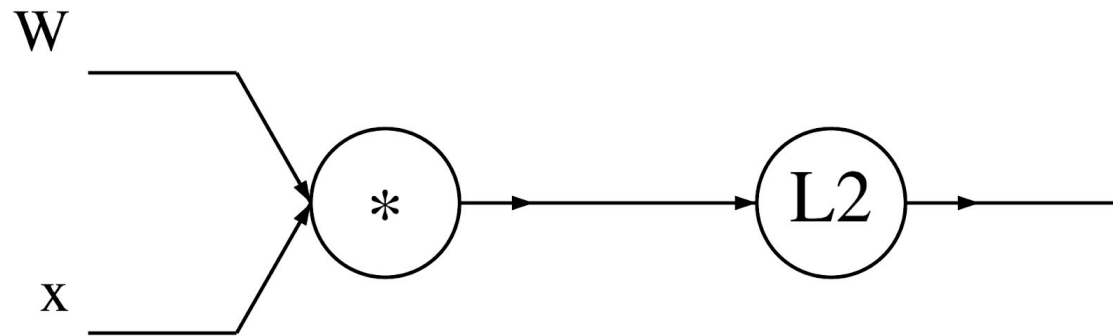

A vectorized example: $f(x, W) = ||W \cdot x||^2 = \sum_{i=1}^n (W \cdot x)_i^2$

$$\begin{bmatrix} 0.1 & 0.5 \\ -0.3 & 0.8 \end{bmatrix} \mathbf{W}$$


$$\begin{bmatrix} 0.2 \\ 0.4 \end{bmatrix} \mathbf{x}$$

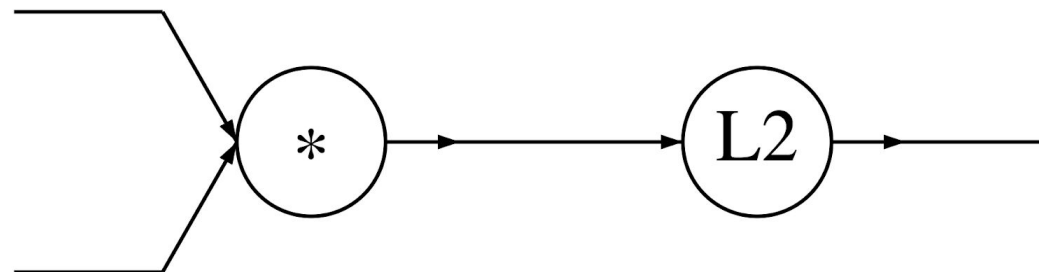

$$q = W \cdot x = \begin{pmatrix} W_{1,1}x_1 + \cdots + W_{1,n}x_n \\ \vdots \\ W_{n,1}x_1 + \cdots + W_{n,n}x_n \end{pmatrix}$$

$$f(q) = ||q||^2 = q_1^2 + \cdots + q_n^2$$


A vectorized example: $f(x, W) = ||W \cdot x||^2 = \sum_{i=1}^n (W \cdot x)_i^2$

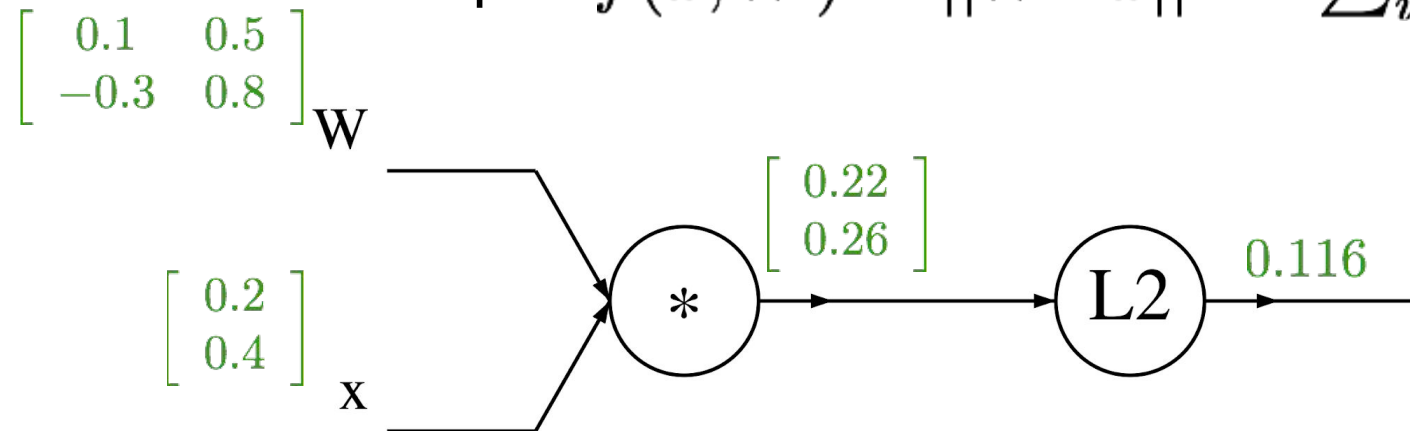

$$q = W \cdot x = \begin{pmatrix} W_{1,1}x_1 + \cdots + W_{1,n}x_n \\ \vdots \\ W_{n,1}x_1 + \cdots + W_{n,n}x_n \end{pmatrix}$$

$$f(q) = ||q||^2 = q_1^2 + \cdots + q_n^2$$


A vectorized example: $f(x, W) = ||W \cdot x||^2 = \sum_{i=1}^n (W \cdot x)_i^2$

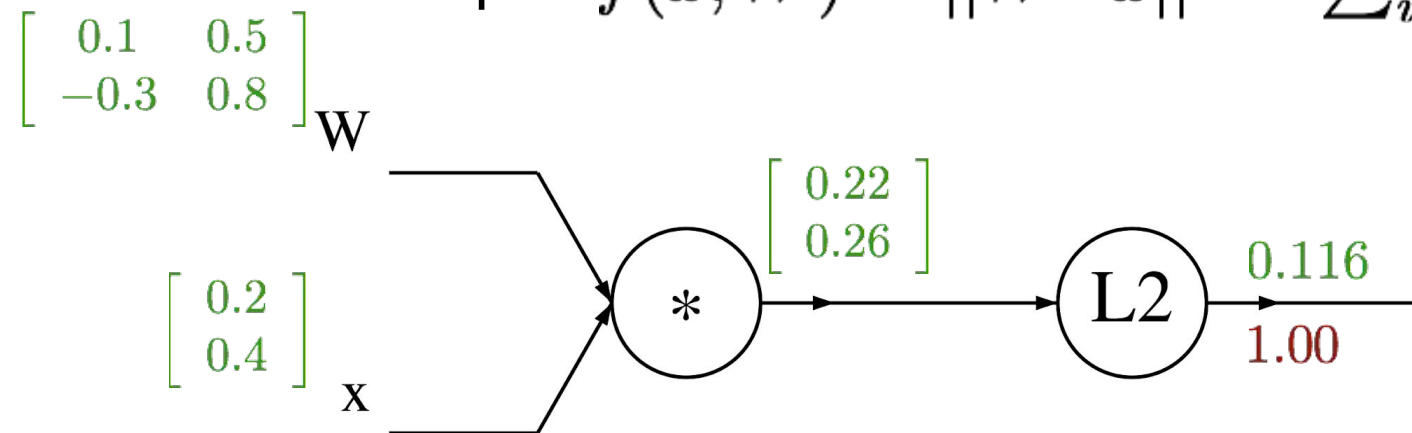

$$q = W \cdot x = \begin{pmatrix} W_{1,1}x_1 + \cdots + W_{1,n}x_n \\ \vdots \\ W_{n,1}x_1 + \cdots + W_{n,n}x_n \end{pmatrix}$$

$$f(q) = ||q||^2 = q_1^2 + \cdots + q_n^2$$

A vectorized example: $f(x, W) = ||W \cdot x||^2 = \sum_{i=1}^n (W \cdot x)_i^2$

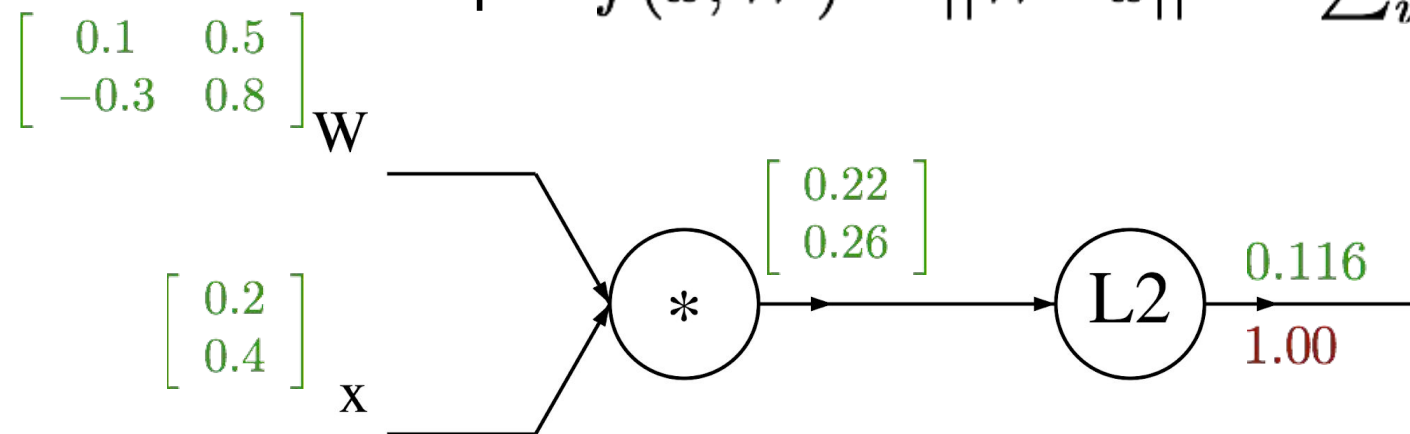


$$q = W \cdot x = \begin{pmatrix} W_{1,1}x_1 + \cdots + W_{1,n}x_n \\ \vdots \\ W_{n,1}x_1 + \cdots + W_{n,n}x_n \end{pmatrix}$$

$$f(q) = ||q||^2 = q_1^2 + \cdots + q_n^2$$

$$\frac{\partial f}{\partial q_i} = 2q_i$$

$$\nabla_q f = 2q$$

A vectorized example: $f(x, W) = ||W \cdot x||^2 = \sum_{i=1}^n (W \cdot x)_i^2$

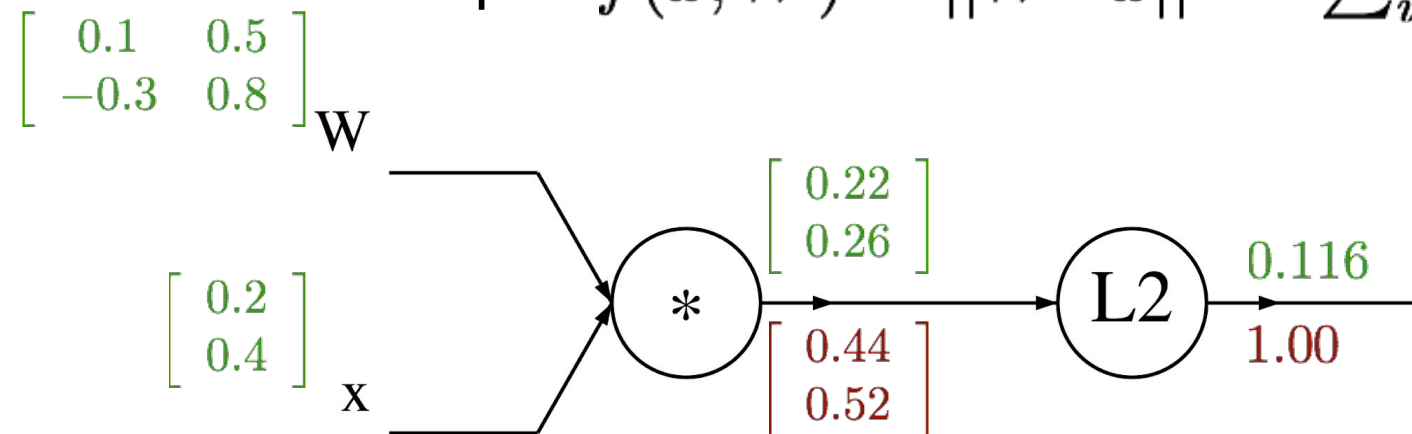


$$q = W \cdot x = \begin{pmatrix} W_{1,1}x_1 + \cdots + W_{1,n}x_n \\ \vdots \\ W_{n,1}x_1 + \cdots + W_{n,n}x_n \end{pmatrix}$$

$$f(q) = ||q||^2 = q_1^2 + \cdots + q_n^2$$

$$\frac{\partial f}{\partial q_i} = 2q_i$$

$$\nabla_q f = 2q$$

A vectorized example: $f(x, W) = ||W \cdot x||^2 = \sum_{i=1}^n (W \cdot x)_i^2$

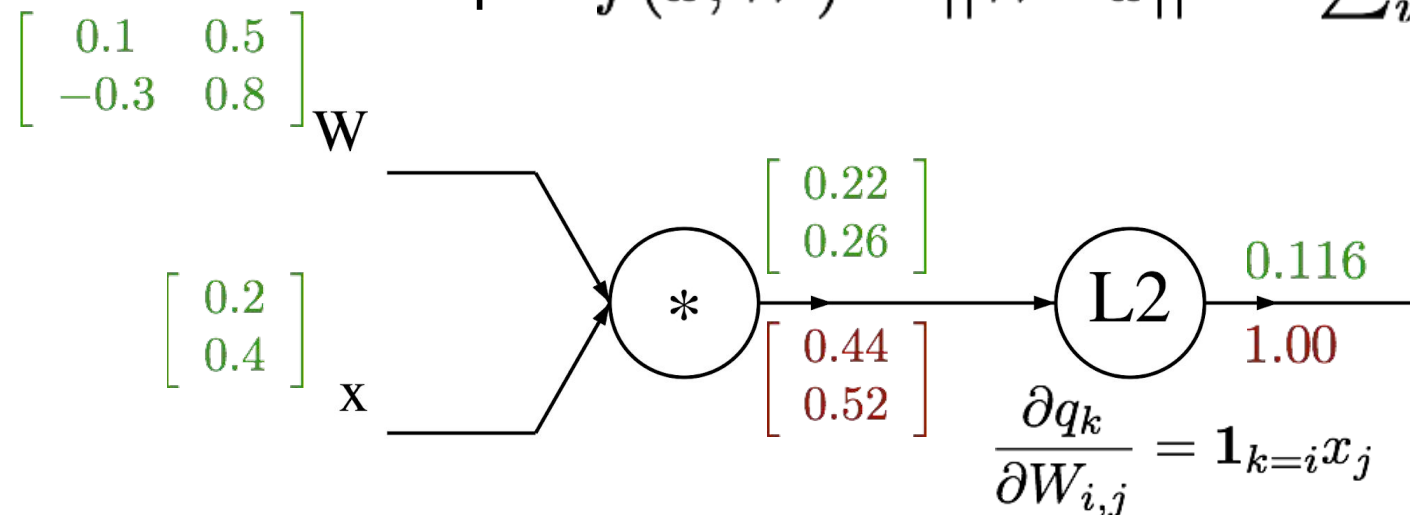


$$q = W \cdot x = \begin{pmatrix} W_{1,1}x_1 + \cdots + W_{1,n}x_n \\ \vdots \\ W_{n,1}x_1 + \cdots + W_{n,n}x_n \end{pmatrix}$$

$$f(q) = ||q||^2 = q_1^2 + \cdots + q_n^2$$

A vectorized example: $f(x, W) = ||W \cdot x||^2 = \sum_{i=1}^n (W \cdot x)_i^2$

$$\begin{bmatrix} 0.1 & 0.5 \\ -0.3 & 0.8 \end{bmatrix} W$$

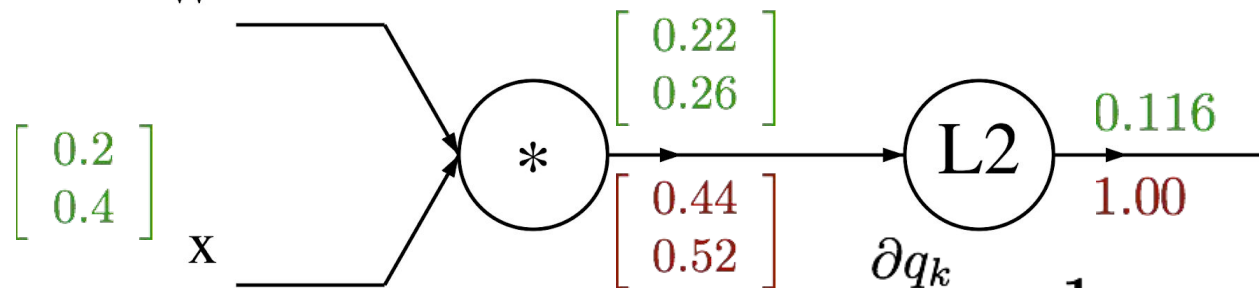


$$q = W \cdot x = \begin{pmatrix} W_{1,1}x_1 + \cdots + W_{1,n}x_n \\ \vdots \\ W_{n,1}x_1 + \cdots + W_{n,n}x_n \end{pmatrix}$$

$$f(q) = ||q||^2 = q_1^2 + \cdots + q_n^2$$

$$\frac{\partial q_k}{\partial W_{i,j}} = \mathbf{1}_{k=i}x_j$$

$$\begin{aligned} \frac{\partial f}{\partial W_{i,j}} &= \sum_k \frac{\partial f}{\partial q_k} \frac{\partial q_k}{\partial W_{i,j}} \\ &= \sum_k (2q_k)(\mathbf{1}_{k=i}x_j) \\ &= 2q_i x_j \end{aligned}$$

A vectorized example: $f(x, W) = ||W \cdot x||^2 = \sum_{i=1}^n (W \cdot x)_i^2$

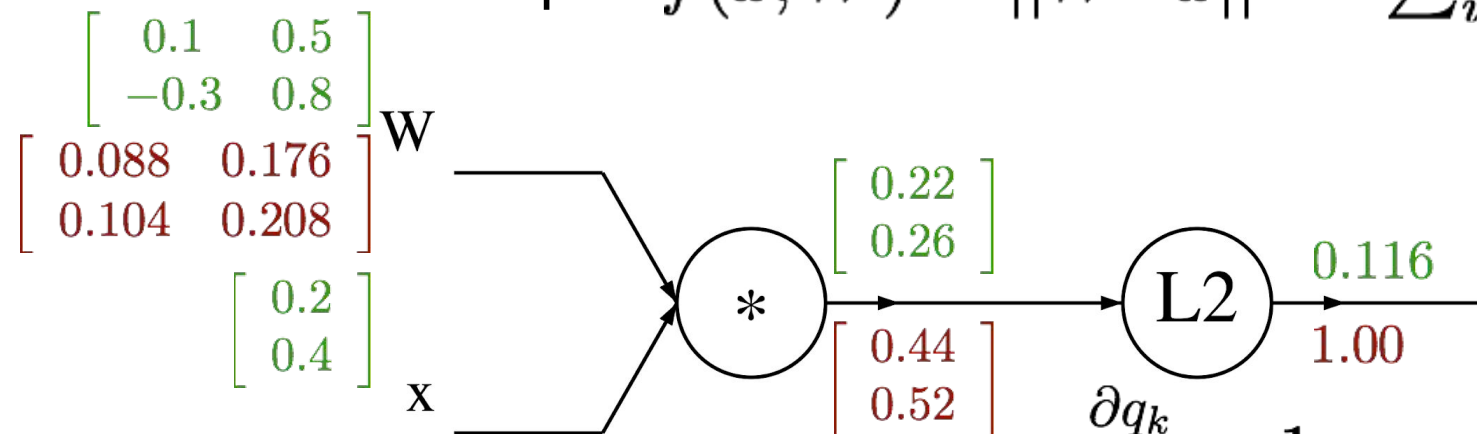


$$q = W \cdot x = \begin{pmatrix} W_{1,1}x_1 + \cdots + W_{1,n}x_n \\ \vdots \\ W_{n,1}x_1 + \cdots + W_{n,n}x_n \end{pmatrix}$$

$$f(q) = ||q||^2 = q_1^2 + \cdots + q_n^2$$

$$\begin{aligned} \frac{\partial q_k}{\partial W_{i,j}} &= \mathbf{1}_{k=i} x_j \\ \frac{\partial f}{\partial W_{i,j}} &= \sum_k \frac{\partial f}{\partial q_k} \frac{\partial q_k}{\partial W_{i,j}} \\ &= \sum_k (2q_k) (\mathbf{1}_{k=i} x_j) \\ &= 2q_i x_j \end{aligned}$$

A vectorized example: $f(x, W) = ||W \cdot x||^2 = \sum_{i=1}^n (W \cdot x)_i^2$

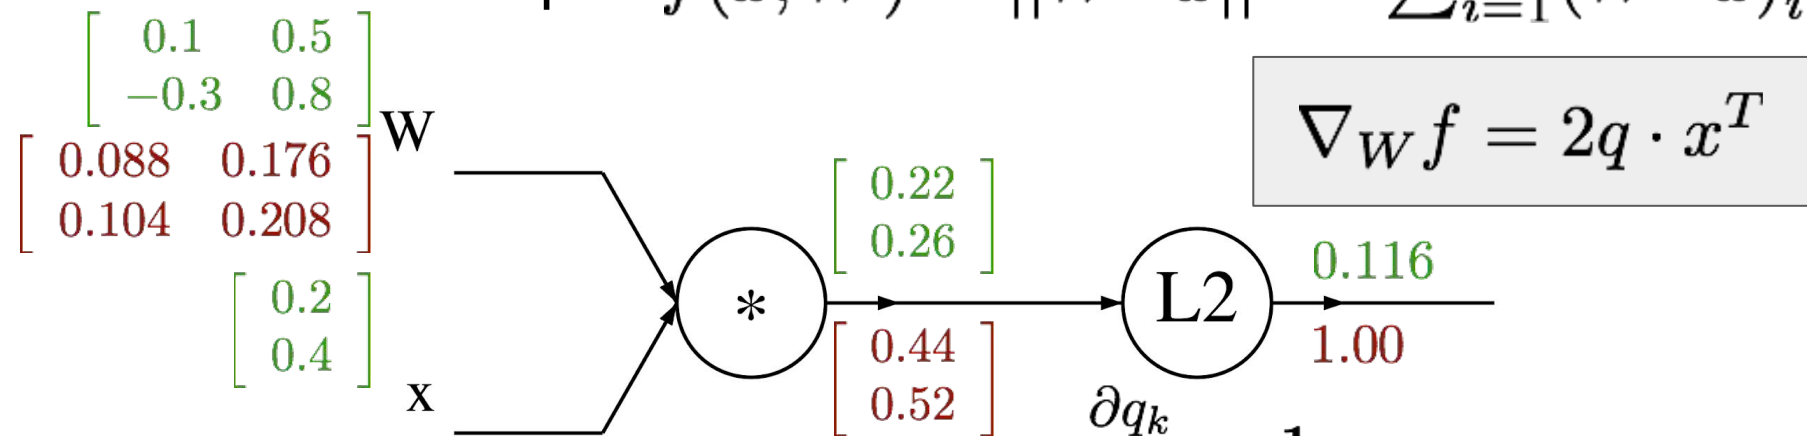


$$q = W \cdot x = \begin{pmatrix} W_{1,1}x_1 + \cdots + W_{1,n}x_n \\ \vdots \\ W_{n,1}x_1 + \cdots + W_{n,n}x_n \end{pmatrix}$$


$$f(q) = ||q||^2 = q_1^2 + \cdots + q_n^2$$

$$\begin{aligned} \frac{\partial q_k}{\partial W_{i,j}} &= \mathbf{1}_{k=i} x_j \\ \frac{\partial f}{\partial W_{i,j}} &= \sum_k \frac{\partial f}{\partial q_k} \frac{\partial q_k}{\partial W_{i,j}} \\ &= \sum_k (2q_k) (\mathbf{1}_{k=i} x_j) \\ &= 2q_i x_j \end{aligned}$$

A vectorized example: $f(x, W) = ||W \cdot x||^2 = \sum_{i=1}^n (W \cdot x)_i^2$

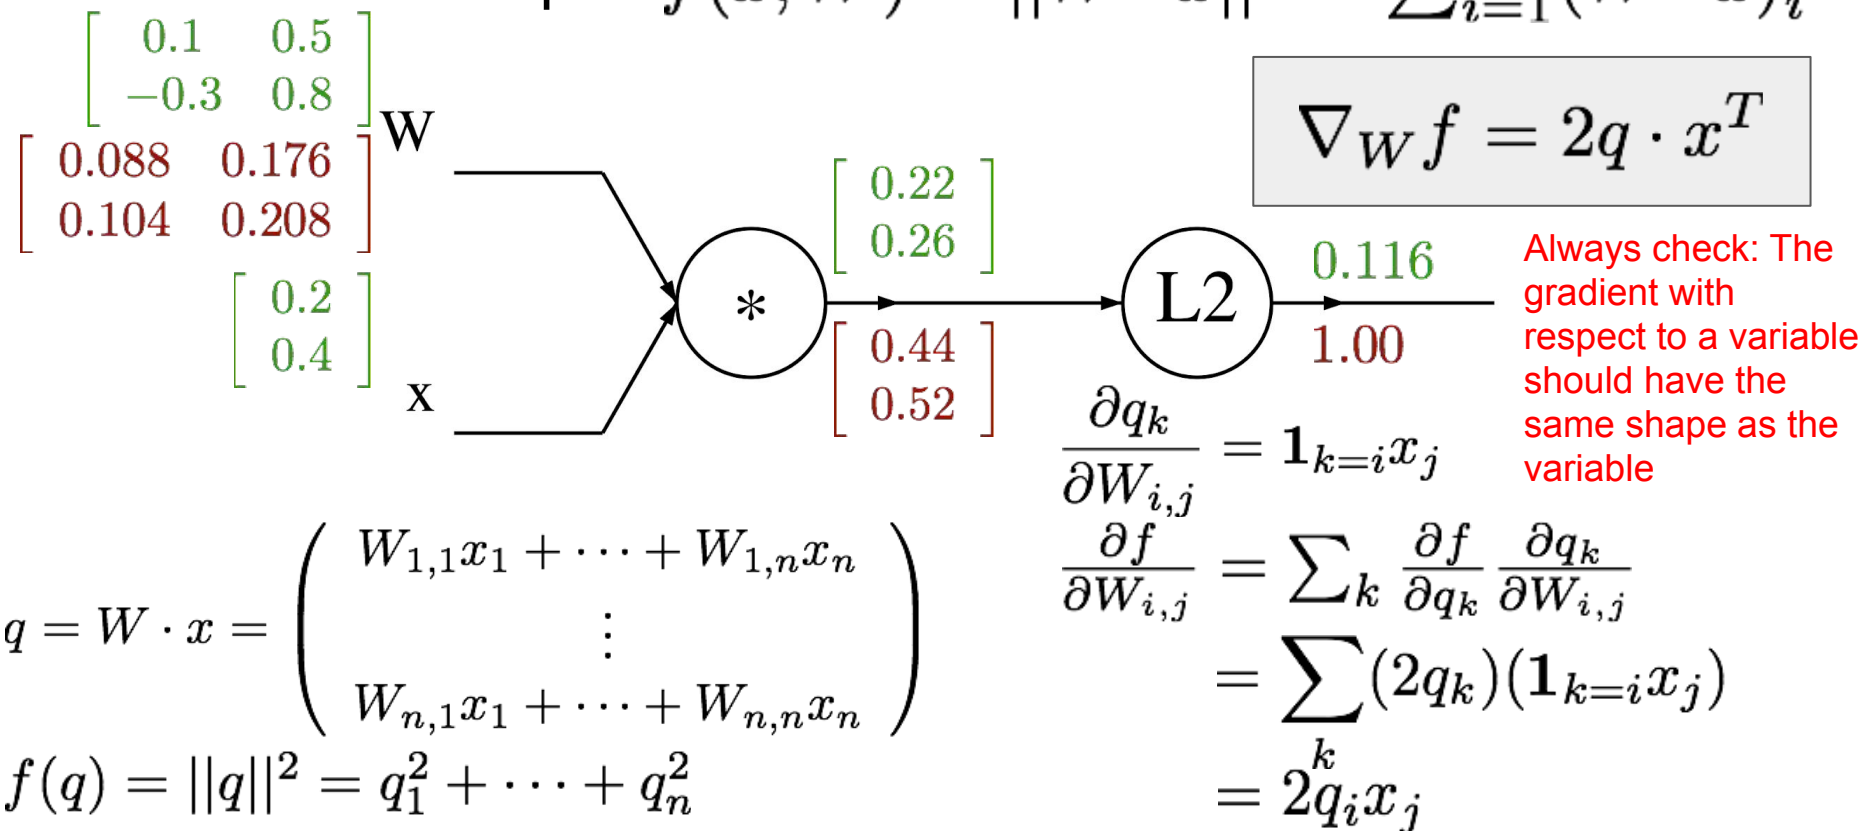

A vectorized example: $f(x, W) = ||W \cdot x||^2 = \sum_{i=1}^n (W \cdot x)_i^2$

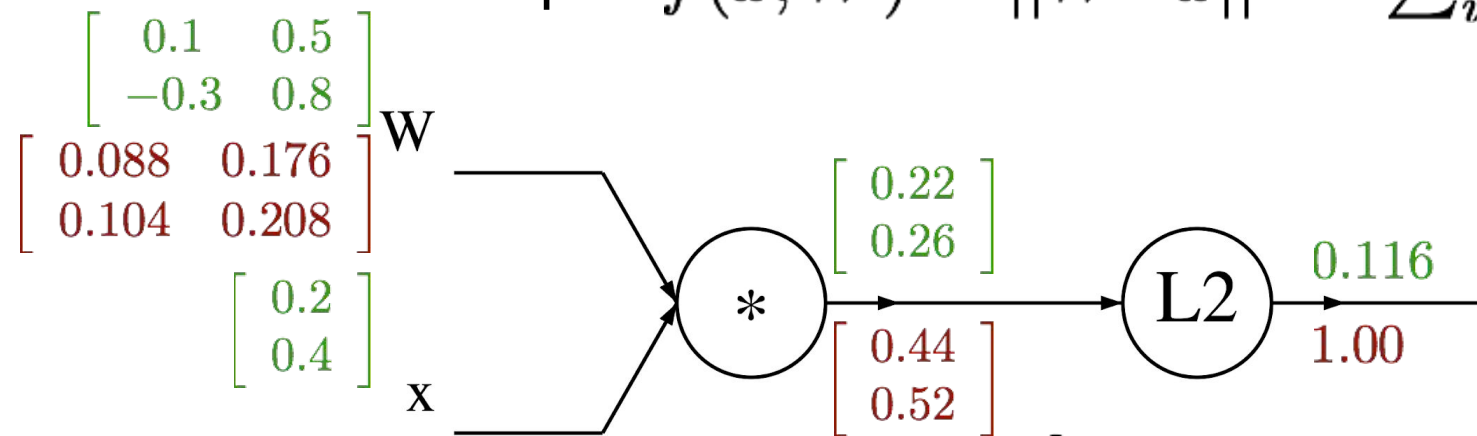


$$q = W \cdot x = \begin{pmatrix} W_{1,1}x_1 + \cdots + W_{1,n}x_n \\ \vdots \\ W_{n,1}x_1 + \cdots + W_{n,n}x_n \end{pmatrix}$$

$$f(q) = ||q||^2 = q_1^2 + \cdots + q_n^2$$

$$\frac{\partial q_k}{\partial x_i} = W_{k,i}$$

A vectorized example: $f(x, W) = ||W \cdot x||^2 = \sum_{i=1}^n (W \cdot x)_i^2$

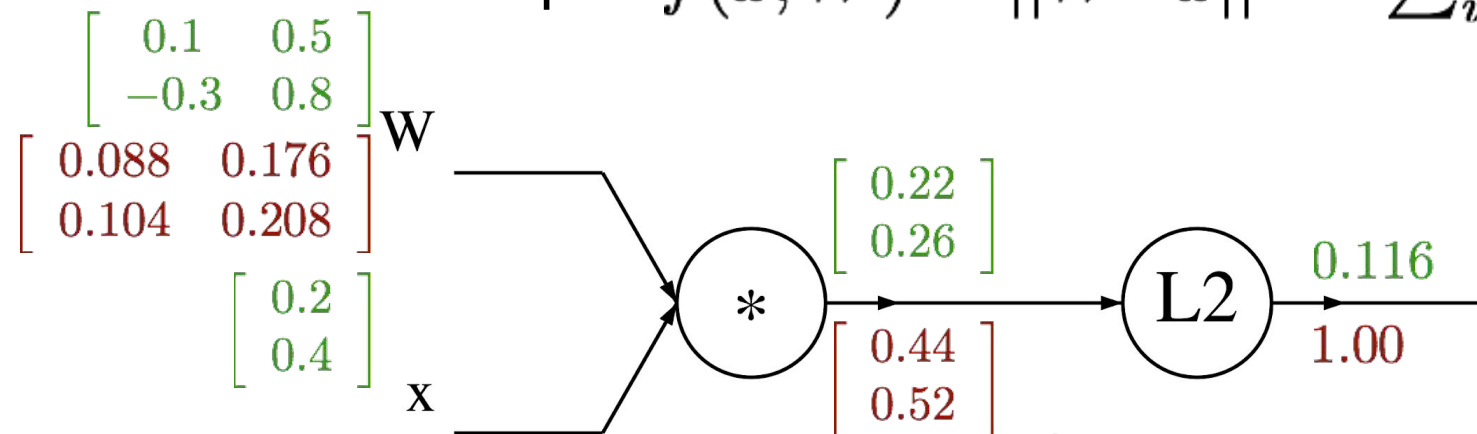


$$q = W \cdot x = \begin{pmatrix} W_{1,1}x_1 + \cdots + W_{1,n}x_n \\ \vdots \\ W_{n,1}x_1 + \cdots + W_{n,n}x_n \end{pmatrix}$$

$$f(q) = ||q||^2 = q_1^2 + \cdots + q_n^2$$

$$\begin{aligned} \frac{\partial q_k}{\partial x_i} &= W_{k,i} \\ \frac{\partial f}{\partial x_i} &= \sum_k \frac{\partial f}{\partial q_k} \frac{\partial q_k}{\partial x_i} \\ &= \sum_k 2q_k W_{k,i} \end{aligned}$$

A vectorized example: $f(x, W) = ||W \cdot x||^2 = \sum_{i=1}^n (W \cdot x)_i^2$

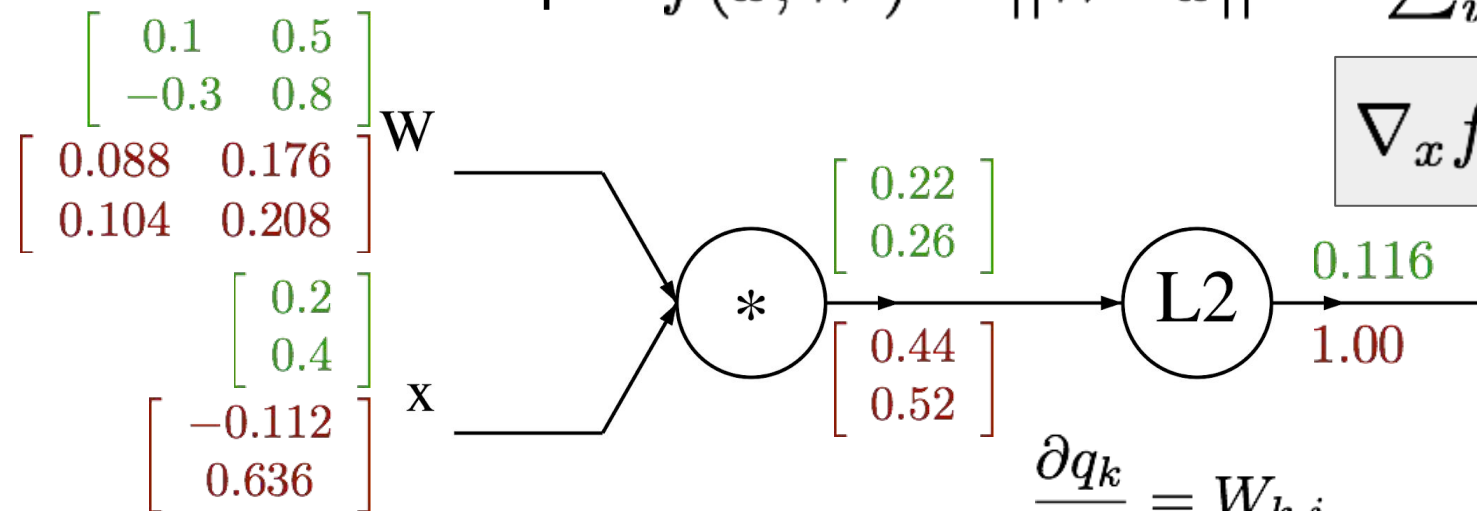

$$\nabla_x f = 2W^T \cdot q$$

$$q = W \cdot x = \begin{pmatrix} W_{1,1}x_1 + \dots + W_{1,n}x_n \\ \vdots \\ W_{n,1}x_1 + \dots + W_{n,n}x_n \end{pmatrix}$$

$$f(q) = ||q||^2 = q_1^2 + \dots + q_n^2$$

$$\begin{aligned} \frac{\partial q_k}{\partial x_i} &= W_{k,i} \\ \frac{\partial f}{\partial x_i} &= \sum_k \frac{\partial f}{\partial q_k} \frac{\partial q_k}{\partial x_i} \\ &= \sum_k 2q_k W_{k,i} \end{aligned}$$

In discussion section: A matrix example...

$$z_1 = XW_1$$

$$h_1 = \text{ReLU}(z_1)$$

$$\hat{y} = h_1 W_2$$

$$L = ||\hat{y}||_2^2$$

$$\frac{\partial L}{\partial W_2} = ?$$

$$\frac{\partial L}{\partial W_1} = ?$$

