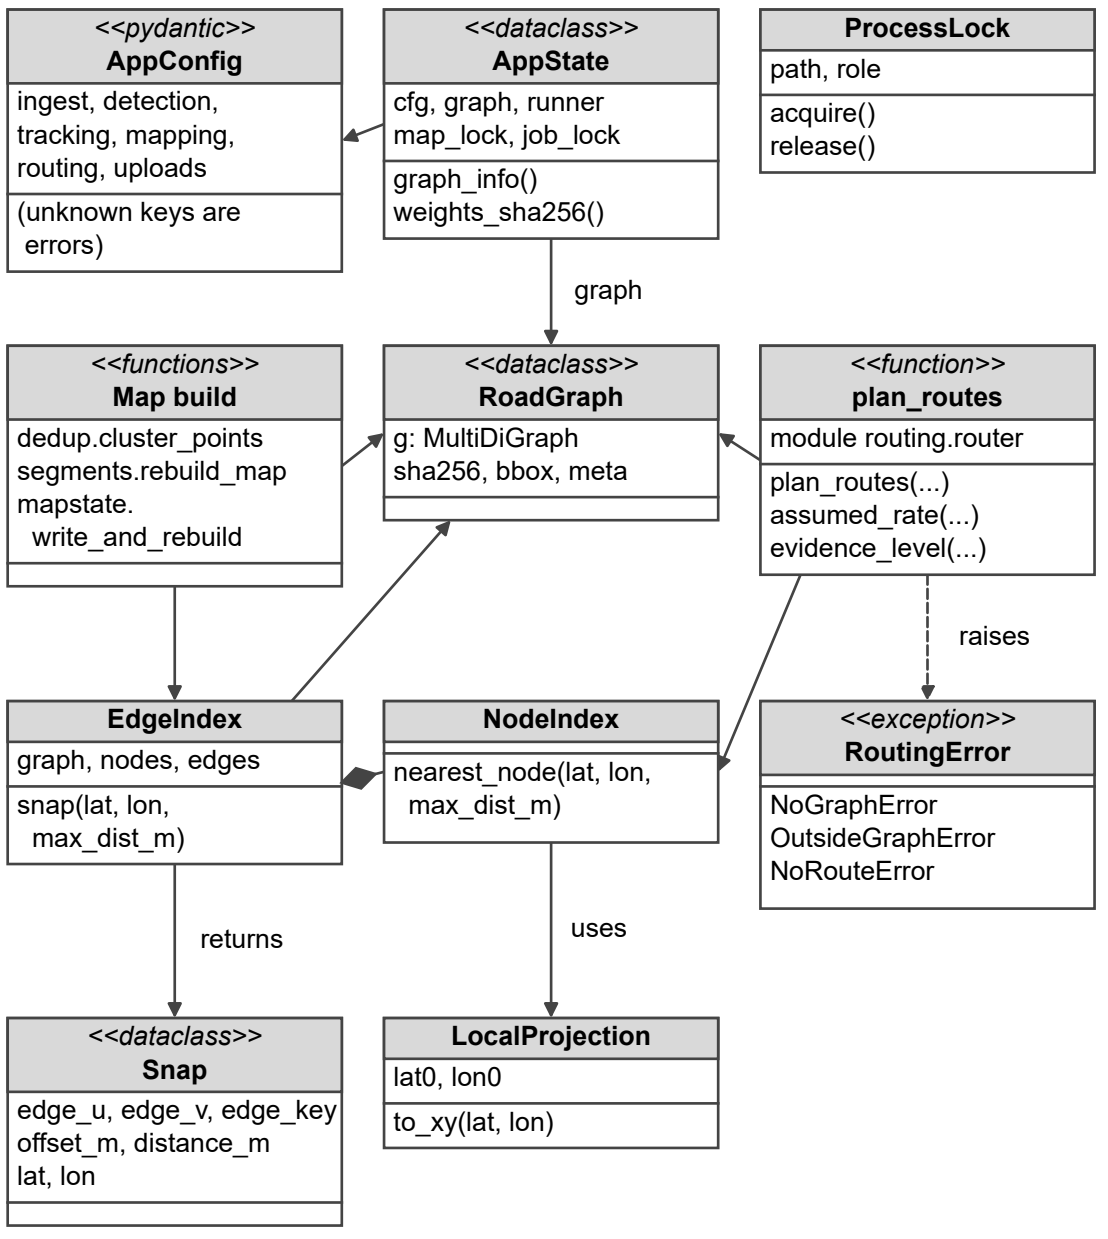

<<pydantic>>
AppConfig
ingest, detection,
tracking, mapping,
routing, uploads
(unknown keys are
errors)
<<dataclass>>
AppState
cfg, graph, runner
map_lock, job_lock
graph_info()
weights_sha256()
ProcessLock
path, role
acquire()
release()
graph
<<functions>>
Map build
dedup.cluster_points
segments.rebuild_map
mapstate.
write_and_rebuild
<<dataclass>>
RoadGraph
g: MultiDiGraph
sha256, bbox, meta
<<function>>
plan_routes
module routing.router
plan_routes(...)
assumed_rate(...)
evidence_level(...)
raises
EdgeIndex
graph, nodes, edges
snap(lat, lon,
max_dist_m)
NodeIndex
nearest_node(lat, lon,
max_dist_m)
<<exception>>
RoutingError
NoGraphError
OutsideGraphError
NoRouteError
returns
uses
<<dataclass>>
Snap
edge_u, edge_v, edge_key
offset_m, distance_m
lat, lon
LocalProjection
lat0, lon0
to_xy(lat, lon)