

Installation

[Microsoft Store](#)[WinGet via Microsoft Store](#)[Scoop](#)[Download](#)

We recommend the Microsoft Store option

We strongly recommend using the Microsoft Store option to install ngrok. The options below should only be used when the Microsoft store is not available or if you have a specific need to use a different installation method.

Download a standalone executable with zero run time dependencies. Don't know your architecture? [Help me find it.](#)

[Download for Windows \(64-Bit\)](#)[Download for Windows \(32-Bit\)](#)

Run the following command to add your authtoken to the default **ngrok.yml** [configuration file](#).

```
ngrok config add-authtoken 34qDVGq7G61T7N5N4rTBn86oQIF_7CJ5Mj86Ym9m57hgCSjFk
```



Deploy your app online

Run the following in the command line.

```
ngrok http 80
```



Go to your dev domain to see your app!

<https://serafina-aquiline-nonstably.ngrok-free.dev>



Home



Gallery

>  Rudransh - Persona

Downloads



Desktop



Documents

Name

Type

Compressed size

Password p...

Size

Ratio

Date modified

 ngrok

Application

9,418 KB

No

25,449 KB

63%

23-10-2025 21:58

ngrok-v3-stable-windows-am

+

←→↑↺🖥️>Downloads>ngrok-v3-stable-windows-amd64

Search ngrok-v3-stable-windows-amd64

New✂️📄📄📄📄🗑️

↕️Sort☰View⋮

Home

Gallery

> Rudransh - Persona

Downloads

Desktop

Documents

Pictures

Music

Videos

Desktop

Screenshots

Unit-4

G582

This PC

Windows-SSD (C:

Network

Name	Date modified	Type	Size
Today			
C:\Users\digwa\Downloads\n			
tcp	start a TCP tunnel		
tls	start a TLS endpoint		
update	update ngrok to the latest version		
version	print the version string		

EXAMPLES:
forward http traffic from assigned public URL to local port 80
ngrok http 80
port 8080 available at baz.ngrok.dev
ngrok http --url baz.ngrok.dev 8080
tunnel arbitrary TCP traffic to port 22
ngrok tcp 22
secure your app with oauth
ngrok http 80 --oauth=google --oauth-allow-email=foo@foo.com

Paid Features:
ngrok http 80 --url mydomain.com # run ngrok with your own custom domain
ngrok http 80 --cidr-allow 2600:8c00::a03c:91ee:fe69:9695/32 # run ngrok with IP policy restrictions
Upgrade your account at https://dashboard.ngrok.com/billing/choose-a-plan to access paid features

Upgrade your account at https://dashboard.ngrok.com/billing/choose-a-plan to access paid features

Flags:
-h, --help help for ngrok

Use "ngrok [command] --help" for more information about a command.

ngrok is a command line application, try typing 'ngrok.exe http 80'
at this terminal prompt to expose port 80.
C:\Users\digwa\Downloads\ngrok-v3-stable-windows-amd64>

1 item | 1 item selected 24.8 MB |

9+ 24°C Clear

🪟 🔍 Search 🐼 📄 🌐 📁 🌀 🗨️ 🛡️ 🌐 🏠 📶 🔊 🔌

ENG IN 📶 🔊 🔌 00:40 01-11-2025 🗨️



Your Authtoken

Use this personal Authtoken to authenticate ngrok agents, SDKs, and the Kubernetes Operator for your own projects. Keep it secret, like a password.

34qDVGq7G61T7N5N4rTBn86oQIF_7CJ5Mj86Ym9m57hgCSjFk



Copy

Add your Authtoken to the ngrok agent using any of these methods:

Service Users

Building an integration or shared automation? Create a [Service User](#) and generate dedicated Authtokens.

Command Line

Authenticate the ngrok agent. This saves your Authtoken to the default configuration file so you only have to do it once.

Command Line

[Hide Authtoken](#)

```
ngrok config add-authtoken 34qDVGq7G61T7N5N4rTBn86oQIF_7CJ5Mj86Ym9m57hgCSjFk
```



Configuration File

at this terminal prompt to expose port 80.

```
C:\Users\digwa\Downloads\ngrok-v3-stable-windows-amd64>ngrok config add-authtoken 34qDVGq7G61T7N5N4rTBn86oQIF_7CJ5Mj86Ym9m57hgCSjFk
```

```
Authtoken saved to configuration file: C:\Users\digwa\AppData\Local/ngrok/ngrok.yml
```

ngrok [command] [flags]

- COMMANDS:
- api CLI to api.ngrok.com
 - completion generates shell completion code for bash or zsh
 - config update or migrate ngrok's configuration file
 - credits prints author and licensing information
 - help help about any command
 - http start an HTTP tunnel
 - service run and control ngrok as a background service
 - start start endpoints in the config file by name
 - tcp start a TCP tunnel
 - tls start a TLS endpoint
 - update update ngrok to the latest version
 - version print the version string

ngrok (Ctrl+C to quit)

♦ Create instant endpoints for local containers within Docker Desktop → <https://ngrok.com/r/docker>

Session Status online

Account Rudransh Digwa (Plan: Free)

Version 3.32.0


Region India (in)

Latency 20ms

Web Interface <http://127.0.0.1:4040>

Forwarding <https://serafina-aquiline-nonstably.ngrok-free.dev> -> <http://localhost:8080>

Connections	ttl	opn	rt1	rt5	p50	p90
	0	0	0.00	0.00	0.00	0.00

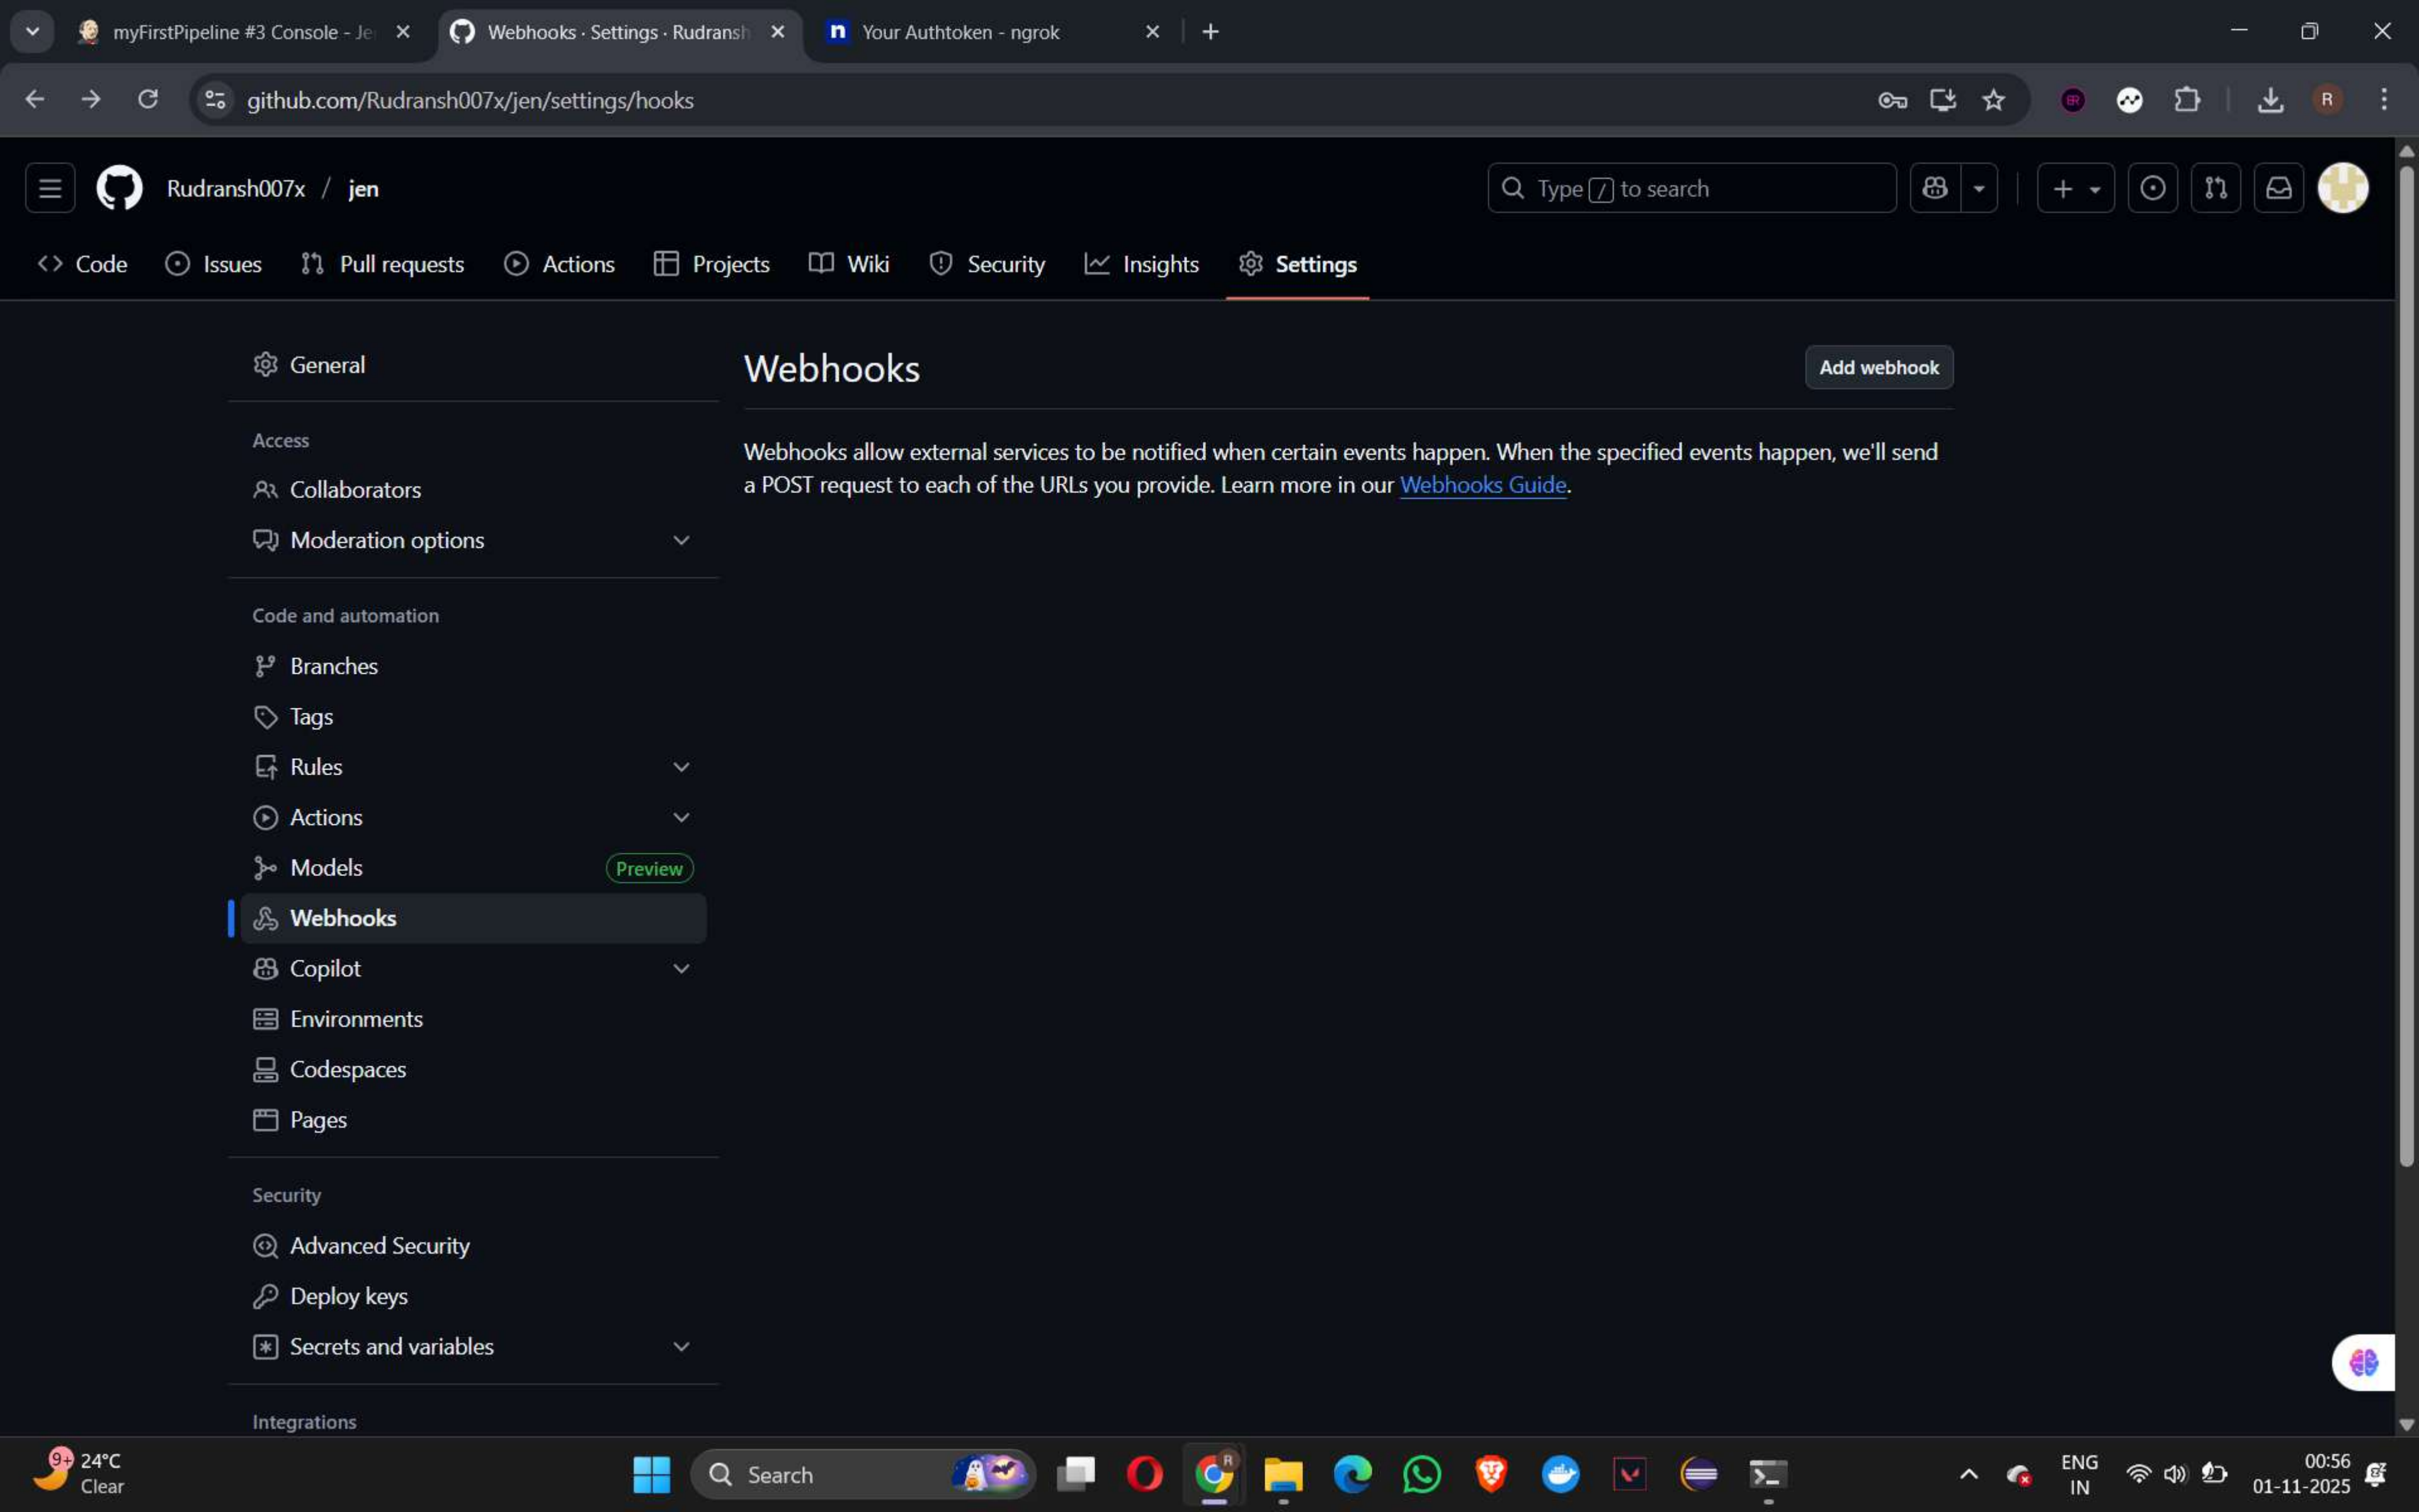

General

Access

Collaborators

Moderation options

Code and automation

Branches

Tags

Rules

Actions

Models

Webhooks

Copilot

Environments

Codespaces

Pages

Security

Advanced Security

Deploy keys

Secrets and variables

Integrations

GitHub Apps

Email notifications

Preview

Webhooks / Add webhook

We'll send a POST request to the URL below with details of any subscribed events. You can also specify which data format you'd like to receive (JSON, `x-www-form-urlencoded`, etc). More information can be found in [our developer documentation](#).

Payload URL *

https://serafina-aquiline-nonstably.ngrok-free.dev/github-webhook/

Content type *

application/json

Secret

SSL verification

By default, we verify SSL certificates when delivering payloads.

Enable SSL verification

Disable (not recommended)

Which events would you like to trigger this webhook?

Just the push event.

Send me everything.

Let me select individual events.

Active

We will deliver event details when this hook is triggered.

Add webhook

myFirstPipeline Config - Jenkins

Webhooks · Settings · Rudransh

Your Authtoken - ngrok

localhost:8080/job/myFirstPipeline/configure

Jenkins

myFirstPipeline / Configuration

Search

Settings

Profile

Configure

General

Triggers

Pipeline

Advanced

Throttle builds ?

Triggers

Set up automated actions that start your build based on specific events, like code changes or scheduled times.

☐

Build after other projects are built ?

☐

Build periodically ?

☒

GitHub hook trigger for GITScm polling ?

☐

Poll SCM ?

☐

Trigger builds remotely (e.g., from scripts) ?

Pipeline

Define your Pipeline using Groovy directly or pull it from source control.

Definition

Pipeline script from SCM

SCM ?

Git

Repositories ?

Save

Apply

24°C Clear

Search

Taskbar icons

01:13 01-11-2025



Rudransh007x / jen

🔍 Type / to search



<> Code

⌚ Issues

🔗 Pull requests

▶ Actions

📁 Projects

📖 Wiki

🛡 Security

📈 Insights

⚙ Settings



jen

webhook

in

main

Cancel changes

Commit changes...

Edit

Preview

Spaces ⬆ ⬆

2 ⬆ ⬆

No wrap ⬆ ⬆

1

webhook

myFirstPipeline - Jenkins

jen/ at main · Rudransh007x/jen

Your Authtoken - ngrok

localhost:8080/job/myFirstPipeline/

Jenkins / myFirstPipeline

Search

Settings

Profile

Add description

Status

Changes

Build Now

Configure

Delete Pipeline

Stages

Rename

Pipeline Syntax

GitHub Hook Log

Credentials

myFirstPipeline

Permalinks

- Last build (#3), 3 hr 27 min ago
- Last stable build (#3), 3 hr 27 min ago
- Last successful build (#3), 3 hr 27 min ago
- Last completed build (#3), 3 hr 27 min ago

Builds

Filter

Today

- #4 1:24 AM

October 31, 2025

- #3 9:46 PM
- #2 9:32 PM
- #1 9:32 PM

9+ 24°C Clear

Search

Chrome

File Explorer

Edge

WhatsApp

Firefox

Docker

VS Code

Word

ENG IN 01:24 01-11-2025



Console Output

[Download](#)[Copy](#)[View as plain text](#)

```
Started by GitHub push by Rudransh007x
Obtained Jenkinsfile from git https://github.com/Rudransh007x/jen.git
[Pipeline] Start of Pipeline
[Pipeline] node
Running on Jenkins in C:\ProgramData\Jenkins\.jenkins\workspace\myFirstPipeline
[Pipeline] {
[Pipeline] stage
[Pipeline] { (Declarative: Checkout SCM)
[Pipeline] checkout
Selected Git installation does not exist. Using Default
The recommended git tool is: NONE
No credentials specified
  > git.exe rev-parse --resolve-git-dir C:\ProgramData\Jenkins\.jenkins\workspace\myFirstPipeline\.git # timeout=10
Fetching changes from the remote Git repository
  > git.exe config remote.origin.url https://github.com/Rudransh007x/jen.git # timeout=10
Fetching upstream changes from https://github.com/Rudransh007x/jen.git
  > git.exe --version # timeout=10
  > git --version # 'git version 2.46.0.windows.1'
  > git.exe fetch --tags --force --progress -- https://github.com/Rudransh007x/jen.git +refs/heads/*:refs/remotes/origin/* # timeout=10
  > git.exe rev-parse "refs/remotes/origin/main^{commit}" # timeout=10
Checking out Revision 7474ceb0eafc41b241329d47be0b58b92b03a15a (refs/remotes/origin/main)
  > git.exe config core.sparsecheckout # timeout=10
  > git.exe checkout -f 7474ceb0eafc41b241329d47be0b58b92b03a15a # timeout=10
Commit message: "webhook"
  > git.exe rev-list --no-walk adfc808c251ac4723974481e25508ee46653990b # timeout=10
[Pipeline] }
[Pipeline] // stage
[Pipeline] }
```


Security

Settings and recommendations to help you keep your account secure

You have security tips

Security tips found in the Security Checkup



[Review security tips](#)

Recent security activity

Signing in with 2-Step Verification was turned on	1:30 AM · Telangana, India	>
---	----------------------------	---

New sign-in on Windows	Oct 17 · Telangana, India	>
------------------------	---------------------------	---

[Review security activity](#)

How you sign in to Google

Make sure you can always access your Google Account by keeping this information up to date

← App passwords

App passwords help you sign into your Google Account on older apps and services that don't support modern security standards.

App passwords are less secure than using up-to-date apps and services that use modern security standards. Before you create an app password, you should check to see if your app needs this in order to sign in.

[Learn more](#)

You don't have any app passwords.

To create a new app specific password, type a name for it below...

App name

|

Create

← App passwords

App passwords help you sign into your Google Account on older apps and services that don't support modern security standards.

App passwords are less secure than using up-to-date apps and services that use modern security standards. Before you create an app password, you should check to see if your app needs this in order to sign in.

[Learn more](#)

Your app passwords

Jenkins-Demo

Created on 1:42AM



To create a new app specific password, type a name for it below...

App name

Create

Name ↓	Health	Enabled
Email Extension Plugin 1933.v45cec755423f This plugin is a replacement for Jenkins's email publisher. It allows to configure every aspect of email notifications: when an email is sent, who should receive it and what the email says Report an issue with this plugin		1933.v4...

☒ Use SMTP Authentication ?

User Name

digwarudransh2@gmail.com

Password

.....

☒ Use SSL ?

☐ Use TLS

SMTP Port ?

463

Reply-To Address

Same as your Gmail ID

Charset

UTF-8

☒ Test configuration by sending test e-mail

Test e-mail recipient

digwarudransh2@gmail.com



Test configuration by sending test e-mail

Test e-mail recipient

digwarudransh2@gmail.com

Email was successfully sent



address not configured yet <digwarudransh2@gmail.com>

2:33 AM (1 minute ago)

to me ▼

This is test email #9 sent from Jenkins

Extended E-mail Notification

SMTP server

smtp.gmail.com

SMTP Port

465

Advanced ^

 Edited

Credentials

- none -

☒ Use SSL

☐ Use TLS

☐ Use OAuth 2.0

Advanced Email Properties

Save

Apply

Extended E-mail Notification

SMTP server

smtp.gmail.com

SMTP Port

465

Advanced ^

 Edited

Credentials

digwarudransh2@gmail.com/***** (gmail creds)



Use SSL



Use TLS



Use OAuth 2.0

Advanced Email Properties

Save

Apply



+ New Item



Build History

Add description

Build Queue



No builds in the queue.

Build Executor Status

0/2

All



S	W	Name ↓	Last Success	Last Failure	Last Duration
		myFirstPipeline	1 hr 22 min #4	N/A	8.8 sec
		MyMavenPipeline	9 days 4 hr #7	9 days 4 hr #6	1 min 3.

Icon:

S

M

L



Jenkins Build SUCCESS: myFirstPipeline #5

Inbox x

address not configured yet <digwarudransh2@gmail.com>

2:52 AM (0 minutes ago)



to me ▼

Good news! The build for myFirstPipeline #5 completed successfully.

← Reply

→ Forward



AI Reply

? Continuous Integration (CI):

CI is the practice of frequently merging code changes into a shared repository and automatically testing them to detect issues early.

? Continuous Deployment/Delivery (CD):

CD automates the process of delivering or deploying code to production after passing tests, ensuring faster and reliable releases.

? Role of Jenkins in CI/CD:

Jenkins automates building, testing, and deploying code changes, acting as the main server in a CI/CD pipeline.

? Webhook in GitHub:

A webhook is an HTTP callback that automatically sends updates from GitHub to another service (like Jenkins) when an event occurs.

? Why Webhooks in Jenkins:

Webhooks allow Jenkins to automatically start a build whenever code is pushed to GitHub, without manual checks.

? Build Triggers in Jenkins:

Jenkins supports triggers like manual builds, SCM polling, webhooks, scheduled (cron) builds, and dependency triggers.

? Polling vs Webhook:

Polling checks GitHub at regular intervals for changes, while webhooks instantly notify Jenkins when a push happens.

? What is ngrok:

Ngrok creates a secure public URL to access local servers over the internet.

? How ngrok helps with Jenkins webhooks:

Ngrok exposes Jenkins (running locally) to GitHub, enabling webhook communication for automatic builds.

? Why configure email notifications:

Email notifications alert developers about build successes or failures, helping them monitor and fix issues quickly.