


Getting Ready for User Database:

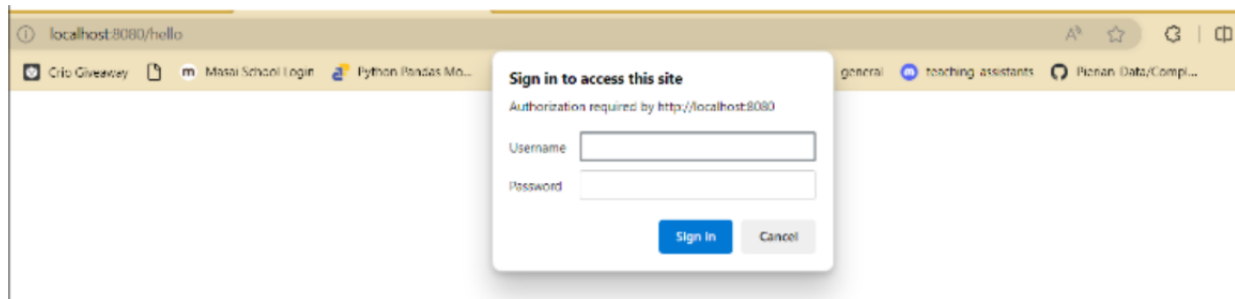

- For every request, a new session ID is created. It means a stateless way of sending a request.
- Now the second problem We do not have more than one user, but we need multiple users with different permissions.
- Now, for that we need a database in memory or a MySQL database.