

Q.1 - Q.20 Carry One Mark Each.

1) $\lim_{x \rightarrow \infty} \frac{x - \sin x}{x + \cos x}$ equals

- a) 1 b) -1 c) ∞ d) 0

(GATE CS 2008)

2) If P, Q, R are subsets of the universal set U , then $(P \cap Q \cap R) \cup (P^c \cap Q \cap R) \cup Q^c \cup R^c$ is:

- a) $Q^c \cup R^c$ b) $P \cup Q^c \cup R^c$ c) $P^c \cup Q^c \cup R^c$ d) U

(GATE CS 2008)

$$x_1 + x_2 + 2x_3 = 1$$

3) The following system of equations $x_1 + 2x_2 + 3x_3 = 2$ has a unique solution. The only possible value(s) for α is/are:

$$x_1 + 4x_2 + \alpha x_3 = 4$$

- a) 0 c) one of 0, 1 or -1
b) either 0 or 1 d) any real number

(GATE CS 2008)

4) In the IEEE floating point representation the hexadecimal value 0x00000000 corresponds to

- a) The normalized value 2^{-127} c) The normalized value +0
b) The normalized value 2^{-126} d) The special value +0

(GATE CS 2008)

5) In the Karnaugh map shown below, X denotes a don't care term. What is the minimal form of the function represented by the Karnaugh map?

		ab			
		00	01	11	10
cd	00	1	1		1
	01	X			
	11	X			
	10	1	1		X

Fig. 5.1: Karnaugh map

- a) $\bar{b} \cdot d + a \cdot \bar{d}$ b) $a \cdot \bar{b} + \bar{b} \cdot d + a \cdot b \cdot \bar{d}c$ c) $b \cdot d + a \cdot \bar{d}$ d) $a \cdot \bar{b} + \bar{b} \cdot d + \bar{a} \cdot d$

(GATE CS 2008)

- 6) Let r denote number system radix. The only value(s) of r that satisfy the equation $\sqrt{121_r} = 11_r$ is / are

- a) decimal 10 c) decimal 10 and 11
b) decimal 11 d) any value > 2


(GATE CS 2008)

- 7) The most efficient algorithm for finding the number of connected components in an undirected graph on n vertices and m edges has time complexity

- a) $\theta(n)$ b) $\theta(m)$ c) $\theta(m + n)$ d) $\theta(mn)$

(GATE CS 2008)

- 8) Given f_1 , f_3 and f in canonical sum of products form (in decimal) for the circuit

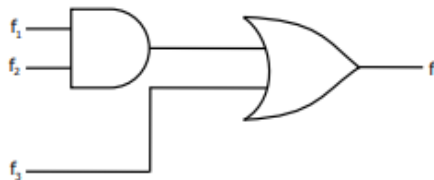Fig. 8.1: Logic circuit for functions f_1 , f_2 , and f_3 in canonical sum of products form.

$$f_1 = \Sigma m(4, 5, 6, 7, 8)$$

$$f_3 = \Sigma m(1, 6, 15)$$

$$f = \Sigma m(1, 6, 15)$$

then f_2 is

- a) Any size
b) 2^{16} bytes-size of TCP header
c) 2^{16} bytes
d) 1500 bytes

(GATE CS 2008)

15) Which of the following tuple relational calculus expression(s) is/are equivalent to $\forall t \in r(P(t))$?

- a) $\neg \exists t \in r(P(t))$
b) $\exists t \notin r(P(t))$
c) $\neg \exists t \in r(\neg P(t))$
d) $\exists t \notin r(\neg P(t))$

- a) I only b) II only c) III only d) III and IV

(GATE CS 2008)

16) A clustering index is defined on the fields which are of type

- a) non-key and ordering c) key and ordering
b) non-key and non-ordering d) key and non-ordering

(GATE CS 2008)

17) Which of the following system calls results in the sending of SYN packets?

- a) socket b) bind c) listen d) connect

(GATE CS 2008)

18) Which combination of the integer variables x, y and z makes the variable a get the value 4 in the following expression?

$$a = (x > y) ? ((x > z) ? x : z) : ((y > z) ? y : z)$$

- a) $x = 3, y = 4, z = 2$ c) $x = 6, y = 3, z = 5$
b) $x = 6, y = 5, z = 3$ d) $x = 5, y = 4, z = 5$

(GATE CS 2008)

19) The Breadth First Search algorithm has been implemented using the queue data structure. One possible order of visiting the nodes of the following graph is

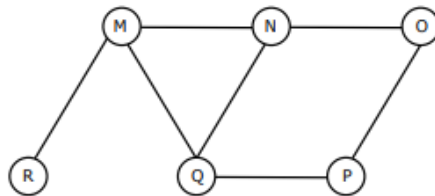


Fig. 19.1: Graph

- a) MNOPQR b) NQMPOR c) QMNPOR d) QMNPOR

(GATE CS 2008)

20) The data blocks of a very large file in the Unix file system are allocated using

- a) contiguous allocation
b) linked allocation
c) indexed allocation
d) an extension of indexed allocation

(GATE CS 2008)

Q. 21 – Q. 75 carry one mark each.

21) The minimum number of equal length subintervals needed to approximate $\int_1^2 xe^x dx$ to an accuracy of at least $\frac{1}{3} \times 10^{-6}$ using the trapezoidal rule is

- a) 1000e b) 1000 c) 100e d) 100

(GATE CS 2008)

22) The Newton-Raphson iteration $x_{n+1} = \frac{1}{2}(x_n + \frac{R}{x_n})$ can be used to compute the

- a) square of R c) square root of R
b) reciprocal of R d) logarithm of R

(GATE CS 2008)

23) Which of the following statements is true for every planar graph on n vertices?

- a) The graph is connected
b) The graph is Eulerian
c) The graph has a vertex-cover of size at most $3n/4$
d) The graph has an independent set of size at least $n/3$

(GATE CS 2008)

24) Let

$$P = \sum_{\substack{1 \leq i \leq 2k \\ i \text{ odd}}} i \quad \text{and} \quad Q = \sum_{\substack{1 \leq i \leq 2k \\ i \text{ even}}} i$$

where k is a positive integer. Then

- a) $P=Q-K$ b) $P=Q+K$ c) $P=Q$ d) $P=Q+2K$

(GATE CS 2008)

25) A point on a curve is said to be an extremum if it is a local minimum or a local maximum. The number of distinct extrema for the curve $3x^4 - 16x^3 + 24x^2 + 37$ is

- a) 0 b) 1 c) 2 d) 3

(GATE CS 2008)

26) If P, Q, R are Boolean variables, then

$$(P + \overline{Q})(P.\overline{Q} + P.R)(\overline{P}.R + \overline{Q})$$

Simplifies to

- a) $P.\overline{Q}$ b) $P.\overline{R}$ c) $P.\overline{Q} + R$ d) $P.\overline{R} + Q$

(GATE CS 2008)

- 27) Aishwarya studies either computer science or mathematics everyday. If she studies computer science on a day, then the probability that she studies mathematics the next day is 0.6. If she studies mathematics on a day, then the probability that she studies computer science the next day is 0.4. Given that Aishwarya studies computer science on Monday, what is the probability that she studies computer science on Wednesday?

- a) 0.24 b) 0.36 c) 0.4 d) 0.6

(GATE CS 2008)

- 28) How many of the following matrices have an eigenvalue 1?
 $\begin{pmatrix} 1 & 0 \\ 0 & 0 \end{pmatrix} \begin{pmatrix} 1 & 1 \\ 0 & 1 \end{pmatrix} \begin{pmatrix} 1 & -1 \\ 0 & 1 \end{pmatrix} \begin{pmatrix} -1 & 0 \\ 0 & -1 \end{pmatrix}$

- a) one b) two c) three d) four

(GATE CS 2008)

- 29) Let X be a random variable following normal distribution with mean +1 and variance 4. Let Y be another normal variable with mean -1 and variance unknown. If $P(X \leq -1) = P(Y \geq 2)$, the standard deviation of Y is

- a) 3 b) 2 c) $\sqrt{2}$ d) 1

(GATE CS 2008)

- 30) Let fsa and pda be two predicates such that $\text{fsa}(x)$ means x is a finite state automaton, and $\text{pda}(y)$ means x is a pushdown automaton. Let equivalent be another predicate such that $\text{equivalent}(a, b)$ means that a and b are equivalent. Which of the following first order logic statements represents the following:

Each finite state automaton has an equivalent pushdown automaton

- a) $(\forall x \text{ fsa}(x)) \Rightarrow (\exists y \text{ pda}(y) \wedge \text{equivalent}(x, y))$
 b) $\neg \forall y (\exists x \text{ fsa}(x) \Rightarrow \text{pda}(y) \wedge \text{equivalent}(x, y))$
 c) $\forall x \exists y (\text{fsa}(x) \wedge \text{pda}(y) \wedge \text{equivalent}(x, y))$
 d) $\forall x \exists y (\text{fsa}(y) \wedge \text{pda}(x) \wedge \text{equivalent}(x, y))$

(GATE CS 2008)

- 31) P and Q are two propositions. Which of the following logical expressions are equivalent?

- a) $P \vee \neg Q$
 b) $\neg(\neg P \wedge Q)$
 c) $(P \wedge Q) \vee (P \wedge \neg Q) \vee (\neg P \wedge \neg Q)$
 d) $(P \wedge Q) \vee (P \wedge \neg Q) \vee (\neg P \wedge Q)$

- a) Only I and II
- b) Only I, II and III
- c) Only I, II and IV
- d) All of I, II, III and IV

(GATE CS 2008)

- 32) For a magnetic disk with concentric circular tracks, the seek latency is not linearly proportional to the seek distance due to
- a) non-uniform distribution of requests
 - b) arm starting and stopping inertia
 - c) higher capacity of tracks on the periphery of the platter
 - d) use of unfair arm scheduling policies

(GATE CS 2008)

- 33) Which of the following is/are true of the auto-increment addressing mode?
- a) It is useful in creating self-relocating code
 - b) If it is included in an Instruction Set Architecture, then an additional ALU is required for effective address calculation
 - c) The amount of increment depends on the size of the data item accessed
- a) I only b) II only c) III only d) II and III only

(GATE CS 2008)

- 34) Which of the following must be true for the RFE (Return From Exception) instruction on a general purpose processor?
- a) It must be a trap instruction
 - b) It must be a privileged instruction
 - c) An exception cannot be allowed to occur during execution of an RFE instruction
- a) I only c) I and II only
- b) II only d) I, II and III only

(GATE CS 2008)

- 35) For inclusion to hold between two cache levels $L1$ and $L2$ in a multi-level cache hierarchy, which of the following are necessary?
- a) $L1$ must be a write-through cache
 - b) $L2$ must be a write-through cache
 - c) The associativity of $L2$ must be greater than that of $L1$
 - d) The $L2$ cache must be at least as large as the $L1$ cache
- a) IV only c) I, II and IV only
- b) I and IV only d) I, II, III and IV

(GATE CS 2008)

- 36) Which of the following are NOT true in a pipelined processor?
- a) Bypassing can handle all RAW hazards
 - b) Register renaming can eliminate all register carried WAR hazards
 - c) Control hazard penalties can be eliminated by dynamic branch prediction

- a) I and II only b) I and III only c) II and III only d) I, II and III

(GATE CS 2008)

37) The use of multiple register windows with overlap causes a reduction in the number of memory accesses for

- a) Function locals and parameters
b) Register saves and restores
c) Instruction

- a) I only b) II only c) III only d) I, II and III

(GATE CS 2008)

38) In an instruction execution pipeline, the earliest that the data TLB (Translation Lookaside Buffer) can be accessed is

- a) Before effective address calculation has started
b) During effective address calculation
c) After effective address calculation has completed
d) After data cache lookup has completed

(GATE CS 2008)

39) Consider the following functions:

$$f(n) = 2^n$$

$$g(n) = n!$$

$$h(n) = n^{\log n}$$

Which of the following statements about the asymptotic behaviour of $f(n)$, $g(n)$ and $h(n)$ is true?

- (A) $f(n) = O(g(n))$; $g(n) = O(h(n))$ (C) $g(n) = O(f(n))$; $h(n) = O(f(n))$
(B) $f(n) = \Omega(g(n))$; $g(n) = O(h(n))$ (D) $h(n) = O(f(n))$; $g(n) = \Omega(f(n))$

(GATE CS 2008)

40) The minimum number of comparisons required to determine if an integer appears more than $n/2$ times in a sorted array of n integers is

- a) $\theta(n)$ b) $\theta(\log n)$ c) $\theta(\log^* n)$ d) $\theta(1)$

(GATE CS 2008)

41) A B-tree of order 4 is built from scratch by 10 successive insertions. What is the maximum number of node splitting operations that may take place?

- a) 3 b) 4 c) 5 d) 6

(GATE CS 2008)

- 42) G is a graph on n vertices and $2n - 2$ edges. The edges of G can be partitioned into two edge-disjoint spanning trees. Which of the following is NOT true for G ?
- For every subset of k vertices, the induced subgraph has at most $2k - 2$ edges
 - The minimum cut in G has at least two edges
 - There are two edge-disjoint paths between every pair of vertices
 - There are two vertex-disjoint paths between every pair of vertices

(GATE CS 2008)

- 43) Consider the Quicksort algorithm. Suppose there is a procedure for finding a pivot element which splits the list into two sub-lists each of which contains at least one-fifth of the elements. Let $T(n)$ be the number of comparisons required to sort n elements. Then

- $T(n) \leq 2T(n/5) + n$
- $T(n) \leq T(n/5) + T(4n/5) + n$
- $T(n) \leq 2T(4n/5) + n$
- $T(n) \leq 2T(n/2) + n$

(GATE CS 2008)

- 44) The subset-sum problem is defined as follows: Given a set S of n positive integers and a positive integer W , determine whether there is a subset of S Whose elements sum to W . An algorithm Q solves this problem in $O(nW)$ time. Which of the following statements is false?

- Q solves the subset-sum problem in polynomial time when the input is encoded in unary
- Q solves the subset-sum problem in polynomial time when the input is encoded in binary
- The subset sum problem belongs to the class NP
- The subset sum problem is NP-h

(GATE CS 2008)




Fig. 45.1: Graph for Dijkstra's algorithm

- 45) Dijkstra's single source shortest path algorithm when run from vertex a in the above graph, computes the correct shortest path distance to

- only vertex a
- only vertex a, e, f, g, h
- only vertices a, b, c, d
- all the vertices

(GATE CS 2008)

- 46) You are given the postorder traversal, P , of a binary search tree on the n elements $1, 2, \dots, n$. You have to determine the unique binary search tree that has P as its

postorder traversal. What is the time complexity of the most efficient algorithm for doing this?

- a) $\theta(\log n)$
- b) $\theta(n)$
- c) $\theta(n \log n)$
- d) None of the above, as the tree cannot be uniquely determined

(GATE CS 2008)

47) We have a binary heap on n elements and wish to insert n more elements (not necessarily one after another) into this heap. The total time required for this is

- a) $\theta(\log n)$
- b) $\theta(n)$
- c) $\theta(n \log n)$
- d) $\theta(n^2)$

(GATE CS 2008)

48) Which of the following statements is false?

- a) Every NFA can be converted to an equivalent DFA
- b) Every non-deterministic Turing machine can be converted to an equivalent deterministic Turing machine
- c) Every regular language is also a context-free language
- d) Every subset of a recursively enumerable set is recursive

(GATE CS 2008)

49) Given below are two finite state automata (\rightarrow indicates the start state and F indicates a final state):



Fig. 49.1: two finite state automata

Which of the following represents the product automaton $X = Y \times Z$?




Fig. 49.2: Product automaton

(GATE CS 2008)

50) Which of the following statements are true?

- a) Every left-recursive grammar can be converted to a right-recursive grammar and vice-versa.
- b) All ϵ -productions can be removed from any context-free grammar by suitable transformations.
- c) The language generated by a context-free grammar all of whose productions are of the form $X \rightarrow w$ or $X \rightarrow wY$ (where w is a string of terminals and Y is a

non-terminal) is always regular.

d) The derivation trees of strings generated by a context-free grammar in Chomsky Normal Form are always binary trees.

a) I, II, III and IV

c) I, III and IV only

b) II, III and IV only

d) I, II and IV only

(GATE CS 2008)

51) Match the following:

E. Checking that identifiers are declared before their use	$L = \{a^n b^m c^n d^m \mid n \geq 1, m \geq 1\}$
F. Number of formal parameters in the declaration of a function agrees with the number of actual parameters in use of that function	$X \rightarrow XbX \mid XcX \mid dXf \mid g$
G. Arithmetic expressions with matched pairs of parentheses	$L = \{wcw \mid w \in (a \mid b)^*\}$
H. Palindromes	$X \rightarrow bXb \mid cXc \mid e$

a) E-P, F-R, G-Q, H-S

c) E-R, F-P, G-Q, H-S

b) E-R, F-P, G-S, H-Q

d) E-P, F-R, G-S, H-Q

(GATE CS 2008)

52) Match the following NFAs with the regular expressions they correspond to

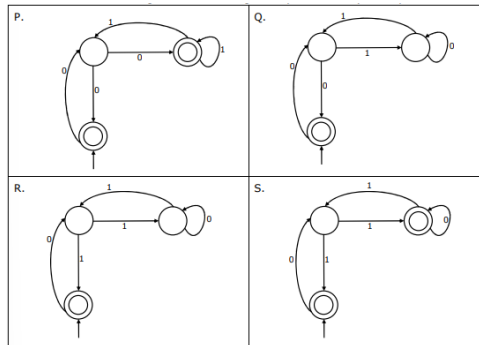


Fig. 52.1: NFA's

a) $\epsilon + 0(01^*1 + 00)^*01^*$

b) $\epsilon + 0(10^*1 + 00)^*0$

c) $\epsilon + 0(01^*1 + 10)^*1$

d) $\epsilon + 0(10^*1 + 10)^*10^*$

- (A) $P \rightarrow 2, Q \rightarrow 1, R \rightarrow 3, S \rightarrow 4$ (C) $P \rightarrow 1, Q \rightarrow 2, R \rightarrow 3, S \rightarrow 4$
 (B) $P \rightarrow 1, Q \rightarrow 3, R \rightarrow 2, S \rightarrow 4$ (D) $P \rightarrow 3, Q \rightarrow 2, R \rightarrow 1, S \rightarrow 4$

(GATE CS 2008)

53) Which of the following are regular sets?

- a) $\{a^n b^2 m \mid n \geq 0, m \geq 0\}$
- b) $\{a^n b^m \mid n = 2m\}$
- c) $\{a^n b^m \mid n \neq m\}$
- d) $\{xycy \mid x, y \in \{a, b\}^*\}$

- a) I and IV only b) I and II only c) I only d) IV only

(GATE CS 2008)

54) Which of the following are true?

- a) A programming language which does not permit global variables of any kind and has no nesting of procedures/functions, but permits recursion can be implemented with static storage allocation
- b) Multi-level access link (or display) arrangement is needed to arrange activation records only if the programming language being implemented has nesting of procedures/functions
- c) Recursion in programming languages cannot be implemented with dynamic storage allocation
- d) Nesting procedures/functions and recursion require a dynamic heap allocation scheme and cannot be implemented with a stack-based allocation scheme for activation records
- e) Programming languages which permit a function to return a function as its result cannot be implemented with a stack-based storage allocation scheme for activation records

- a) II and V only c) I, II and V only
 b) I, III and IV only d) II, III and V only

(GATE CS 2008)

55) An LALR(1) parser for a grammar G can have shift-reduce (S-R) conflicts if and only if

- a) The SLR(1) parser for G has S-R conflicts
- b) The LR(1) parser for G has S-R conflicts
- c) The LR(0) parser for G has S-R conflicts
- d) The LALR(1) parser for G has reduce-reduce conflicts

(GATE CS 2008)

56) In the slow start phase of the TCP congestion control algorithm, the size of the congestion window

- a) does not increase
- b) increases linearly
- c) increases quadratically
- d) increases exponentially

(GATE CS 2008)

57) If a class *B* network on the Internet has a subnet mask of 255.255.248.0, what is the maximum number of hosts per subnet?

- a) 1022
- b) 1023
- c) 2046
- d) 2047

(GATE CS 2008)

58) A computer on a 10Mbps network is regulated by a token bucket. The token bucket is filled at a rate of 2Mbps. It is initially filled to capacity with 16Megabits. What is the maximum duration for which the computer can transmit at the full 10Mbps?

- a) 1.6 seconds
- b) 2 seconds
- c) 5 seconds
- d) 8 seconds

(GATE CS 2008)

59) A client process *P* needs to make a TCP connection to a server process *S*. Consider the following situation: the server process *S* executes a socket (), a bind () and a listen () system call in that order, following which it is preempted. Subsequently, the client process *P* executes a socket () system call followed by connect () system call to connect to the server process *S*. The server process has not executed any accept () system call. Which one of the following events could take place?

- a) connect () system call returns successfully
- b) connect () system call blocks
- c) connect () system call returns an error
- d) connect () system call results in a core dump

(GATE CS 2008)

60) What is printed by the following C program?

```
int f(int *x, int *py, int **ppz)
{
    int y, z;
    **ppz += 1;  z = **ppz;
    *py += 2;    y = *py;
    *x += 3;
    return x + y + z;
}

void main()
{
    int c, *b, **a;
    c = 4; b = &c; a = &b;
    printf("%d", f(c, b, a));
}
```

- a) 18
- b) 19
- c) 21
- d) 22

(GATE CS 2008)

61) Choose the correct option to fill ?1 and ?2 so that the program below prints an input string in reverse order. Assume that the input string is terminated by a newline character.

```

void reverse(void) {
    int c;
    if ( ?1 ) reverse();
    ?2
}

```

```

int main() {
    printf("Enter Text"); printf("\n");
    reverse(); printf("\n");
}

```

- a) ?1: (getchar() != '\n')
 ?2: getchar(c);
- b) ?1: (c = getchar()) != '\n'
 ?2: getchar(c);
- c) ?1: (c != '\n')
 ?2: putchar(c);
- d) ?1: ((c = getchar()) != '\n')
 ?2: putchar(c);

(GATE CS 2008)

- 62) The following C function takes a single-linked list of integers as a parameter and rearranges the elements of the list. The function is called with the list containing the integers 1, 2, 3, 4, 5, 6, 7 in the given order. What will be the contents of the list after the function completes execution?

```

struct node {
    int value;
    struct node *next;
};

void rearrange(struct node *list) {
    struct node *p, *q;
    int temp;
    if (!list || !list->next) return;
    p = list;
    q = list->next;
    while (q) {
        temp = p->value; p->value = q->value;
        q->value = temp; p = q->next;
        q = p->next;
    }
}

```

- a) 1, 2, 3, 4, 5, 6, 7 b) 2, 1, 4, 3, 6, 5, 7 c) 1, 3, 2, 5, 4, 7, 6 d) 2, 3, 4, 5, 6, 7, 1

(GATE CS 2008)

- 63) The P and V operations on counting semaphores, where s is a counting semaphore, are defined as follows:

```
P(s): s = s - 1;
      if s < 0 then wait;
```

```
V(s): s = s + 1;
      if s <= 0 then wakeup a process waiting on s;
```

Assume that P_b and V_b , the wait and signal operations on binary semaphores, are provided. Two binary semaphores x_b and y_b are used to implement the semaphore operations $P(s)$ and $V(s)$ as follows:

```
P(s): P_b(x_b);
s = s - 1;
if (s < 0)
  V_b(y_b);
else V_b(x_b);
V(s): P_b(x_b);
s = s + 1;
if (s ≤ 0) V_b(y_b);
V_b(x_b);
```

The initial values of x_b and y_b are respectively:

- a) 0 and 0 b) 0 and 1 c) 1 and 0 d) 1 and 1

(GATE CS 2008)

64) Which of the following statements about synchronous and asynchronous I/O is NOT true?

- An ISR is invoked on completion of I/O in synchronous I/O but not in asynchronous I/O
- In both synchronous and asynchronous I/O, an ISR (Interrupt Service Routine) is invoked after completion of the I/O
- A process making a synchronous I/O call waits until I/O is complete, but a process making an asynchronous I/O call does not wait for completion of the I/O
- In the case of synchronous I/O, the process waiting for the completion of I/O is woken up by the ISR that is invoked after the completion of I/O

(GATE CS 2008)

65) Which of the following is NOT true of deadlock prevention and deadlock avoidance schemes?

- In deadlock prevention, the request for resources is always granted if the resulting state is safe
- In deadlock avoidance, the request for resources is always granted if the result state is safe
- Deadlock avoidance is less restrictive than deadlock prevention
- Deadlock avoidance requires knowledge of resource requirements a priori

(GATE CS 2008)

66) A process executes the following code

```
for (i = 0; i ≤ n; i++) for ( ; ) ;
```

The total number of child processes created is

- a) n b) $2^n - 1$ c) $2n$ d) $2^{n+1} - 1$

(GATE CS 2008)

67) A processor uses 36-bit physical addresses and 32-bit virtual addresses, with a page frame size of 4 Kbytes. Each page table entry is of size 4 bytes. A three-level page table is used for virtual to physical address translation, where the virtual address is used as follows:

- Bits 30 – –31 are used to index into the first level page table
- Bits 21 – –29 are used to index into the second level page table
- Bits 12 – –20 are used to index into the third level page table
- Bits 0 – –11 are used as offset within the page

The number of bits required for addressing the next level page table (or page frame) in the page table entry of the first, second, and third level page tables are respectively:

- a) 20, 20 and 20 b) 24, 24 and 24 c) 24, 24 and 20 d) 25, 25 and 24

(GATE CS 2008)

68) Let R and S be two relations with the following schema:

$R(P, Q, R1, R2, R3)$ $S(P, Q, S1, S2)$

Where $\{P, Q\}$ is the key for both schemas. Which of the following queries are equivalent?

- a) $\pi_P(R \bowtie S)$
 b) $\pi_P(R) \bowtie \pi_P(S)$
 c) $\pi_P(\pi_{P,Q}(R) - (\pi_{P,Q}(S)))$
 d) $\pi_P(\pi_{P,Q}(R) - (\pi_{P,Q}(R) - \pi_{P,Q}(S)))$

- a) Only I and II b) Only I and III c) Only I, II and III d) Only I, III and IV

(GATE CS 2008)

69) Consider the following relational schemes for a library database:

Book (Title, Author, Catalog_no, Publisher, Year, Price)

Collection (Title, Author, Catalog_no) with in the following functional dependencies:

- a) Title, Author \rightarrow Catalog_no
 b) Catalog_no \rightarrow Title Author Publisher Year
 c) Publisher Title Year \rightarrow Price

Assume $\{\text{Author, Title}\}$ is the key for both schemes. Which of the following statements is true?

- a) Both Book and Collection are in BCNF
 b) Both Book and Collection are in 3NF only
 c) Book is in 2NF and Collection is in 3NF
 d) Both Book and Collection are in 2NF only

(GATE CS 2008)

70) Consider a file of 16384 records. Each record is 32 bytes long and its key field is of size 6 bytes. The file is ordered on a non-key field, and the file organization is

unspanned. The file is stored in a file system with block size 1024 bytes, and the size of a block pointer is 10 bytes. If the secondary index is built on the key field of the file, and a multi-level index scheme is used to store the secondary index, the number of first-level and second-level blocks in the multi-level index are respectively

- a) 8 and 0 b) 128 and 6 c) 256 and 4 d) 512 and 5

Common Data for Questions: 71, 72 and 73

Consider a machine with a 2-way set associative data cache of size 64Kbytes and block size 16bytes. The cache is managed using 32-bit virtual addresses and the page size is 4Kbytes. A program to be run on this machine begins as follows:

```
double ARR[1024][1024];

int i, j;

/* Initialize array ARR to 0.0 */
for (i = 0; i < 1024; i++)
    for (j = 0; j < 1024; j++)
        ARR[i][j] = 0.0;
```

The size of double is 8 Bytes. Array ARR is located in memory starting at the beginning of virtual page 0xF000 and stored in row major order. The cache is initially empty and no pre-fetching is done. The only data memory references made by the program are those to array ARR

71) The total size of the tags in the cache directory is

- a) 32Kbits b) 34Kbits c) 64Kbits d) 68Kbits

(GATE CS 2008)

72) Which of the following array elements has the same cache index as ARR [0] [0]?

- a) ARR [0] [4] b) ARR [4] [0] c) ARR [0] [5] d) ARR [5] [0]

(GATE CS 2008)

73) The cache hit ratio for this initialization loop is

- a) 0% b) 25% c) 50% d) 75%

(GATE CS 2008)

Common Data for Questions: 74 and 75

Consider the following C functions:

```
int f1 ( int n )
{
    if ( n == 0 || n == 1 )
```

```

        return n;
    else
        return ( 2 * f1(n - 1) + 3 * f1(n - 2) );
}

int f2 ( int n )
{
    int i;
    int X[N], Y[N], Z[N];

    X[0] = Y[0] = Z[0] = 0;
    X[1] = 1; Y[1] = 2; Z[1] = 3;
    for (i = 2; i <= n; i++) {
        X[i] = Y[i - 1] + Z[i - 2];
        Y[i] = 2 * X[i];
        Z[i] = 3 * X[i];
    }

    return X[n];
}

```

74) The running time of f1(n) and f2(n) are

- | | |
|----------------------------------|------------------------------------|
| a) $\Theta(n)$ and $\Theta(n)$ | c) $\Theta(n)$ and $\Theta(2^n)$ |
| b) $\Theta(2^n)$ and $\Theta(n)$ | d) $\Theta(2^n)$ and $\Theta(2^n)$ |

(GATE CS 2008)

75) F1(8) and F2(8) return the values

- | | |
|------------------|------------------|
| a) 1661 and 1640 | c) 1640 and 1640 |
| b) 59 and 59 | d) 1640 and 1661 |

(GATE CS 2008)

Linked Answer Questions: Q.76 to 85 Carry Two Marks Each

Statement for Linked Answer Questions: 76 & 77

Delayed branching can help in the handling of control hazards

76) For all delayed conditional branch instructions, irrespective of whether the condition evaluates to true or false

- The instruction following the conditional branch instruction in memory is executed
- The first instruction in the fall through path is executed
- The first instruction in the taken path is executed
- The branch takes longer to execute than any other instruction

(GATE CS 2008)

77) The following code is to run on a pipelined processor with one branch delay slot:

```
I1: ADD R2 <- R7 + R8
```

I2: SUB R4 <- R5 - R6
 I3: ADD R1 <- R2 + R3
 I4: STORE Memory[R4] <- R1
 BRANCH to Label if R1 == 0

Which of the instructions I1, I2, I3 or I4 can legitimately occupy the delay slot without any other program modification?

- a) I1 b) I2 c) I3 d) I4

(GATE CS 2008)

Statement for Linked Answer Questions: 78 & 79

Let x_n denote the number of binary strings of length n that contain no consecutive 0s.

78) Which of the following recurrences does x_n satisfy?

- a) $x_n = 2x_{n-1}$ b) $x_n = x_{\lfloor n/2 \rfloor} + 1$ c) $x_n = x_{\lfloor n/2 \rfloor} + n$ d) $x_n = x_{n-1} + x_{n-2}$

(GATE CS 2008)

79) The value of x_5 is:

- a) 5 b) 7 c) 8 d) 16

(GATE CS 2008)

Statement for Linked Answer Questions: 80 & 81

The subset-sum problem is defined as follows: Given a set of n positive integers, $S = \{a_1, a_2, a_3, \dots, a_n\}$, and positive integer W , is there a subset of S whose elements sum to W ? A dynamic program for solving this problem uses a 2-dimensional Boolean array, X , with n rows and $W + 1$ columns.

$X[i, j]$, $1 \leq i \leq n$, $0 \leq j \leq W$, is TRUE if and only if there is a subset of $\{a_1, a_2, \dots, a_i\}$ whose elements sum to j .

80) Which of the following is valid for $2 \leq i \leq n$ and $1 \leq j \leq W$?

- a) $X[i, j] = X[i - 1, j] \vee X[i - 1, j - a_i]$ c) $X[i, j] = X[i - 1, j] \wedge X[i - 1, j - a_i]$
 b) $X[i, j] = X[i, j - 1] \vee X[i - 1, j - a_i]$ d) $X[i, j] = X[i - 1, j - 1] \wedge X[i - 1, j - a_i]$

(GATE CS 2008)

81) Which entry of the array X , if TRUE, implies that there is a subset whose elements sum to W ?

- a) $X[1, W]$ b) $X[n, 0]$ c) $X[n, W]$ d) $X[1, n]$

(GATE CS 2008)

Statement for Linked Answer Questions: 82 & 83

Consider the following ER diagram:




Fig. 81.1: ER diagram

82) The minimum number of tables needed to represent M, N, P, R1, R2 is

- a) 2 b) 3 c) 4 d) 5

(GATE CS 2008)

83) Which of the following is a correct attribute set for one of the tables for the correct answer to the above question?

- a) (M1, M2, M3, P1) b) (M1, P1, N1, N2) c) (M1, P1, N1) d) (M1, P1)

(GATE CS 2008)

Statement for Linked Answer Questions: 84 & 85

Consider the following C program that attempts to locate an element x in an array $Y[]$ using binary search. The program is erroneous.

```
1. f(int Y[10], int x) {
2.     int u, j, k;
3.     i = 0, j = 9;
4.     do {
5.         k = (i + j) / 2;
6.         if (Y[k] <= k) i = k; else j = k;
7.     } while ((Y[k] != x) && (i < j));
8.     if (Y[k] == x) printf("x is in the array");
9.     else printf("x is not in the array");
10. }
```

84) On which of the following contents of Y and x does the program fail?

- a) Y is [1 2 3 4 5 6 7 8 9 10] and $x < 10$
 b) Y is [1 3 5 7 9 11 13 15 17 19] and $x < 1$
 c) Y is [2 2 2 2 2 2 2 2 2 2] and $x > 2$
 d) Y is [2 4 6 8 10 12 14 16 18 20] and $2 < x < 20$ and x is even

(GATE CS 2008)

85) The correction needed in the program to make it work properly is:

- a) Change line 6 to: if (Y[k] < x) i = k+1; else j = k-1;
 b) Change line 6 to: if (Y[k] < x) i = k-1; else j = k+1;
 c) Change line 6 to: if (Y[k] <= x) i = k; else j = k;
 d) Change line 7 to: while ((Y[k] == x) && (i < j))

(GATE CS 2008)