

Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Login</u>	13.753 s	1	0	1	0	7	0	0	7

FAIL & SKIP SCENARIOS -- 3 --

#	Feature Name	Scenario Name
1	<u>Login</u>	<u>TaskCreate</u>


TAG	Scenario			Feature				
Name	T	P	F	S	T	P	F	S
@tag	1	0	1	0	1	0	1	0

FEATURES SUMMARY -- 5 --



#	Feature Name	T	P	F	S	Duration
1	<u>Login</u>	1	0	1	0	13.753 s


SCENARIOS SUMMARY -- 6 --

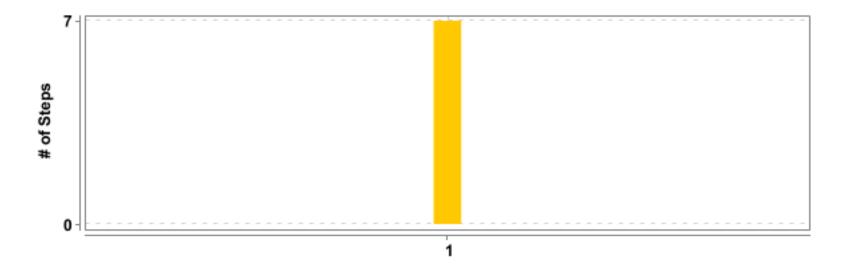


#	Feature Name	Scenario Name	T	P	F	S	Duration	
1	Login	<u>TaskCreate</u>	7	0	0	7	13.747 s	

DETAILED SECTION -- 7 --

## Login

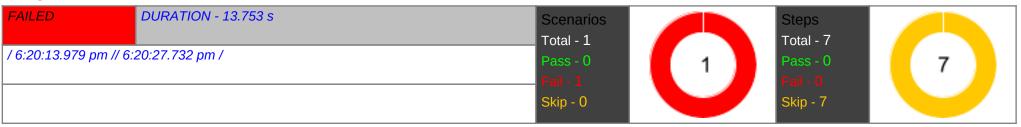

## **TaskCreate**

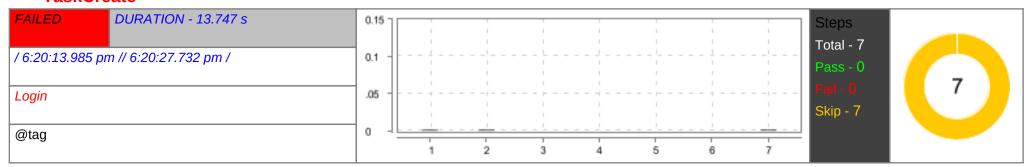

#	Step / Hook Details	Status	Duration
	BEFORE - Test.Add_accounts_module.init()	FAILED	3.538 s
	io.cucumber.core.exception.CucumberException: Failed to instantiate class Test.Add_accounts_module		
	at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67)		
	at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45)		
	at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		
	at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64)		
	at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46)		
	at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21)		
	at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)		
	at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84)		
	at io.cucumber.core.runner.TestStep.run(TestStep.java:56)		
	at io.cucumber.core.runner.TestCase.run(TestCase.java:78)		
	at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)		
	at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132)		
	at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137)		
	at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)		
	at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137)		
	at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129)		

	Step / Hook Details	Status	Duration
	at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77)		
	at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)		
	at java.base/java.lang.reflect.Method.invoke(Method.java:568)		
	at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139)		
	at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:677)		
	at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:221)		
	at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50)		
	at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:969)		
	at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:194)		
	at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148)		
	at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128)		
	at java.base/java.util.ArrayList.forEach(ArrayList.java:1511)		
	at org.testng.TestRunner.privateRun(TestRunner.java:829)		
	at org.testng.TestRunner.run(TestRunner.java:602)		
	at org.testng.SuiteRunner.runTest(SuiteRunner.java:437)		
	at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:431)		
	at org.testng.SuiteRunner.privateRun(SuiteRunner.java:391)		
	at org.testng.SuiteRunner.run(SuiteRunner.java:330)		
	at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52)		
	at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95)		
	at org.testng.TestNG.runSuitesSequentially(TestNG.java:1256)		
	at org.testng.TestNG.runSuitesLocally(TestNG.java:1176)		
	at org.testng.TestNG.runSuites(TestNG.java:1099)		
	at org.testng.TestNG.run(TestNG.java:1067)		
	at org.testng.remote.AbstractRemoteTestNG.run(AbstractRemoteTestNG.java:115)		
	at org.testng.remote.RemoteTestNG.initAndRun(RemoteTestNG.java:251)		
	at org.testng.remote.RemoteTestNG.main(RemoteTestNG.java:77)		
(	Caused by: java.lang.reflect.InvocationTargetException		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)		
	at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)		
	at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)		
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)		
	at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53)		
	44 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message:		
	session not created: This version of ChromeDriver only supports Chrome version 114 Current browser version is 118.0.5993.89 with binary		
	eath C:\Program Files\Google\Chrome\Application\chrome.exe Host info: host: 'INHYLP0032', ip: '10.10.21.215' Build info: version: '4.8.2',		
	evision: '826dbfc730' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.		
5	elenium.chrome.ChromeDriver Command: [null, newSession {capabilities=[Capabilities {browserName: chrome, goog:chromeOptions: {args:		

DETAILED SECTION -- 9 --

#	Step / Hook Details	Status	Duration
	[remote-allow-origins=*], extensions: []}}], desiredCapabilities=Capabilities {browserName: chrome, goog:chromeOptions: {args: [remote-allow-origins=*], extensions: []}}], desiredCapabilities=Capabilities {browserName: chrome, goog:chromeOptions: {args: [remote-allow-origins=*], extensions: []}}		
	allow-origins=*], extensions: []}}] at org.openga.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:148)		
	at org.openga.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java.146)		
	at org.openga.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java.100)		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:165)		
	at org.openqa.selenium.remote.entpcommandexecutor.execute(nttpcommandexecutor.java.103) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:168) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158)		
	at org.openga.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:1543)		
	at org.openga.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:343)		
	at org.openqa.selenium.remote.RemoteWebDriver.startsession(RemoteWebDriver.java.229) at org.openqa.selenium.remote.RemoteWebDriver. <init>(RemoteWebDriver.java.259)</init>		
	at org.openqa.selenium.chromium.ChromiumDriver. <init>(ChromiumDriver.java:101)</init>		
	at org.openqa.selenium.chrome.ChromeDriver. <init>(ChromeDriver.java:88)</init>		
	at org.openqa.selenium.chrome.ChromeDriver. <init>(ChromeDriver.java:84)</init>		
	at org.openqa.selenium.chrome.ChromeDriver. <init>(ChromeDriver.java:52)</init>		
	at Test.Add_accounts_module. <init>(Add_accounts_module.java:19)</init>		
	BEFORE - Test.Add_leads_module.init()	FAILED	1.408 s
	org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: session not created: This version of ChromeDriver only supports Chrome version 114 Current browser version is 118.0.5993.89 with binary path C:\Program Files\Google\Chrome\Application\chrome.exe Host info: host: 'INHYLP0032', ip: '10.10.21.215' Build info: version: '4.8.2', revision: '826dbfc730' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.chrome. ChromeDriver Command: [null, newSession {capabilities= Capabilities {browserName: chrome, goog:chromeOptions: {args: [remote-allow-origins=*], extensions: []}}}, extensions: []}}} at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:148) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:106) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:165) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:165) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:157) at org.openqa.selenium.chromium.ChromiumDriver. <init>(ChromeDriver.java:301) at org.openqa.selenium.chromium.ChromiumDriver.<init>(ChromeDriver.java:101) at org.openqa.selenium.chromium.ChromiumDriver.<init>(ChromeDriver.java:88)</init></init></init>		
	at org.openqa.selenium.chrome.ChromeDriver. <init>(ChromeDriver.java:84)</init>		
	at org.openqa.selenium.chrome.ChromeDriver. <init>(ChromeDriver.java:52)</init>		
	at Test.Add_leads_module.init(Add_leads_module.java:26)		
	BEFORE - Test.Steps account view.init()	FAILED	1.393 s
	BEI O'NE Tookiekope_koodank_viowinik()		I

DETAILED SECTION -- 10 --

#	Step / Hook Details	Status	Duration
	version of ChromeDriver only supports Chrome version 114 Current browser version is 118.0.5993.89 with binary path C:\Program Files\Google\Chrome\Application\chrome.exe Host info: host: 'INHYLP0032', ip: '10.10.21.215' Build info: version: '4.8.2', revision: '826dbfc730' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.chrome. ChromeDriver Command: [null, newSession {capabilities=[Capabilities {browserName: chrome, goog:chromeOptions: {args: [remote-allow-origins=*], extensions: []}}], desiredCapabilities=Capabilities {browserName: chrome, goog:chromeOptions: {args: [remote-allow-origins=*], extensions: []}}}] at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:148) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:106) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:67) at org.openqa.selenium.remote.BriteCommandExecutor.execute(HttpCommandExecutor.java:165) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183) at org.openqa.selenium.remote.RemoteWebDriver.commandExecutor.execute(DriverCommandExecutor.java:158) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:157) at org.openqa.selenium.chrome.ChromeDriver.startSession(ChromeDriver.java:84) at org.openqa.selenium.chrome.ChromeDriver.sinit>(ChromeDriver.java:84) at org.openqa.selenium.chrome.ChromeDriver.sinit>(ChromeDriver.java:84) at org.openqa.selenium.chrome.ChromeDriver.sinit>(ChromeDriver.java:84) at org.openqa.selenium.chrome.ChromeDriver.sinit>(ChromeDriver.java:52)		
	at Test.Steps_account_view.init(Steps_account_view.java:23)		
	BEFORE - Test.Step_contact.init()  org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: session not created: This version of ChromeDriver only supports Chrome version 114 Current browser version is 118.0.5993.89 with binary path C:\Program Files\Google\Chrome\Application\chrome.exe Host info: host: 'INHYLP0032', ip: '10.10.21.215' Build info: version: '4.8.2', revision: '826dbfc730' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.chrome. ChromeDriver Command: [null, newSession {capabilities=[Capabilities {browserName: chrome, goog:chromeOptions: {args: [remote-allow-origins=*], extensions: []}}, desiredCapabilities=Capabilities {browserName: chrome, goog:chromeOptions: {args: [remote-allow-origins=*], extensions: []}}} at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:148) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:106) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:65) at org.openqa.selenium.remote.Service.DriverCommandExecutor.execute(HttpCommandExecutor.java:165) at org.openqa.selenium.remote.Service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183) at org.openqa.selenium.remote.RemoteWebDriver.secute(RemoteWebDriver.java:543) at org.openqa.selenium.remote.RemoteWebDriver.session(RemoteWebDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.session(RemoteWebDriver.java:157) at org.openqa.selenium.chromium.ChromiumDriver.  org.openqa.selenium.chromie.ChromeDriver.sinit>(ChromeDriver.java:84) at org.openqa.selenium.chrome.ChromeDriver.sinit>(ChromeDriver.java:84) at org.openqa.selenium.chrome.ChromeDriver.sinit>(ChromeDriver.java:52)	FAILED	1.295 s

	Step / Hook Details	Status	Duration
at Test.Ste	ep_contact.init(Step_contact.java:31)		
BEFORE -	Test.Step_Task.init()	FAILED	1.242 s
io.cucumber.	core.exception.CucumberException: Failed to instantiate class Test.Step_Task		
at io.cucur	nber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67)		
at io.cucur	nber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45)		
at io.cucur	nber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		
at io.cucur	nber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64)		
at io.cucur	nber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46)		
at io.cucur	nber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21)		
at io.cucur	nber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)		
at io.cucur	nber.core.runner.TestStep.executeStep(TestStep.java:84)		
at io.cucur	nber.core.runner.TestStep.run(TestStep.java:56)		
at io.cucur	nber.core.runner.TestCase.run(TestCase.java:78)		
at io.cucur	nber.core.runner.Runner.runPickle(Runner.java:75)		
at io.cucur	nber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132)		
at io.cucur	nber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137)		
at io.cucur	nber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)		
at io.cucur	nber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137)		
at io.cucur	nber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129)		
at io.cucur	nber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35)		
at java.bas	se/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)		
at java.bas	se/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77)		
at java.bas	se/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)		
at java.bas	se/java.lang.reflect.Method.invoke(Method.java:568)		
at org.test	ng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139)		
at org.test	ng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:677)		
at org.test	ng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:221)		
at org.test	ng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50)		
at org.test	ng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:969)		
at org.test	ng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:194)		
at org.test	ng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148)		
at org.test	ng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128)		
at java.bas	se/java.util.ArrayList.forEach(ArrayList.java:1511)		
at org.test	ng.TestRunner.privateRun(TestRunner.java:829)		
at org.test	ng.TestRunner.run(TestRunner.java:602)		
_	ng.SuiteRunner.runTest(SuiteRunner.java:437)		
_	ng.SuiteRunner.runSequentially(SuiteRunner.java:431)		
_	ng.SuiteRunner.privateRun(SuiteRunner.java:391)		
_	ng.SuiteRunner.run(SuiteRunner.java:330)		
_	ng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52)		

DETAILED SECTION -- 12 --

#	Step / Hook Details	Status	Duration
	at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95)		
	at org.testng.TestNG.runSuitesSequentially(TestNG.java:1256)		
	at org.testng.TestNG.runSuitesLocally(TestNG.java:1176)		
	at org.testng.TestNG.runSuites(TestNG.java:1099)		
	at org.testng.TestNG.run(TestNG.java:1067)		
	at org.testng.remote.AbstractRemoteTestNG.run(AbstractRemoteTestNG.java:115)		
	at org.testng.remote.RemoteTestNG.initAndRun(RemoteTestNG.java:251)		
	at org.testng.remote.RemoteTestNG.main(RemoteTestNG.java:77)		
	Caused by: java.lang.reflect.InvocationTargetException		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method)		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)		
	at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)		
	at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)		
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)		
	at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53)		
	44 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message:		
	session not created: This version of ChromeDriver only supports Chrome version 114 Current browser version is 118.0.5993.89 with binary		
	path C:\Program Files\Google\Chrome\Application\chrome.exe Host info: host: 'INHYLP0032', ip: '10.10.21.215' Build info: version: '4.8.2',		
	revision: '826dbfc730' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa. selenium.chrome.ChromeDriver Command: [null, newSession {capabilities=[Capabilities {browserName: chrome, goog:chromeOptions: {args:		
	[-remote-allow-origins=*], extensions: []}}], desiredCapabilities=Capabilities {browserName: chrome, goog:chromeOptions: {args: [remote-allow-origins=*], extensions: []}}], desiredCapabilities=Capabilities {browserName: chrome, goog:chromeOptions: {args: [remote-allow-origins=*], extensions: []}},		
	allow-origins=*], extensions: []}}]		
	at org.openga.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:148)		
	at org.openga.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:106)		
	at org.openga.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:67)		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:165)		
	at org.openga.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)		
	at org.openga.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:229)		
	at org.openga.selenium.remote.RemoteWebDriver. <init>(RemoteWebDriver.java:157)</init>		
	at org.openga.selenium.chromium.ChromiumDriver. <init>(ChromiumDriver.java:101)</init>		
	at org.openga.selenium.chrome.ChromeDriver. <init>(ChromeDriver.java:88)</init>		
	at org.openga.selenium.chrome.ChromeDriver. <init>(ChromeDriver.java:84)</init>		
	at org.openqa.selenium.chrome.ChromeDriver. <init>(ChromeDriver.java:52)</init>		
	at Test.Step_Task. <init>(Step_Task.java:19)</init>		
1	Given user is on portal "https://devportal.uncode.io/apption/login"	SKIPPED	0.001 s
2	When User enter Username as "Saigaurav"	SKIPPED	0.001 s
3	And User enter Password as "Uncode@123"	SKIPPED	0.000 s
4	And click on Task	SKIPPED	0.000 s

DETAILED SECTION -- 13 --

#	Step / Hook Details	Status	Duration
5	And click on Create Task	SKIPPED	0.000 s
6	And click on all Inputs	SKIPPED	0.000 s
7	And click on save	SKIPPED	0.001 s
	AFTER - Test.Step_Task.tearDown(io.cucumber.java.Scenario)	FAILED	1.198 s
	io.cucumber.core.exception.CucumberException: Failed to instantiate class Test.Step_Task		
	at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67)		
	at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45)		
	at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		
	at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64)		
	at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46)		
	at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21)		
	at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)		
	at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84)		
	at io.cucumber.core.runner.TestStep.run(TestStep.java:56)		
	at io.cucumber.core.runner.TestCase.run(TestCase.java:90)		
	at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)		
	at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132)		
	at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137)		
	at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)		
	at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137)		
	at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129)		
	at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77)		
	at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)		
	at java.base/java.lang.reflect.Method.invoke(Method.java:568)		
	at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139)		
	at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:677)		
	at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:221)		
	at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50)		
	at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:969)		
	at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:194)		
	at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148)		
	at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128)		
	at java.base/java.util.ArrayList.forEach(ArrayList.java:1511)		
	at org.testng.TestRunner.privateRun(TestRunner.java:829)		
	at org.testng.TestRunner.run(TestRunner.java:602)		
	at org.testng.SuiteRunner.runTest(SuiteRunner.java:437)		
	at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:431)		
	at org.testng.SuiteRunner.privateRun(SuiteRunner.java:391)		

DETAILED SECTION -- 14 --

	Step / Hook Details	Status	Duratio
Ť	at org.testng.SuiteRunner.run(SuiteRunner.java:330)		
l	at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52)		
	at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95)		
	at org.testng.TestNG.runSuitesSequentially(TestNG.java:1256)		
l	at org.testng.TestNG.runSuitesLocally(TestNG.java:1176)		
	at org.testng.TestNG.runSuites(TestNG.java:1099)		
ı	at org.testng.TestNG.run(TestNG.java:1067)		
	at org.testng.remote.AbstractRemoteTestNG.run(AbstractRemoteTestNG.java:115)		
ı	at org.testng.remote.RemoteTestNG.initAndRun(RemoteTestNG.java:251)		
ı	at org.testng.remote.RemoteTestNG.main(RemoteTestNG.java:77)		
	Caused by: java.lang.reflect.InvocationTargetException		
ı	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)		
ı	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)		
ı	at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)		
ı	at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)		
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)		
ı	at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53)		
ı	44 more Caused by: org.openga.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message:		
	session not created: This version of ChromeDriver only supports Chrome version 114 Current browser version is 118.0.5993.89 with binary		
	path C:\Program Files\Google\Chrome\Application\chrome.exe Host info: host: 'INHYLP0032', ip: '10.10.21.215' Build info: version: '4.8.2',		
	revision: '826dbfc730' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.		
	selenium.chrome.ChromeDriver Command: [null, newSession {capabilities=[Capabilities {browserName: chrome, goog:chromeOptions: {args:		
	[remote-allow-origins=*], extensions: []}}], desiredCapabilities=Capabilities {browserName: chrome, goog:chromeOptions: {args: [remote-allow-origins=*], extensions: []}}, desiredCapabilities=Capabilities {browserName: chrome, goog:chromeOptions: {args: [remote-allow-origins=*], extensions: []}}, desiredCapabilities=Capabilities=Capabilities {browserName: chrome, goog:chromeOptions: {args: [remote-allow-origins=*], extensions: []}}		
	allow-origins=*], extensions: []}}]		
	at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:148)		
ı	at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:106)		
ı	at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:67)		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:165)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158)		
ı	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)		
	at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:229)		
	at org.openqa.selenium.remote.RemoteWebDriver. <init>(RemoteWebDriver.java:157)</init>		
	at org.openqa.selenium.chromium.ChromiumDriver. <init>(ChromiumDriver.java:101)</init>		
ı	at org.openqa.selenium.chrome.ChromeDriver. <init>(ChromeDriver.java:88)</init>		
	at org.openqa.selenium.chrome.ChromeDriver. <init>(ChromeDriver.java:84)</init>		
	at org.openqa.selenium.chrome.ChromeDriver. <init>(ChromeDriver.java:52)</init>		
	at Test.Step_Task. <init>(Step_Task.java:19)</init>		
T	AFTER - Test.Step_contact.tearDown(io.cucumber.java.Scenario)	FAILED	0.003 s
	java.lang.NullPointerException: Cannot invoke "org.openga.selenium.TakesScreenshot.getScreenshotAs(org.openga.selenium.OutputType)"	]	
	because "ts" is null		

#	Step / Hook Details	Status	Duration
	at Test.Step_contact.tearDown(Step_contact.java:55)		
	AFTER - Test.Steps_account_view.tearDown(io.cucumber.java.Scenario)	FAILED	0.001 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because "ts" is null		
-	at Test.Steps_account_view.tearDown(Steps_account_view.java:47)		0.004
	AFTER - Test.Add_leads_module.tearDown(io.cucumber.java.Scenario)	FAILED	0.001 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because "ts" is null at Test.Add leads module.tearDown(Add leads module.java:50)		
	AFTER - Test.Add_accounts_module.tearDown(io.cucumber.java.Scenario)	FAILED	1.291 s
	io.cucumber.core.exception.CucumberException: Failed to instantiate class Test.Add_accounts_module at io.cucumber.core.backend.DefaultObjectFactory.gatheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.AbstractGlueDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(JavaHookDefinition.java:46) at io.cucumber.core.runner.CoreHookDefinition.execute(SecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep).java:34) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:34) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:34) at io.cucumber.core.runner.TestStep.ace.uto(TestStep.java:36) at io.cucumber.core.runner.TestCase.run(TestCase.java:90) at io.cucumber.core.runner.Runner.nuPickle(Runner.java:75) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$C(cucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$C(cucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.RethrowingThrowableCollector.core.cxecuteAndThrow(RethrowingThrowableCollector.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.cxecuteAndThrow(RethrowingThrowableCollector.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.cxecuteAndThrow(RethrowingThrowableCollector.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.cxecuteAndThrow(RethrowingThrowableCollector.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.cxecuteAndThrow(RethrowingThrowableCollector.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.cxecuteAndThrow(RethrowingThrowableCollector.java:139) at io.cucumber.core.runtime.RethrowingThrowableCollector.cxecute	T ALLED	

DETAILED SECTION -- 16 --

#	Step / Hook Details	Status	Duration
	at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128)		
	at java.base/java.util.ArrayList.forEach(ArrayList.java:1511)		
	at org.testng.TestRunner.privateRun(TestRunner.java:829)		
	at org.testng.TestRunner.run(TestRunner.java:602)		
	at org.testng.SuiteRunner.runTest(SuiteRunner.java:437)		
	at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:431)		
	at org.testng.SuiteRunner.privateRun(SuiteRunner.java:391)		
	at org.testng.SuiteRunner.run(SuiteRunner.java:330)		
	at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52)		
	at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95)		
	at org.testng.TestNG.runSuitesSequentially(TestNG.java:1256)		
	at org.testng.TestNG.runSuitesLocally(TestNG.java:1176)		
	at org.testng.TestNG.runSuites(TestNG.java:1099)		
	at org.testng.TestNG.run(TestNG.java:1067)		
	at org.testng.remote.AbstractRemoteTestNG.run(AbstractRemoteTestNG.java:115)		
	at org.testng.remote.RemoteTestNG.initAndRun(RemoteTestNG.java:251)		
	at org.testng.remote.RemoteTestNG.main(RemoteTestNG.java:77)		
	Caused by: java.lang.reflect.InvocationTargetException		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method)		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)		
	at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)		
	at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)		
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)		
	at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53)		
	44 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message:		
	session not created: This version of ChromeDriver only supports Chrome version 114 Current browser version is 118.0.5993.89 with binary		
	path C:\Program Files\Google\Chrome\Application\chrome.exe Host info: host: 'INHYLP0032', ip: '10.10.21.215' Build info: version: '4.8.2',		
	revision: '826dbfc730' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.		
	selenium.chrome.ChromeDriver Command: [null, newSession {capabilities=[Capabilities {browserName: chrome, goog:chromeOptions: {args:		
	[remote-allow-origins=*], extensions: []}}], desiredCapabilities=Capabilities {browserName: chrome, goog:chromeOptions: {args: [remote-allow-origins=*], extensions: []}}]		
	atiow-origins—j, extensions. []}}] at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:148)		
	at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:106) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:67)		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:165)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)		
	at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:229)		
	at org.openqa.selenium.remote.RemoteWebDriver. <init>(RemoteWebDriver.java:157)</init>		
	at org.openqa.selenium.chromium.ChromiumDriver. <init>(ChromiumDriver.java:101)</init>		

DETAILED SECTION -- 17 --

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.chrome.ChromeDriver. <init>(ChromeDriver.java:88)</init>		
	at org.openqa.selenium.chrome.ChromeDriver. <init>(ChromeDriver.java:84)</init>		
	at org.openqa.selenium.chrome.ChromeDriver. <init>(ChromeDriver.java:52)</init>		
	at Test.Add_accounts_module. <init>(Add_accounts_module.java:19)</init>		
	AFTER - Test.Step_Task.end()	FAILED	1.133 s
	io.cucumber.core.exception.CucumberException: Failed to instantiate class Test.Step_Task		
	at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67)		
	at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45)		
	at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		
	at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64)		
	at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46)		
	at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21)		
	at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)		
	at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84)		
	at io.cucumber.core.runner.TestStep.run(TestStep.java:56)		
	at io.cucumber.core.runner.TestCase.run(TestCase.java:90)		
	at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)		
	at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132)		
	at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137)		
	at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)		
	at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137)		
	at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129)		
	at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77)		
	at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)		
	at java.base/java.lang.reflect.Method.invoke(Method.java:568)		
	at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139)		
	at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:677)		
	at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:221)		
	at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50)		
	at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:969)		
	at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:194)		
	at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148)		
	at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128)		
	at java.base/java.util.ArrayList.forEach(ArrayList.java:1511)		
	at org.testng.TestRunner.privateRun(TestRunner.java:829)		
	at org.testng.TestRunner.run(TestRunner.java:602)		
	at org.testng.SuiteRunner.runTest(SuiteRunner.java:437)		
	at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:431)		

DETAILED SECTION -- 18 --

	Step / Hook Details	Status	Duration
at org.te	stng.SuiteRunner.privateRun(SuiteRunner.java:391)		
at org.te	stng.SuiteRunner.run(SuiteRunner.java:330)		
_	stng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52)		
	stng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95)		
at org.te	stng.TestNG.runSuitesSequentially(TestNG.java:1256)		
_	stng.TestNG.runSuitesLocally(TestNG.java:1176)		
_	stng.TestNG.runSuites(TestNG.java:1099)		
_	stng.TestNG.run(TestNG.java:1067)		
_	stng.remote.AbstractRemoteTestNG.run(AbstractRemoteTestNG.java:115)		
_	stng.remote.RemoteTestNG.initAndRun(RemoteTestNG.java:251)		
_	stng.remote.RemoteTestNG.main(RemoteTestNG.java:77)		
_	: java.lang.reflect.InvocationTargetException		
1	ase/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)		
1	ase/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)		
1	ase/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)		
1	ase/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)		
1 .	ase/java.lang.reflect.Constructor.newInstance(Constructor.java:480)		
1	umber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53)		
	re Caused by: org.openga.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message:		
	t created: This version of ChromeDriver only supports Chrome version 114 Current browser version is 118.0.5993.89 with binary		
	ngram Files\Google\Chrome\Application\chrome.exe Host info: host: 'INHYLP0032', ip: '10.10.21.215' Build info: version: '4.8.2',		
	26dbfc730' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.		
	hrome.ChromeDriver Command: [null, newSession {capabilities=[Capabilities {browserName: chrome, goog:chromeOptions: {args:		
	llow-origins=*], extensions: []}], desiredCapabilities=Capabilities {browserName: chrome, goog:chromeOptions: {args: [remote-		
_	ns=*], extensions: []}}]		
	penqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:148)		
	penqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:106)		
1 - 1	penqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:67)		
1 - 1	penqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:165)		
1 - 1	penqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)		
at org.or	penqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158)		
at org.or	penqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)		
at org.or	penqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:229)		
at org.or	penqa.selenium.remote.RemoteWebDriver. <init>(RemoteWebDriver.java:157)</init>		
at org.or	penqa.selenium.chromium.ChromiumDriver. <init>(ChromiumDriver.java:101)</init>		
at org.or	penqa.selenium.chrome.ChromeDriver. <init>(ChromeDriver.java:88)</init>		
	penqa.selenium.chrome.ChromeDriver. <init>(ChromeDriver.java:84)</init>		
at org.or	penqa.selenium.chrome.ChromeDriver. <init>(ChromeDriver.java:52)</init>		
at Test.S	Step_Task. <init>(Step_Task.java:19)</init>		
AFTER -	Fest.Step_contact.end()	FAILED	0.001 s
	lullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.quit()" because "this.driver" is null	1	

Step / Hook Details	Status	Duration
at Test.Step_contact.end(Step_contact.java:40)		
AFTER - Test.Steps_account_view.end()	FAILED	0.001 s
java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.quit()" because "this.driver" is null at Test.Steps_account_view.end(Steps_account_view.java:32)		
AFTER - Test.Add_leads_module.end()	FAILED	0.001 s
java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.quit()" because "this.driver" is null at Test.Add_leads_module.end(Add_leads_module.java:35)		
AFTER - Test.Add_accounts_module.end()	FAILED	1.206 s
io.cucumber.core.exception.CucumberException: Failed to instantiate class Test.Add_accounts_module at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.AbstractGlueDefinition.execute(DefaultObjectFactory.java:47) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.TestClep.cycutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestCase.run(TestCase.java:90) at io.cucumber.core.runner.TestCase.run(TestCase.java:90) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFcetCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.testng.TestNGCucumberExecutionContext.runTestCase(CucumberRunner.java:129) at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(TestNGCucumberRunner.java:129) at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) at java.base/jdk.internal.reflect.AusiveMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:139) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:221) at org.testng.internal.invokers.TestIn	PAILED	1.200 \$

DETAILED SECTION -- 20 --

<b>#</b>	Step / Hook Details	Status	Duration
	at java.base/java.util.ArrayList.forEach(ArrayList.java:1511)		
	at org.testng.TestRunner.privateRun(TestRunner.java:829)		
	at org.testng.TestRunner.run(TestRunner.java:602)		
	at org.testng.SuiteRunner.runTest(SuiteRunner.java:437)		
	at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:431)		
	at org.testng.SuiteRunner.privateRun(SuiteRunner.java:391)		
	at org.testng.SuiteRunner.run(SuiteRunner.java:330)		
	at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52)		
	at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95)		
	at org.testng.TestNG.runSuitesSequentially(TestNG.java:1256)		
	at org.testng.TestNG.runSuitesLocally(TestNG.java:1176)		
	at org.testng.TestNG.runSuites(TestNG.java:1099)		
1	at org.testng.TestNG.run(TestNG.java:1067)		
ı	at org.testng.remote.AbstractRemoteTestNG.run(AbstractRemoteTestNG.java:115)		
	at org.testng.remote.RemoteTestNG.initAndRun(RemoteTestNG.java:251)		
ı	at org.testng.remote.RemoteTestNG.main(RemoteTestNG.java:77)		
l	Caused by: java.lang.reflect.InvocationTargetException		
ı	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method)		
l	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)		
ı	at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)		
	at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)		
l	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)		
l	at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53)		
l	44 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message:		
l	session not created: This version of ChromeDriver only supports Chrome version 114 Current browser version is 118.0.5993.89 with binary		
l	path C:\Program Files\Google\Chrome\Application\chrome.exe Host info: host: 'INHYLP0032', ip: '10.10.21.215' Build info: version: '4.8.2',		
ı	revision: '826dbfc730' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.		
l	selenium.chrome.ChromeDriver Command: [null, newSession {capabilities=[Capabilities {browserName: chrome, goog:chromeOptions: {args:		
l	[remote-allow-origins=*], extensions: []}}], desiredCapabilities=Capabilities {browserName: chrome, goog:chromeOptions: {args: [remote-allow-origins=*], extensions: []}}, desiredCapabilities=Capabilities {browserName: chrome, goog:chromeOptions: {args: [remote-allow-origins=*], extensions: []}}, desiredCapabilities=Capabilities {browserName: chrome, goog:chromeOptions: {args: [remote-allow-origins=*], extensions: []}}, desiredCapabilities=Capabilities {browserName: chrome, goog:chromeOptions: {args: [remote-allow-origins=*], extensions: []}}		
	allow-origins=*], extensions: []}}]		
	at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:148)		
ı	at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:106)		
	at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:67)		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:165)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158)		
1	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)		
	at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:229)		
	at org.openqa.selenium.remote.RemoteWebDriver. <init>(RemoteWebDriver.java:157)</init>		
	at org.openqa.selenium.chromiumDriver. <init>(ChromiumDriver.java:101)</init>		
	at org.openqa.selenium.chrome.ChromeDriver. <init>(ChromeDriver.java:88)</init>		

DETAILED SECTION -- 21 --

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.chrome.ChromeDriver. <init>(ChromeDriver.java:84)</init>		
	at org.openqa.selenium.chrome.ChromeDriver. <init>(ChromeDriver.java:52)</init>		
	at Test.Add_accounts_module. <init>(Add_accounts_module.java:19)</init>		