Experiment 14
Adding a Secondary Hard Disk to a Virtual Machine

Aim

To add an additional virtual hard disk to an existing Ubuntu virtual machine using VMware Workstation and verify that the new disk is displayed in the virtual machine hardware configuration.

Algorithm

1. Open VMware Workstation and select the required virtual machine from the Library.
2. Ensure that the virtual machine is powered off before changing its hardware configuration.
3. Click Edit virtual machine settings.
4. In the Hardware tab, select Add.
5. Choose Hard Disk from the list of hardware types and click Next.
6. Select the required virtual disk type, such as SCSI, and continue.
7. Choose whether to create a new virtual disk or use an existing disk.
8. Specify the disk capacity. In this experiment, the additional disk capacity is 2 GB.
9. Complete the wizard and confirm the new hard disk configuration.
10. Verify that the additional hard disk appears in the device list of the virtual machine.

Implementation

Input

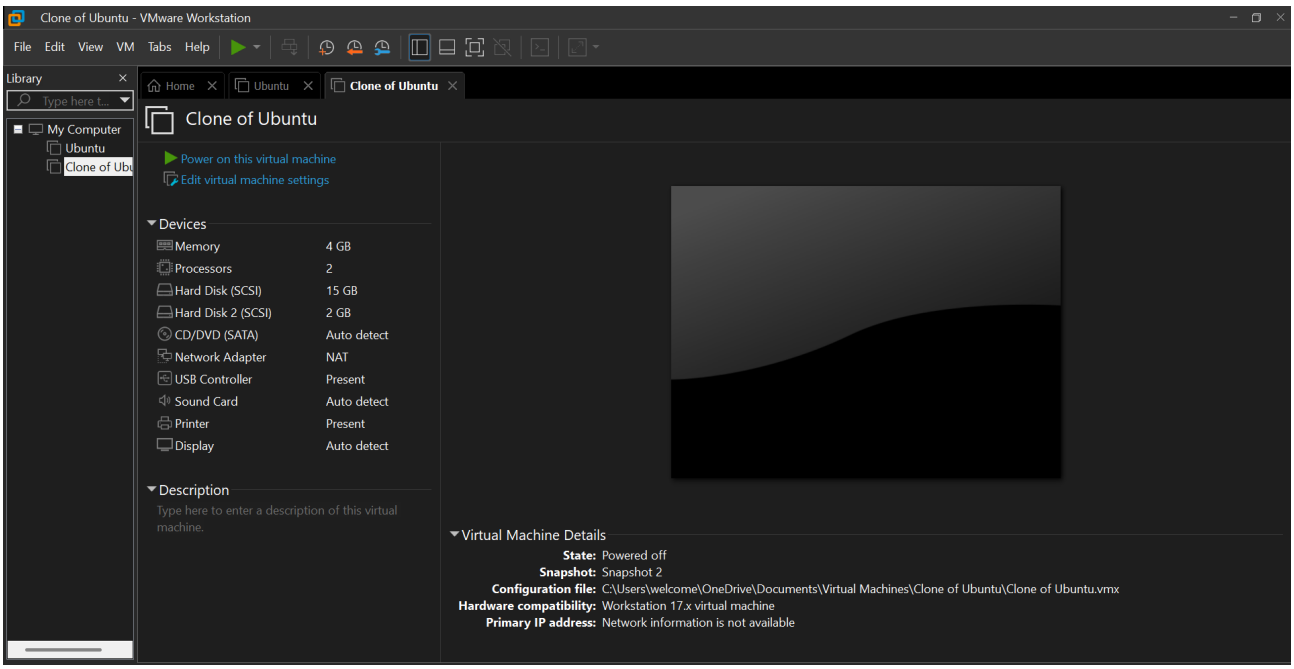


Figure 1: Clone of Ubuntu virtual machine showing the additional 2 GB hard disk in VMware Workstation.

Output

The VMware Workstation device list shows that a second virtual hard disk has been added to the virtual machine named **Clone of Ubuntu**.

Virtual machine name: Clone of Ubuntu

Memory: 4 GB

Processors: 2

Primary hard disk (SCSI): 15 GB

Additional hard disk (SCSI): 2 GB

CD/DVD drive: SATA – Auto detect

Network adapter: NAT

VM state: Powered off

Snapshot: Snapshot 2

The screenshot confirms that the original 15 GB disk and the newly added 2 GB disk are both listed under Devices. The virtual machine is powered off in the captured state.

Result

Thus, an additional 2 GB SCSI virtual hard disk was added successfully to the Clone of Ubuntu virtual machine using VMware Workstation, and the updated hardware configuration was verified.