



Design High availability Architecture:

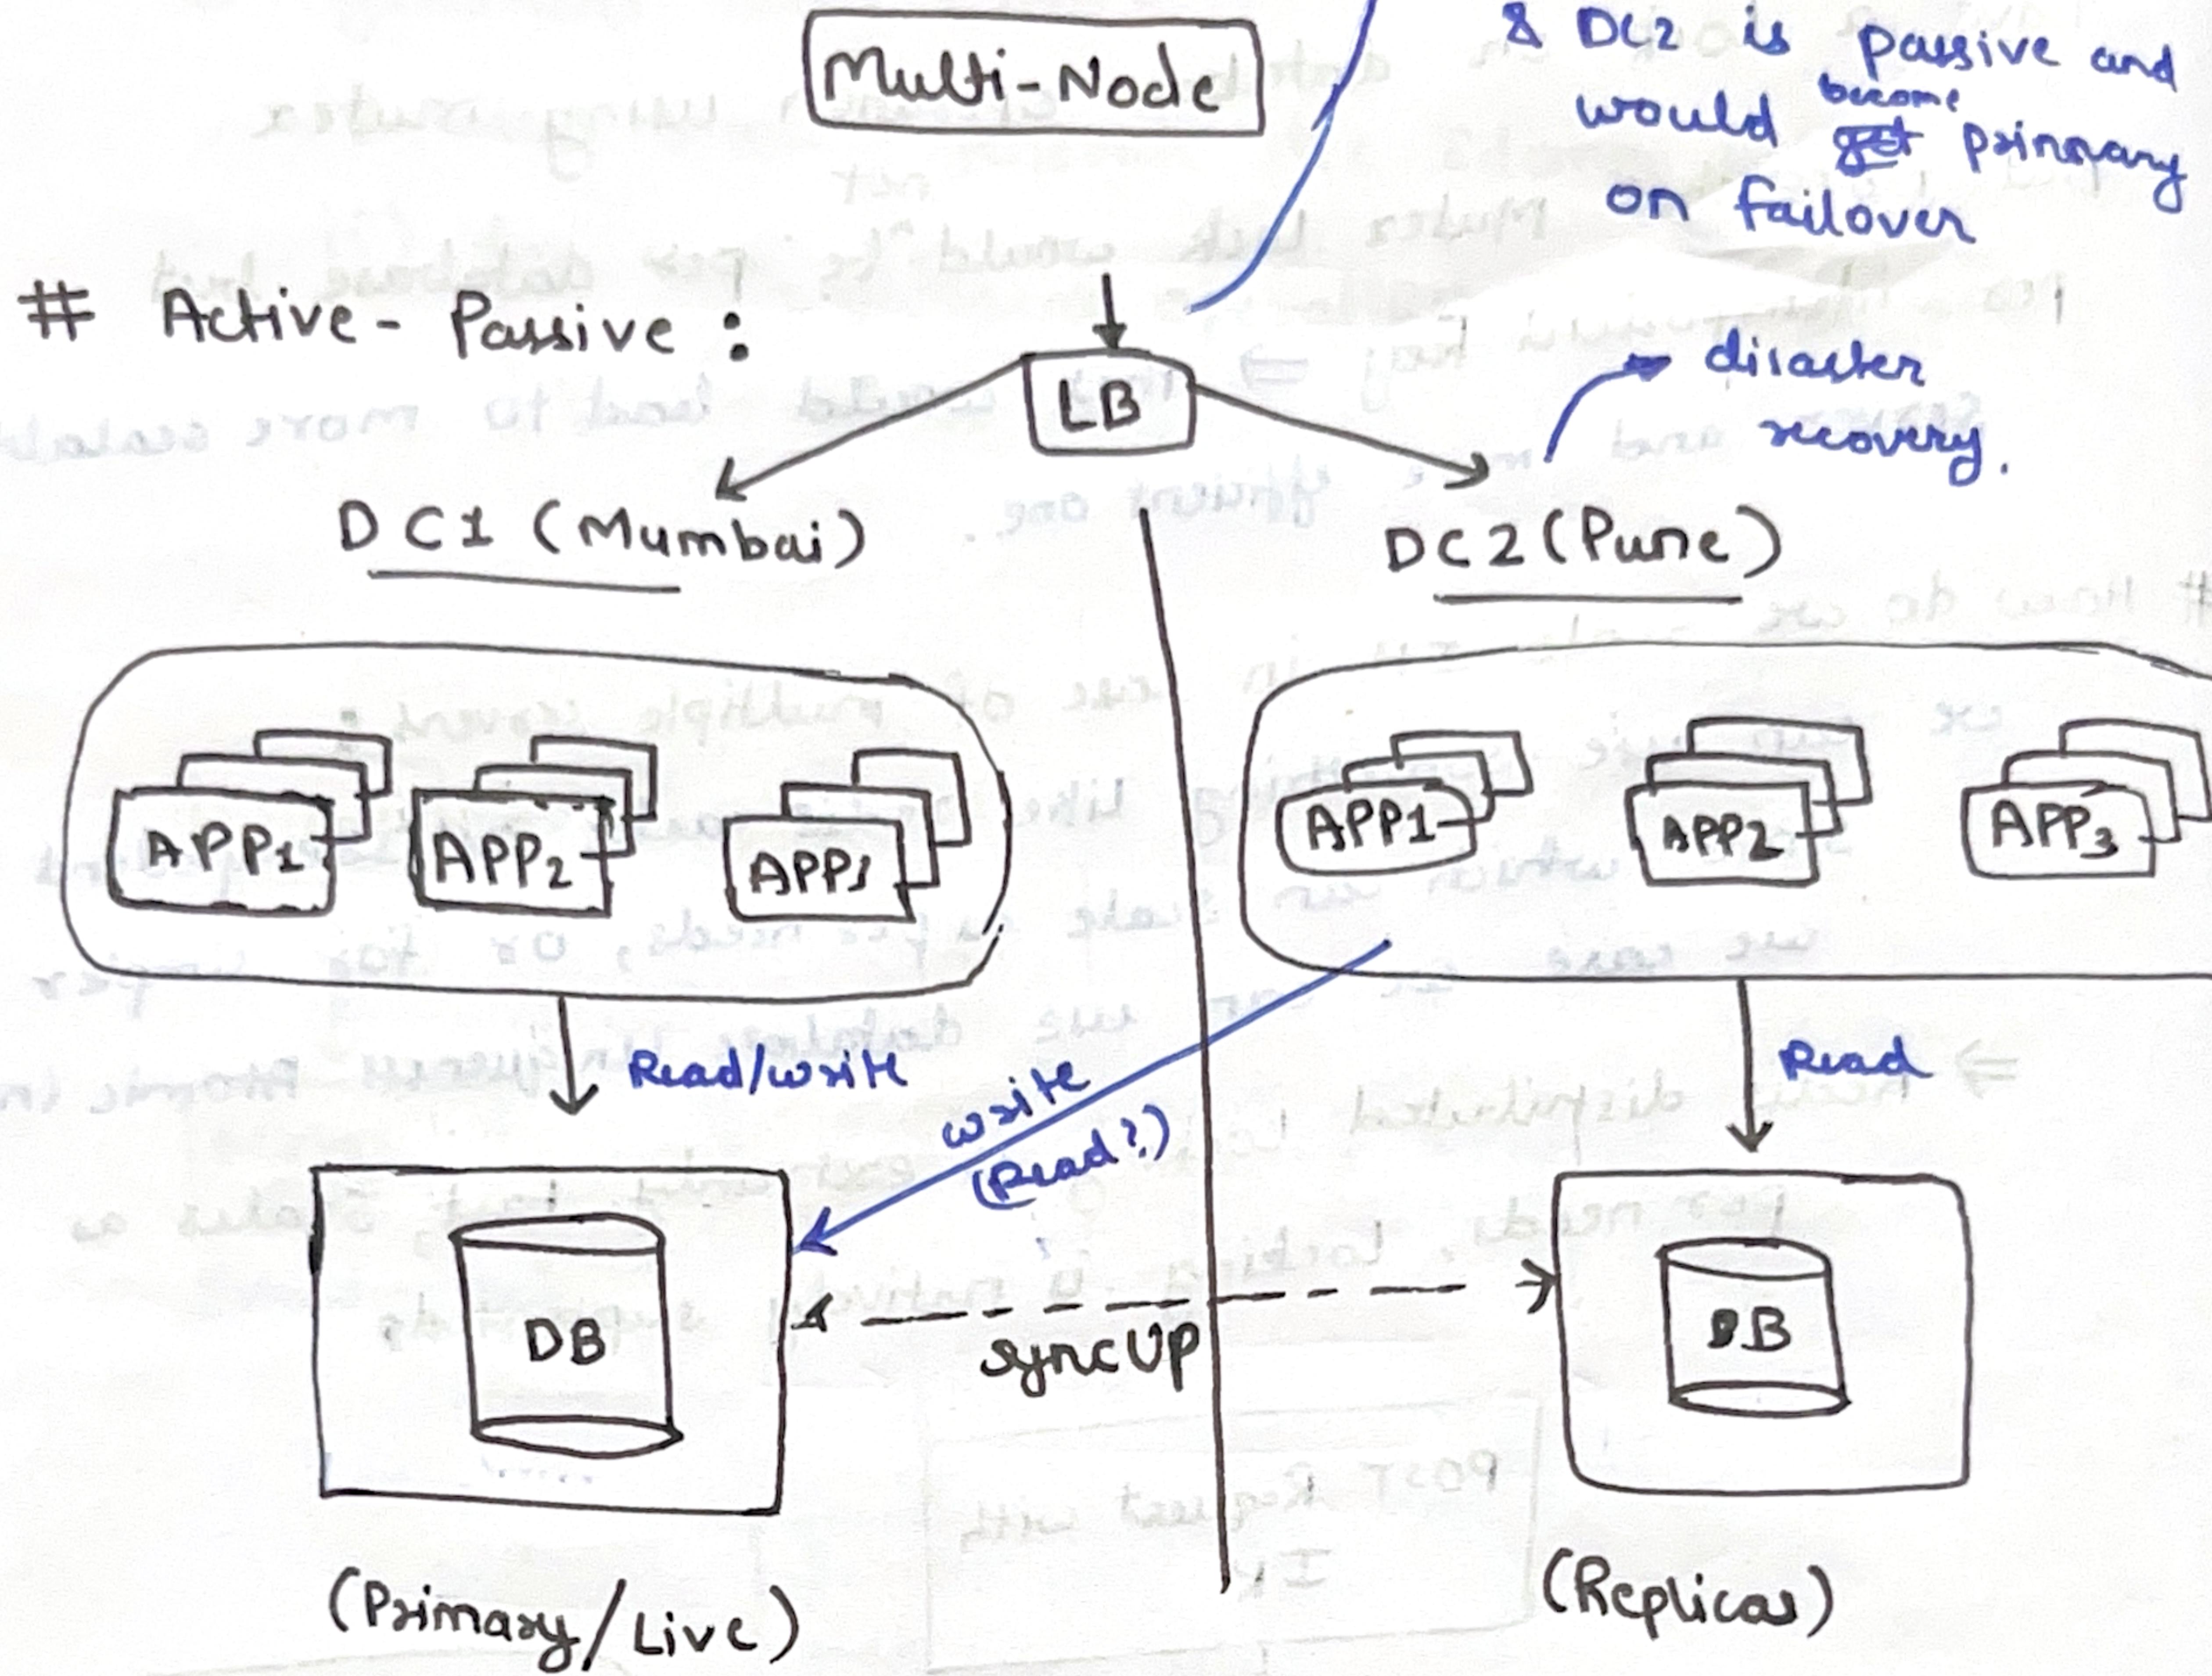

Our generally ^{wed} multi master SQL databases are not multi master, we can only write in one master.

if database of DC1 becomes inactive, the traffic would get routed to DR database

Active-Active :

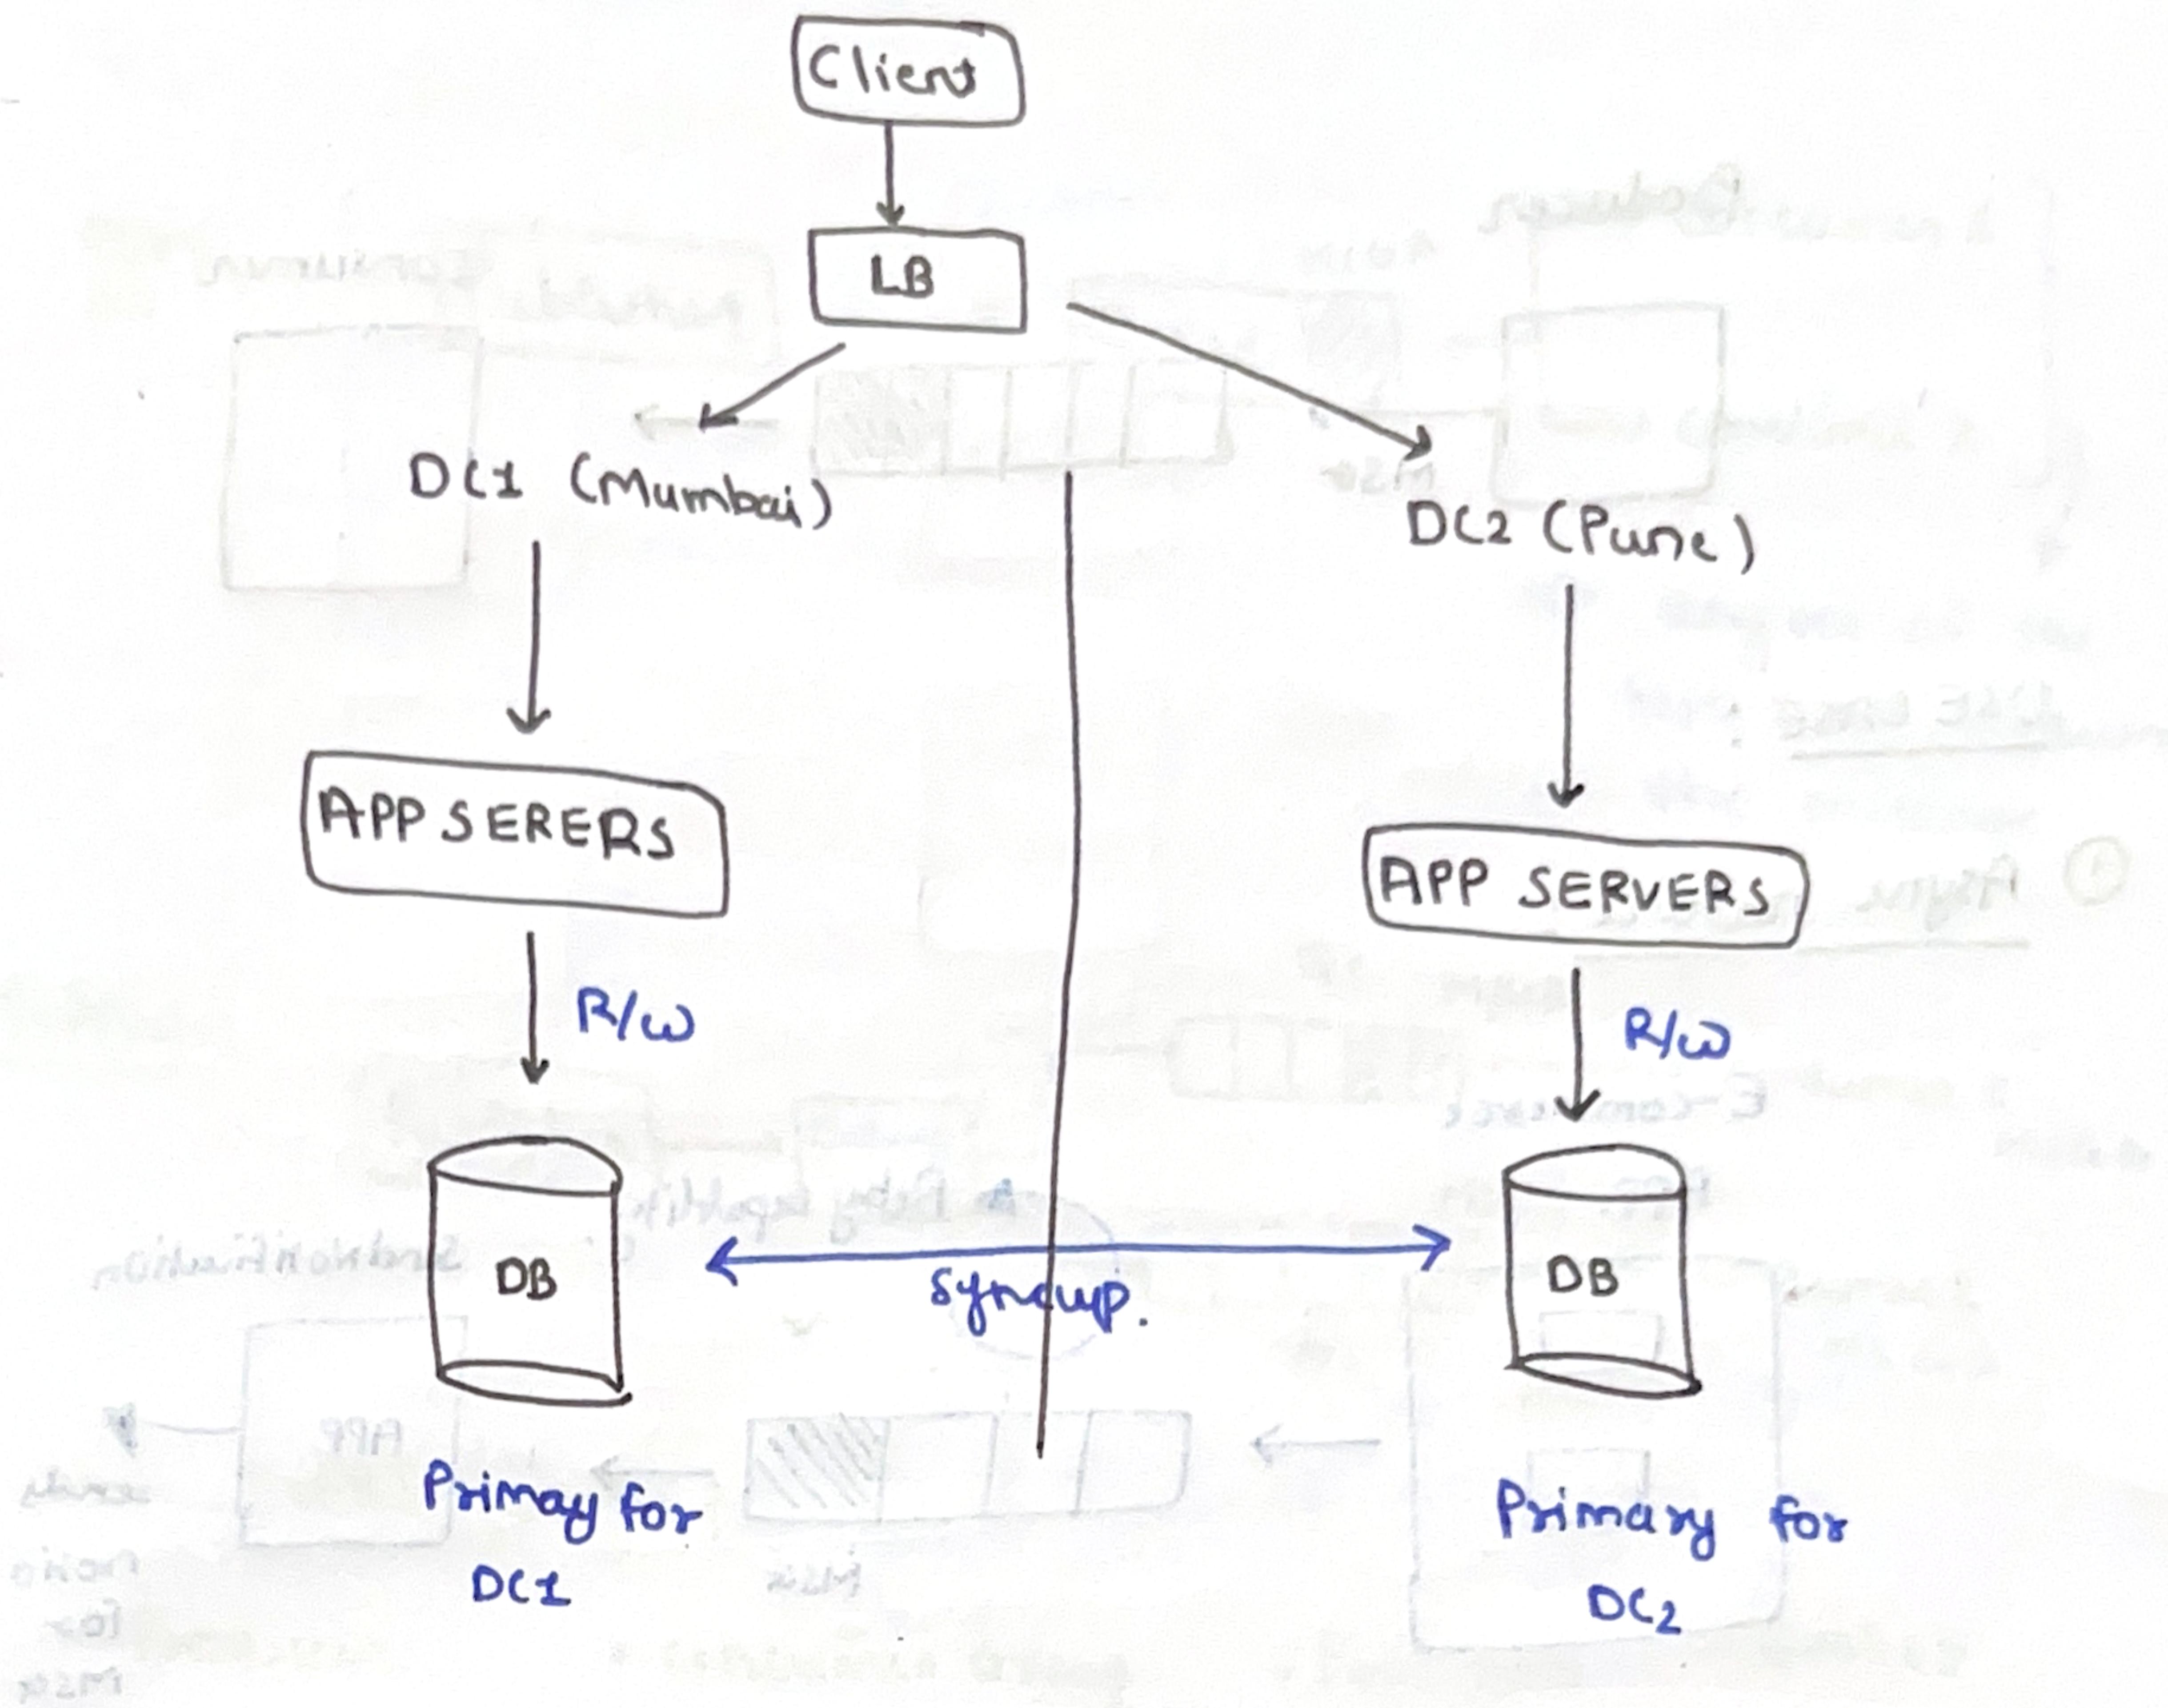

Syncup is quite difficult, as there might be delay bet' the syncup and actual real from other server; also there might be same update happening at same time in different DB.