

Caching


Caching is a technique used to store temporary copies of data so that future requests can be served faster without downloading the same data again.

Why do we use Caching ?

Caching is used to improve performance, reduce loading time, and decrease the amount of data transferred over the network.

Simple Example

When you visit a website for the first time, your browser downloads images, scripts, and styles from the server.

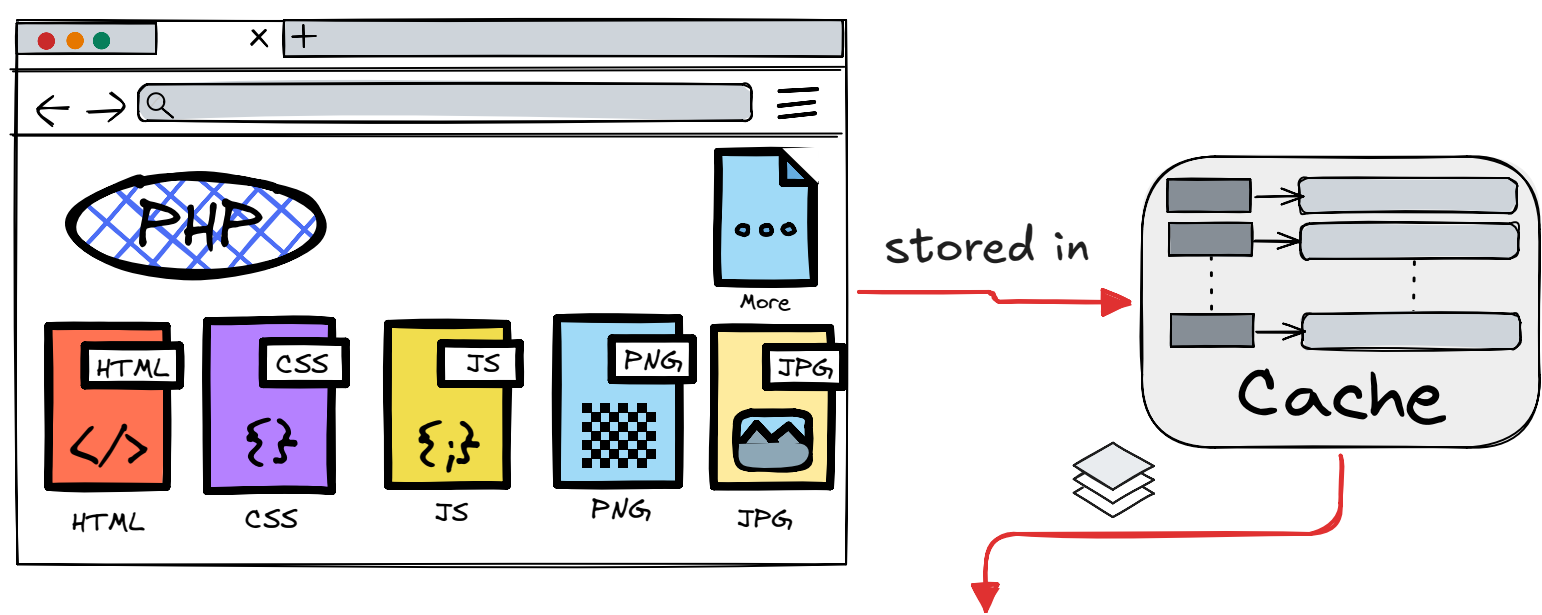

the browser loads them from the local cache instead of downloading them again.

Cache Headers

- Cache-Control: max-age=3600** — It tells browsers and intermediate caches how long the response can be stored
- Cache-Control: no-cache** — no-cache means the browser must check with the server before using the cached copy.
- Cache-Control: no-store** — no-store means the response should never be stored in cache.
- Cache-Control: public** — The response can be cached by browsers and shared caches (like CDNs).
- Cache-Control: private** — The response can only be cached by the user's browser.
- ETag: "abc123"** — ETag is a unique identifier for a specific version of a resource.



Cache Flow

