


# Chapter 1 :Introduction

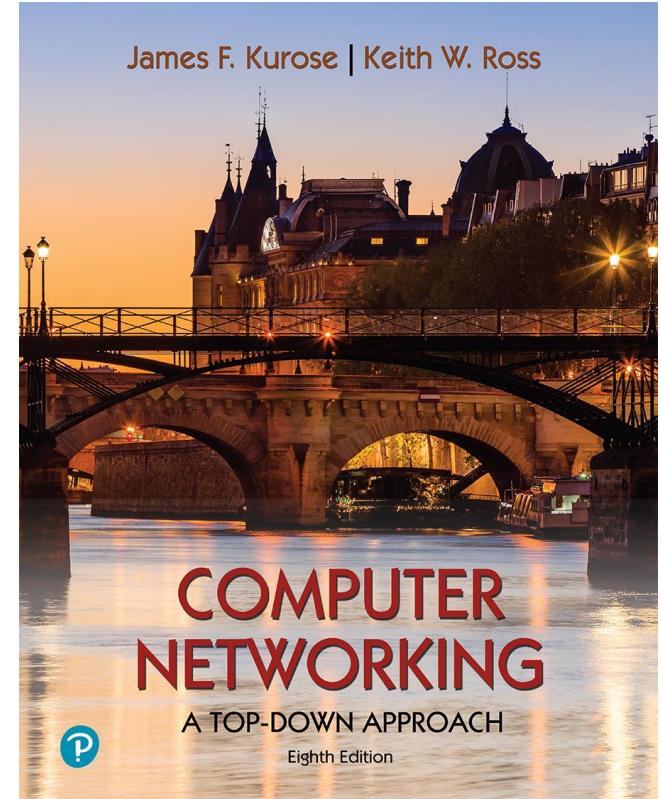

*Computer Networking: A  
Top-Down Approach*  
8<sup>th</sup> edition  
Jim Kurose, Keith Ross  
Pearson, 2020

# Introduction to The Course

- Lectures: ( Saturday, 10:00 am – 12:00 pm)
- (Monday & Wednesday 11:00 – 12:00 pm)
- Room: A210
- Lecturer : Dr. Ibrahim Sokar
- Office:

# Course Description

- This course provides students all concepts and fundamentals of modern computer networks;
- It is about contemporary protocols and technologies as well as the underlying principles behind these protocols. It covers protocol layering: Application, Transport, Network, and Link

# Course Format

- Lectures and lab.,
- Participation in class discussion is expected.
- Students' participation in the course will involve four forms of activities:
  - Attending and participating in the lectures and lab.
  - Assignments.
  - Exams and quizzes.
  - In-class discussions.

# Marks

- Exams: there will be two main exams
  - Midterm exam: 20 marks
  - Final exam: 60 marks.
- Assignments, Attendance and Quizzes: 20 marks
  
- Lab Experiments : In Lab Activities and Participation: 40 marks
- Final Exam 60 marks

# Chapter 1: introduction

## *Chapter goal:*

- Get “feel,” “big picture,” introduction to terminology
  - more depth, detail *later* in course
- Approach:
  - use Internet as example



## *Overview/roadmap:*

- What *is* the Internet?
- What *is* a protocol?
- **Network edge:** hosts, access network, physical media
- **Network core:** packet/circuit switching, internet structure
- **Performance:** loss, delay, throughput
- Security
- Protocol layers, service models
- History

# The Internet: a “nuts and bolts” view



Billions of connected computing *devices*:

- *hosts* = end systems
- running *network apps* at Internet's “edge”

*Packet switches*: forward packets (chunks of data)


- routers, switches

*Communication links*

- fiber, copper, radio, satellite
- transmission rate: *bandwidth*

*Networks*

- collection of devices, routers, links: managed by an organization

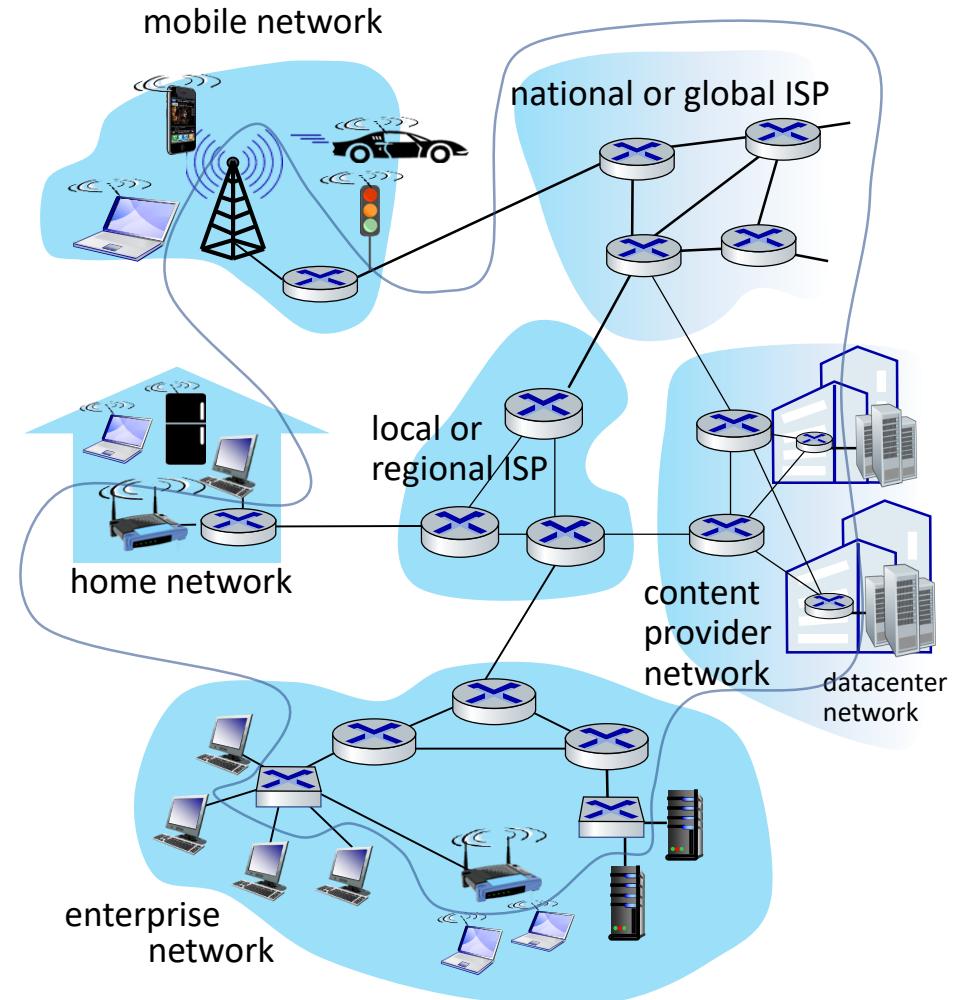

# “Fun” Internet-connected devices



Amazon Echo



Internet refrigerator



Security Camera



IP picture frame



Slingbox: remote  
control cable TV



Pacemaker & Monitor



Tweet-a-watt:  
monitor energy use



Web-enabled toaster +  
weather forecaster



AR devices

Internet phones



sensorized,  
bed  
mattress




Fitbit

*Others?*


# The Internet: a “nuts and bolts” view

- *Internet: “network of networks”*
  - Interconnected ISPs
- *protocols are everywhere*
  - control sending, receiving of messages
  - e.g., HTTP (Web), streaming video, Skype, TCP, IP, WiFi, 4G, Ethernet
- *Internet standards*
  - RFC: Request for Comments
  - IETF: Internet Engineering Task Force

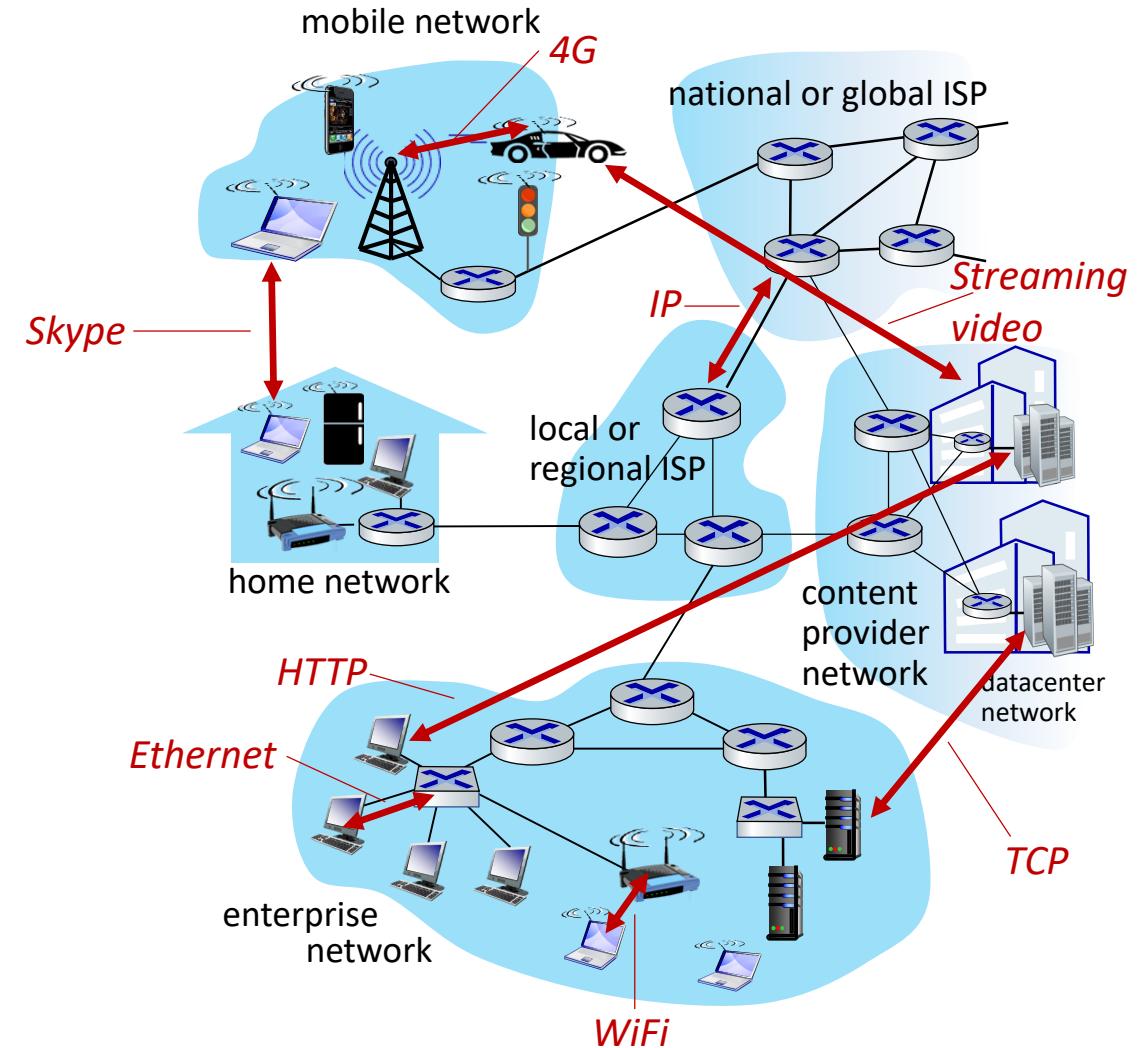

# The Internet: a “service” view

- *Infrastructure* that provides services to applications:
  - Web, streaming video, multimedia teleconferencing, email, games, e-commerce, social media, interconnected appliances, ...
- provides *programming interface* to distributed applications:
  - “hooks” allowing sending/receiving apps to “connect” to, use Internet transport service
  - provides service options, analogous to postal service

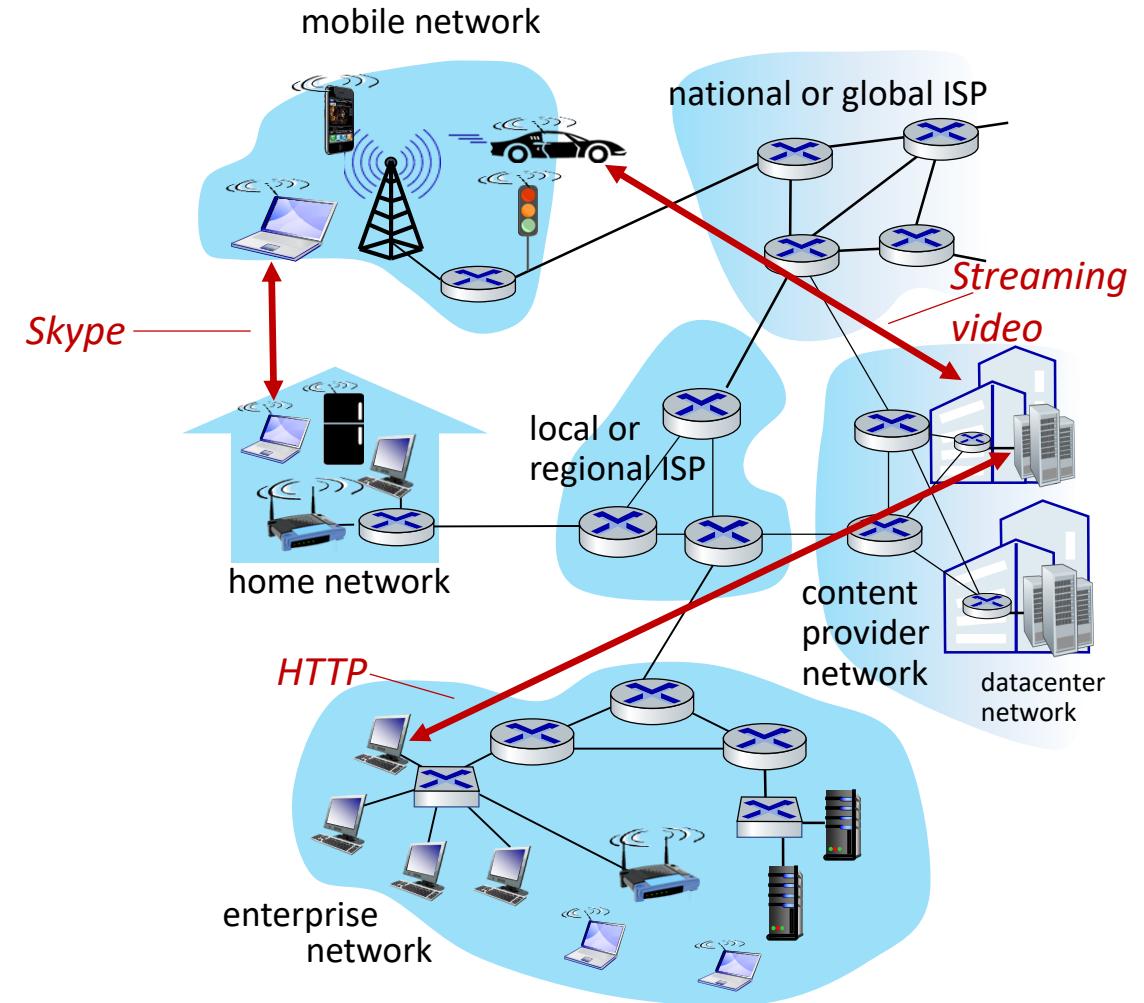

# What's a protocol?

## *Human protocols:*

- “what’s the time?”
- “I have a question”
- introductions

... specific messages sent  
... specific actions taken  
when message received,  
or other events


## *Network protocols:*

- computers (devices) rather than humans
- all communication activity in Internet governed by protocols

*Protocols define the **format, order** of messages sent and received among network entities, and **actions taken** on msg transmission, receipt*

# What's a protocol?

A human protocol and a computer network protocol:

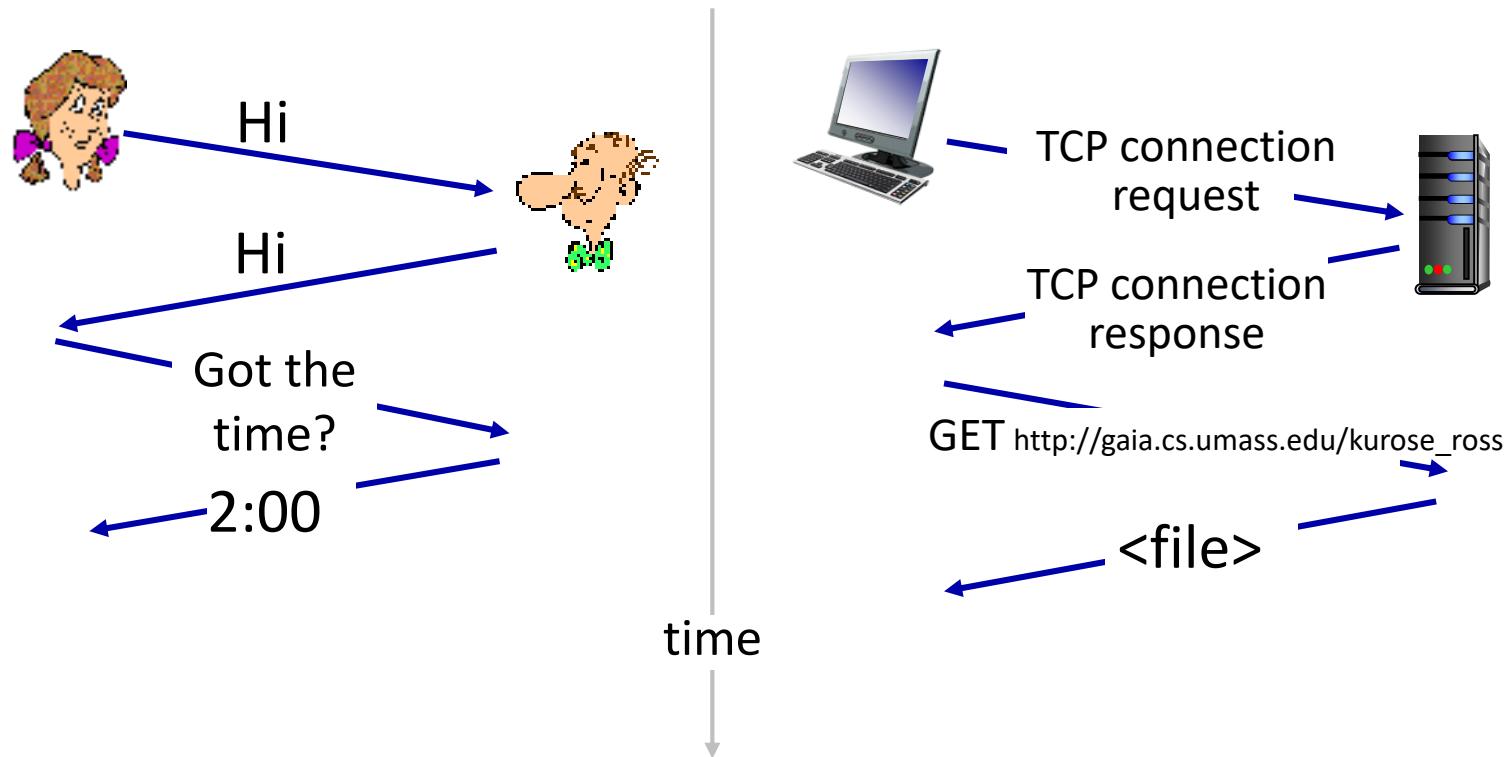

*Q:* other human protocols?

# Chapter 1: roadmap


- What *is* the Internet?
- What *is* a protocol?
- **Network edge:** hosts, access network, physical media
- Network core: packet/circuit switching, internet structure
- Performance: loss, delay, throughput
- Security
- Protocol layers, service models
- History



# A closer look at Internet structure

## Network edge:

- hosts: clients and servers
- servers often in data centers

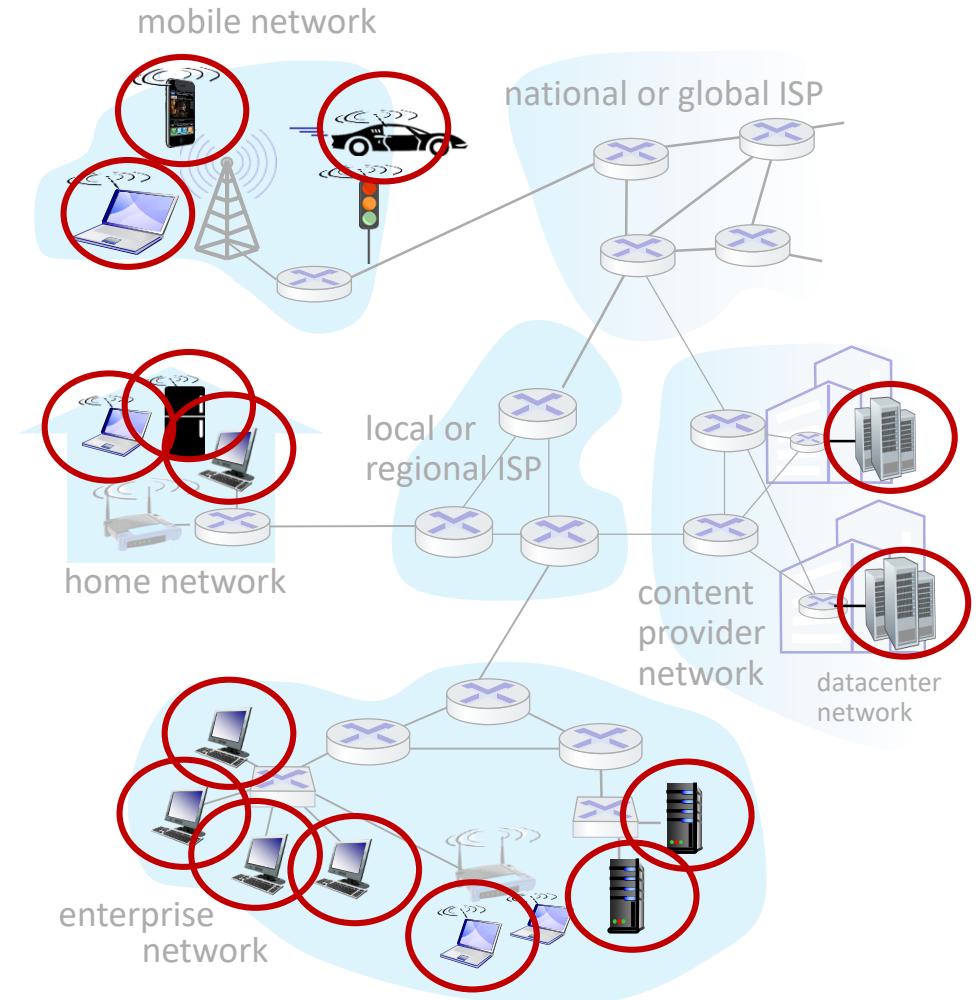


# A closer look at Internet structure

## Network edge:

- hosts: clients and servers
- servers often in data centers

## Access networks, physical media:

- wired, wireless communication links

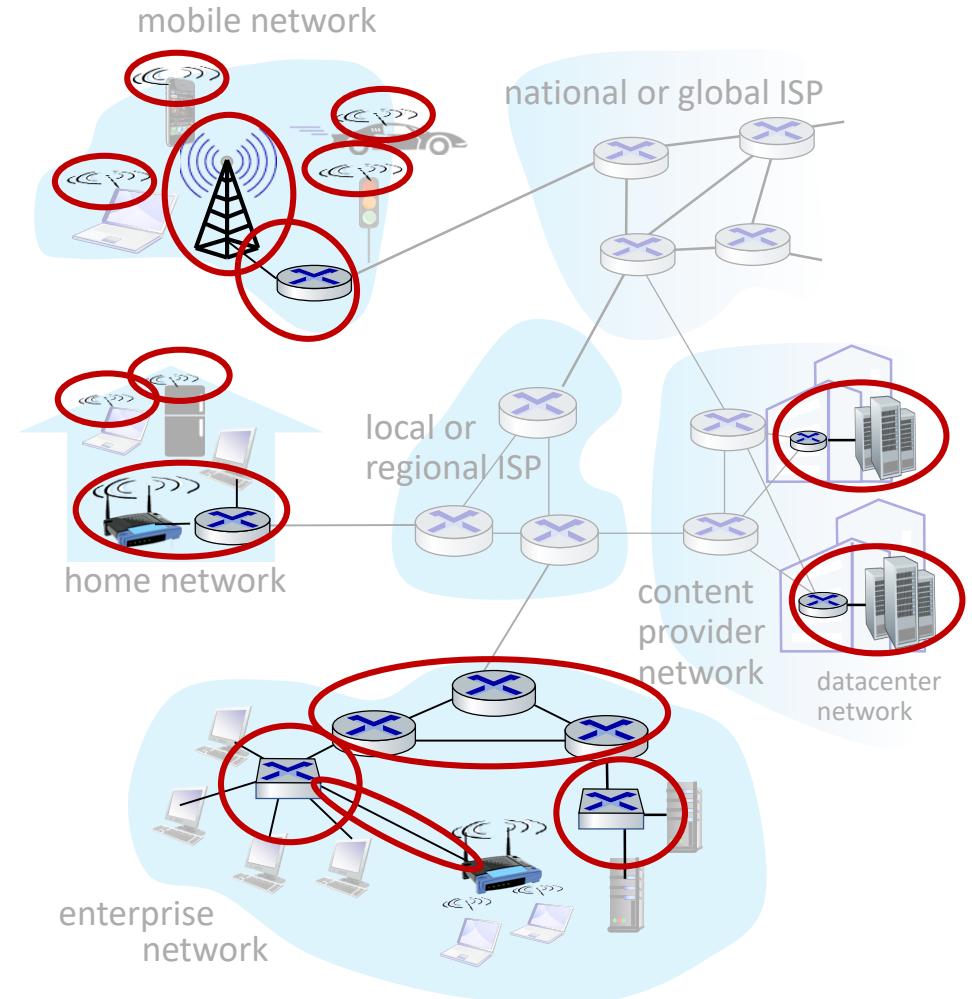

# A closer look at Internet structure

## Network edge:


- hosts: clients and servers
- servers often in data centers

## Access networks, physical media:

- wired, wireless communication links

## Network core:

- interconnected routers
- network of networks

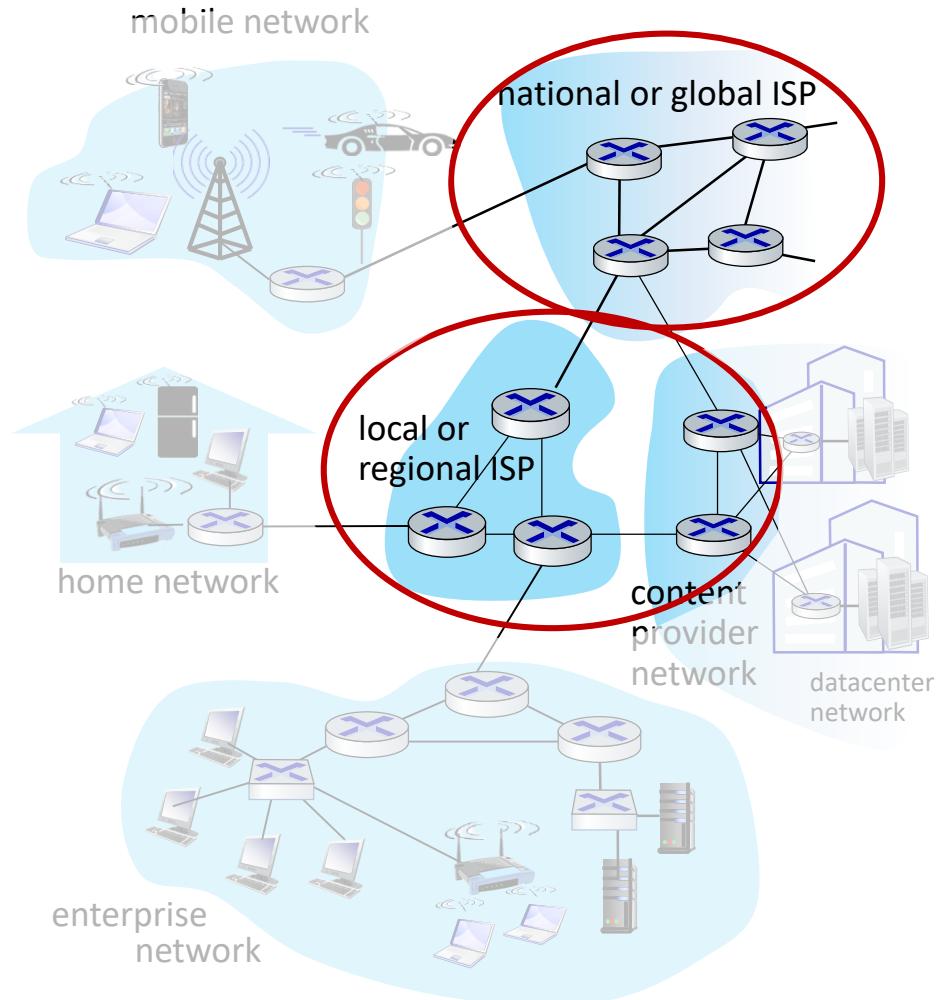


# Access networks and physical media

*Q: How to connect end systems  
to edge router?*


- residential access nets
- institutional access networks (school, company)
- mobile access networks (WiFi, 4G/5G)

*What to look for:*

- transmission rate (bits per second) of access network?
- shared or dedicated access among users?

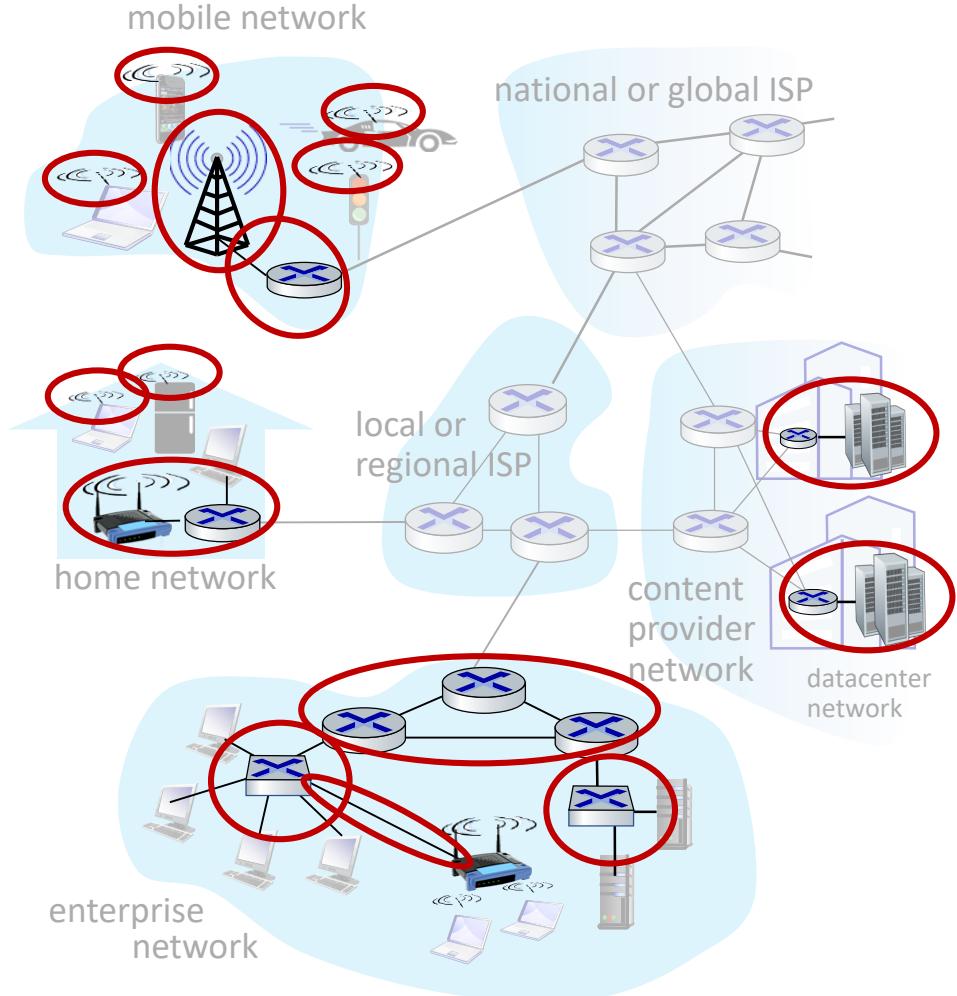


# Access networks: cable-based access

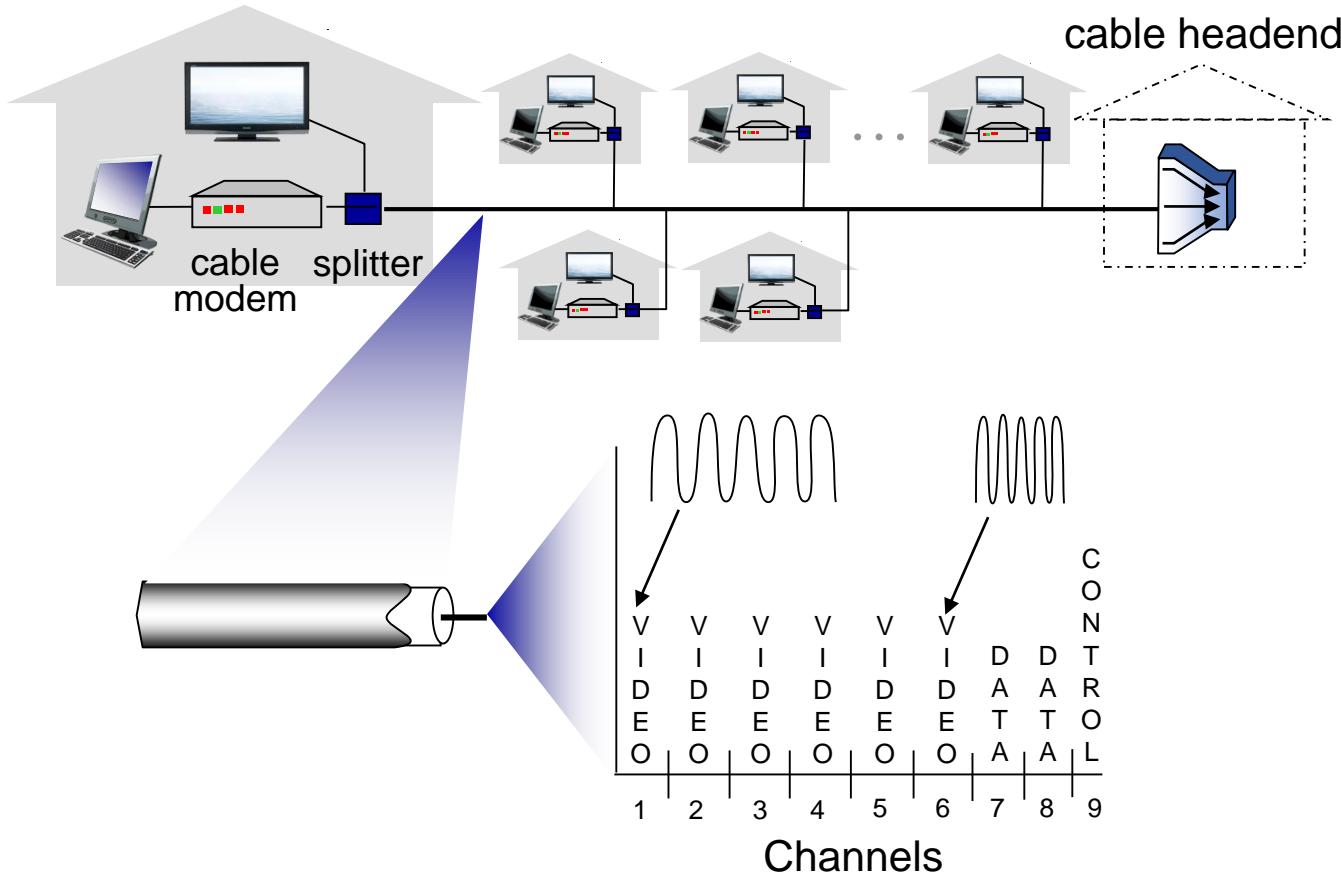


*frequency division multiplexing (FDM):* different channels transmitted in different frequency bands

# Access networks: cable-based access

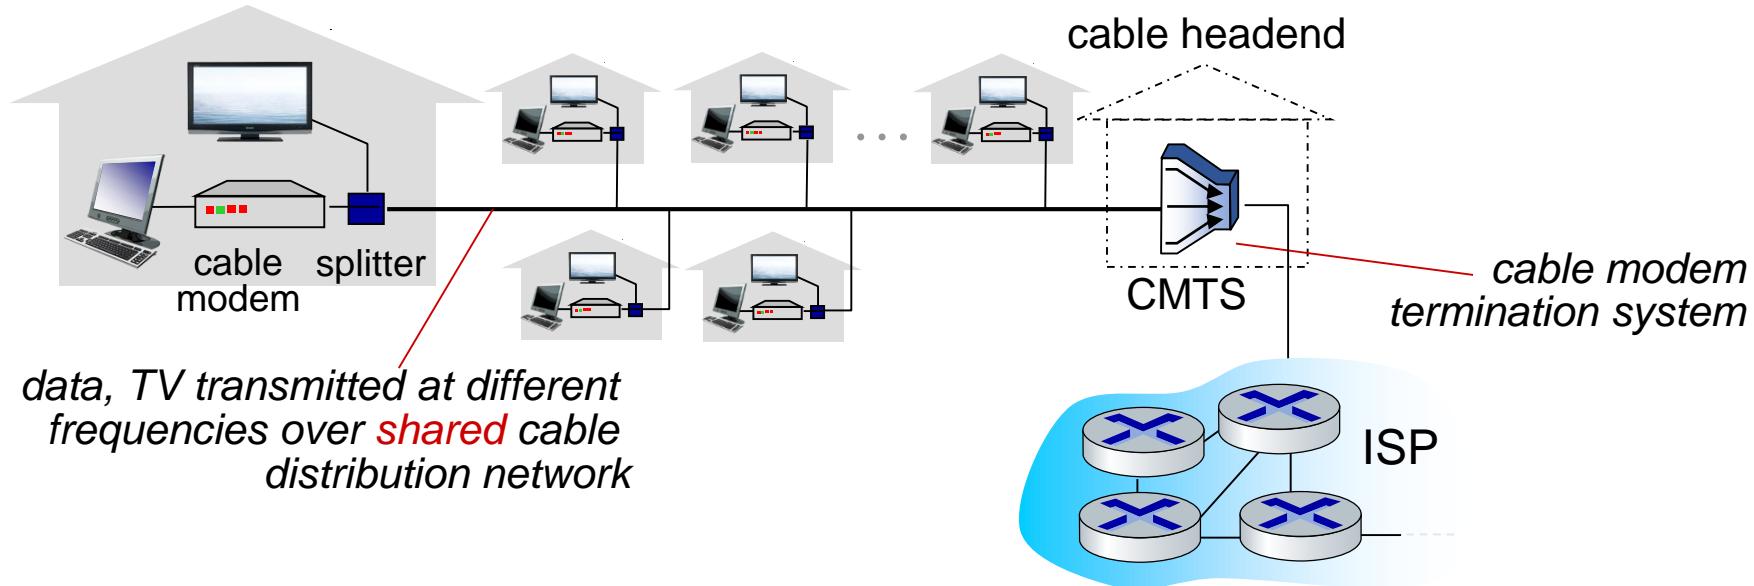


- HFC: hybrid fiber coax
  - asymmetric: up to 40 Mbps – 1.2 Gbs downstream transmission rate, 30-100 Mbps upstream transmission rate
- network of cable, fiber attaches homes to ISP router
  - homes **share access network** to cable headend

# Access networks: digital subscriber line (DSL)

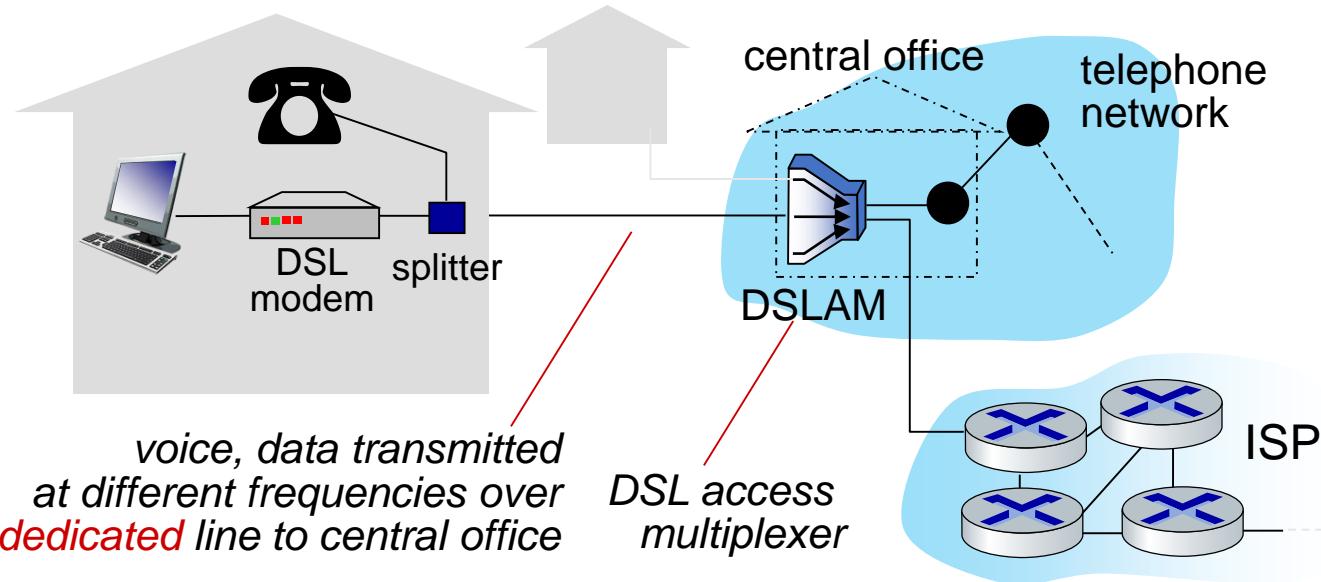

- use *existing* telephone line to central office DSLAM
  - data over DSL phone line goes to Internet
  - voice over DSL phone line goes to telephone net
- 24-52 Mbps dedicated downstream transmission rate
- 3.5-16 Mbps dedicated upstream transmission rate

# Access networks: home networks

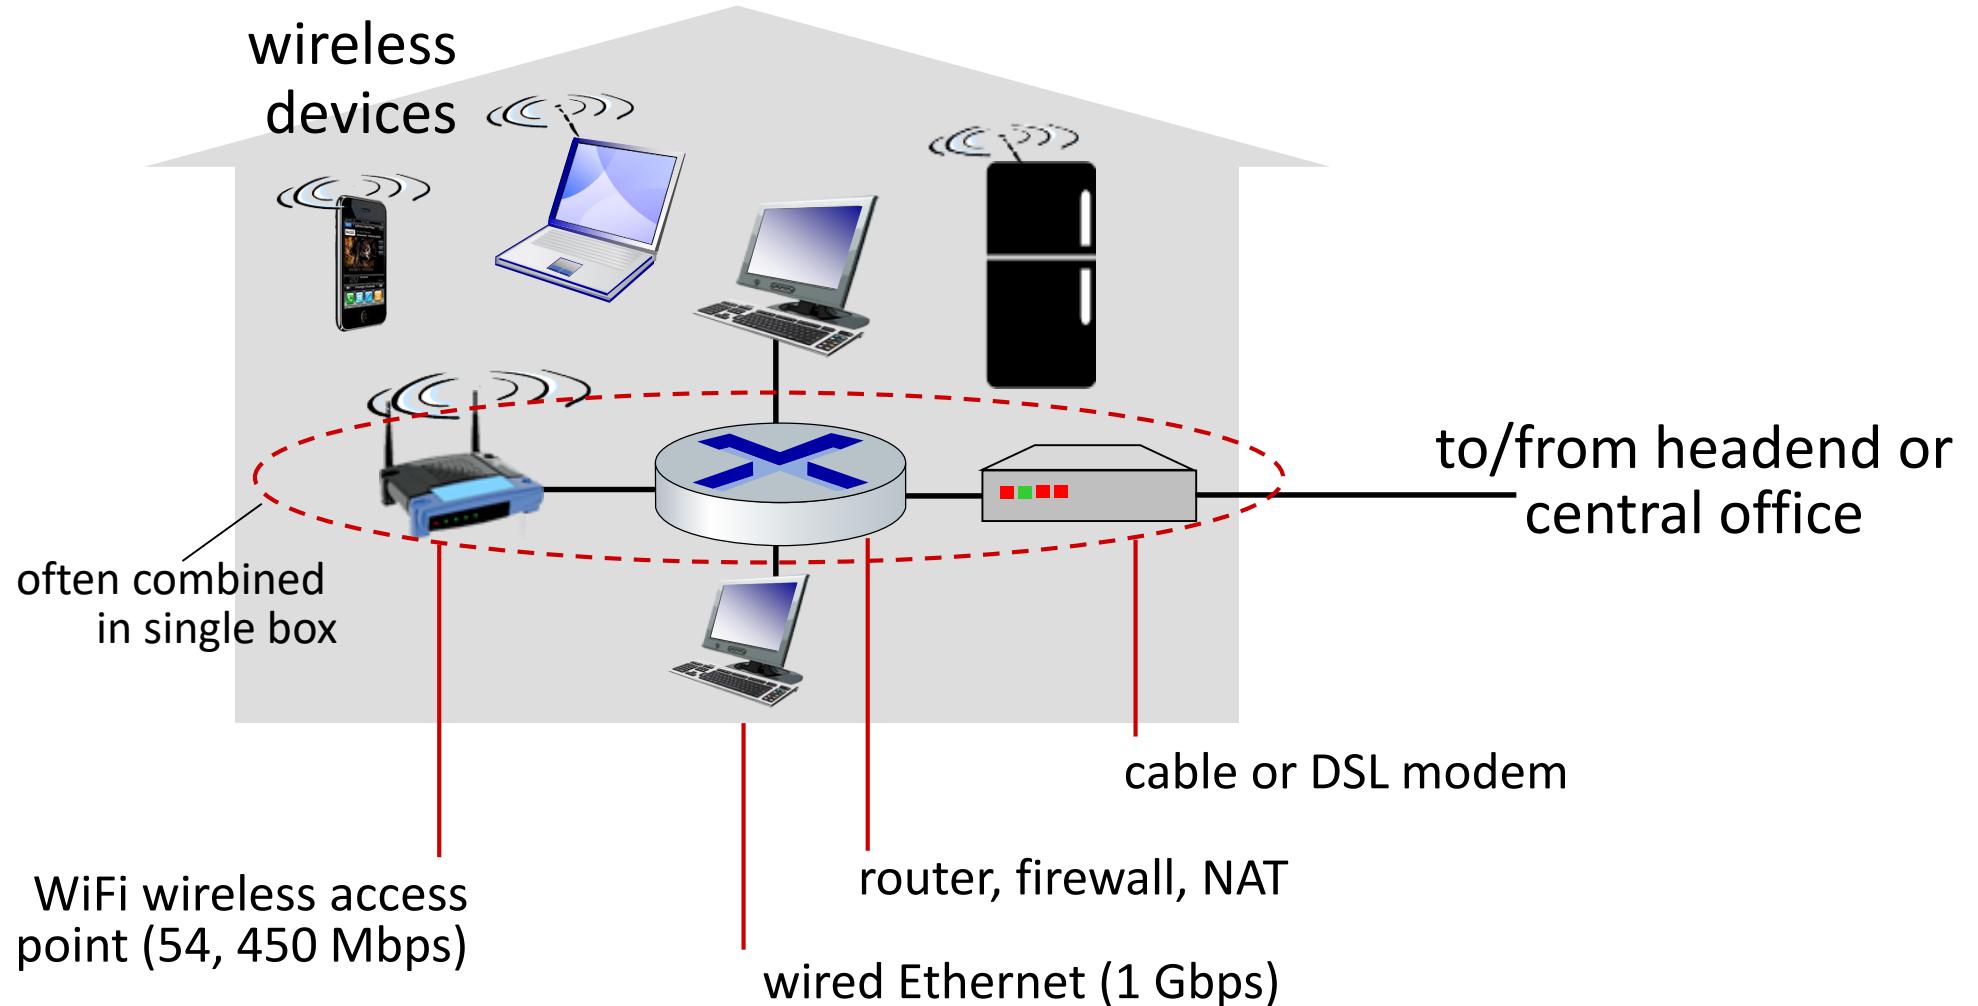


# Wireless access networks

Shared *wireless* access network connects end system to router

- via base station aka “access point”

## Wireless local area networks (WLANs)

- typically within or around building (~100 ft)
- 802.11b/g/n (WiFi): 11, 54, 450 Mbps transmission rate

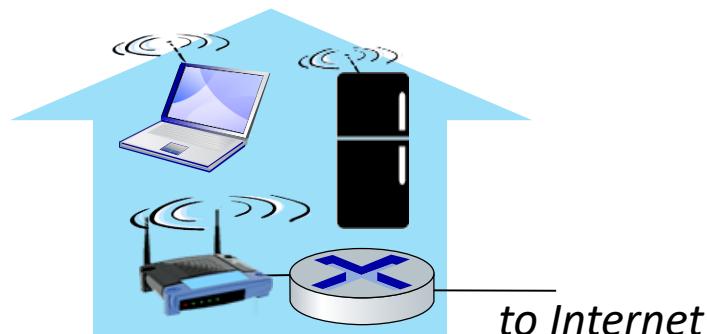


## Wide-area cellular access networks

- provided by mobile, cellular network operator (10's km)
- 10's Mbps
- 4G cellular networks (5G coming)



# Access networks: enterprise networks

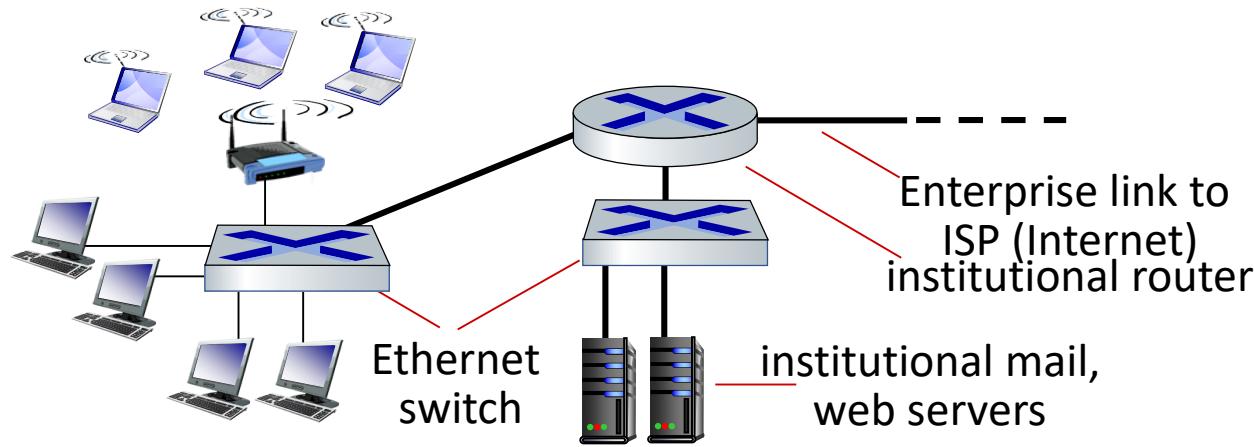


- companies, universities, etc.
- mix of wired, wireless link technologies, connecting a mix of switches and routers (we'll cover differences shortly)
  - Ethernet: wired access at 100Mbps, 1Gbps, 10Gbps
  - WiFi: wireless access points at 11, 54, 450 Mbps

# Host: sends *packets* of data

host sending function:

- takes application message
- breaks into smaller chunks, known as *packets*, of length  $L$  bits
- transmits packet into access network at *transmission rate R*
  - link transmission rate, aka link *capacity, aka link bandwidth*

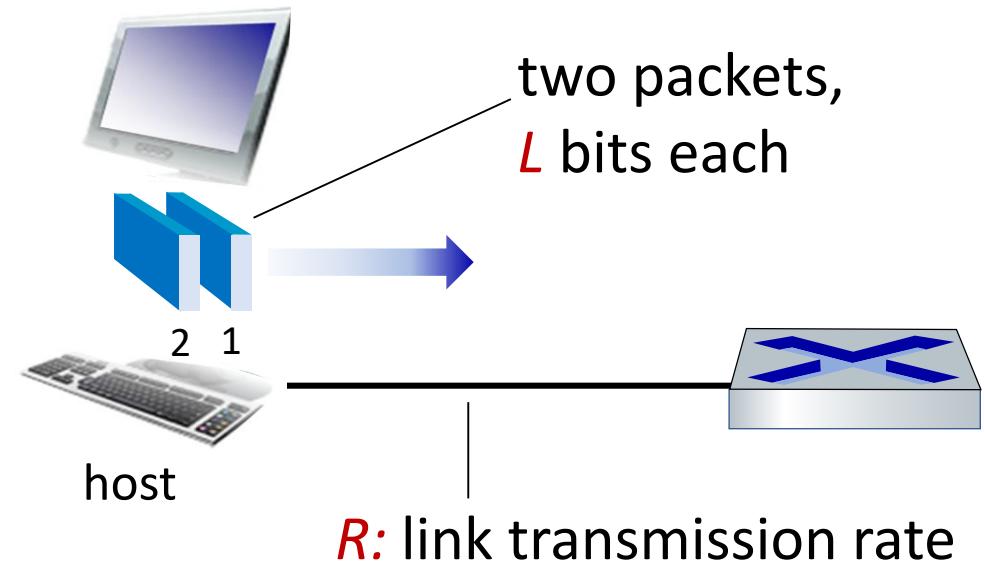


$$\text{packet transmission delay} = \frac{\text{time needed to transmit } L\text{-bit packet into link}}{R \text{ (bits/sec)}}$$

# Links: physical media

- **bit**: propagates between transmitter/receiver pairs
- **physical link**: what lies between transmitter & receiver
- **guided media**:
  - signals propagate in solid media: copper, fiber, coax
- **unguided media**:
  - signals propagate freely, e.g., radio

## Twisted pair (TP)

- two insulated copper wires
  - Category 5: 100 Mbps, 1 Gbps Ethernet
  - Category 6: 10Gbps Ethernet

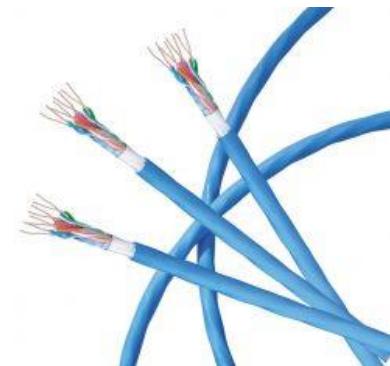

# Links: physical media


## Coaxial cable:

- two concentric copper conductors
- bidirectional
- broadband:
  - multiple frequency channels on cable
  - 100's Mbps per channel



## Fiber optic cable:

- glass fiber carrying light pulses, each pulse a bit
- high-speed operation:
  - high-speed point-to-point transmission (10's-100's Gbps)
- low error rate:
  - repeaters spaced far apart
  - immune to electromagnetic noise

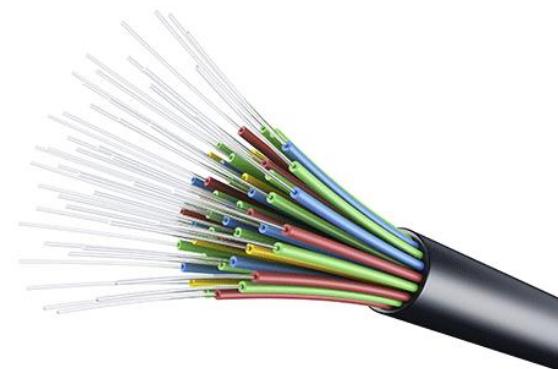

# Links: physical media

## Wireless radio

- signal carried in electromagnetic spectrum
- no physical “wire”
- broadcast and “half-duplex” (sender to receiver)
- propagation environment effects:
  - reflection
  - obstruction by objects
  - interference

## Radio link types:

- terrestrial microwave
  - up to 45 Mbps channels
- Wireless LAN (WiFi)
  - Up to 100's Mbps
- wide-area (e.g., cellular)
  - 4G cellular: ~ 10's Mbps
- satellite
  - up to 45 Mbps per channel
  - 270 msec end-end delay
  - geosynchronous versus low-earth-orbit


# Chapter 1: roadmap

- What *is* the Internet?
- What *is* a protocol?
- Network edge: hosts, access network, physical media
- **Network core:** packet/circuit switching, internet structure
- Performance: loss, delay, throughput
- Security
- Protocol layers, service models
- History




# The network core

- mesh of interconnected routers
- **packet-switching:** hosts break application-layer messages into *packets*
  - forward packets from one router to the next, across links on path from source to destination
  - each packet transmitted at full link capacity

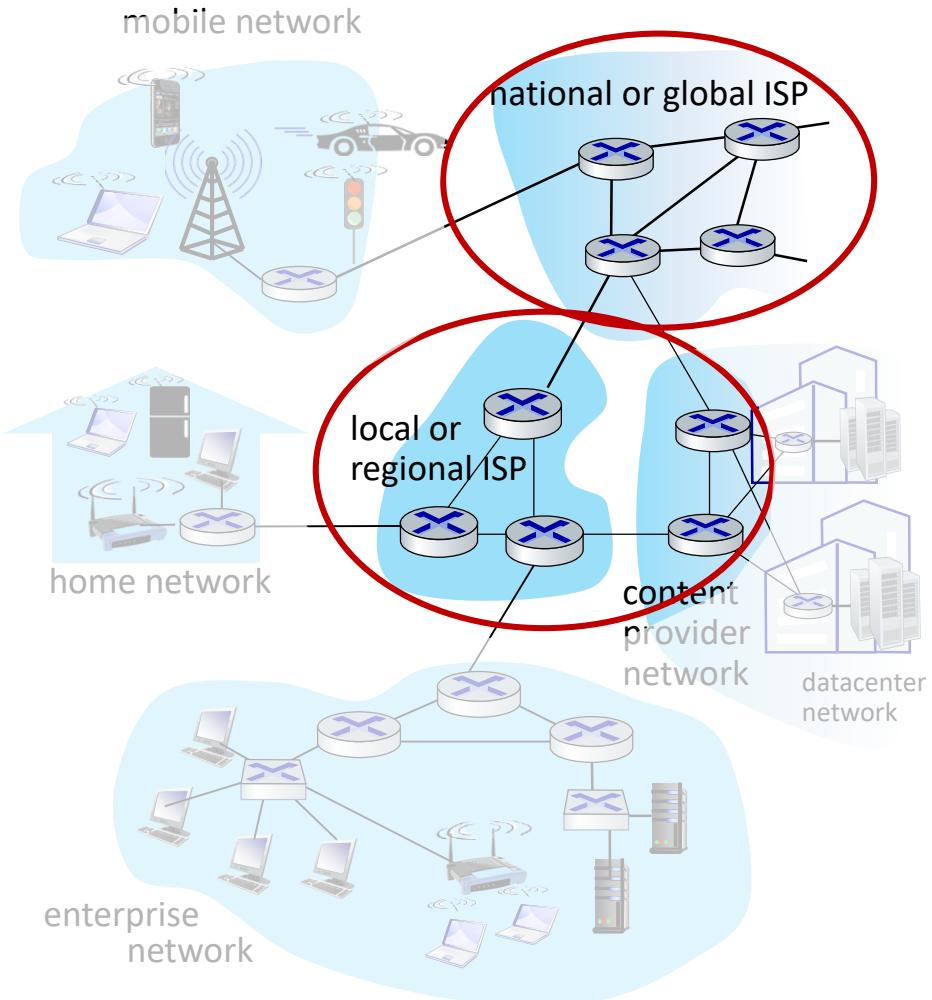

# Packet-switching: store-and-forward

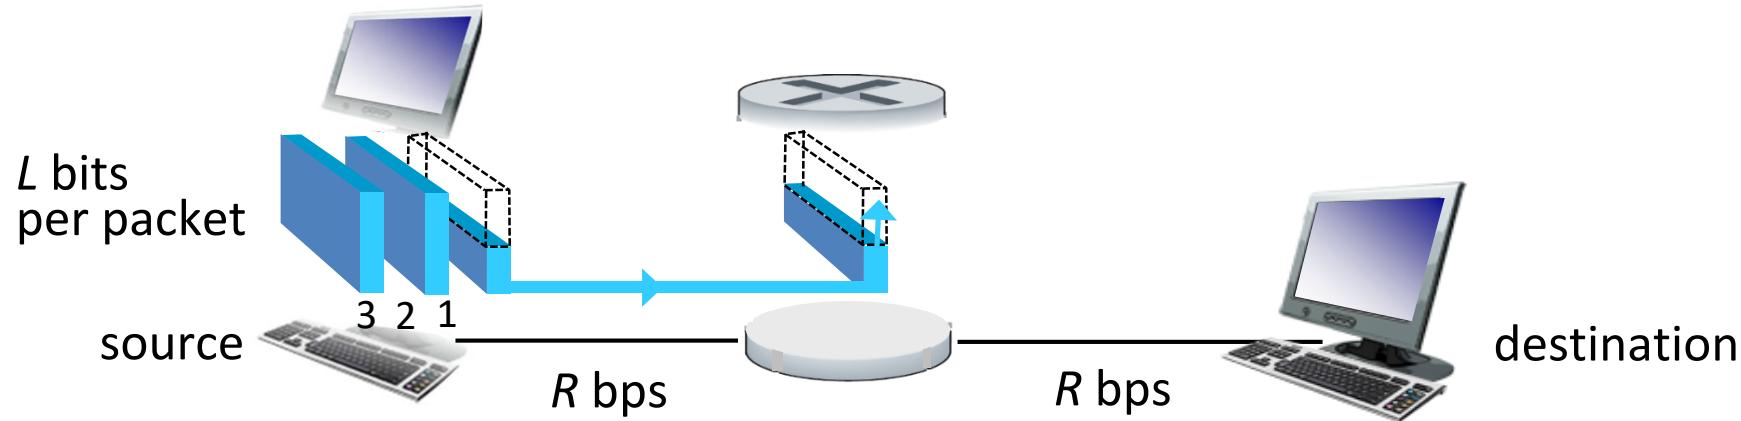


- **Transmission delay:** takes  $L/R$  seconds to transmit (push out)  $L$ -bit packet into link at  $R$  bps
- **Store and forward:** entire packet must arrive at router before it can be transmitted on next link
- **End-end delay:**  $2L/R$  (above), assuming zero propagation delay (more on delay shortly)

*One-hop numerical example:*

- $L = 10$  Kbits
- $R = 100$  Mbps
- one-hop transmission delay = 0.1 msec

# Packet-switching: queueing delay, loss

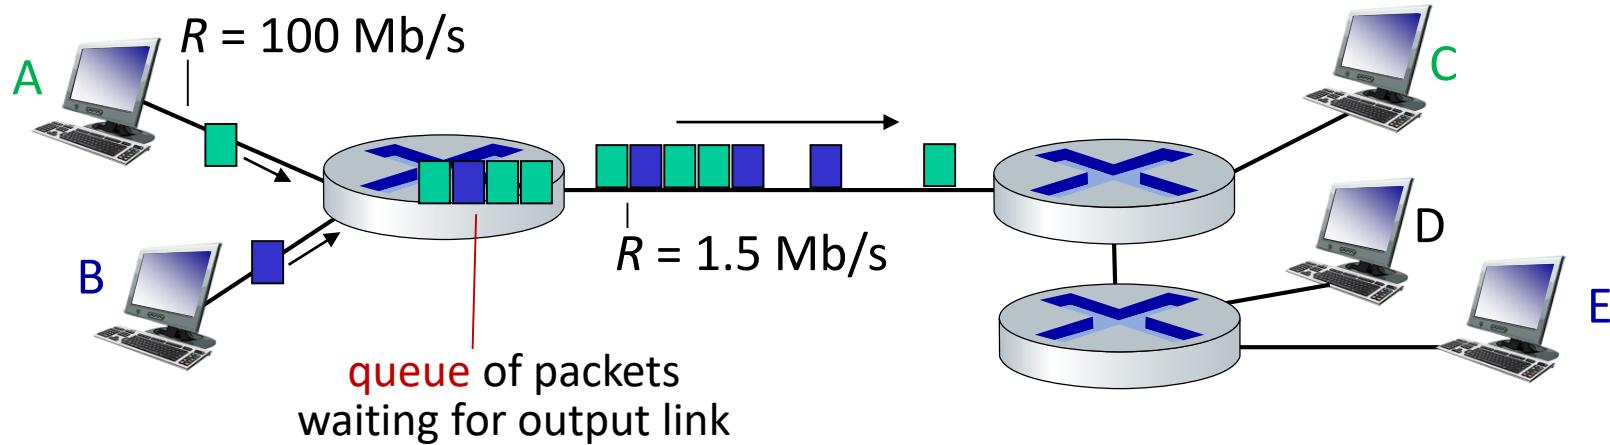


*Packet queuing and loss:* if arrival rate (in bps) to link exceeds transmission rate (bps) of link for a period of time:

- packets will queue, waiting to be transmitted on output link
- packets can be dropped (lost) if memory (buffer) in router fills up

# Two key network-core functions

*Forwarding:*

- *local* action:  
move arriving  
packets from  
router's input link  
to appropriate  
router output link

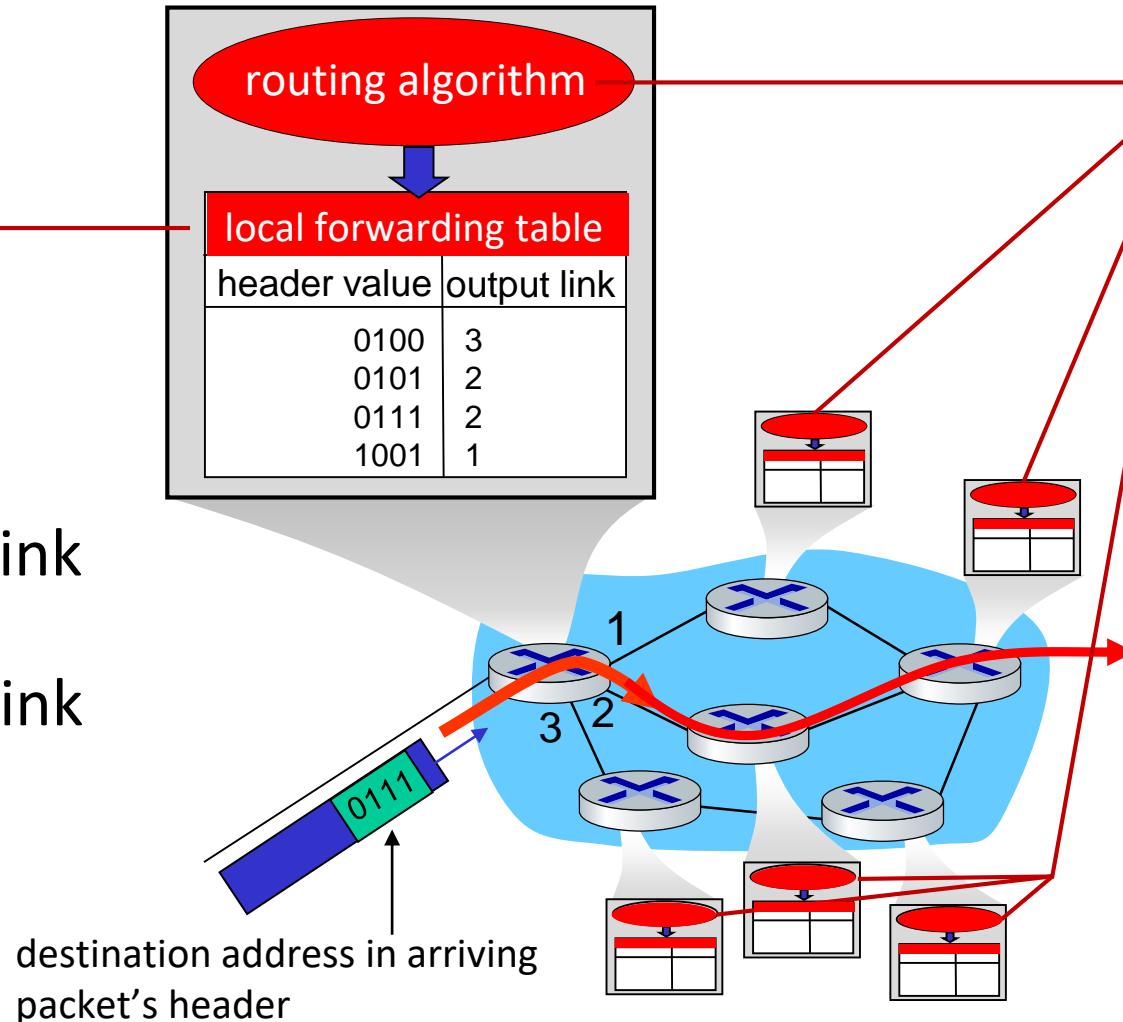


*Routing:*

- *global* action:  
determine source-  
destination paths  
taken by packets
- routing algorithms

# Alternative to packet switching: circuit switching

end-end resources allocated to,  
reserved for “call” between source  
and destination

- in diagram, each link has four circuits.
  - call gets 2<sup>nd</sup> circuit in top link and 1<sup>st</sup> circuit in right link.
- dedicated resources: no sharing
  - circuit-like (guaranteed) performance
- circuit segment idle if not used by call (no sharing)
- commonly used in traditional telephone networks

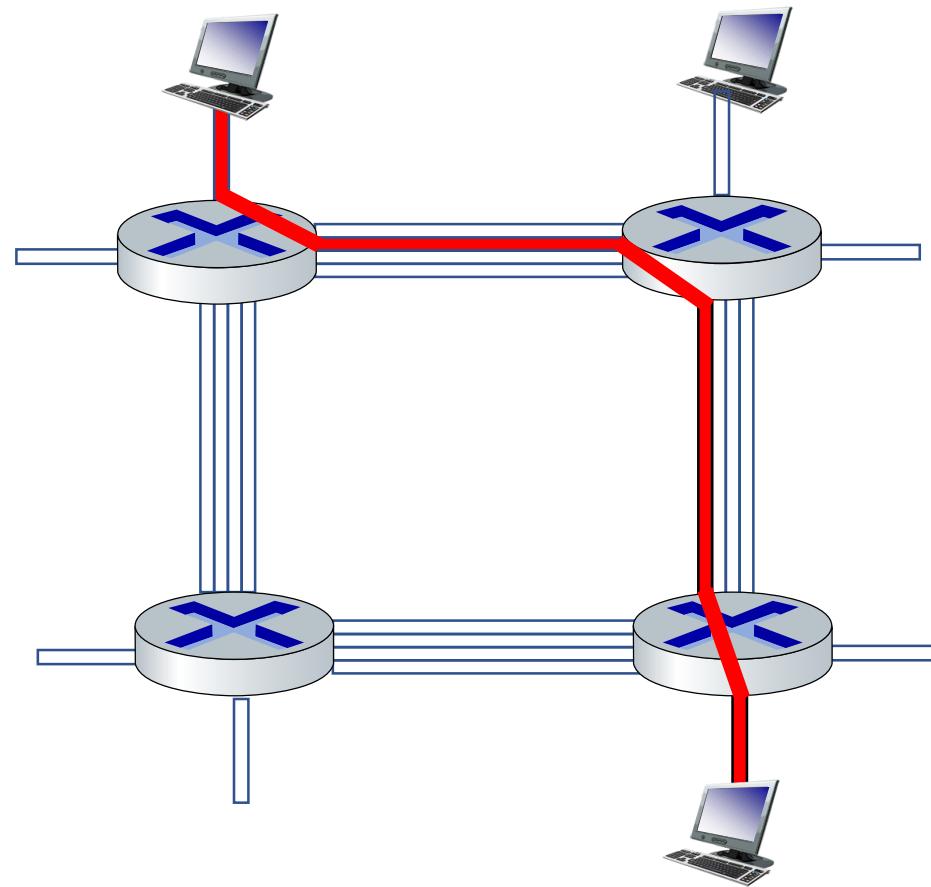



# Circuit switching: FDM and TDM

## Frequency Division Multiplexing (FDM)

- optical, electromagnetic frequencies divided into (narrow) frequency bands
- each call allocated its own band, can transmit at max rate of that narrow band

## Time Division Multiplexing (TDM)

- time divided into slots
- each call allocated periodic slot(s), can transmit at maximum rate of (wider) frequency band, but only during its time slot(s)

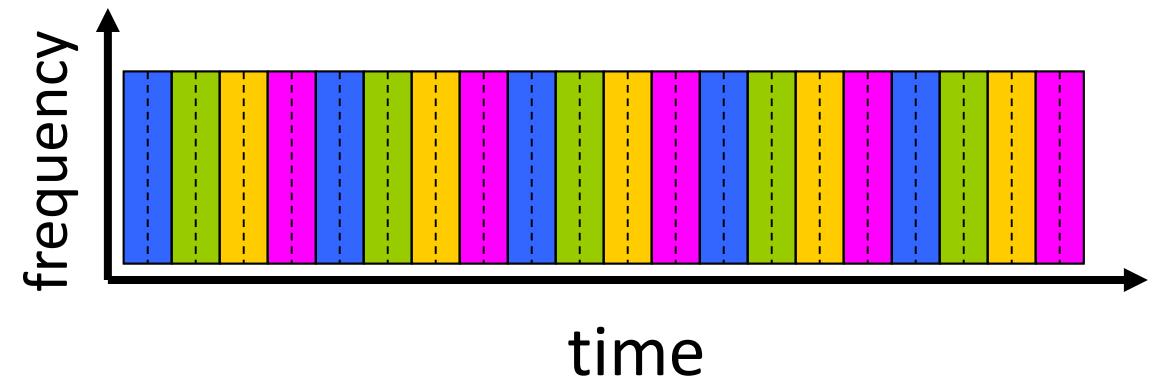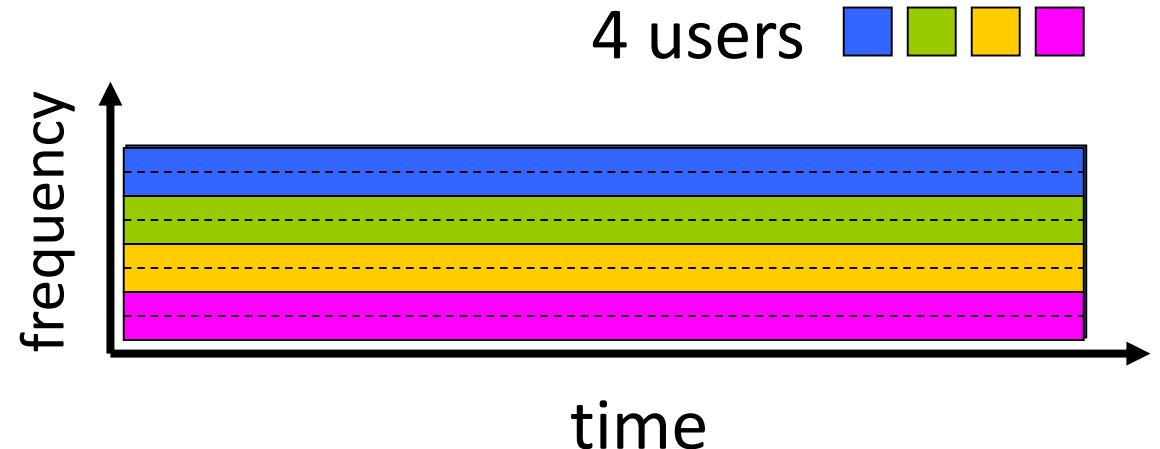


# Packet switching versus circuit switching

*packet switching allows more users to use network!*

Example:

- 1 Gb/s link
- each user:
  - 100 Mb/s when “active”
  - active 10% of time
- *circuit-switching*: 10 users
- *packet switching*: with 35 users, probability > 10 active at same time is less than .0004 \*

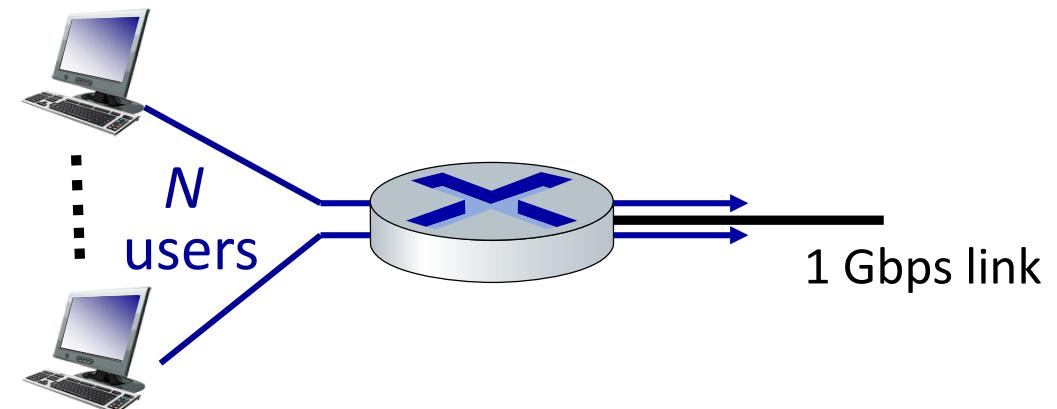

*Q:* how did we get value 0.0004?

*Q:* what happens if > 35 users ?

\* Check out the online interactive exercises for more examples: [http://gaia.cs.umass.edu/kurose\\_ross/interactive](http://gaia.cs.umass.edu/kurose_ross/interactive)

# Packet switching versus circuit switching

Is packet switching a “slam dunk winner”?

- great for “bursty” data – sometimes has data to send, but at other times not
  - resource sharing
  - simpler, no call setup
- **excessive congestion possible:** packet delay and loss due to buffer overflow
  - protocols needed for reliable data transfer, congestion control
- **Q: How to provide circuit-like behavior?**
  - bandwidth guarantees traditionally used for audio/video applications


**Q:** human analogies of reserved resources (circuit switching) versus on-demand allocation (packet switching)?

# Internet structure: a “network of networks”

- Hosts connect to Internet via **access** Internet Service Providers (ISPs)
  - residential, enterprise (company, university, commercial) ISPs
- Access ISPs in turn must be interconnected
  - so that any two hosts can send packets to each other
- Resulting network of networks is very complex
  - evolution was driven by **economics** and **national policies**
- Let's take a stepwise approach to describe current Internet structure


# Internet structure: a “network of networks”

*Question:* given *millions* of access ISPs, how to connect them together?

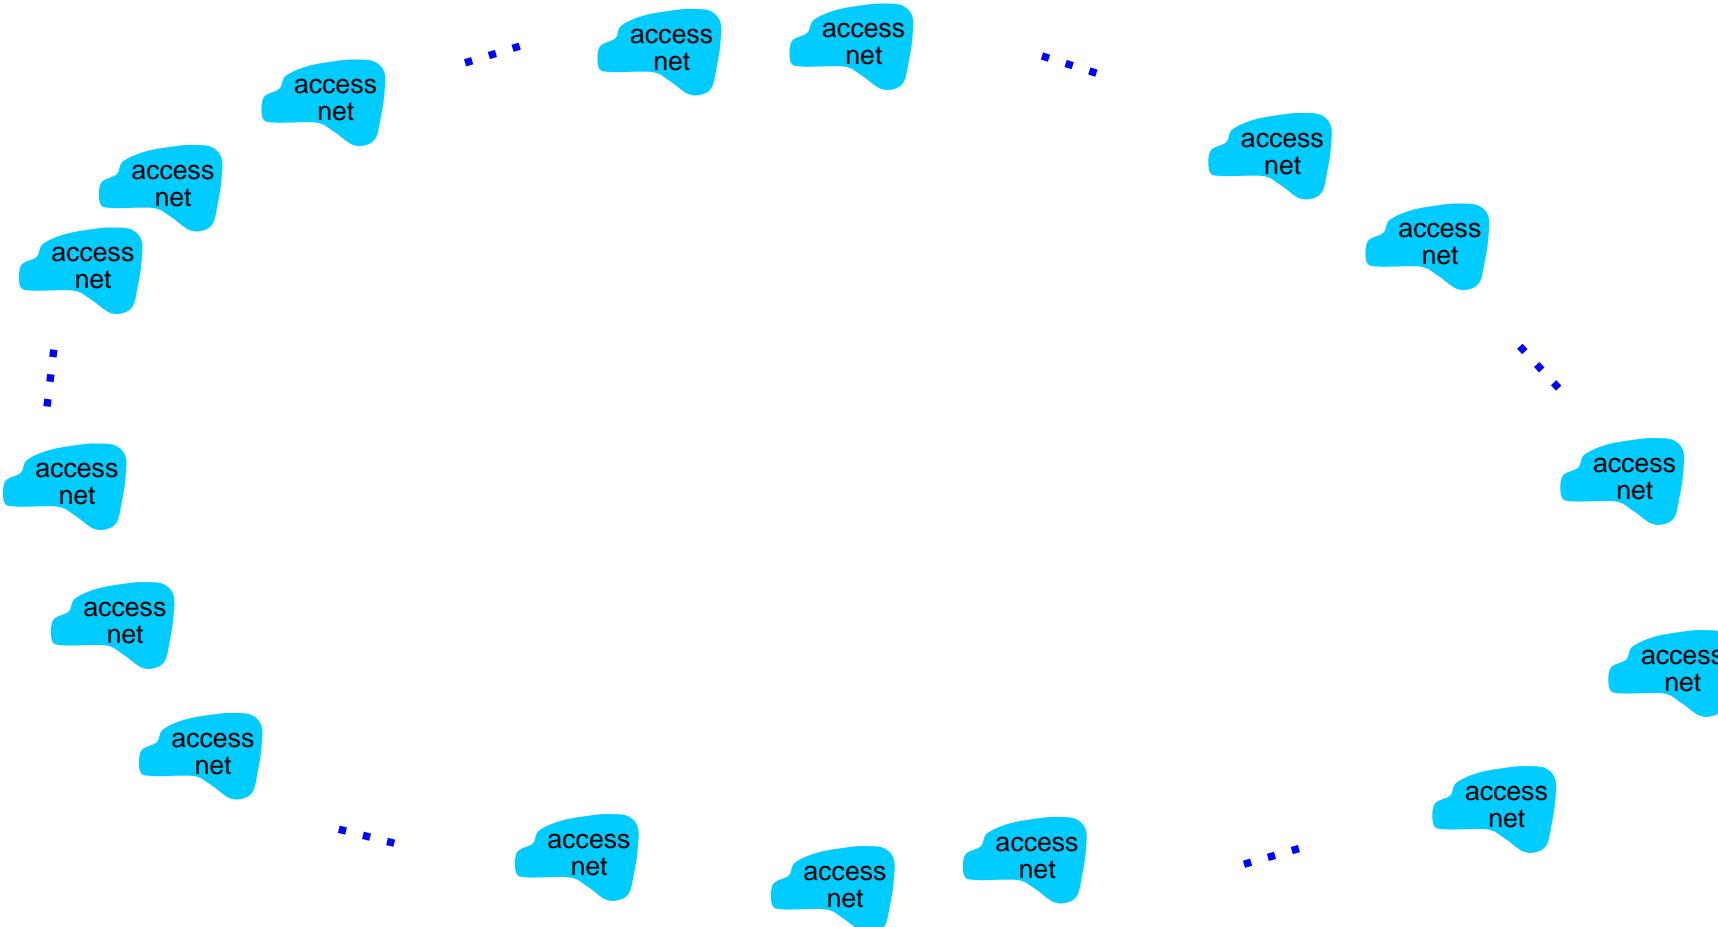

# Internet structure: a “network of networks”


*Question:* given *millions* of access ISPs, how to connect them together?

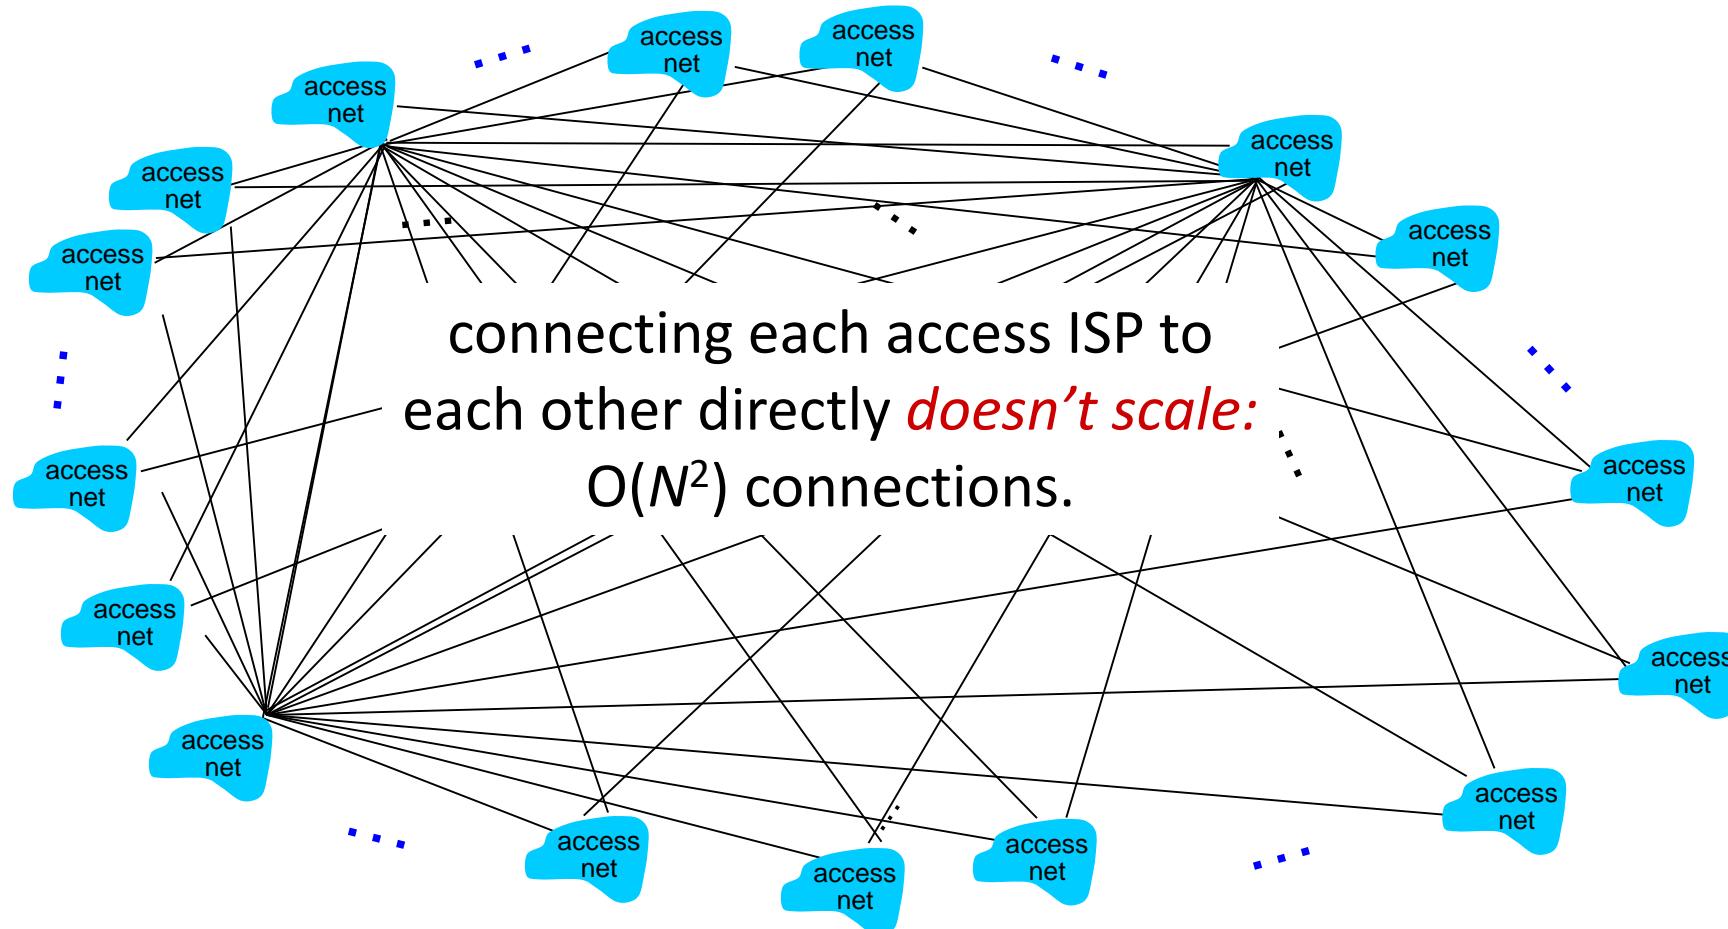

# Internet structure: a “network of networks”


*Option: connect each access ISP to one global transit ISP?*

*Customer and provider ISPs have economic agreement.*

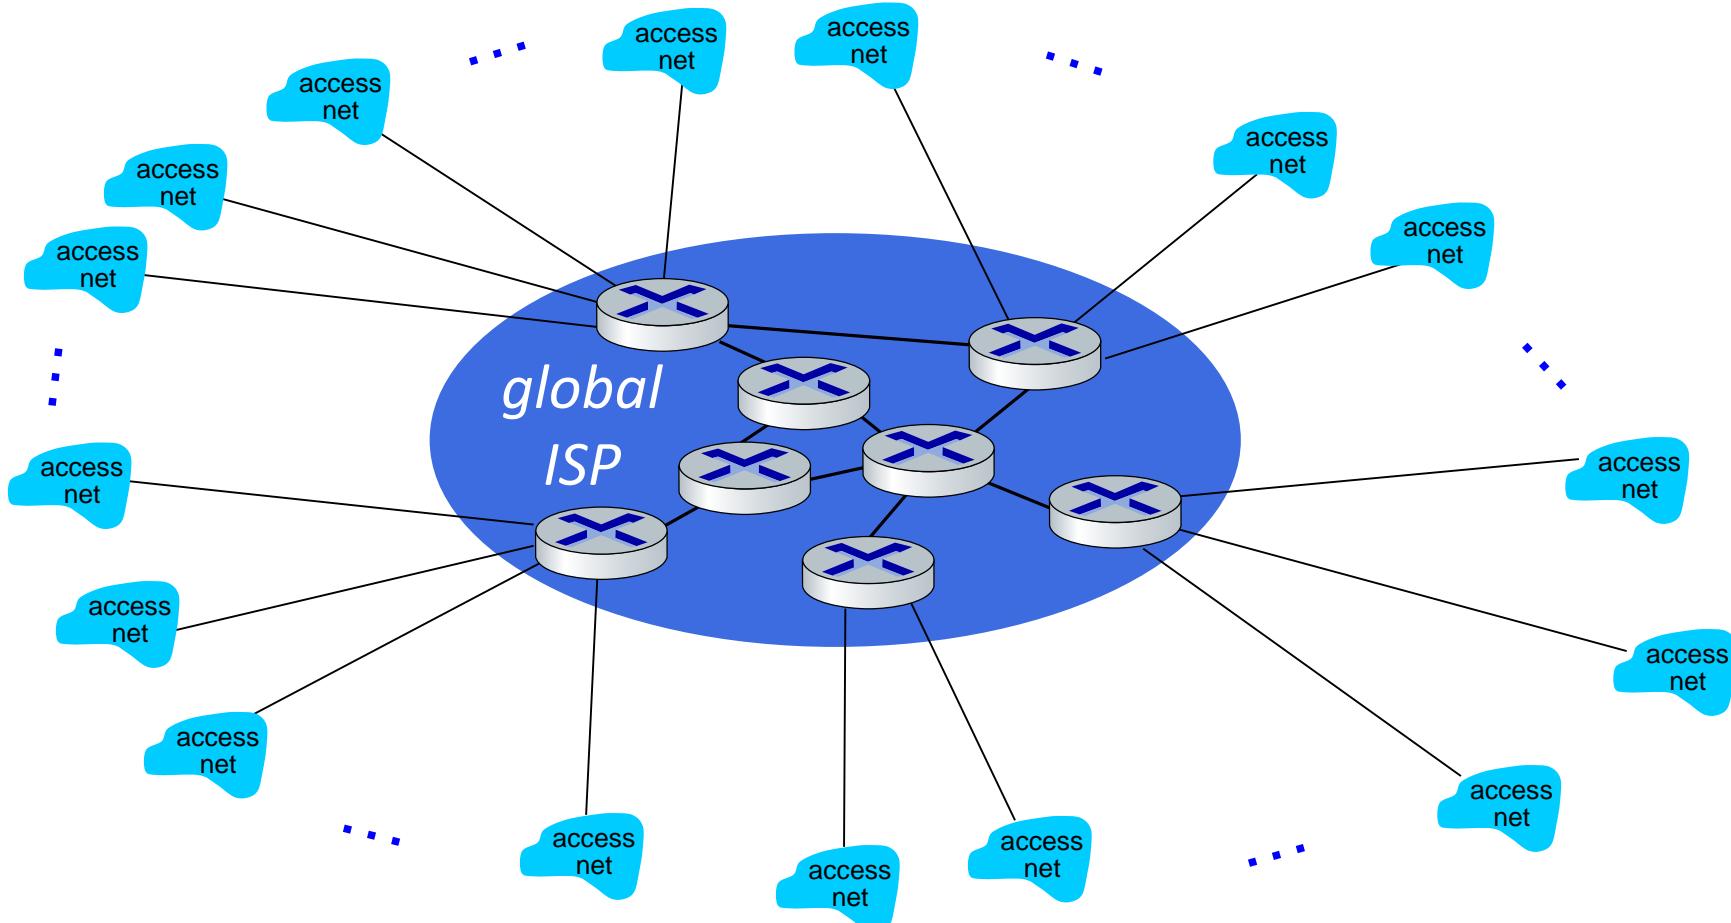


# Internet structure: a “network of networks”

But if one global ISP is viable business, there will be competitors ....

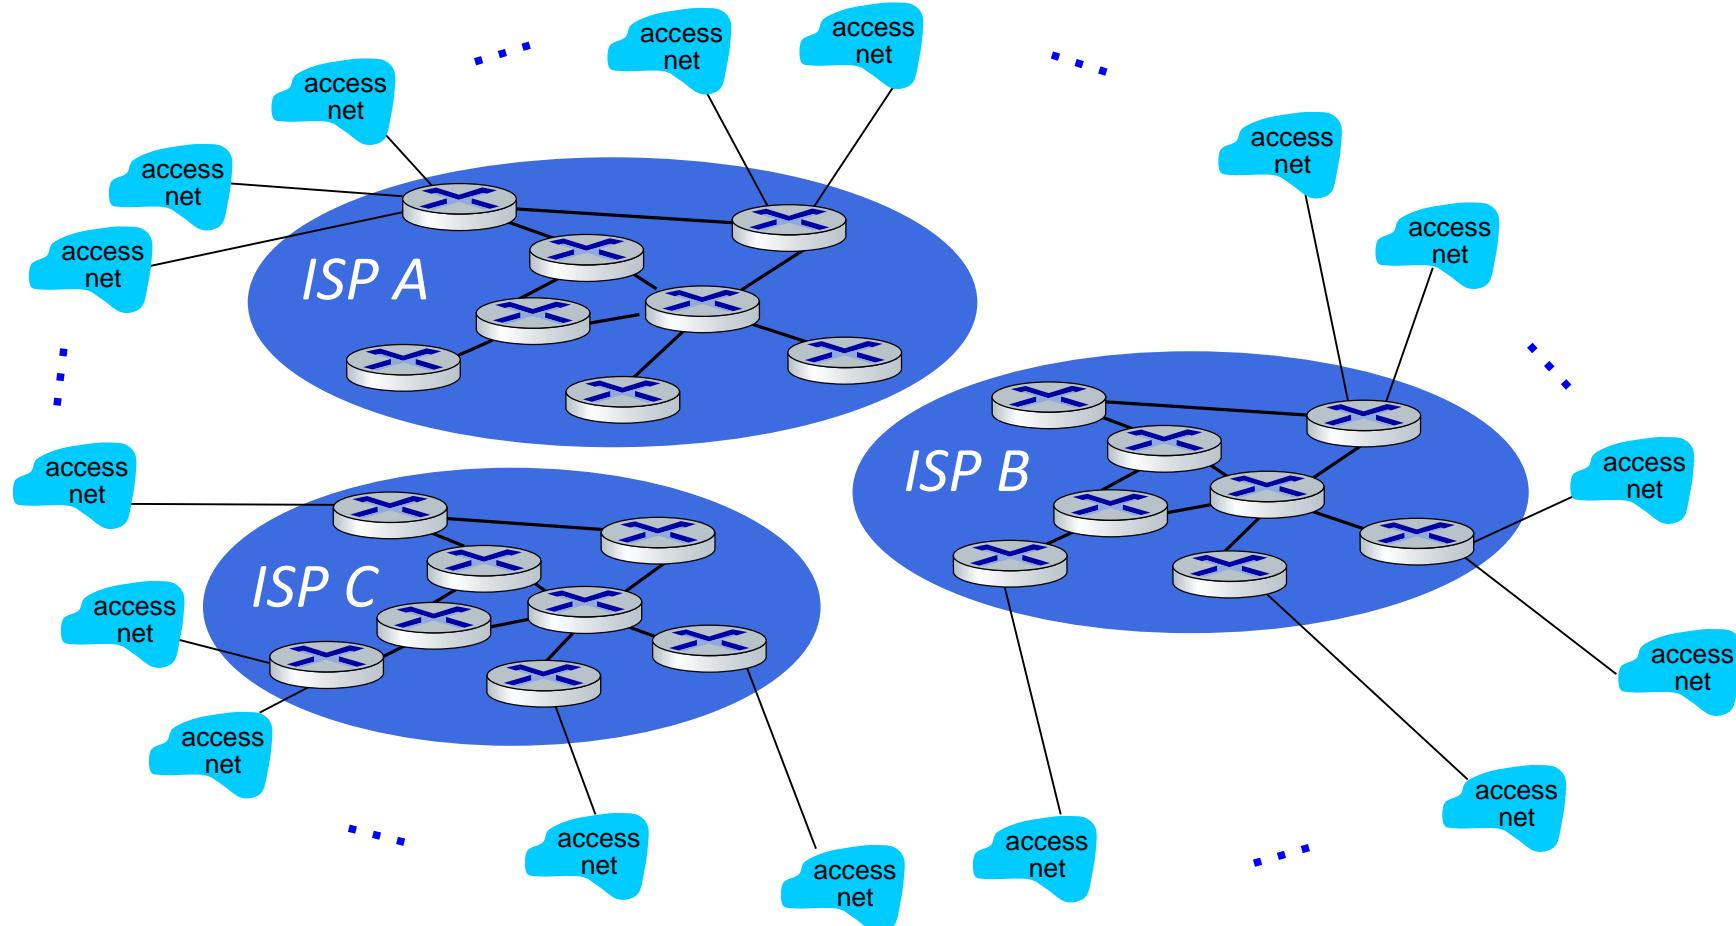


# Internet structure: a “network of networks”

But if one global ISP is viable business, there will be competitors ... who will want to be connected

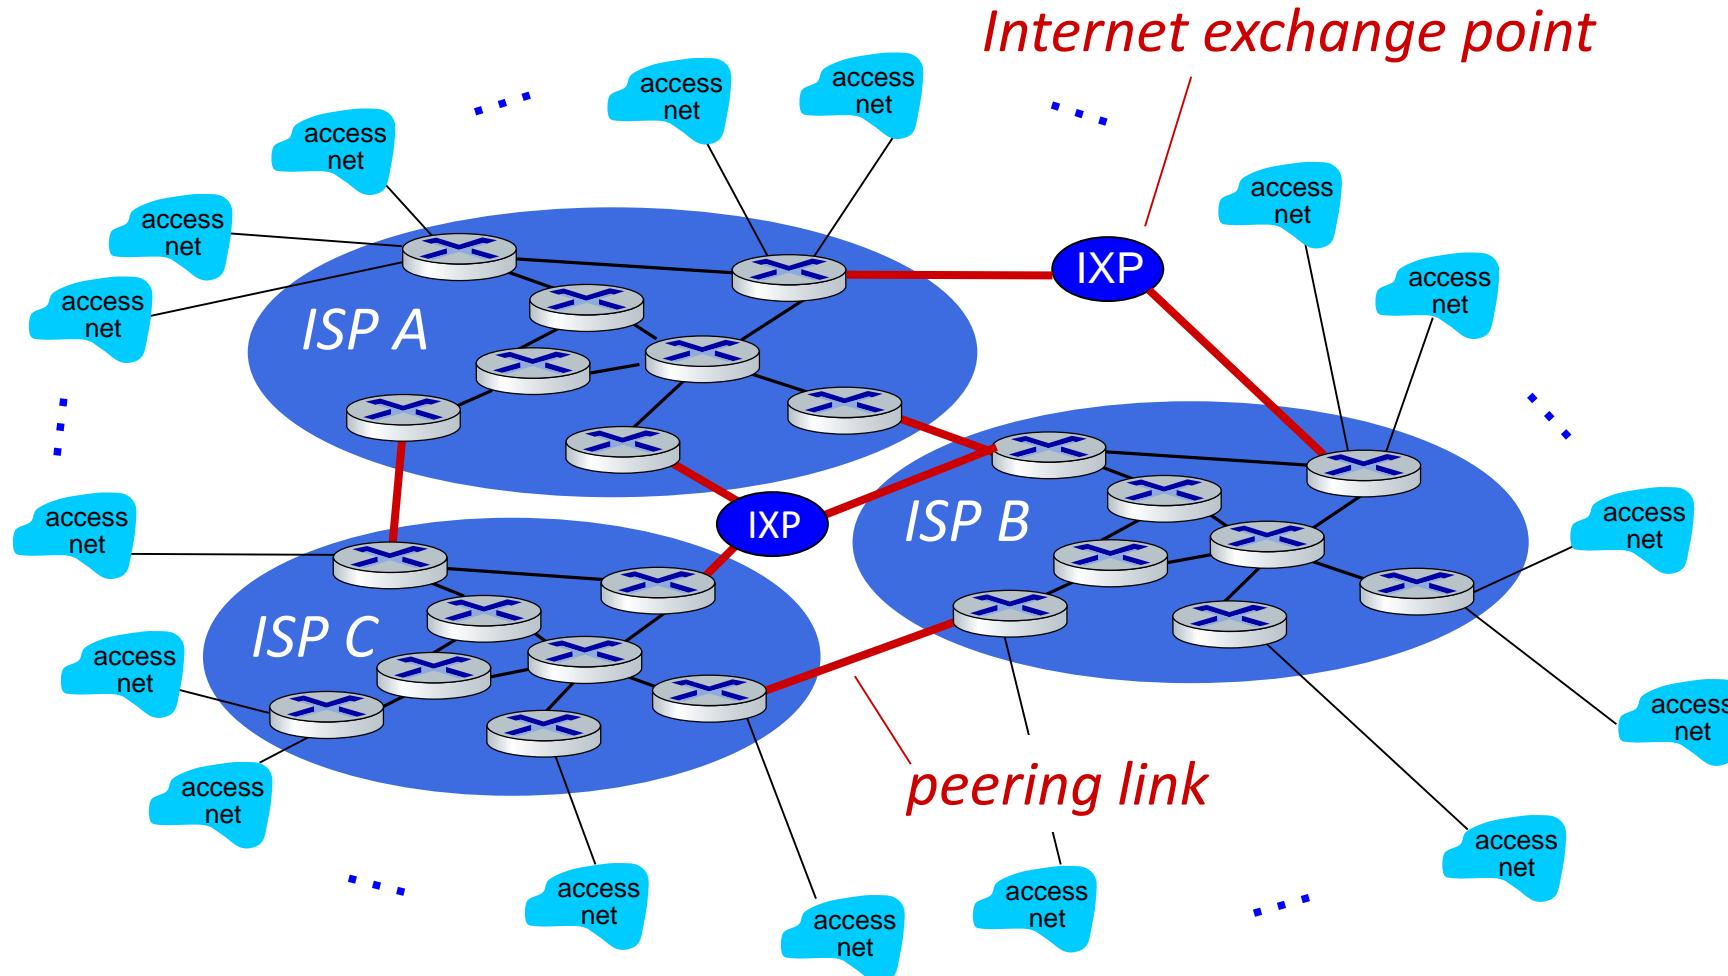


# Internet structure: a “network of networks”

... and regional networks may arise to connect access nets to ISPs

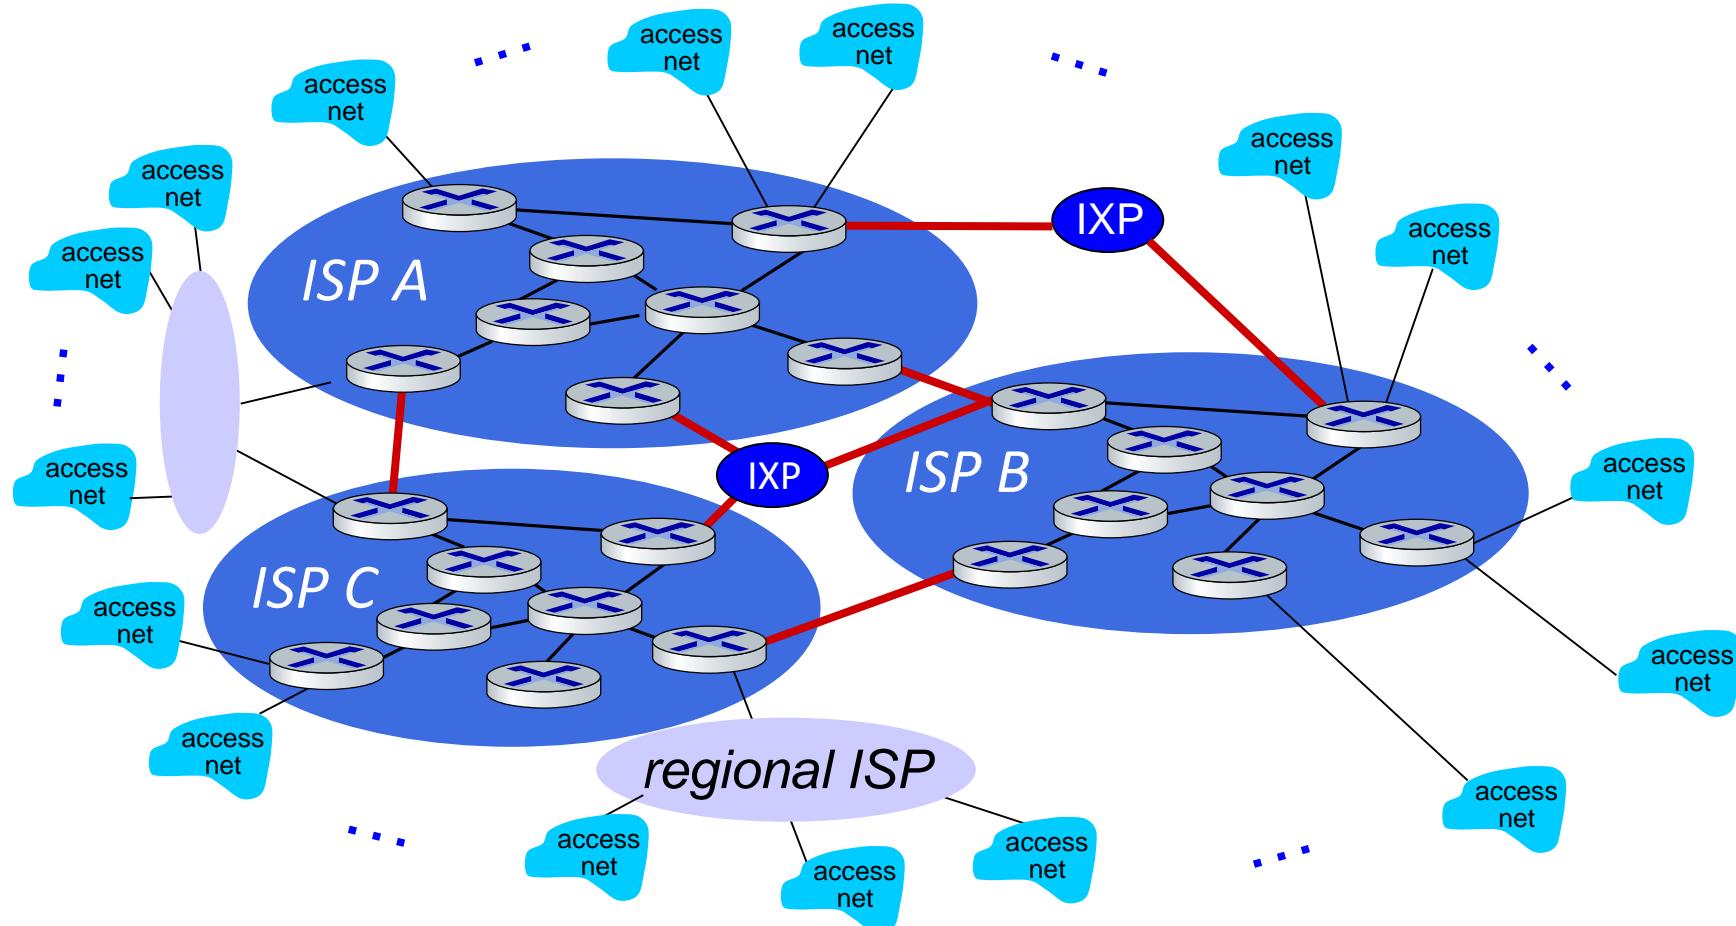


# Internet structure: a “network of networks”

... and content provider networks (e.g., Google, Microsoft, Akamai) may run their own network, to bring services, content close to end users

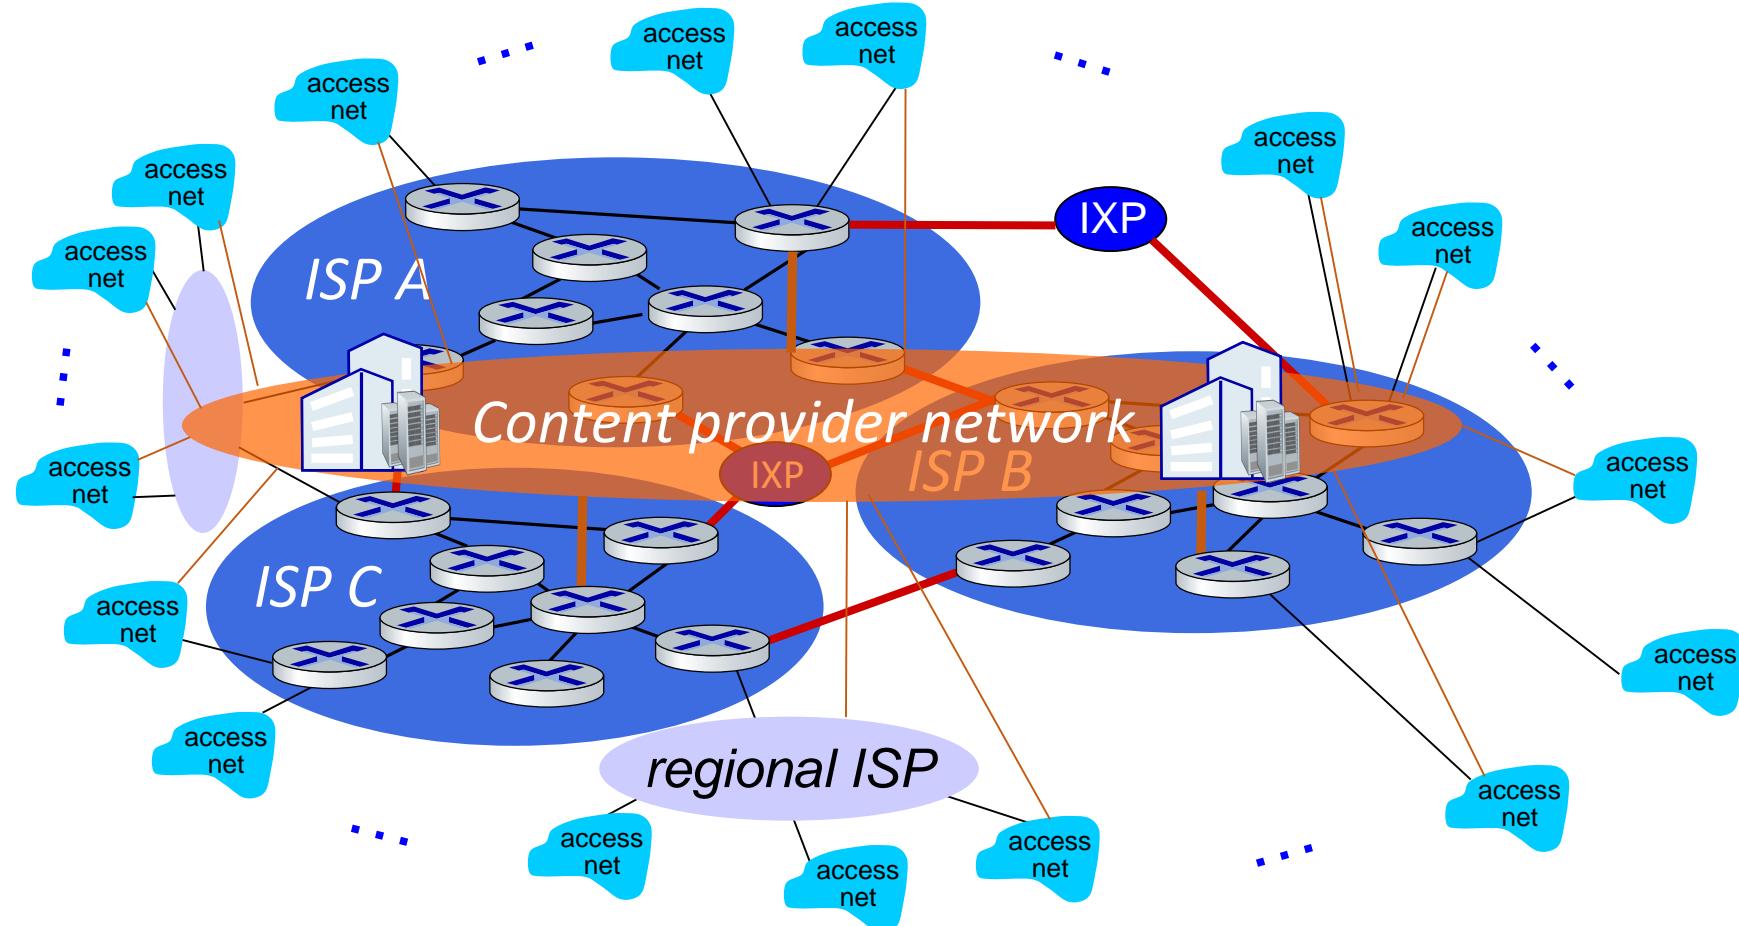

# Internet structure: a “network of networks”

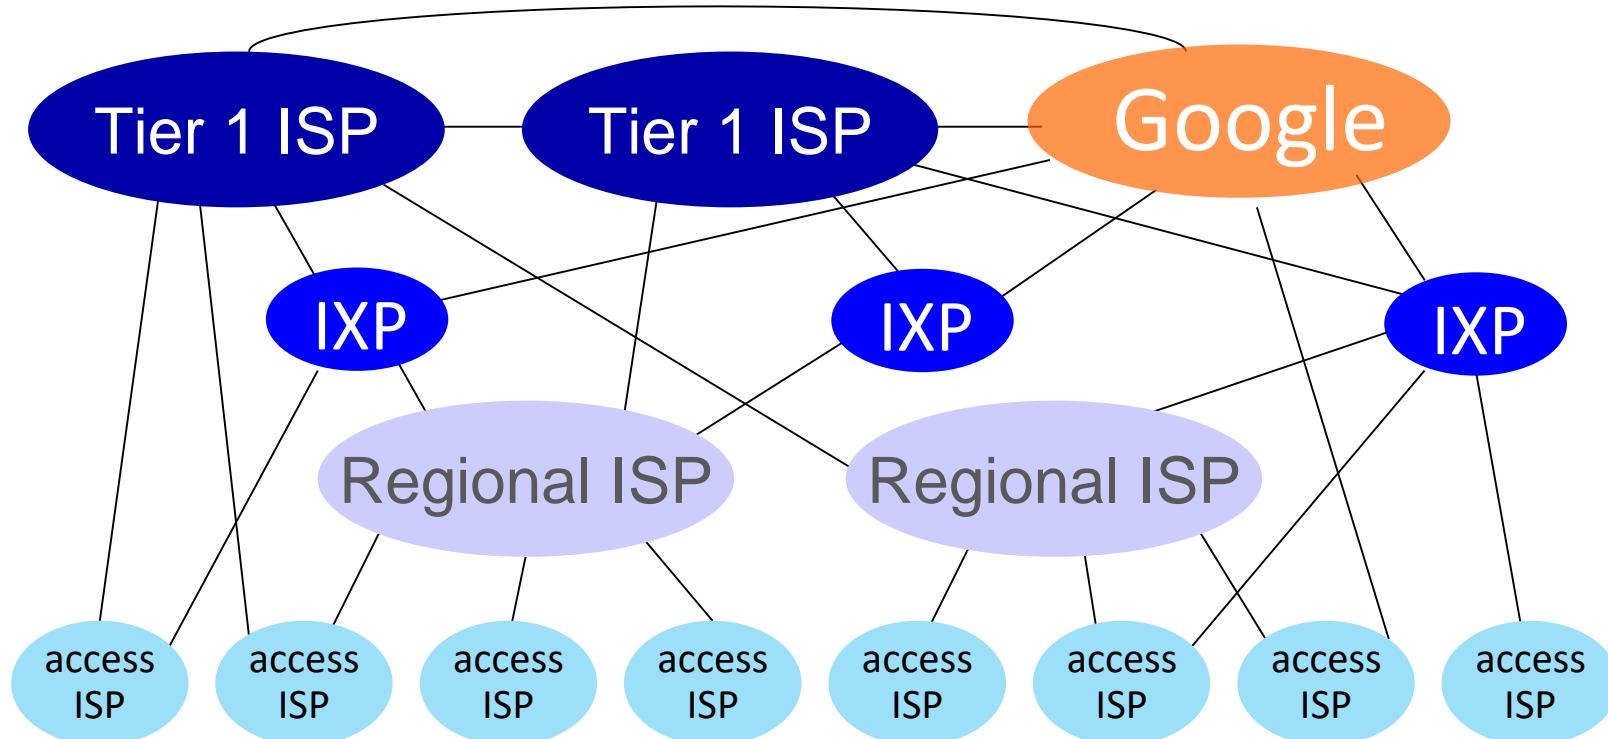

At “center”: small # of well-connected large networks

- **“tier-1” commercial ISPs** (e.g., Level 3, Sprint, AT&T, NTT), national & international coverage
- **content provider networks** (e.g., Google, Facebook): private network that connects its data centers to Internet, often bypassing tier-1, regional ISPs

# Tier-1 ISP Network map: Sprint (2019)



# Chapter 1: roadmap


- What *is* the Internet?
- What *is* a protocol?
- Network edge: hosts, access network, physical media
- Network core: packet/circuit switching, internet structure
- **Performance:** loss, delay, throughput
- Security
- Protocol layers, service models
- History




# How do packet loss and delay occur?

packets *queue* in router buffers

- packets queue, wait for turn
- arrival rate to link (temporarily) exceeds output link capacity: packet loss

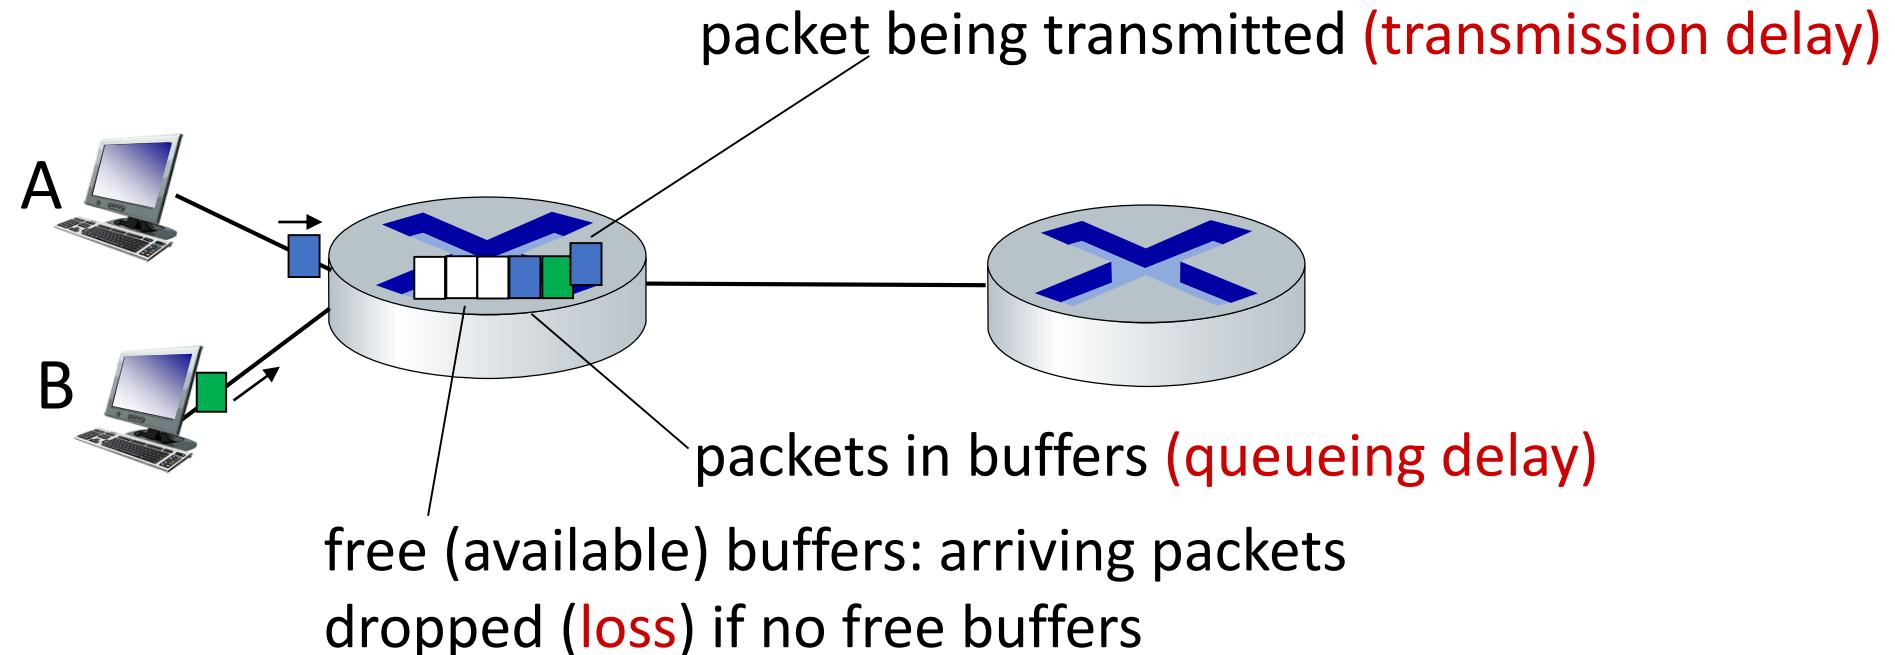

# Packet delay: four sources

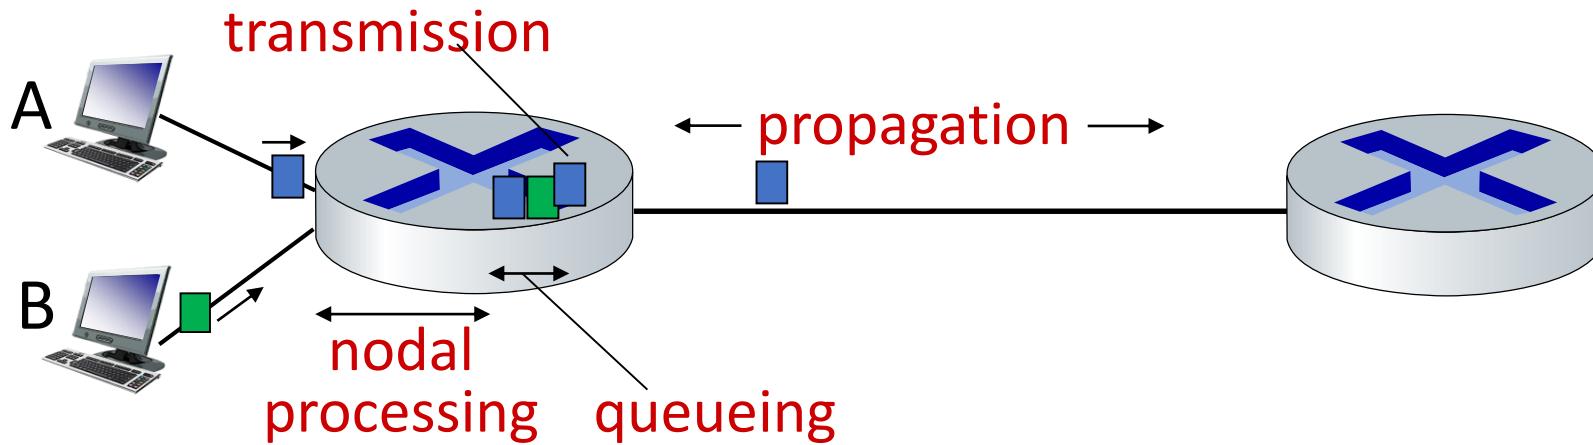

$$d_{\text{nodal}} = d_{\text{proc}} + d_{\text{queue}} + d_{\text{trans}} + d_{\text{prop}}$$


$d_{\text{proc}}$ : nodal processing

- check bit errors
- determine output link
- typically < msec

$d_{\text{queue}}$ : queueing delay

- time waiting at output link for transmission
- depends on congestion level of router

# Packet delay: four sources

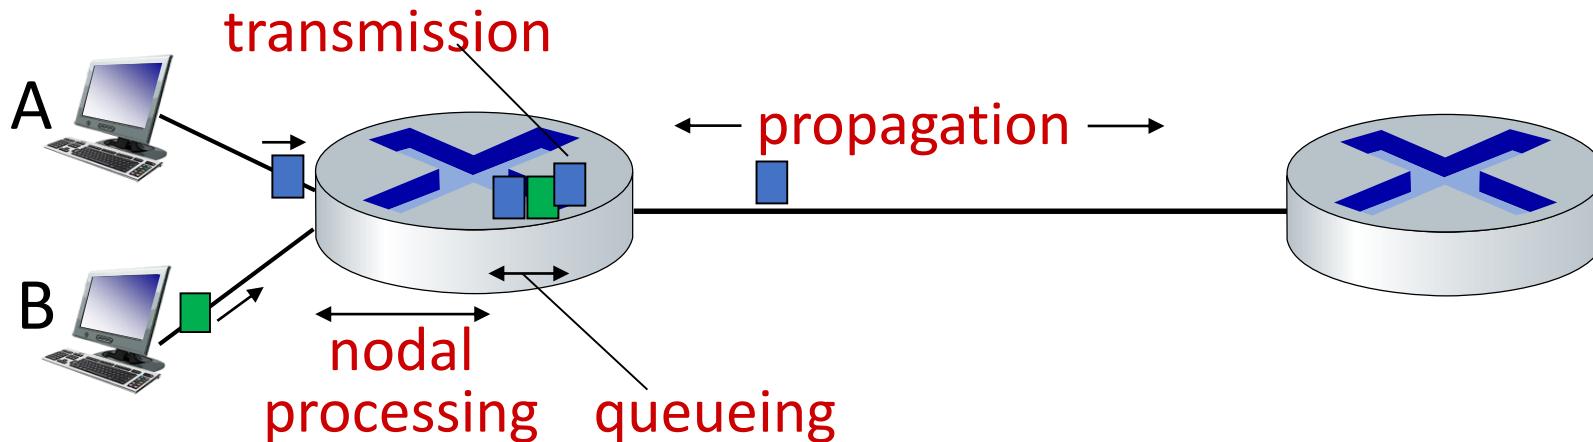

$$d_{\text{nodal}} = d_{\text{proc}} + d_{\text{queue}} + d_{\text{trans}} + d_{\text{prop}}$$

$d_{\text{trans}}$ : transmission delay:

- $L$ : packet length (bits)
- $R$ : link *transmission rate (bps)*
- $d_{\text{trans}} = L/R$


$d_{\text{trans}}$  and  $d_{\text{prop}}$   
very different

$d_{\text{prop}}$ : propagation delay:

- $d$ : length of physical link
- $s$ : propagation speed ( $\sim 2 \times 10^8$  m/sec)
- $d_{\text{prop}} = d/s$

\* Check out the online interactive exercises:  
[http://gaia.cs.umass.edu/kurose\\_ross](http://gaia.cs.umass.edu/kurose_ross)


# Caravan analogy

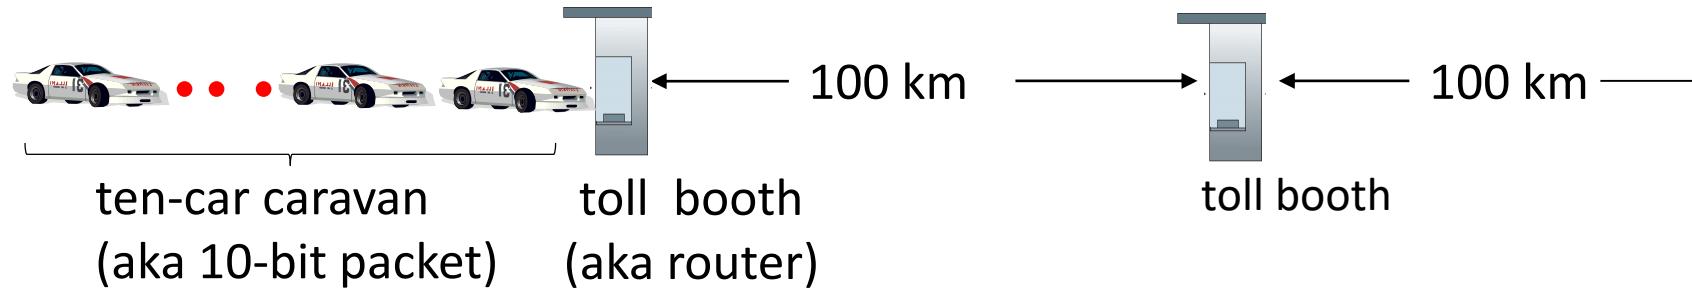

- cars “propagate” at 100 km/hr
- toll booth takes 12 sec to service car (bit transmission time)
- car ~ bit; caravan ~ packet
- **Q: How long until caravan is lined up before 2nd toll booth?**

- time to “push” entire caravan through toll booth onto highway =  $12 * 10 = 120$  sec
- time for last car to propagate from 1st to 2nd toll both:  $100\text{km}/(100\text{km/hr}) = 1$  hr
- **A: 62 minutes**


# Caravan analogy

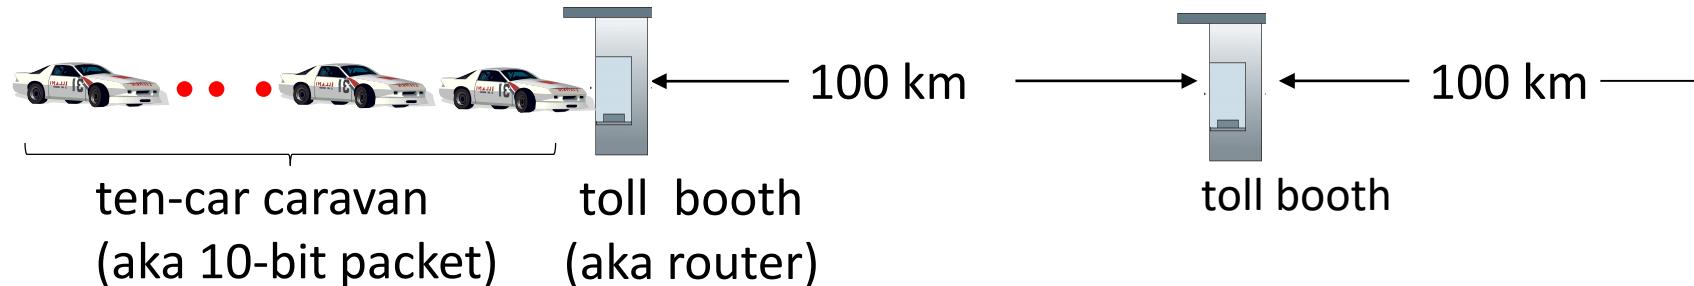

- suppose cars now “propagate” at 1000 km/hr
  - and suppose toll booth now takes one min to service a car
  - ***Q: Will cars arrive to 2nd booth before all cars serviced at first booth?***
- A: Yes!** after 7 min, first car arrives at second booth; three cars still at first booth

# Packet queueing delay (revisited)


- $R$ : link bandwidth (bps)
- $L$ : packet length (bits)
- $a$ : average packet arrival rate
- $La/R \sim 0$ : avg. queueing delay small
- $La/R \rightarrow 1$ : avg. queueing delay large
- $La/R > 1$ : more “work” arriving is more than can be serviced - average delay infinite!

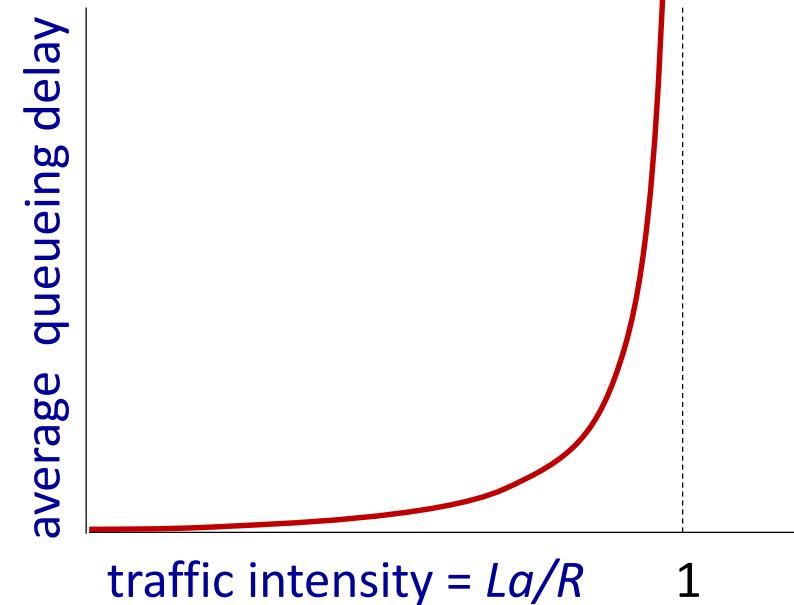

$La/R \rightarrow 1$


# “Real” Internet delays and routes

- what do “real” Internet delay & loss look like?
- **traceroute** program: provides delay measurement from source to router along end-end Internet path towards destination. For all  $i$ :
  - sends three packets that will reach router  $i$  on path towards destination (with time-to-live field value of  $i$ )
  - router  $i$  will return packets to sender
  - sender measures time interval between transmission and reply

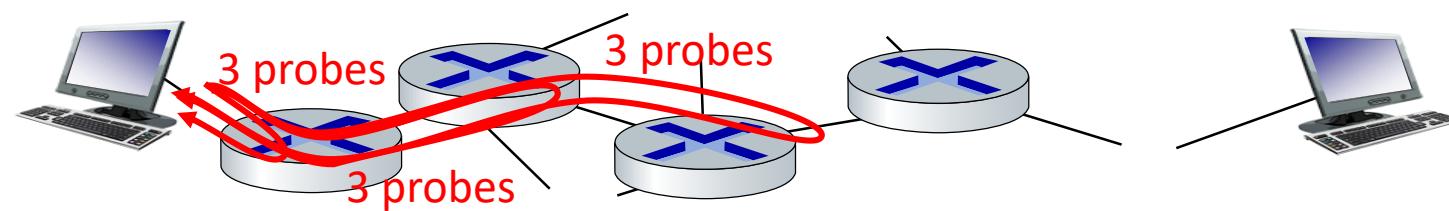

# Real Internet delays and routes


traceroute: gaia.cs.umass.edu to www.eurecom.fr

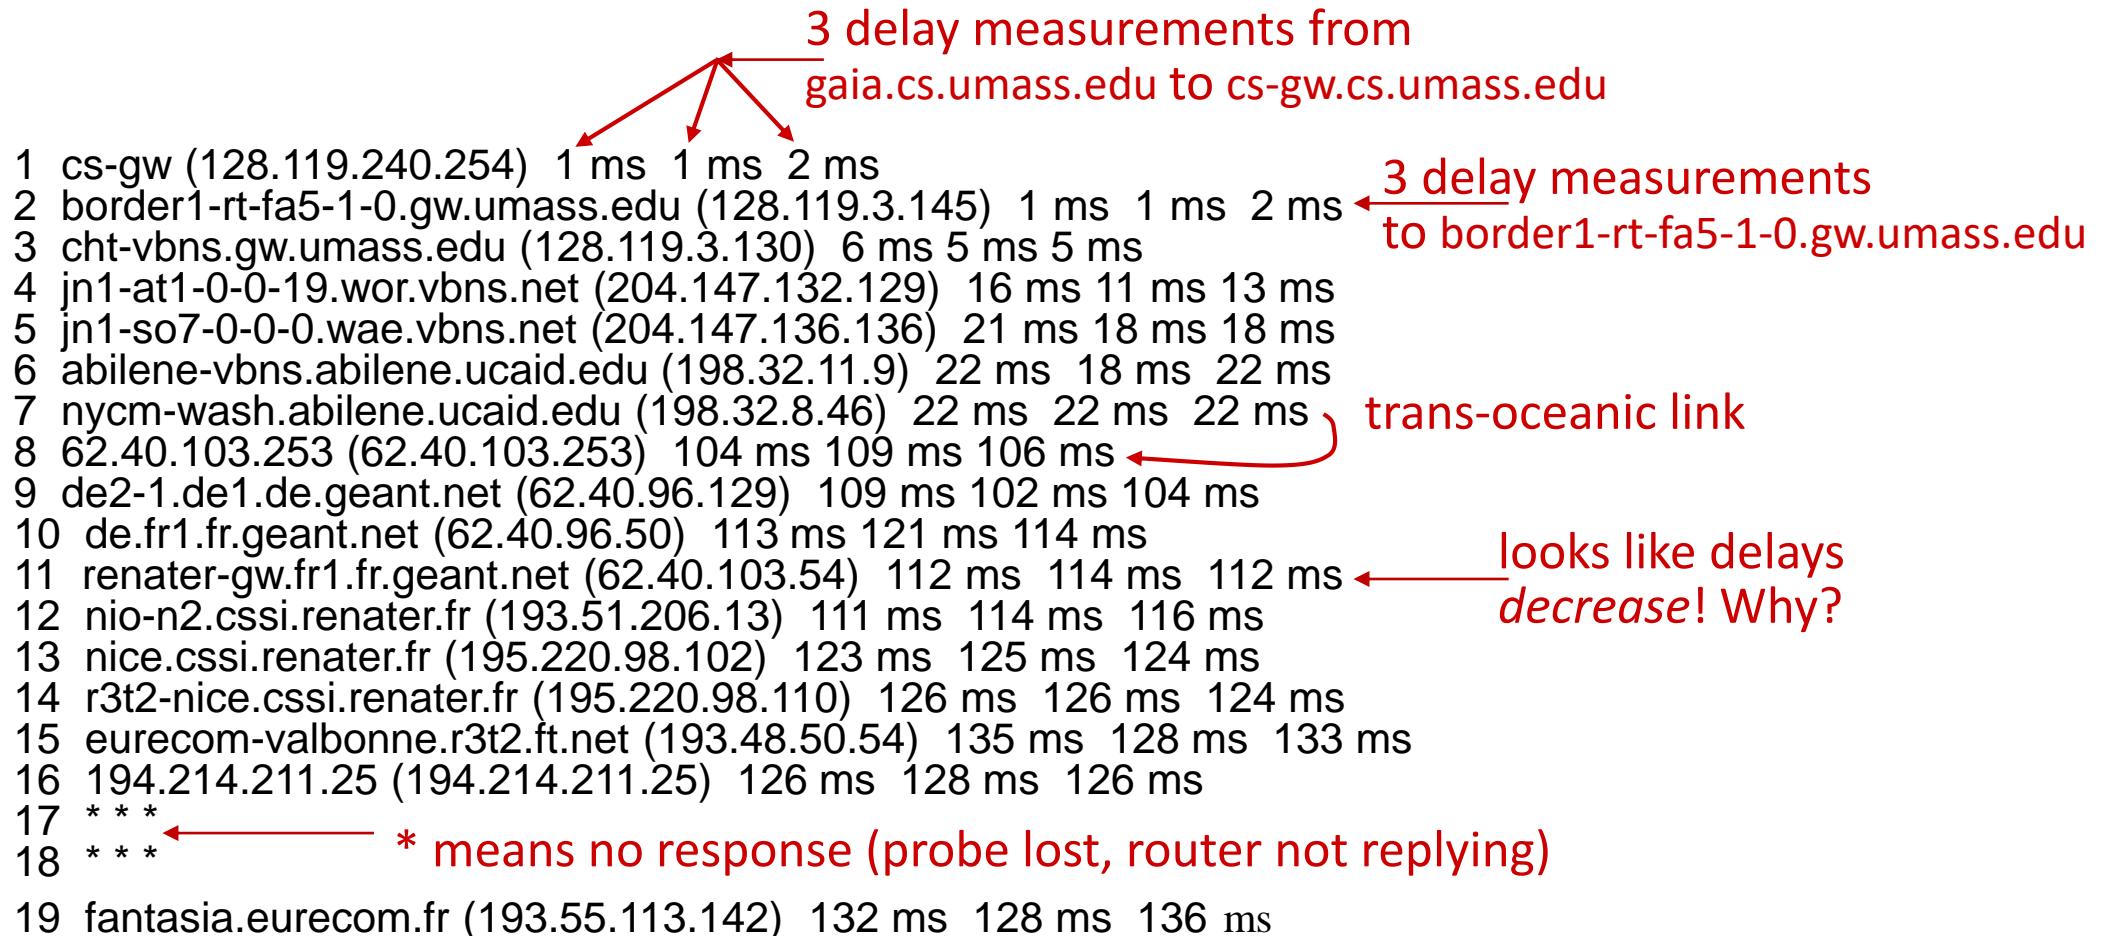

\* Do some traceroutes from exotic countries at [www.traceroute.org](http://www.traceroute.org)

# Packet loss


- queue (aka buffer) preceding link in buffer has finite capacity
- packet arriving to full queue dropped (aka lost)
- lost packet may be retransmitted by previous node, by source end system, or not at all

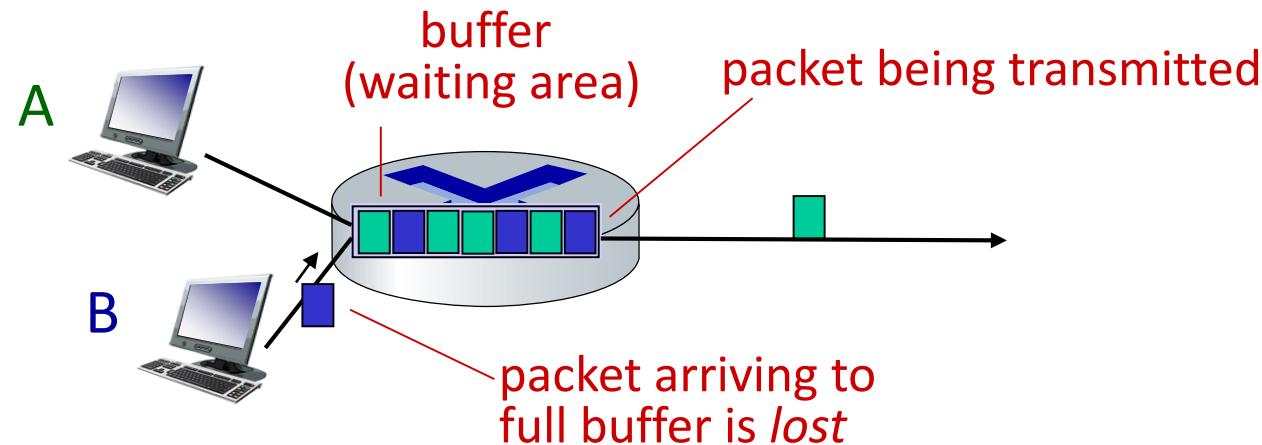

\* Check out the Java applet for an interactive animation on queuing and loss


# Throughput

- *throughput*: rate (bits/time unit) at which bits are being sent from sender to receiver
  - *instantaneous*: rate at given point in time
  - *average*: rate over longer period of time

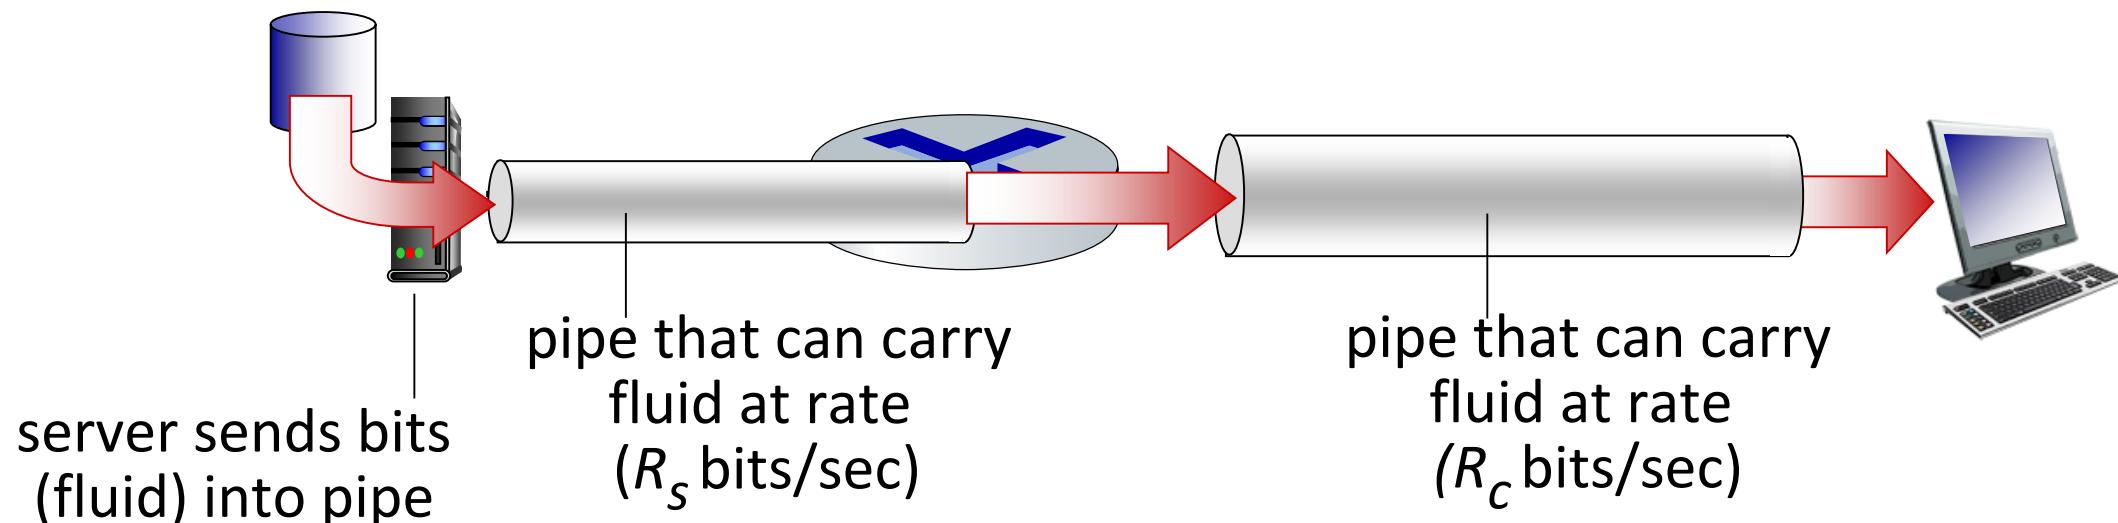


# Throughput

$R_s < R_c$  What is average end-end throughput?

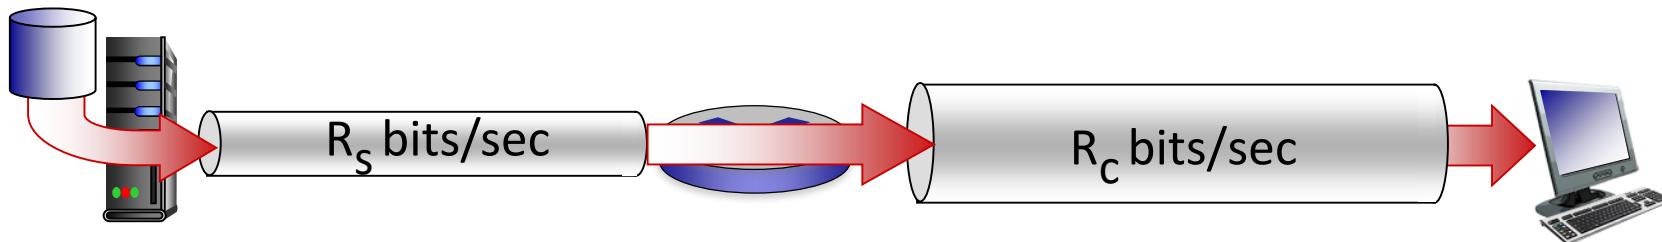


$R_s > R_c$  What is average end-end throughput?

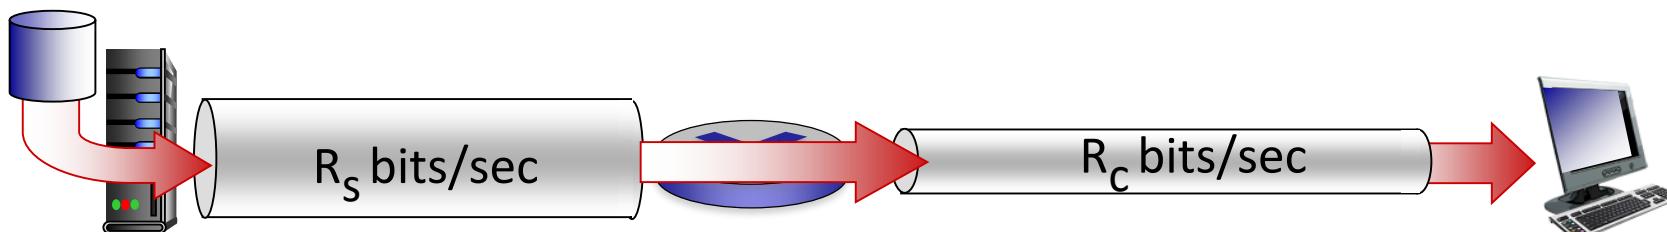

*bottleneck link*

link on end-end path that constrains end-end throughput

# Throughput: network scenario

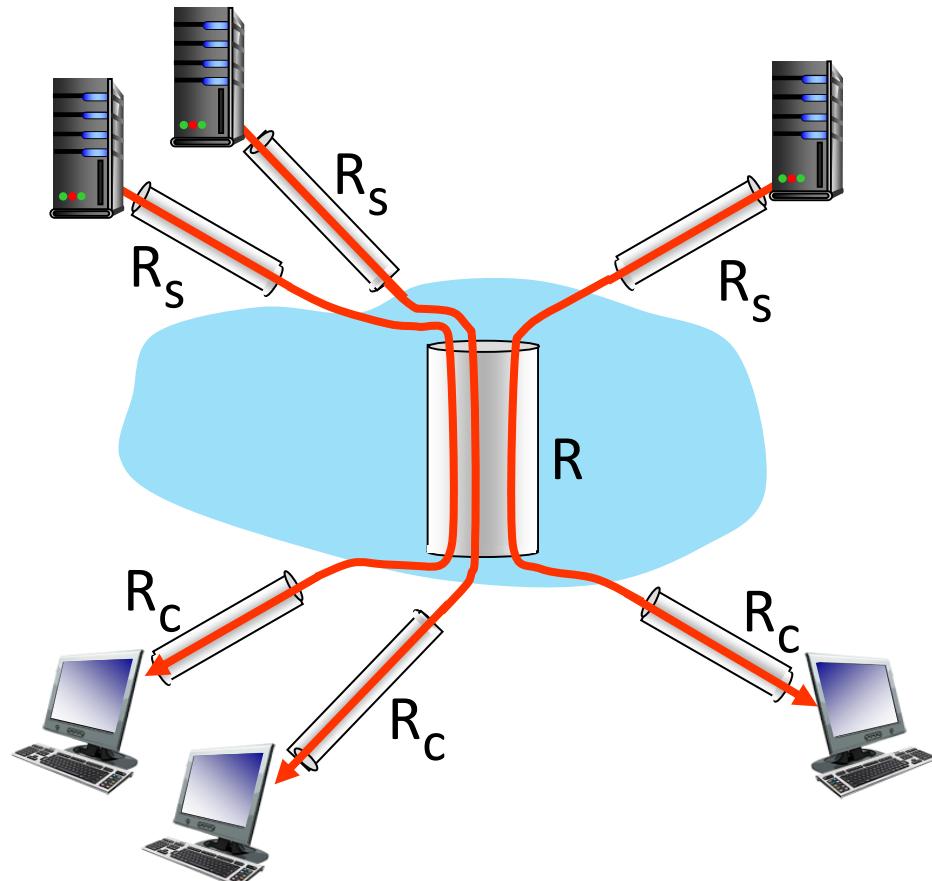

10 connections (fairly) share  
backbone bottleneck link  $R$  bits/sec

- per-connection end-end throughput:  $\min(R_c, R_s, R/10)$
- in practice:  $R_c$  or  $R_s$  is often bottleneck

\* Check out the online interactive exercises for more examples: [http://gaia.cs.umass.edu/kurose\\_ross/](http://gaia.cs.umass.edu/kurose_ross/)

# Chapter 1: roadmap

- What *is* the Internet?
- What *is* a protocol?
- Network edge: hosts, access network, physical media
- Network core: packet/circuit switching, internet structure
- Performance: loss, delay, throughput
- **Security**
- Protocol layers, service models
- History



# Network security

- **field of network security:**
  - how bad guys can attack computer networks
  - how we can defend networks against attacks
  - how to design architectures that are immune to attacks
- **Internet not originally designed with (much) security in mind**
  - *original vision*: “a group of mutually trusting users attached to a transparent network” ☺
  - Internet protocol designers playing “catch-up”
  - security considerations in all layers!


# Bad guys: malware

- malware can get in host from:
  - *virus*: self-replicating infection by receiving/executing object (e.g., e-mail attachment)
  - *worm*: self-replicating infection by passively receiving object that gets itself executed
- **spyware malware** can record keystrokes, web sites visited, upload info to collection site
- infected host can be enrolled in **botnet**, used for spam or distributed denial of service (DDoS) attacks

# Bad guys: denial of service

*Denial of Service (DoS):* attackers make resources (server, bandwidth) unavailable to legitimate traffic by overwhelming resource with bogus traffic


1. select target
2. break into hosts  
around the network  
(see botnet)
3. send packets to target  
from compromised  
hosts

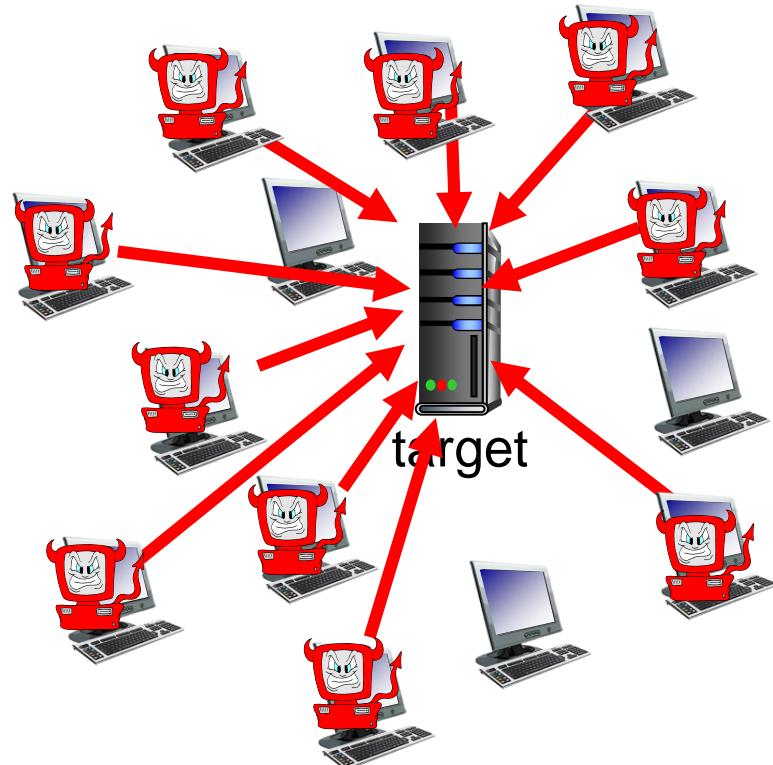

# Bad guys: packet interception

*packet “sniffing”:*


- broadcast media (shared Ethernet, wireless)
- promiscuous network interface reads/records all packets (e.g., including passwords!) passing by

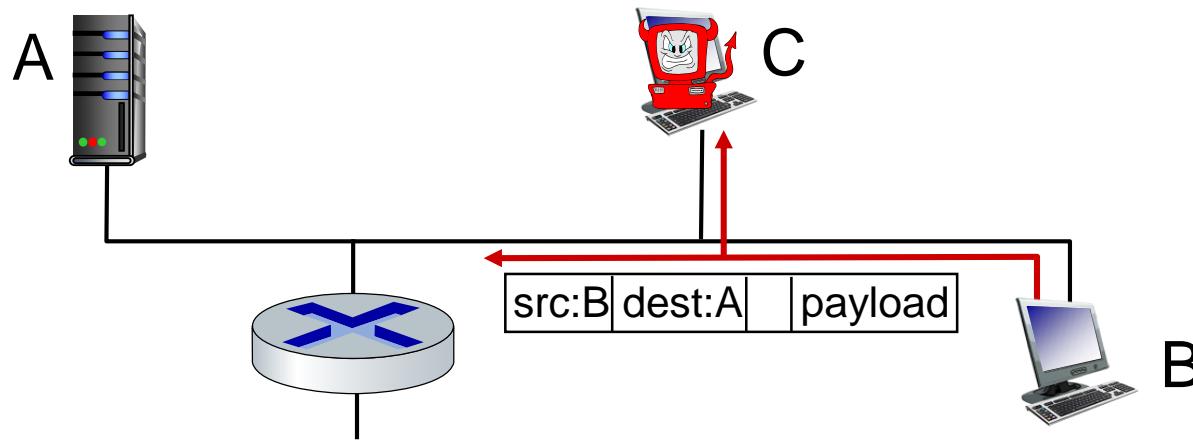

Wireshark software used for our end-of-chapter labs is a (free) packet-sniffer

# Bad guys: fake identity

*IP spoofing:* send packet with false source address

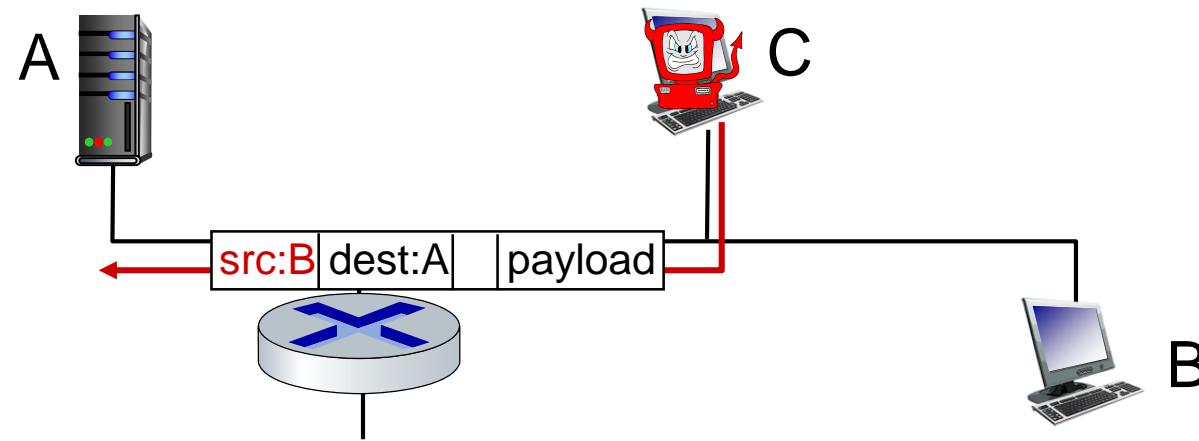

*... lots more on security (throughout, Chapter 8)*

# Chapter 1: roadmap

- What *is* the Internet?
- What *is* a protocol?
- Network edge: hosts, access network, physical media
- Network core: packet/circuit switching, internet structure
- Performance: loss, delay, throughput
- Security
- **Protocol layers, service models**
- History



# Protocol “layers” and reference models

*Networks are complex,  
with many “pieces”:*


- hosts
- routers
- links of various media
- applications
- protocols
- hardware, software

*Question:*

is there any hope of  
*organizing* structure of  
network?

.... or at least our  
*discussion* of networks?

# Example: organization of air travel

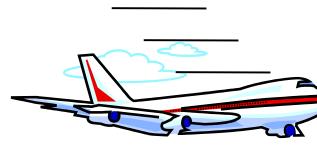

ticket (purchase)  
baggage (check)  
gates (load)  
runway takeoff  
airplane routing

ticket (complain)  
baggage (claim)  
gates (unload)  
runway landing  
airplane routing

airplane routing

airline travel: a series of steps, involving many services

# Example: organization of air travel



*layers:* each layer implements a service

- via its own internal-layer actions
- relying on services provided by layer below

*Q:* describe in words  
the service provided  
in each layer above


# Why layering?

dealing with complex systems:


- explicit structure allows identification, relationship of complex system's pieces
  - layered *reference model* for discussion
- modularization eases maintenance, updating of system
  - change in layer's service *implementation*: transparent to rest of system
  - e.g., change in gate procedure doesn't affect rest of system
- layering considered harmful?
- layering in other complex systems?

# Internet protocol stack

- *application*: supporting network applications
  - IMAP, SMTP, HTTP
- *transport*: process-process data transfer
  - TCP, UDP
- *network*: routing of datagrams from source to destination
  - IP, routing protocols
- *link*: data transfer between neighboring network elements
  - Ethernet, 802.11 (WiFi), PPP
- *physical*: bits “on the wire”

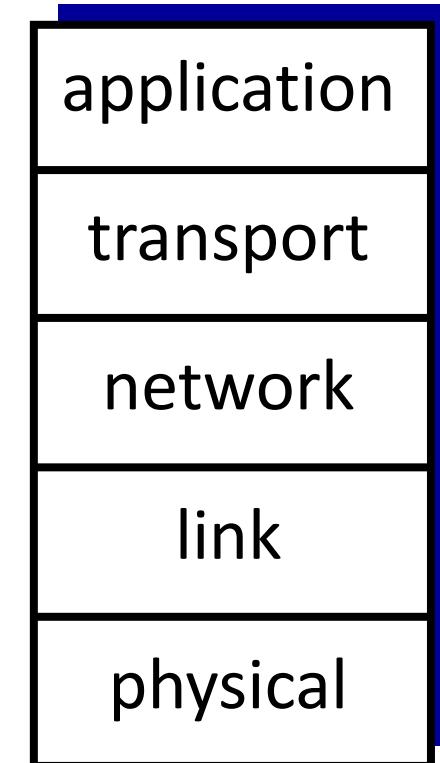

# Encapsulation

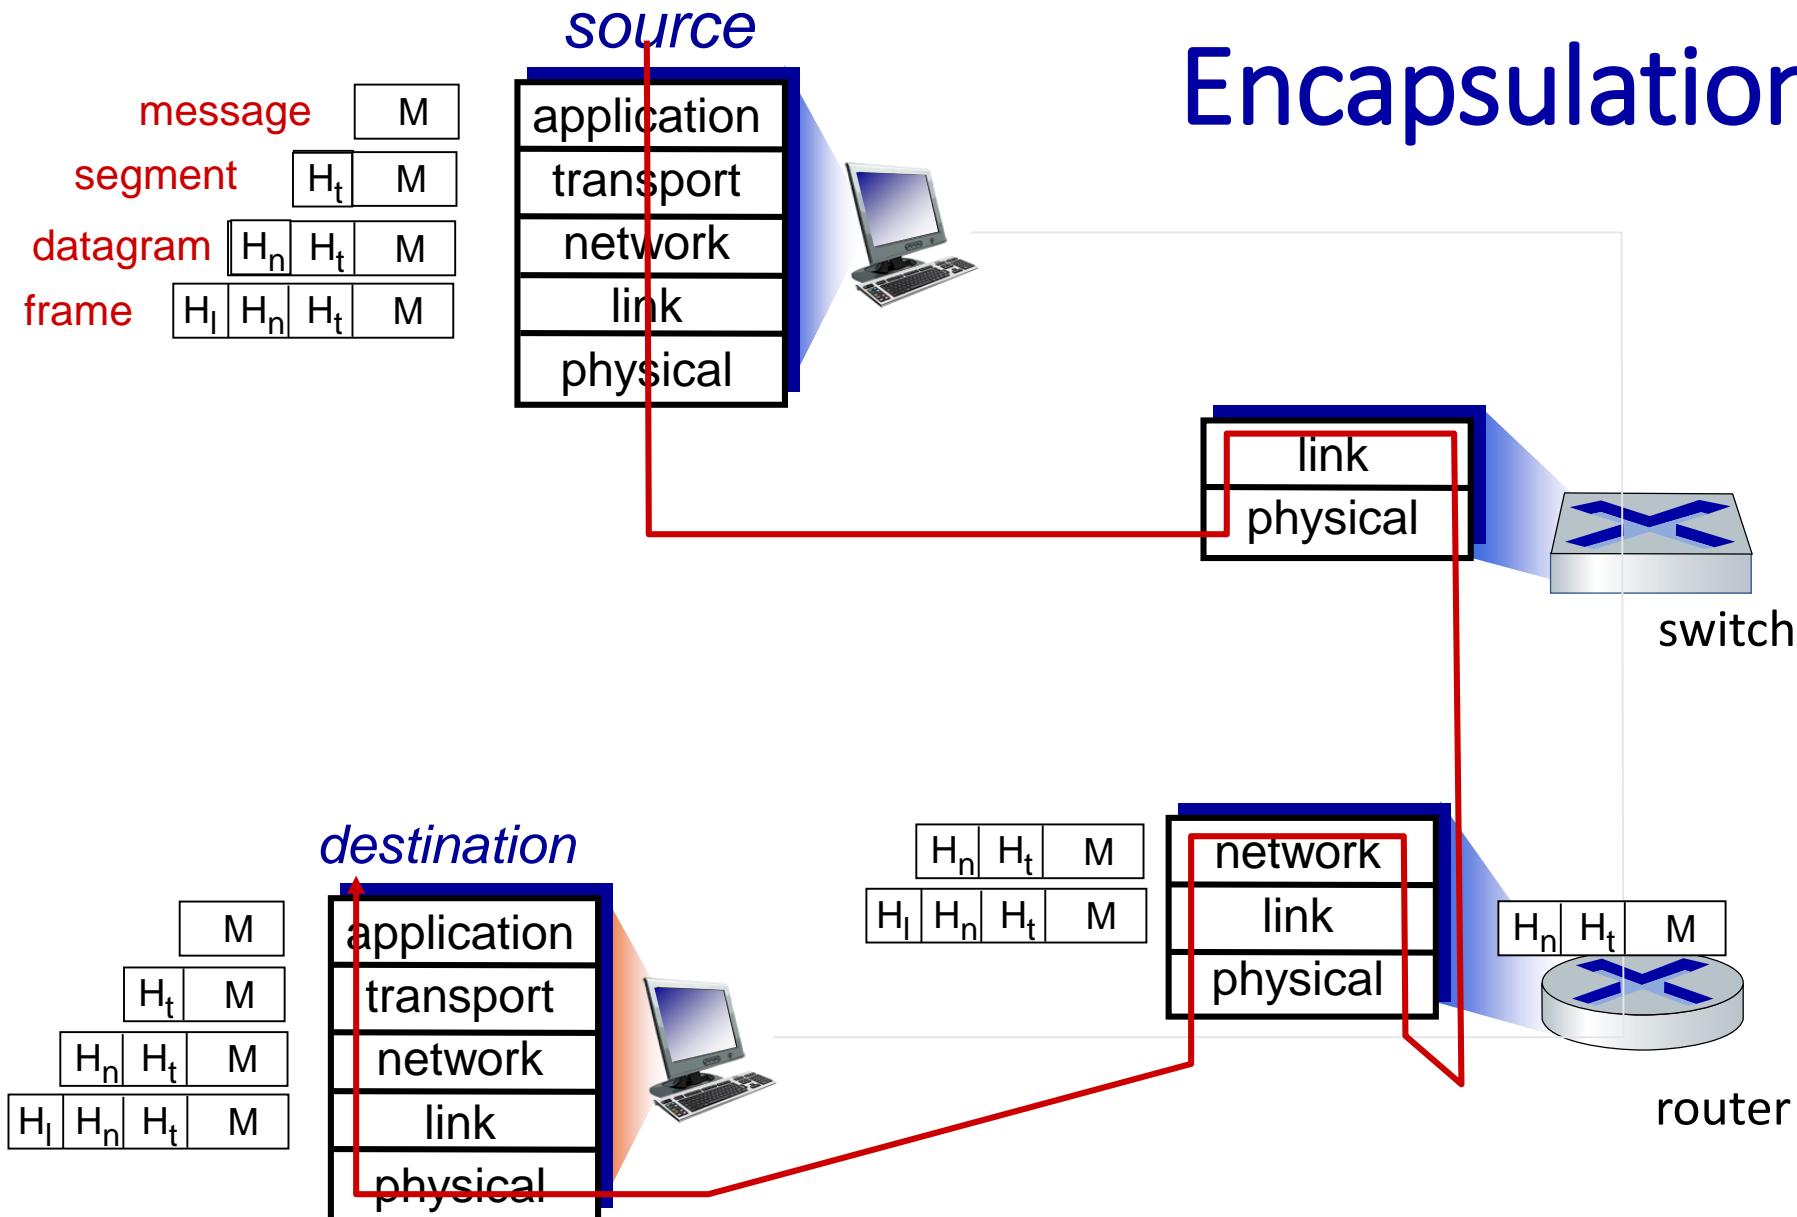

# Chapter 1: summary

*We've covered a "ton" of material!*

- Internet overview
- what's a protocol?
- network edge, access network, core
  - packet-switching versus circuit-switching
  - Internet structure
- performance: loss, delay, throughput
- layering, service models
- security
- history

*You now have:*


- context, overview, vocabulary, "feel" of networking
- more depth, detail, *and fun* to follow!

# Additional Chapter 1 slides

# ISO/OSI reference model

Two layers not found in Internet protocol stack!

- *presentation*: allow applications to interpret meaning of data, e.g., encryption, compression, machine-specific conventions
- *session*: synchronization, checkpointing, recovery of data exchange
- Internet stack “missing” these layers!
  - these services, *if needed*, must be implemented in application
  - needed?

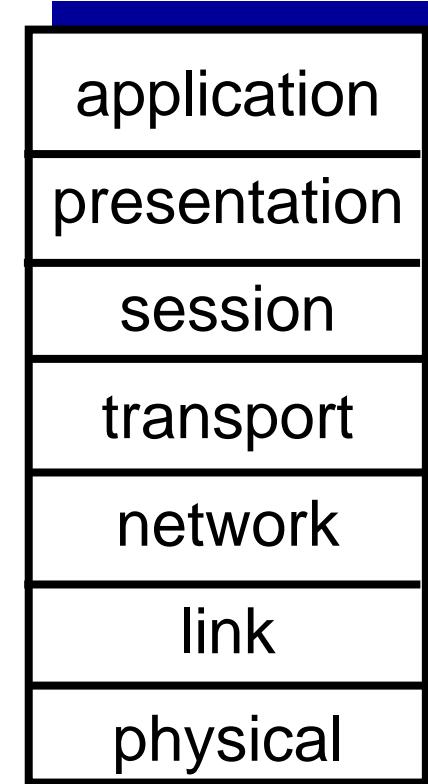

The seven layer OSI/ISO reference model

# Wireshark

