bbob constrained f38 d10 i1 — what the agent chose, and when

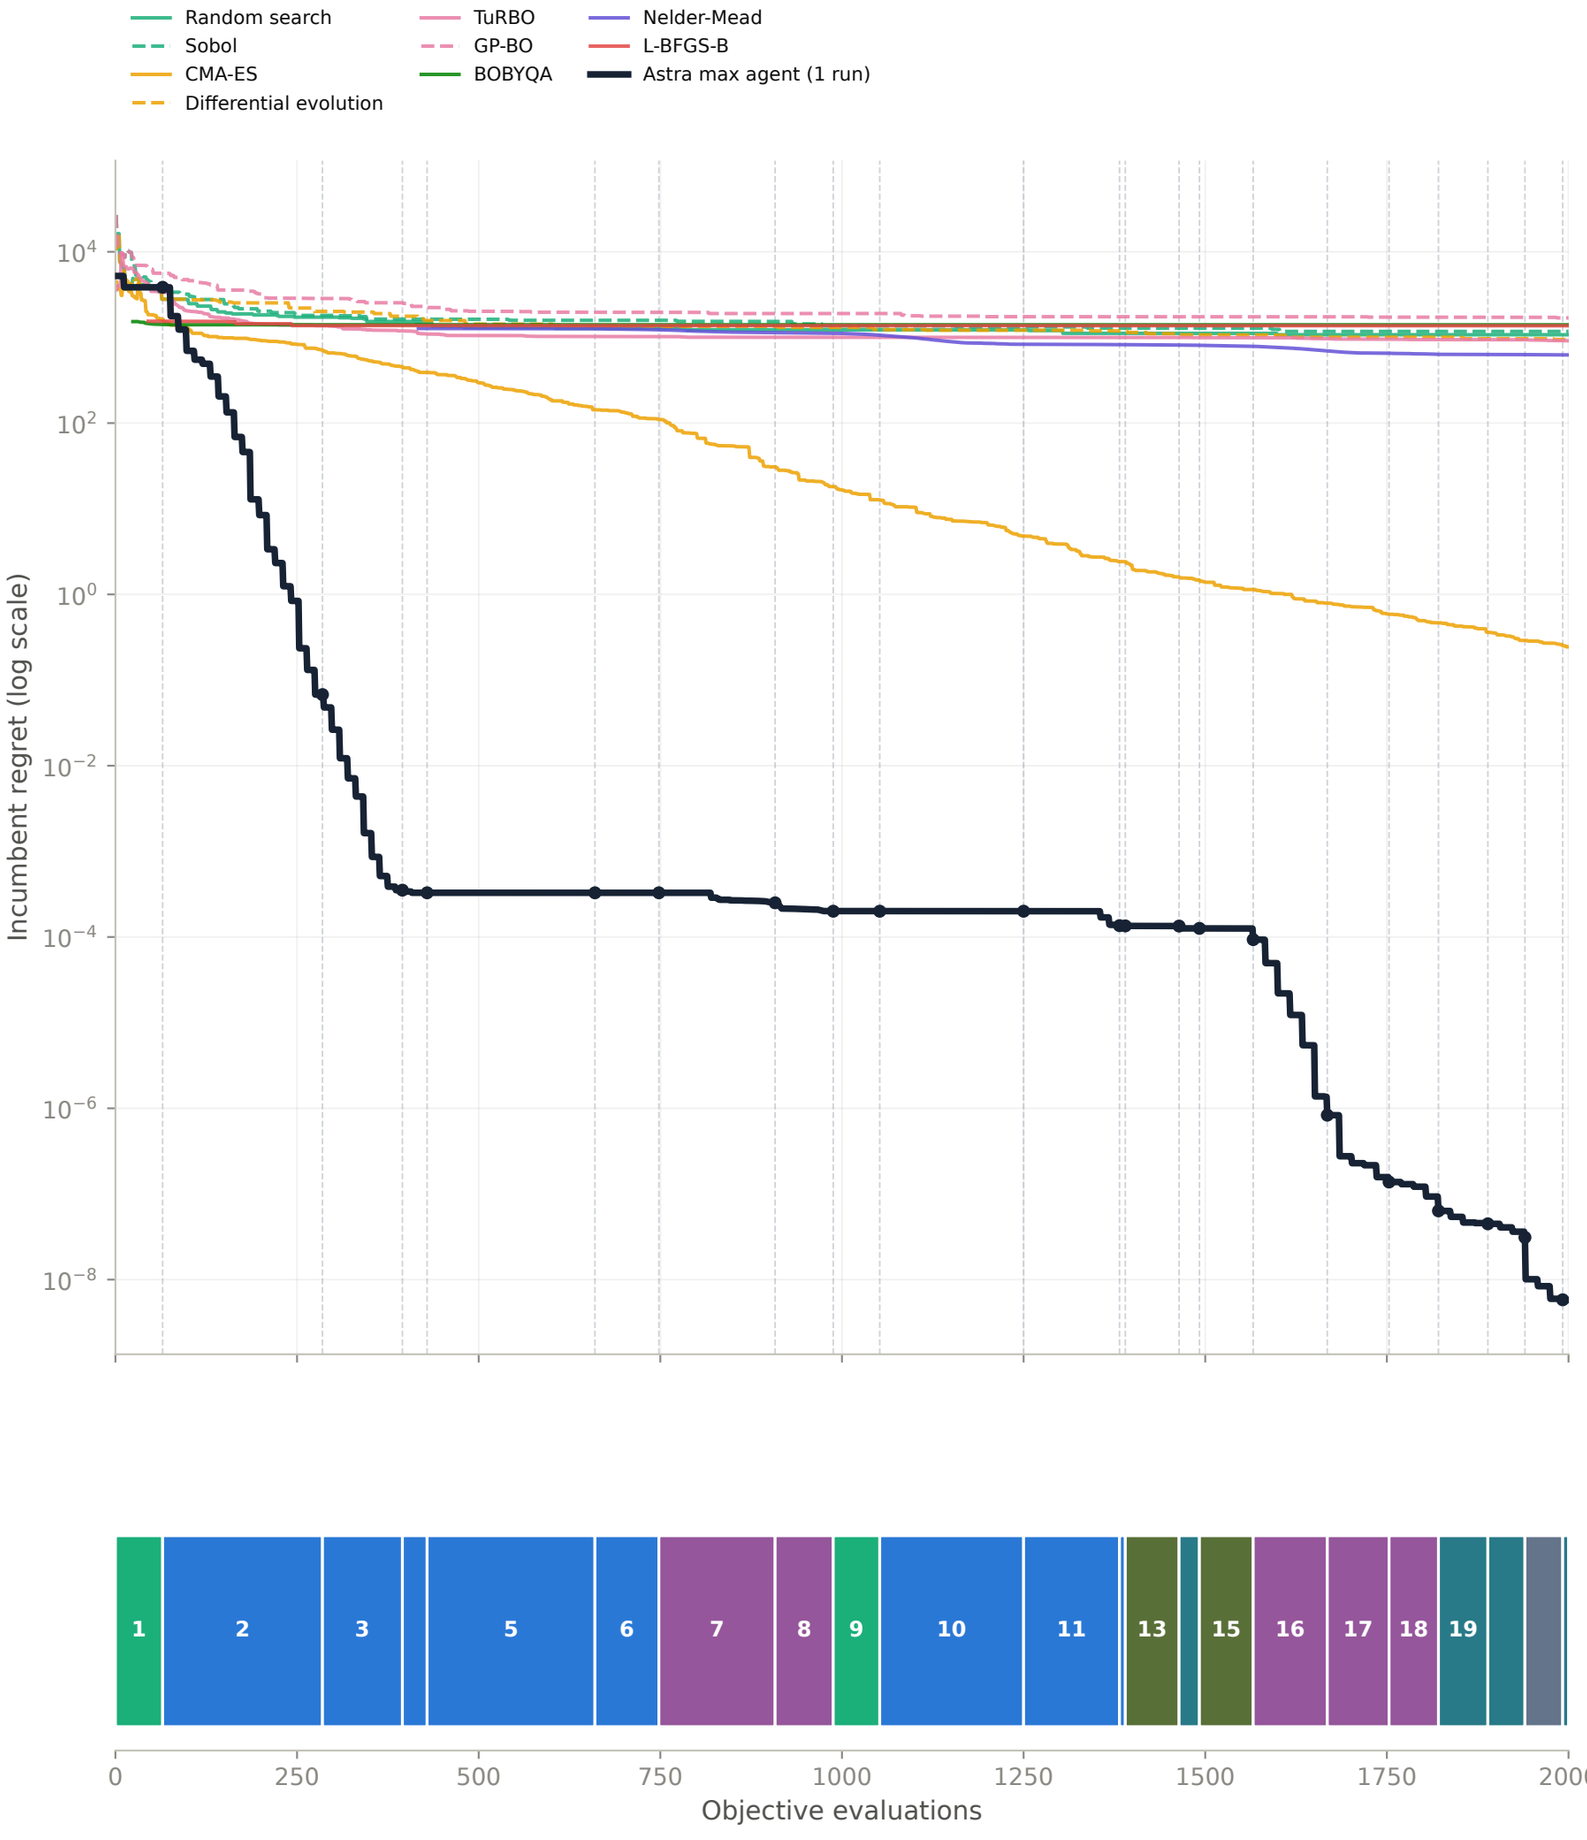

Block decisions

1. sobol_initial
   65 calls · evaluations 1–65
2. slsqp_local
   220 calls · evaluations 66–285
3. slsqp_local
   110 calls · evaluations 286–395
4. slsqp_local
   34 calls · evaluations 396–429
5. slsqp_restart2
   231 calls · evaluations 430–660
6. slsqp_restart2
   88 calls · evaluations 661–748
7. cobyqa_local
   160 calls · evaluations 749–908
8. cobyqa_local
   80 calls · evaluations 909–988
9. projected_sobol
   64 calls · evaluations 989–1052
10. slsqp_projected_start
    198 calls · evaluations 1053–1250
11. slsqp_projected_start
    132 calls · evaluations 1251–1382
12. slsqp_projected_start
    8 calls · evaluations 1383–1390
13. face_quadratic
    74 calls · evaluations 1391–1464
14. face_direction_scan
    28 calls · evaluations 1465–1492
15. face_quadratic_fine
    74 calls · evaluations 1493–1566
16. face_trust_bfgs
    102 calls · evaluations 1567–1668
17. face_trust_bfgs
    85 calls · evaluations 1669–1753
18. face_trust_bfgs
    68 calls · evaluations 1754–1821
19. face_trust_fine
    68 calls · evaluations 1822–1889
20. face_trust_fine
    51 calls · evaluations 1890–1940
21. face_boundary_polish
    52 calls · evaluations 1941–1992
22. final_direction_scan
    8 calls · evaluations 1993–2000

Boundaries: evaluator snapshots of prospective decisions; method changes inside a block stay in that block.
Agent: one fresh run, 2,000/2,000 evaluations; GPT-6 Astra, max reasoning. Baselines: seed means (10 stochastic / 1 deterministic); 2,000-evaluation allowance.
Means include seeds with a feasible incumbent; feasibility counts are reported. Regret ≤ 10^{-12} is shown at 10^{-12}; early-stopped baseline incumbents are carried forward.