bbob mixint f15 d10 i1 — what the agent chose, and when

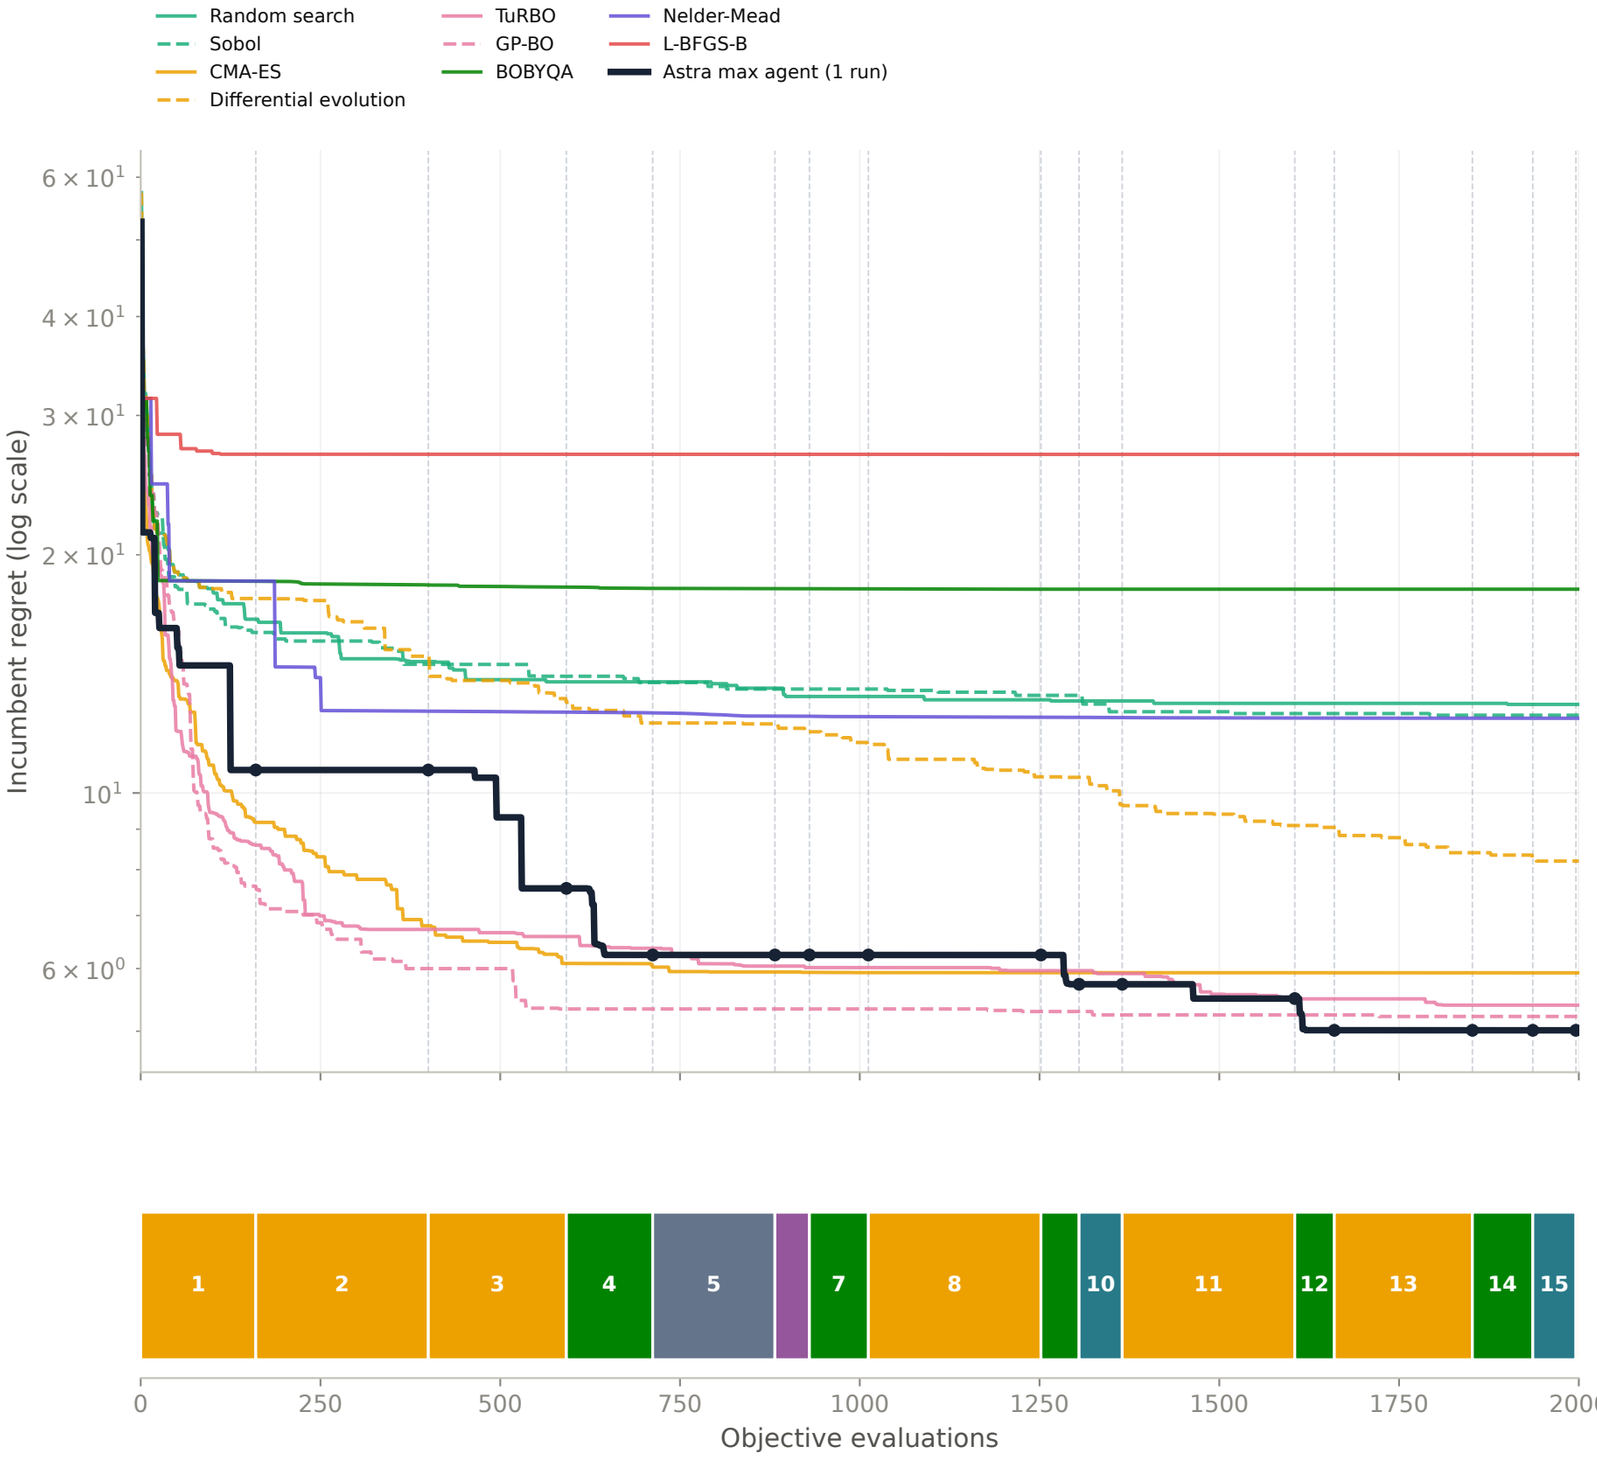

Block decisions

1. cma_es
   160 calls · evaluations 1–160
2. cma_es
   240 calls · evaluations 161–400
3. cma_es
   192 calls · evaluations 401–592
4. bobyqa_local
   120 calls · evaluations 593–712
5. coordinate_grid
   170 calls · evaluations 713–882
6. paired_coordinate
   48 calls · evaluations 883–930
7. bobyqa_2d_multistart
   82 calls · evaluations 931–1012
8. adaptive_de_plateaus
   240 calls · evaluations 1013–1252
9. bobyqa_2d_multistart
   53 calls · evaluations 1253–1305
10. coordinate_plateaus
    60 calls · evaluations 1306–1365
11. adaptive_de_plateaus
    240 calls · evaluations 1366–1605
12. bobyqa_2d_multistart
    55 calls · evaluations 1606–1660
13. adaptive_de_plateaus
    192 calls · evaluations 1661–1852
14. bobyqa_2d_multistart
    84 calls · evaluations 1853–1936
15. coordinate_plateaus
    60 calls · evaluations 1937–1996
16. fd_2d_descent
    4 calls · evaluations 1997–2000

Boundaries: evaluator snapshots of prospective decisions; method changes inside a block stay in that block.
Agent: one fresh run, 2,000/2,000 evaluations; GPT-6 Astra, max reasoning. Baselines: seed means (10 stochastic / 1 deterministic); 2,000-evaluation allowance.
Regret ≤ 10^{-12} is shown at 10^{-12}; early-stopped baseline incumbents are carried forward.