bbob mixint f8 d10 i1 — what the agent chose, and when

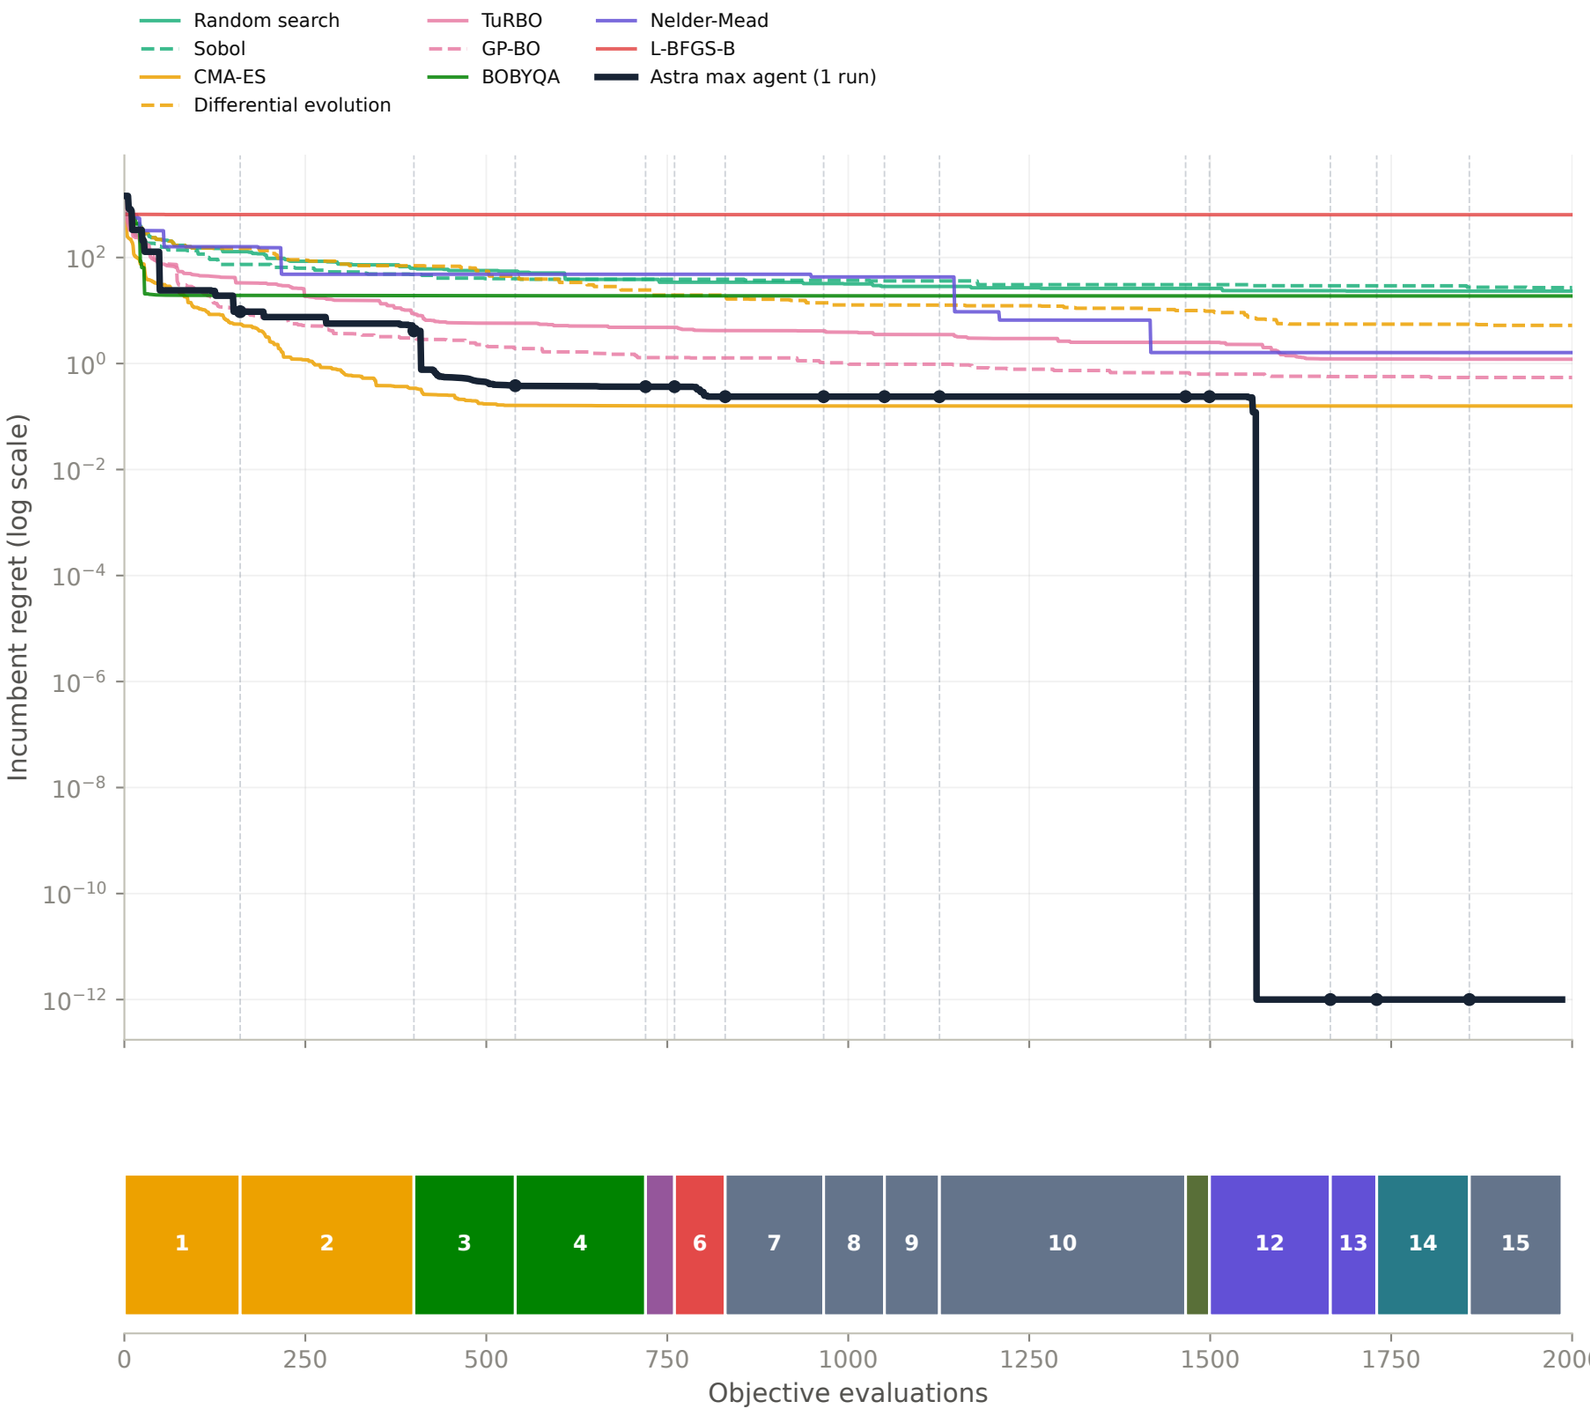

Boundaries: evaluator snapshots of prospective decisions; method changes inside a block stay in that block.
Agent: one fresh run, 1,986/2,000 evaluations; GPT-6 Astra, max reasoning. Baselines: seed means (10 stochastic / 1 deterministic); 2,000-evaluation allowance.
Regret ≤ 10^{-12} is shown at 10^{-12}; early-stopped baseline incumbents are carried forward.

Block decisions

1. cma_es
   160 calls · evaluations 1–160
2. cma_es
   240 calls · evaluations 161–400
3. bobyqa_local
   140 calls · evaluations 401–540
4. bobyqa_local
   180 calls · evaluations 541–720
5. finite_diff_probe
   40 calls · evaluations 721–760
6. lbfgsb_active2
   70 calls · evaluations 761–830
7. coordinate_grid
   136 calls · evaluations 831–966
8. paired_grid
   84 calls · evaluations 967–1050
9. pair_screen
   76 calls · evaluations 1051–1126
10. adjacent_tables
    340 calls · evaluations 1127–1466
11. terminal_response
    33 calls · evaluations 1467–1499
12. surrogate_terminal
    167 calls · evaluations 1500–1666
13. surrogate_audit
    64 calls · evaluations 1667–1730
14. plateau_refinement
    128 calls · evaluations 1731–1858
15. continuous_audit
    128 calls · evaluations 1859–1986