
bent cigar d10 i1 — what the agent chose, and when

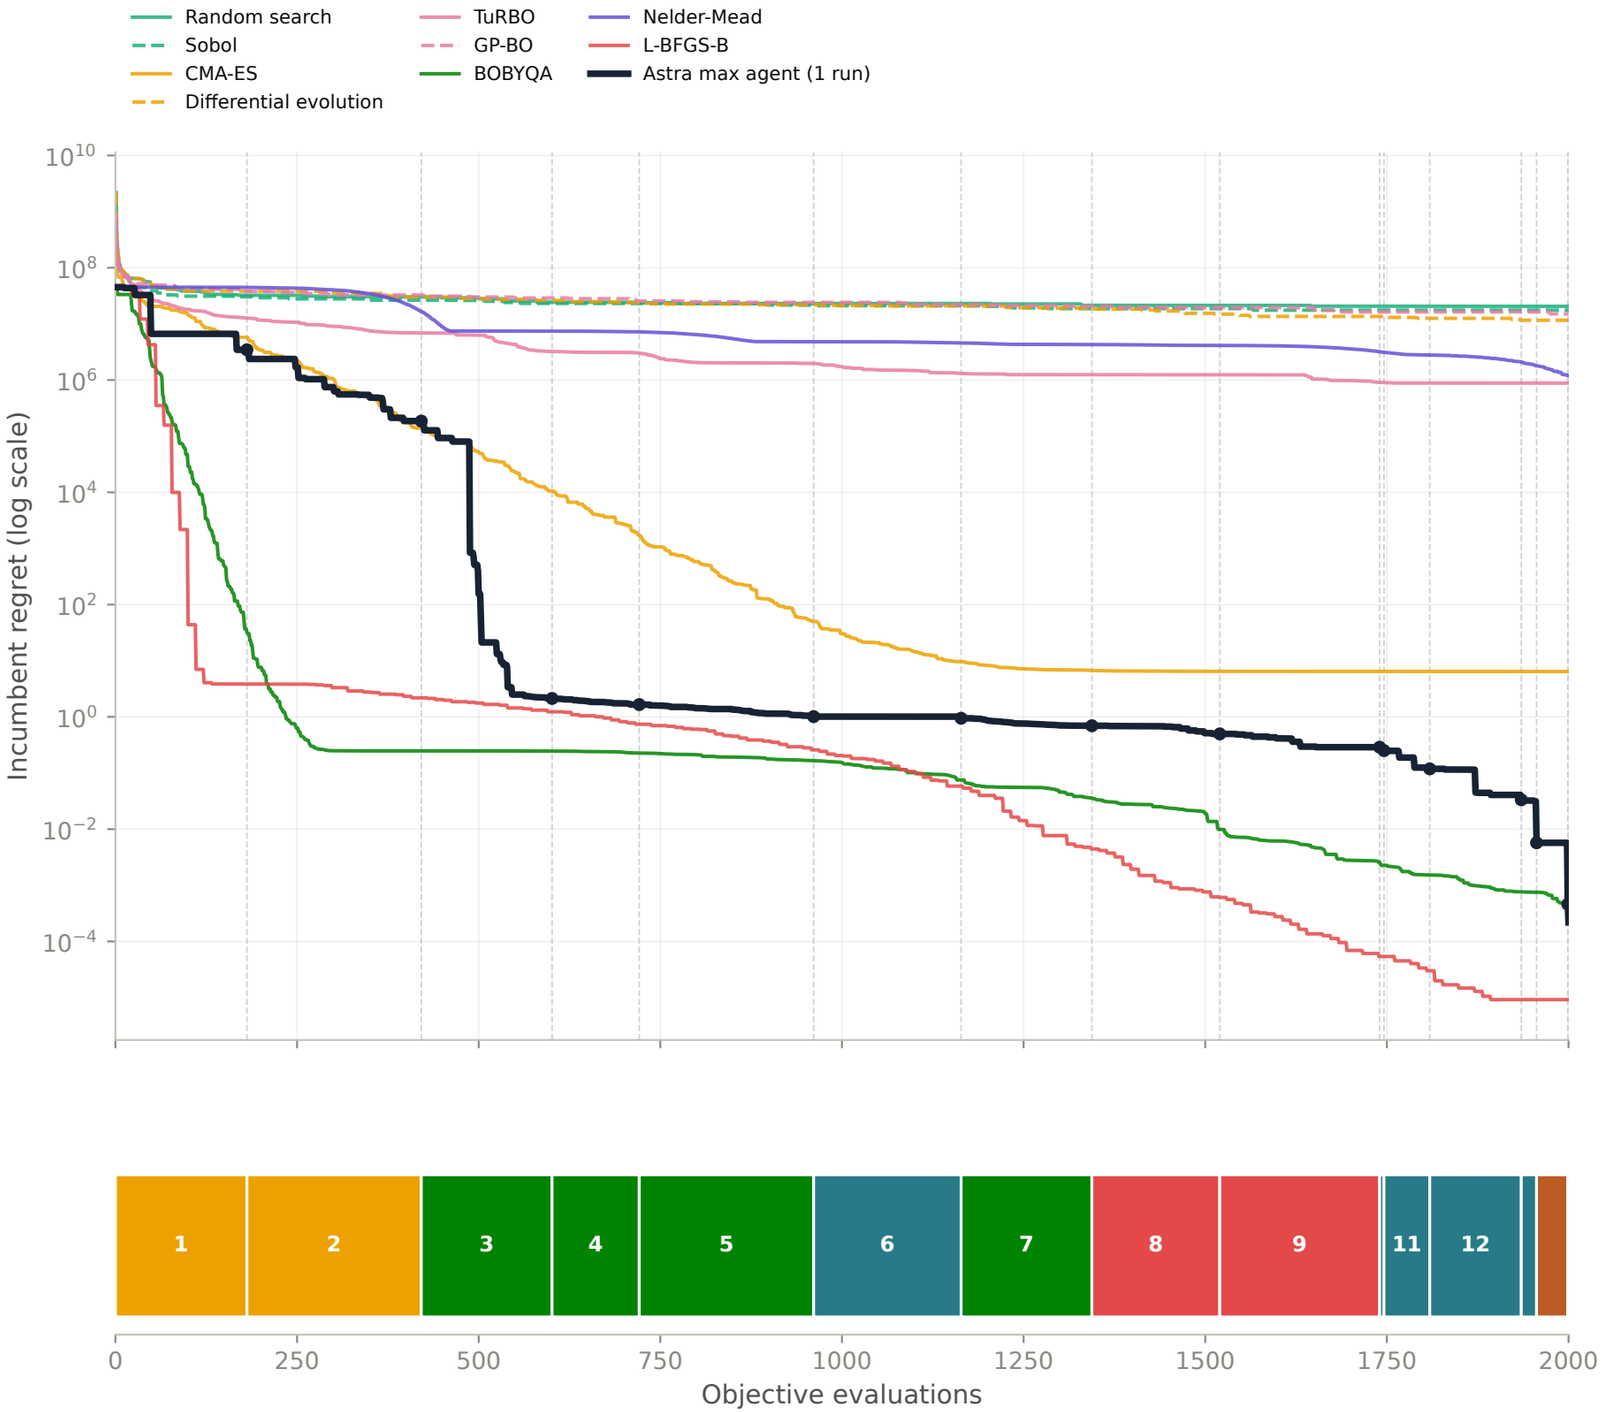

Boundaries: evaluator snapshots of prospective decisions; method changes inside a block stay in that block.
Agent: one fresh run, 2,000/2,000 evaluations; GPT-6 Astra, max reasoning. Baselines: seed means (10 stochastic / 1 deterministic); 2,000-evaluation allowance.
Regret ≤ 10^{-12} is shown at 10^{-12}; early-stopped baseline incumbents are carried forward.

Block decisions

1. cma_es
   181 calls · evaluations 1–181
2. cma_es
   240 calls · evaluations 182–421
3. bobyqa_full
   180 calls · evaluations 422–601
4. bobyqa_full
   120 calls · evaluations 602–721
5. bobyqa_full
   240 calls · evaluations 722–961
6. newton_fd
   203 calls · evaluations 962–1164
7. bobyqa_whitened
   180 calls · evaluations 1165–1344
8. lbfgsb_scaled
   176 calls · evaluations 1345–1520
9. lbfgsb_scaled
   220 calls · evaluations 1521–1740
10. trajectory_curve
    6 calls · evaluations 1741–1746
11. curve_relaxation
    63 calls · evaluations 1747–1809
12. curve_relaxation
    126 calls · evaluations 1810–1935
13. curve_relaxation
    21 calls · evaluations 1936–1956
14. curve_profile_refine
    43 calls · evaluations 1957–1999
15. final_line_refine
    1 calls · evaluations 2000–2000