cec2017 f6 d30 b5 — what the agent chose, and when

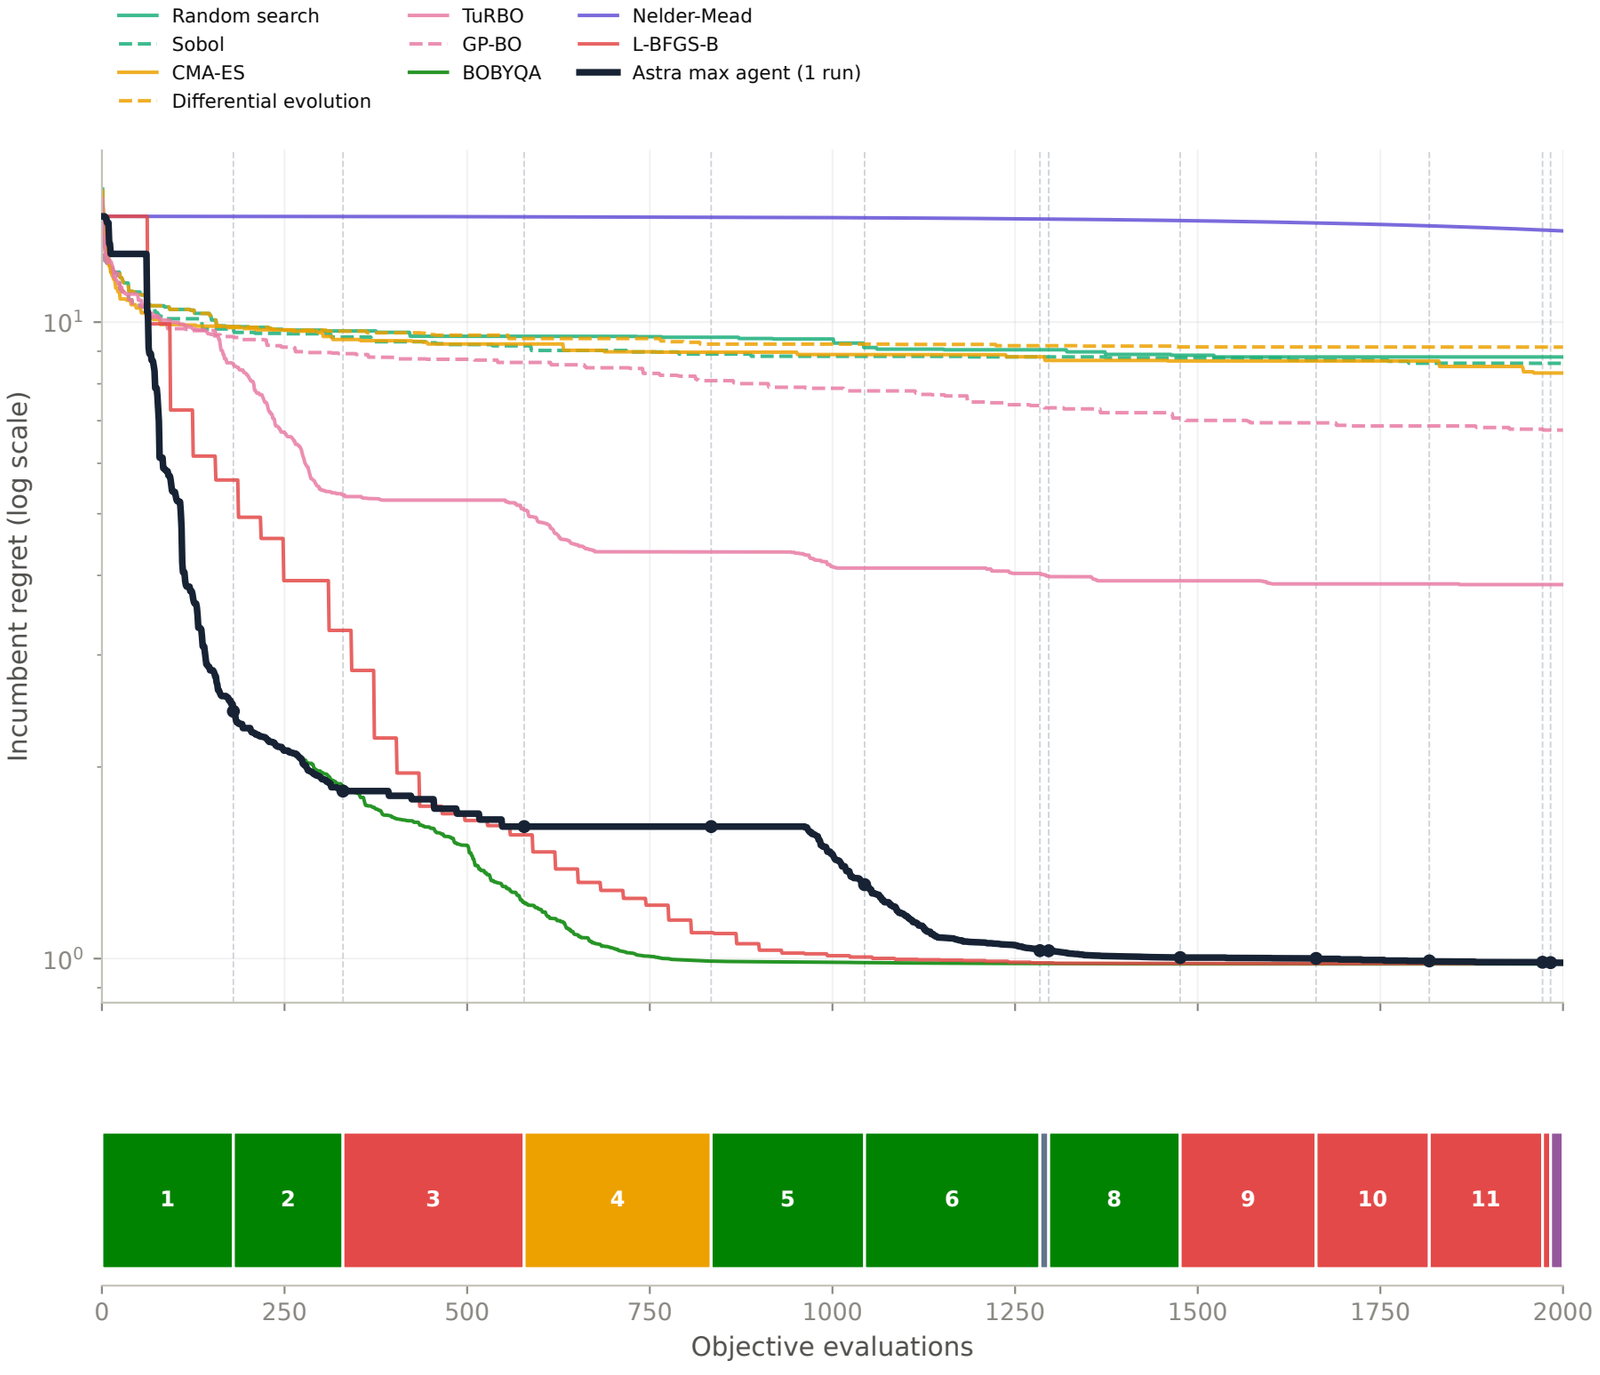

Block decisions

1. bobyqa_local
   180 calls · evaluations 1–180
2. bobyqa_local
   150 calls · evaluations 181–330
3. lbfgsb_fd
   248 calls · evaluations 331–578
4. cma_es
   256 calls · evaluations 579–834
5. bobyqa_local
   210 calls · evaluations 835–1044
6. bobyqa_local
   240 calls · evaluations 1045–1284
7. trajectory_line
   12 calls · evaluations 1285–1296
8. bobyqa_local
   180 calls · evaluations 1297–1476
9. lbfgsb_refine
   186 calls · evaluations 1477–1662
10. lbfgsb_refine
    155 calls · evaluations 1663–1817
11. lbfgsb_refine
    155 calls · evaluations 1818–1972
12. lbfgsb_direction_line
    11 calls · evaluations 1973–1983
13. orthogonal_line
    17 calls · evaluations 1984–2000

Boundaries: evaluator snapshots of prospective decisions; method changes inside a block stay in that block.
Agent: one fresh run, 2,000/2,000 evaluations; GPT-6 Astra, max reasoning. Baselines: seed means (10 stochastic / 1 deterministic); 2,000-evaluation allowance.
Regret ≤ 10^{-12} is shown at 10^{-12}; early-stopped baseline incumbents are carried forward.