gallagher101 d10 i1 — what the agent chose, and when

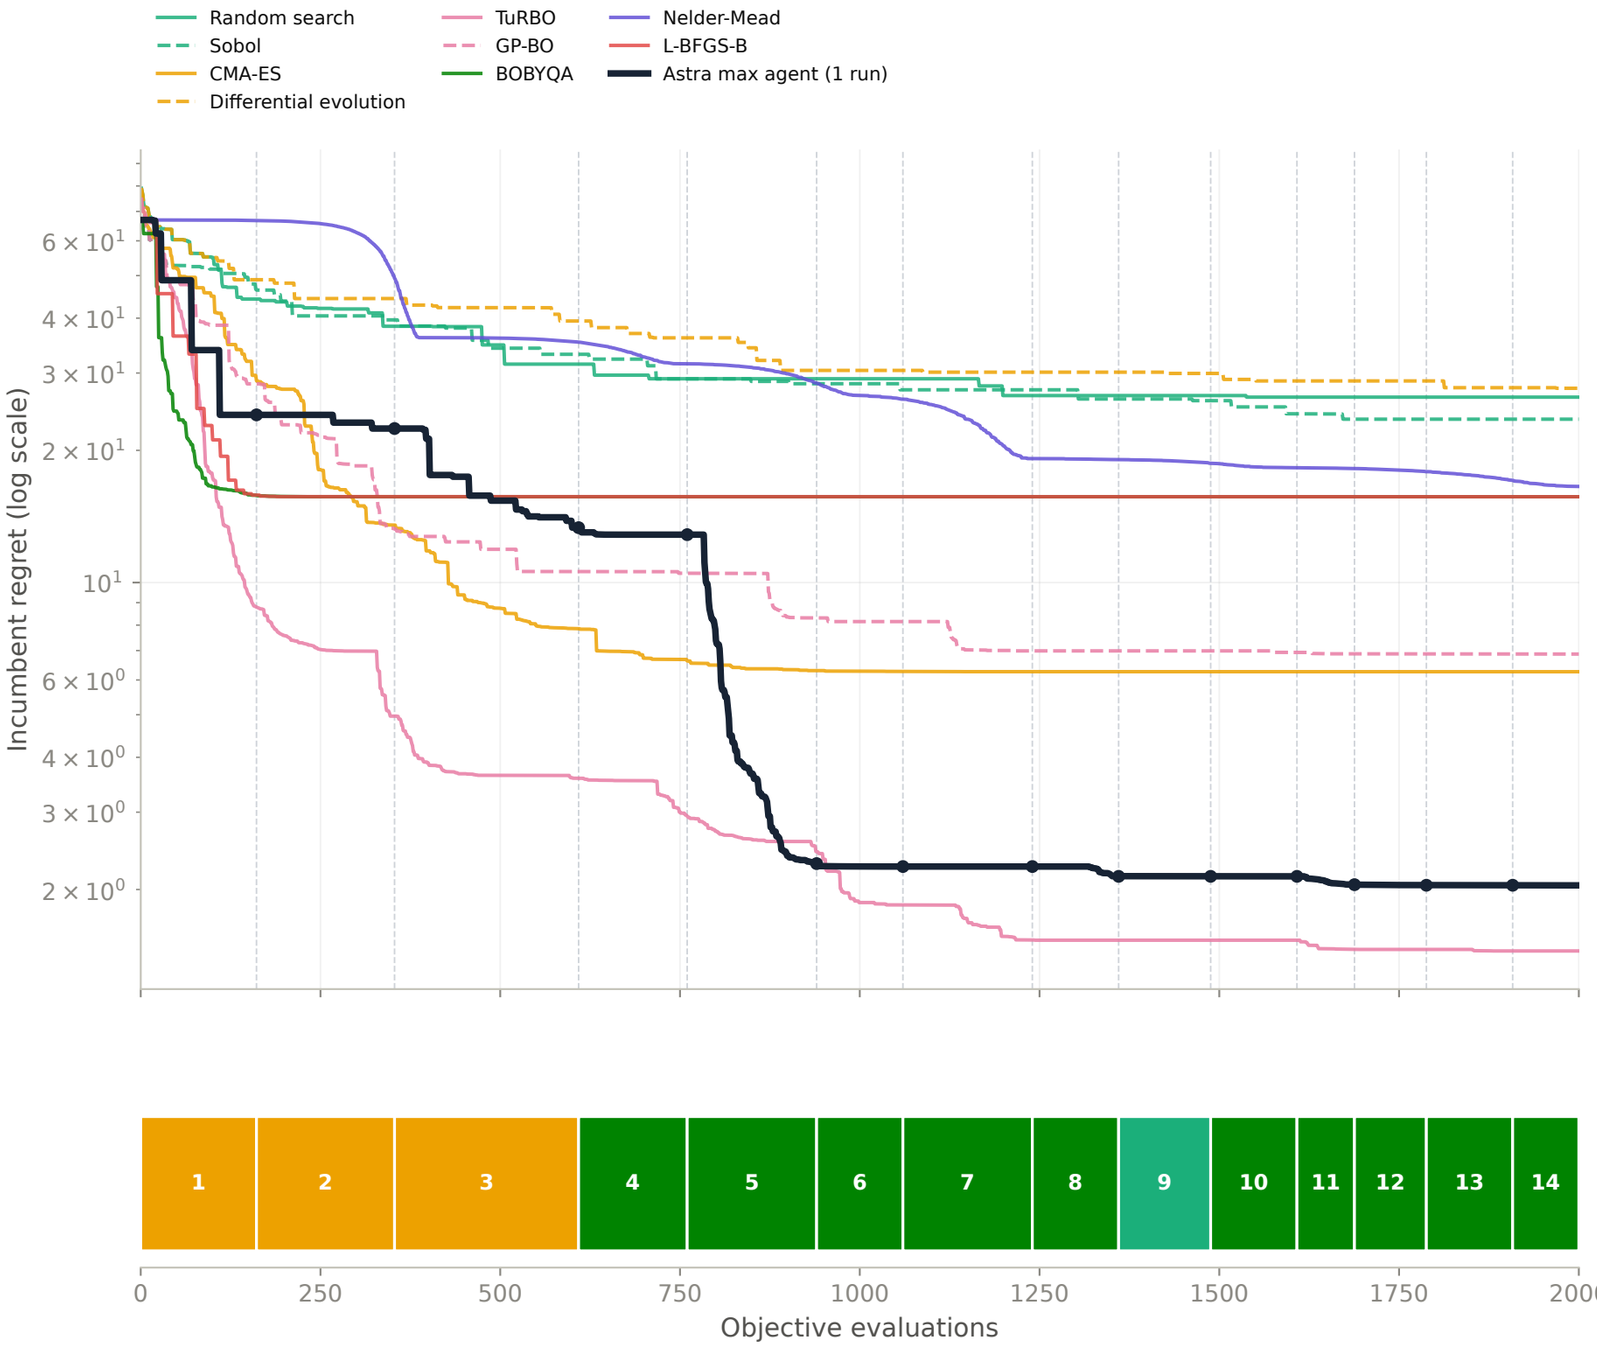

Block decisions

1. cma_es
   161 calls · evaluations 1–161
2. cma_es
   192 calls · evaluations 162–353
3. cma_es
   256 calls · evaluations 354–609
4. bobyqa_local
   151 calls · evaluations 610–760
5. bobyqa_restart
   180 calls · evaluations 761–940
6. bobyqa_restart
   120 calls · evaluations 941–1060
7. bobyqa_multistart
   180 calls · evaluations 1061–1240
8. bobyqa_multistart
   120 calls · evaluations 1241–1360
9. sobol_global
   128 calls · evaluations 1361–1488
10. bobyqa_sobol_seed
    120 calls · evaluations 1489–1608
11. bobyqa_sobol_seed
    80 calls · evaluations 1609–1688
12. bobyqa_sobol_seed
    100 calls · evaluations 1689–1788
13. bobyqa_sobol_restart
    120 calls · evaluations 1789–1908
14. bobyqa_refine_best
    92 calls · evaluations 1909–2000

Boundaries: evaluator snapshots of prospective decisions; method changes inside a block stay in that block.
Agent: one fresh run, 2,000/2,000 evaluations; GPT-6 Astra, max reasoning. Baselines: seed means (10 stochastic / 1 deterministic); 2,000-evaluation allowance.
Regret ≤ 10^{-12} is shown at 10^{-12}; early-stopped baseline incumbents are carried forward.