rosenbrock d10 i1 — what the agent chose, and when

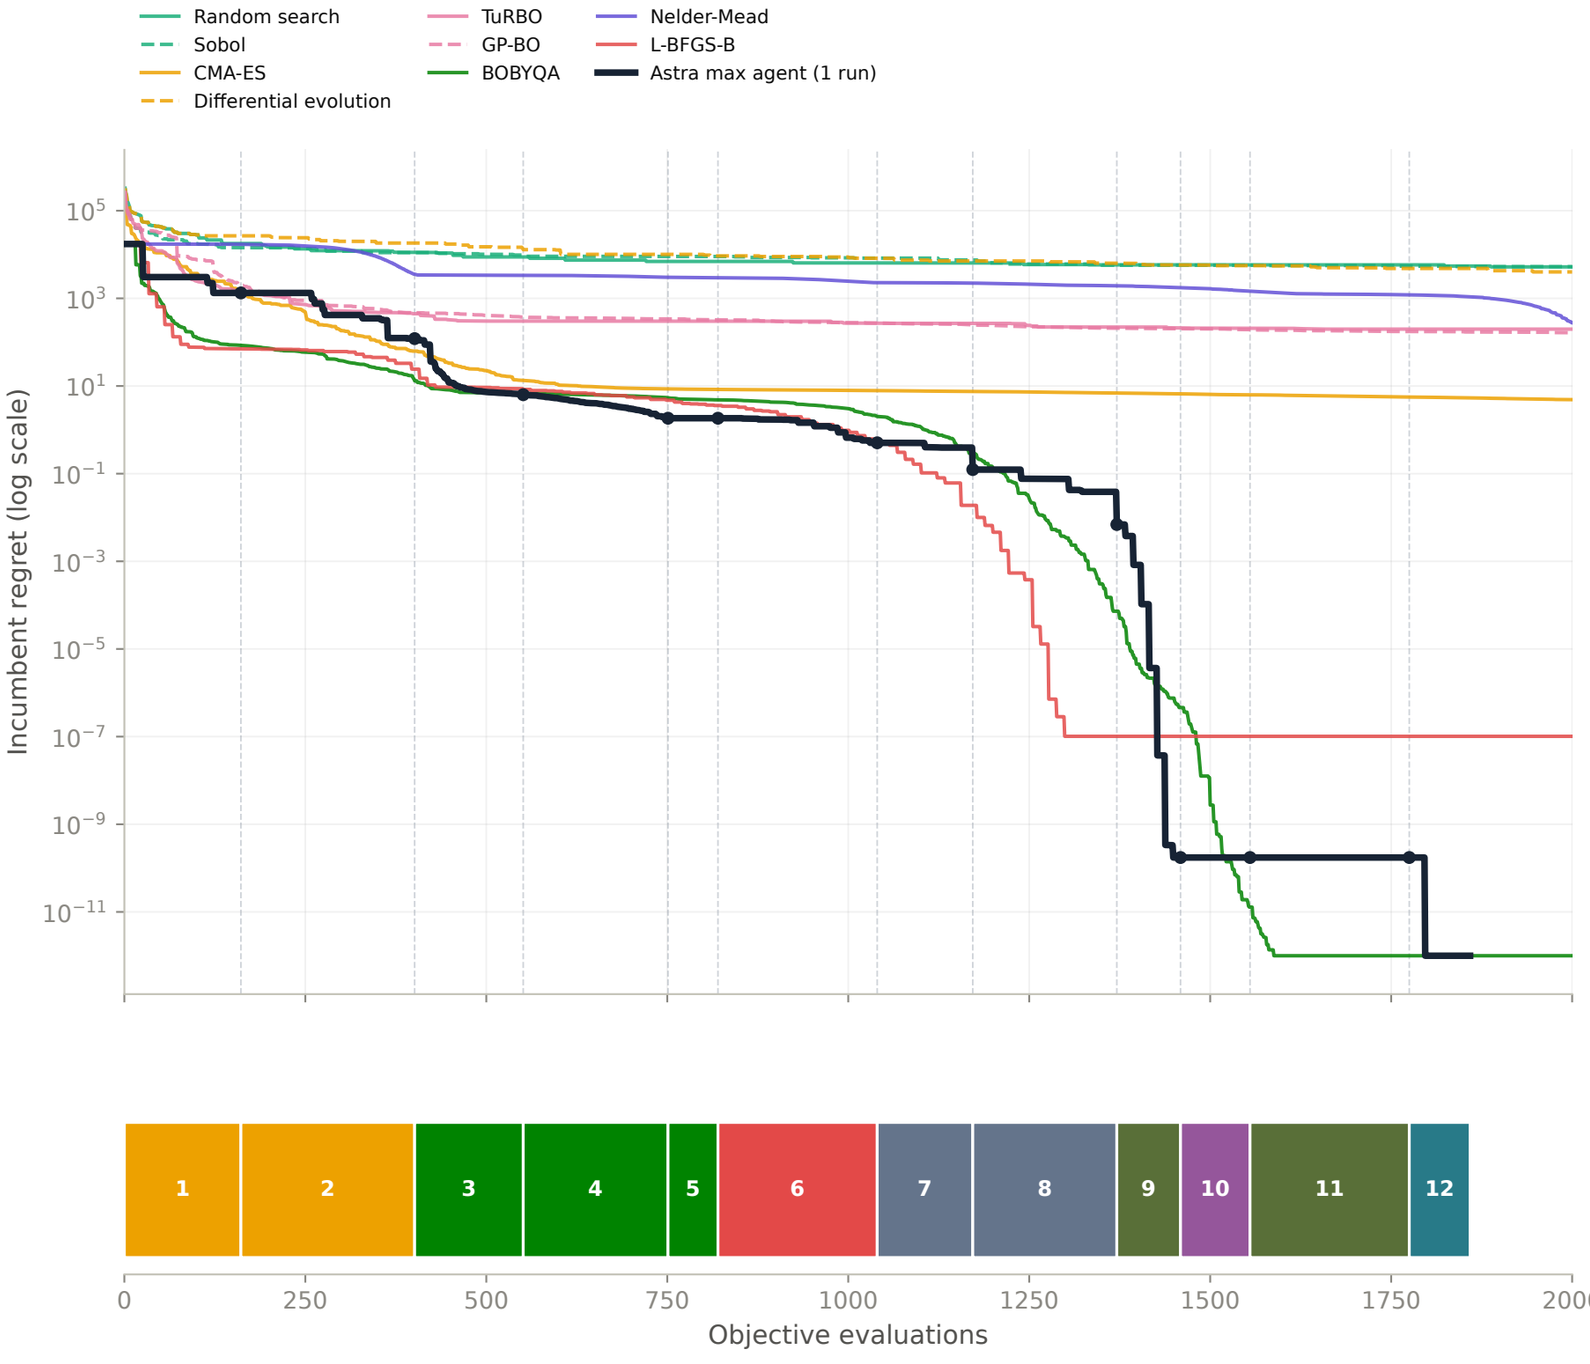

Boundaries: evaluator snapshots of prospective decisions; method changes inside a block stay in that block.
Agent: one fresh run, 1,859/2,000 evaluations; GPT-6 Astra, max reasoning. Baselines: seed means (10 stochastic / 1 deterministic); 2,000-evaluation allowance.
Regret ≤ 10^{-12} is shown at 10^{-12}; early-stopped baseline incumbents are carried forward.

Block decisions

1. cma_es
   161 calls · evaluations 1–161
2. cma_es
   240 calls · evaluations 162–401
3. bobyqa
   150 calls · evaluations 402–551
4. bobyqa
   200 calls · evaluations 552–751
5. bobyqa_full
   69 calls · evaluations 752–820
6. lbfgsb
   220 calls · evaluations 821–1040
7. fd_newton_trust
   132 calls · evaluations 1041–1172
8. fd_newton_trust
   199 calls · evaluations 1173–1371
9. precond_bfgs
   88 calls · evaluations 1372–1459
10. basin_probe
    96 calls · evaluations 1460–1555
11. bfgs_restart
    220 calls · evaluations 1556–1775
12. central_bfgs
    84 calls · evaluations 1776–1859