
rosenbrock d20 i1 — what the agent chose, and when

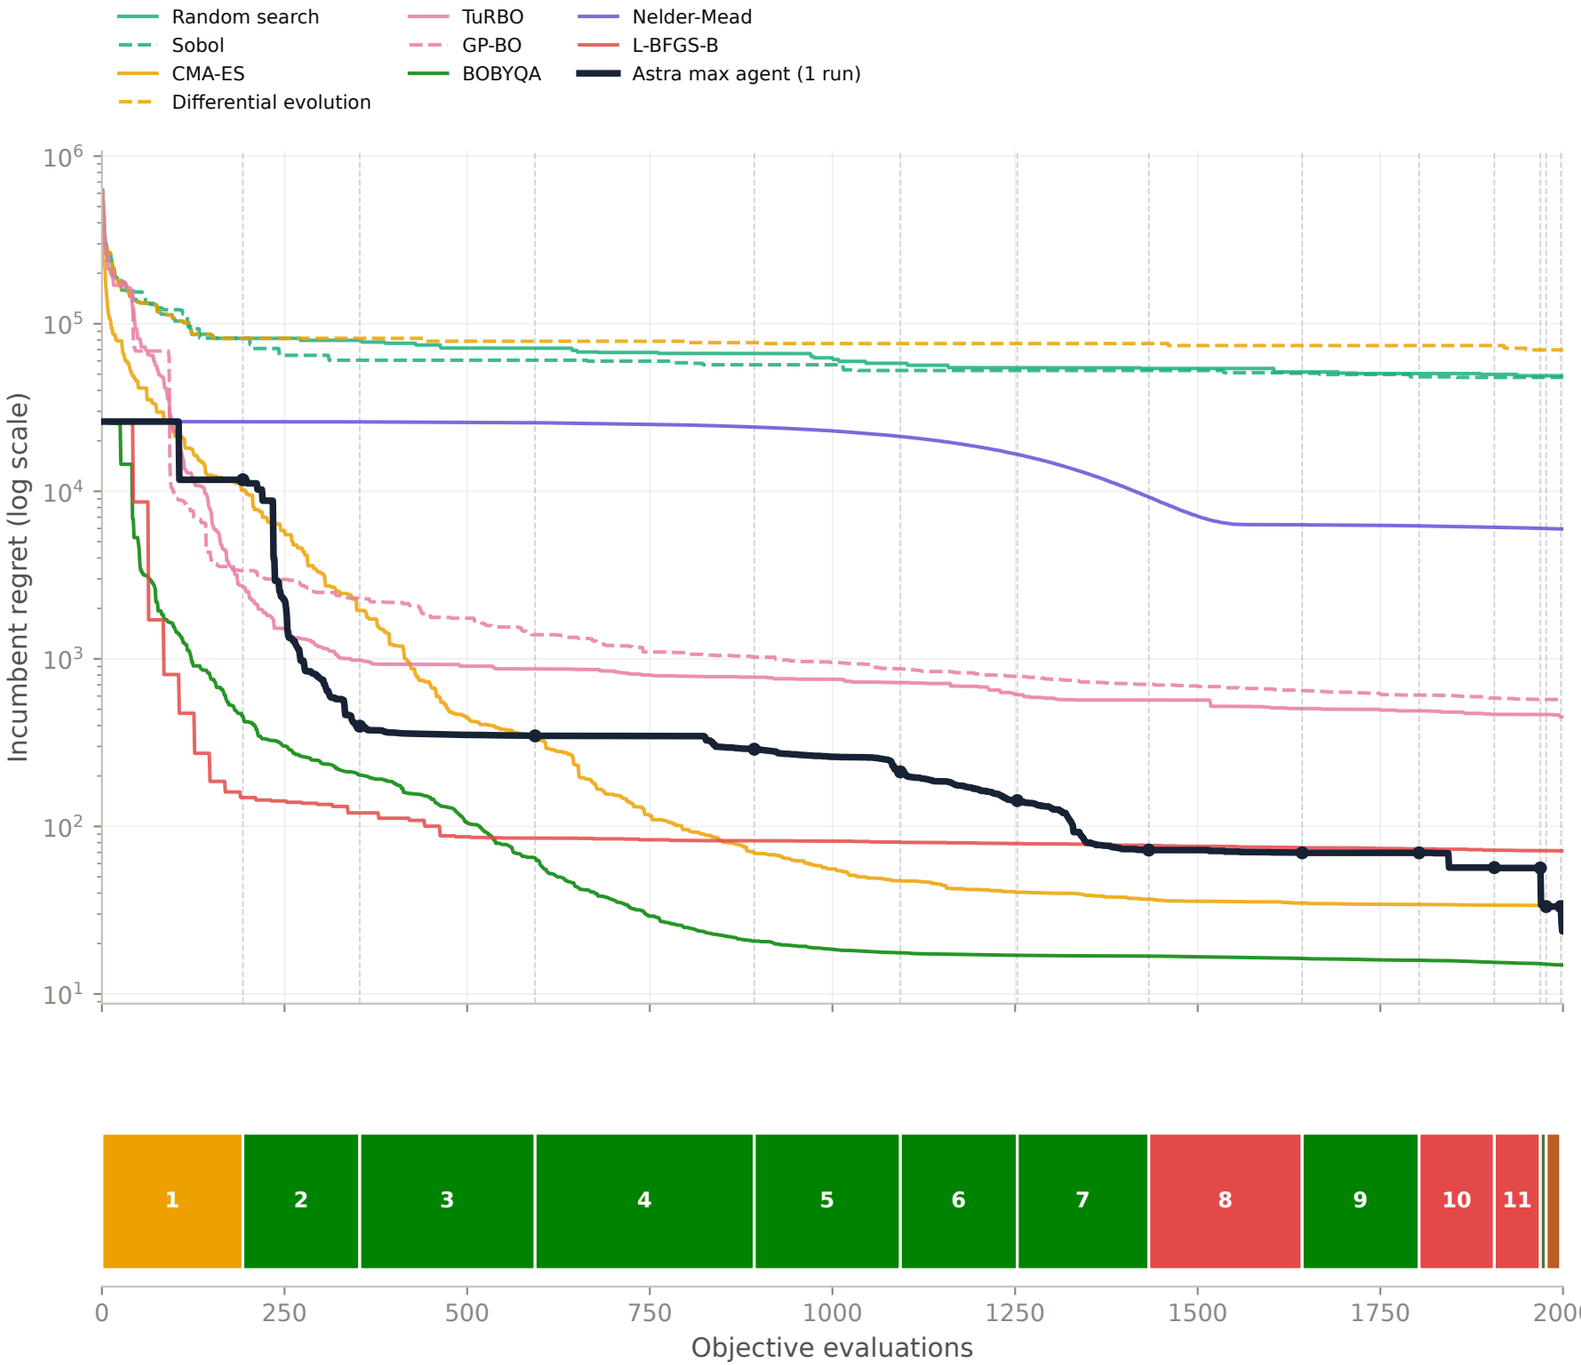

Boundaries: evaluator snapshots of prospective decisions; method changes inside a block stay in that block.
Agent: one fresh run, 2,000/2,000 evaluations; GPT-6 Astra, max reasoning. Baselines: seed means (10 stochastic / 1 deterministic); 2,000-evaluation allowance.
Regret ≤ 10^{-12} is shown at 10^{-12}; early-stopped baseline incumbents are carried forward.

Block decisions

1. cma_es
   193 calls · evaluations 1–193
2. bobyqa
   160 calls · evaluations 194–353
3. bobyqa
   240 calls · evaluations 354–593
4. bobyqa_full
   300 calls · evaluations 594–893
5. bobyqa_full
   200 calls · evaluations 894–1093
6. bobyqa_full
   160 calls · evaluations 1094–1253
7. bobyqa_full
   180 calls · evaluations 1254–1433
8. lbfgsb_scaled
   210 calls · evaluations 1434–1643
9. bobyqa_full
   160 calls · evaluations 1644–1803
10. lbfgsb_scaled
    103 calls · evaluations 1804–1906
11. lbfgsb_scaled
    63 calls · evaluations 1907–1969
12. gradient_line
    8 calls · evaluations 1970–1977
13. gradient_refine
    20 calls · evaluations 1978–1997
14. gradient_refine
    3 calls · evaluations 1998–2000