# step ellipsoid d10 i1 — what the agent chose, and when

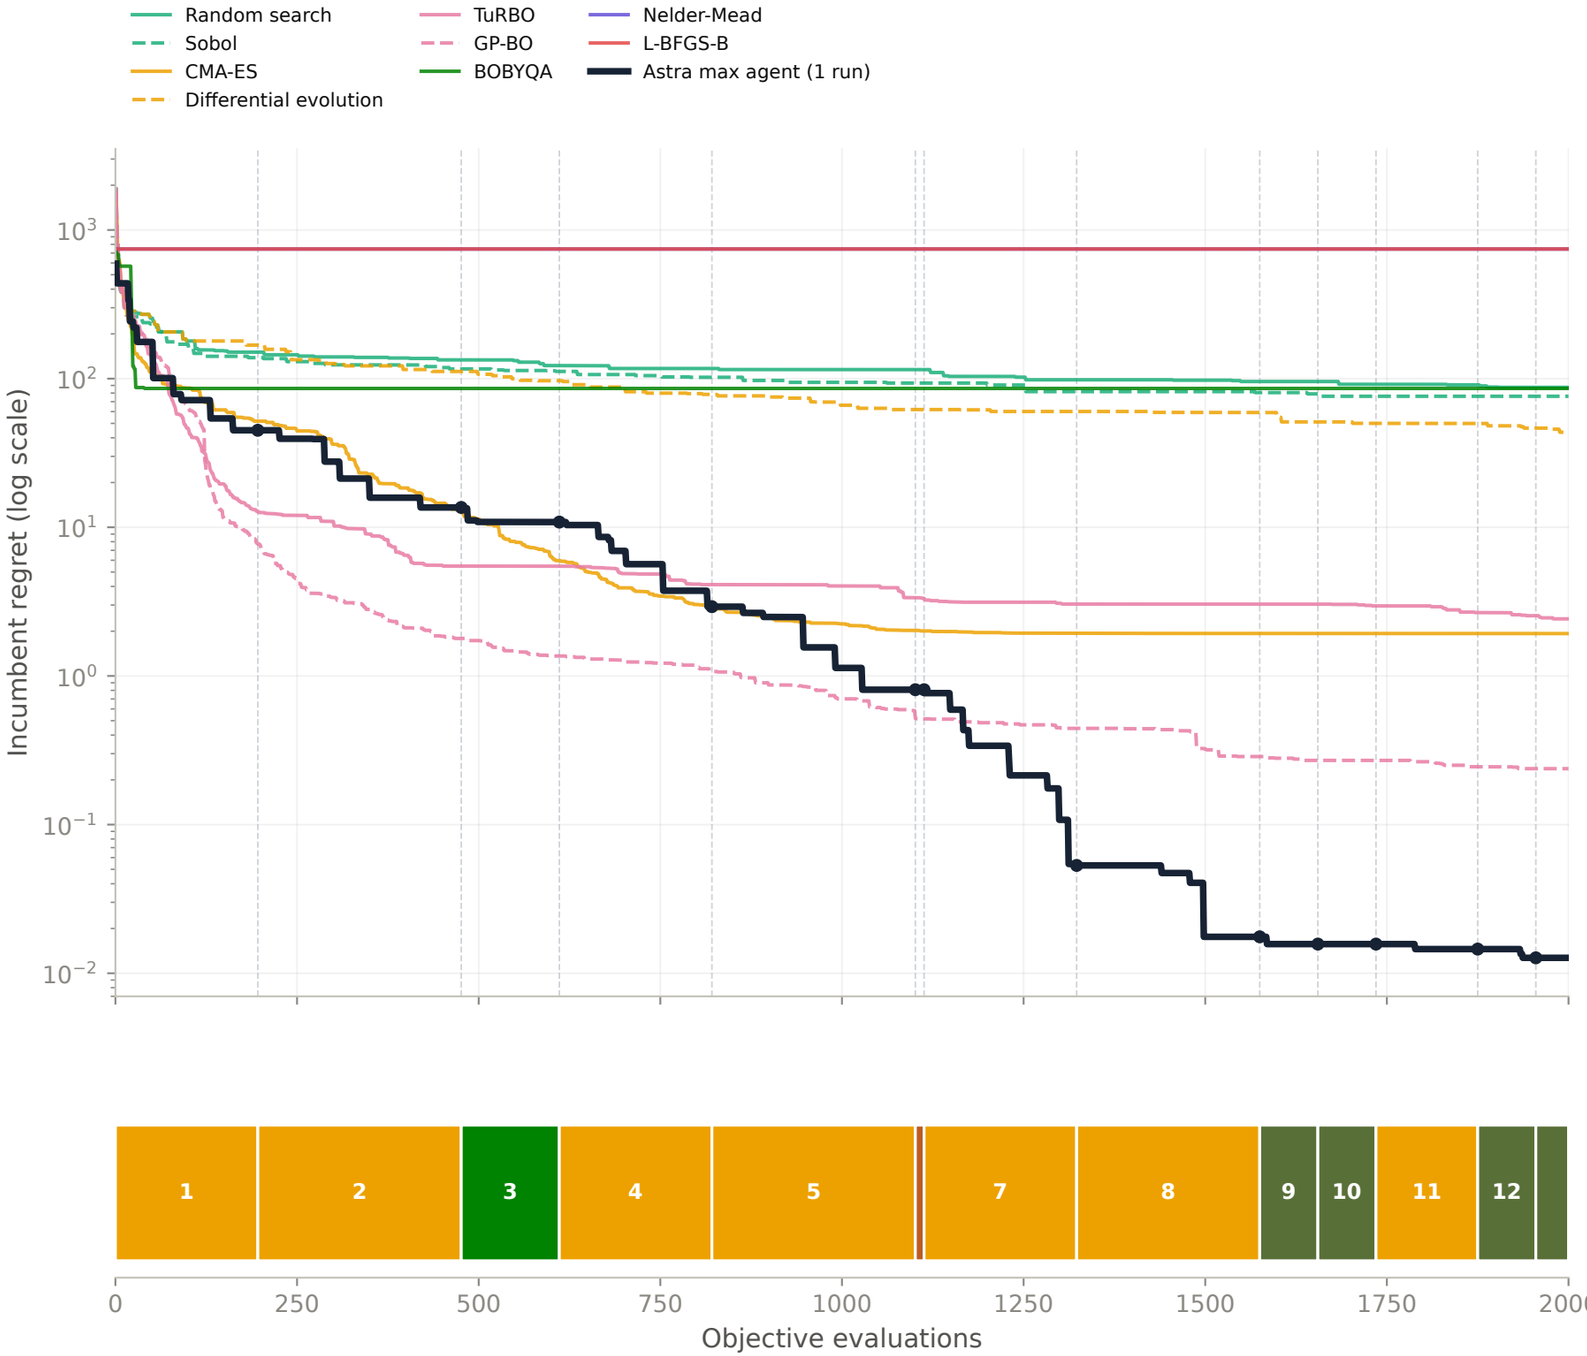


Boundaries: evaluator snapshots of prospective decisions; method changes inside a block stay in that block.
Agent: one fresh run, 2,000/2,000 evaluations; GPT-6 Astra, max reasoning. Baselines: seed means (10 stochastic / 1 deterministic); 2,000-evaluation allowance.
Regret ≤ $10^{-12}$ is shown at $10^{-12}$; early-stopped baseline incumbents are carried forward.

## Block decisions

1. cma_es
   196 calls · evaluations 1–196
2. cma_es
   280 calls · evaluations 197–476
3. bobyqa_local
   135 calls · evaluations 477–611
4. cma_es
   210 calls · evaluations 612–821
5. cma_es
   280 calls · evaluations 822–1101
6. quadratic_trials
   12 calls · evaluations 1102–1113
7. cma_es
   210 calls · evaluations 1114–1323
8. cma_es
   252 calls · evaluations 1324–1575
9. covariance_multiscale_poll
   80 calls · evaluations 1576–1655
10. adaptive_direct_poll
    80 calls · evaluations 1656–1735
11. cma_es_floor
    140 calls · evaluations 1736–1875
12. neutral_covariance_walk
    80 calls · evaluations 1876–1955
13. neutral_covariance_walk
    45 calls · evaluations 1956–2000