bbob noisy f110 d5 i1 — what the agent chose, and when

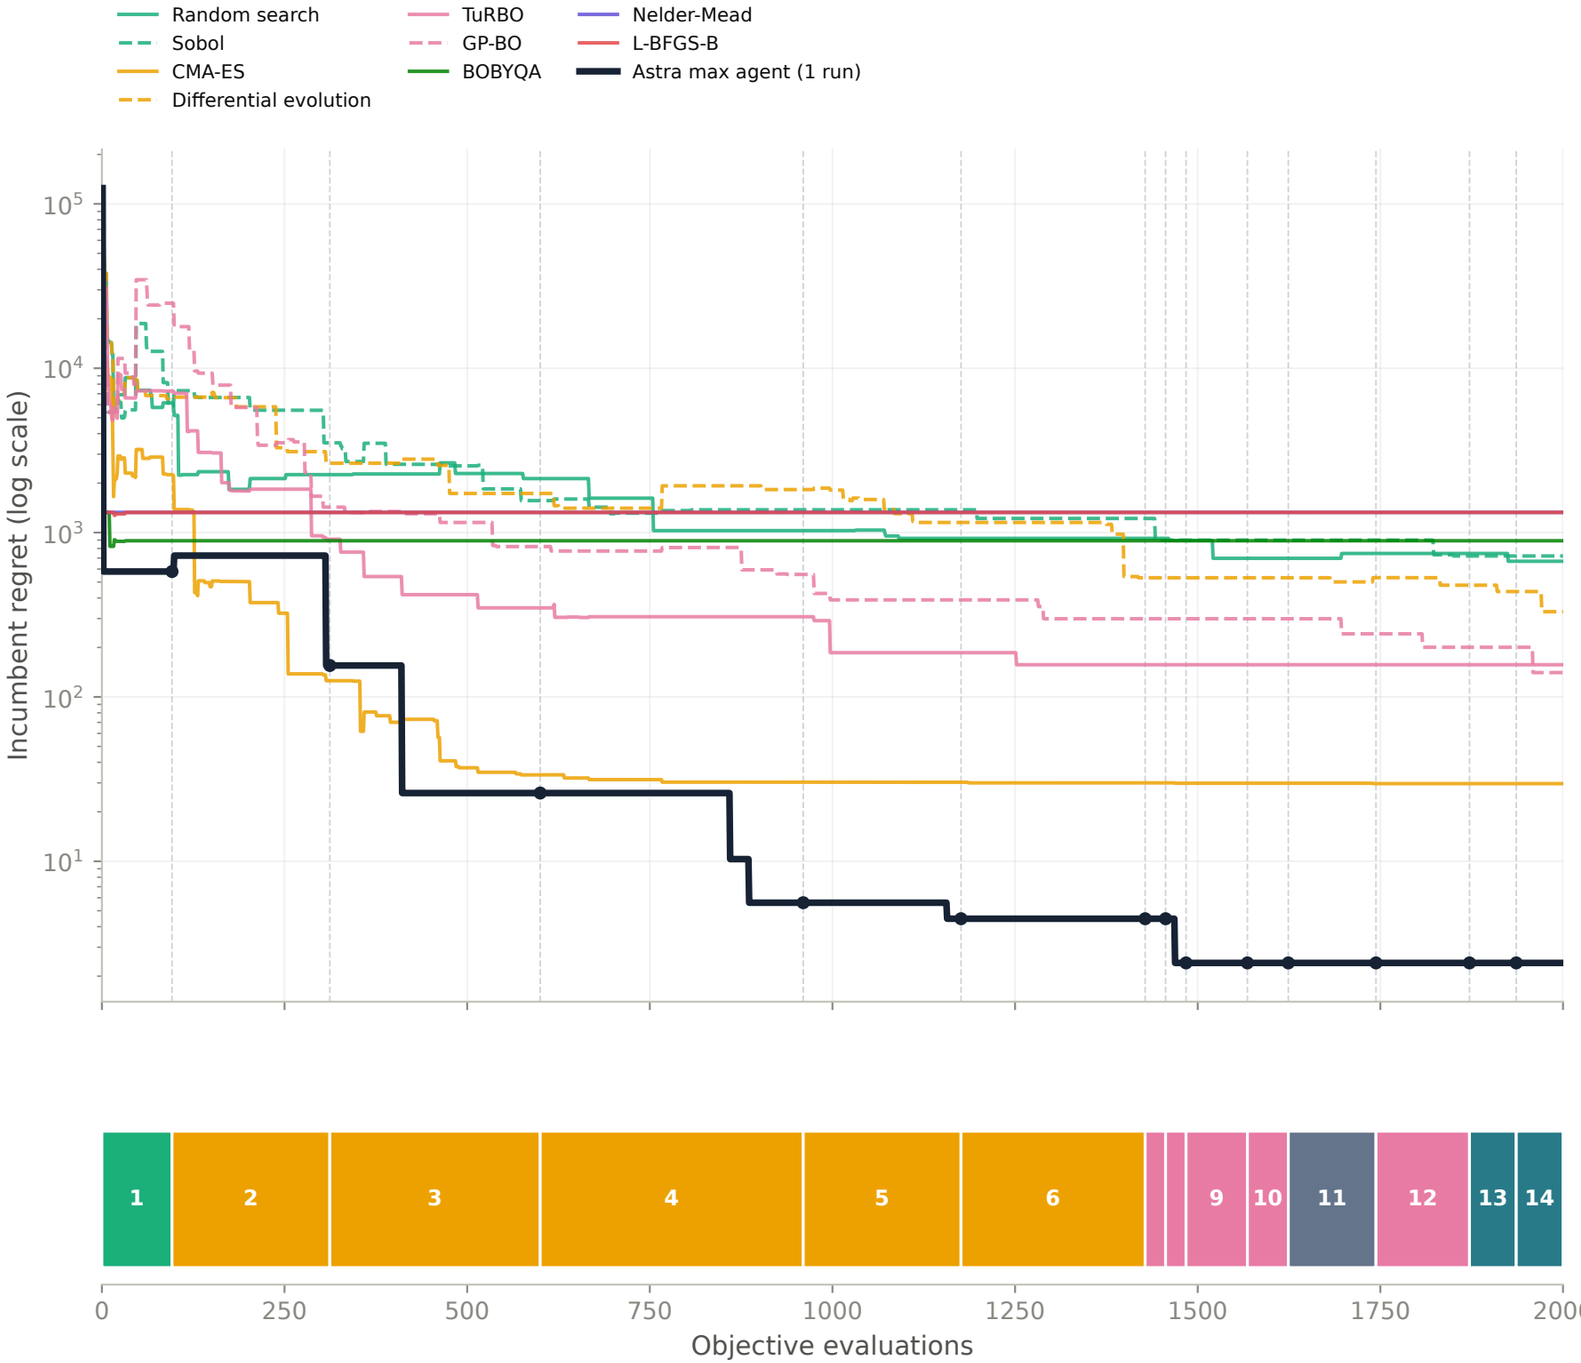

Block decisions

1. sobol_noise
   96 calls · evaluations 1–96
2. cma_median3
   216 calls · evaluations 97–312
3. cma_median3
   288 calls · evaluations 313–600
4. cma_median3
   360 calls · evaluations 601–960
5. cma_median3
   216 calls · evaluations 961–1176
6. cma_median7
   252 calls · evaluations 1177–1428
7. gp_log_mean
   28 calls · evaluations 1429–1456
8. gp_log_conservative
   28 calls · evaluations 1457–1484
9. gp_log_conservative
   84 calls · evaluations 1485–1568
10. gp_log_risk05
    56 calls · evaluations 1569–1624
11. replicated_candidates
    120 calls · evaluations 1625–1744
12. gp_reference_pairs
    128 calls · evaluations 1745–1872
13. consensus_comparison
    64 calls · evaluations 1873–1936
14. final_pair_replication
    64 calls · evaluations 1937–2000

Boundaries: evaluator snapshots of prospective decisions; method changes inside a block stay in that block.
Agent: one fresh run, 2,000/2,000 evaluations; GPT-6 Astra, max reasoning. Baselines: seed means (10 stochastic / 1 deterministic); 2,000-evaluation allowance.
Noisy task: score uses the noise-free value of the lowest-observed-y incumbent. Regret ≤ 10^{-12} is shown at 10^{-12}; early-stopped baseline incumbents are carried forward.