bbob noisy f112 d5 i1 — what the agent chose, and when

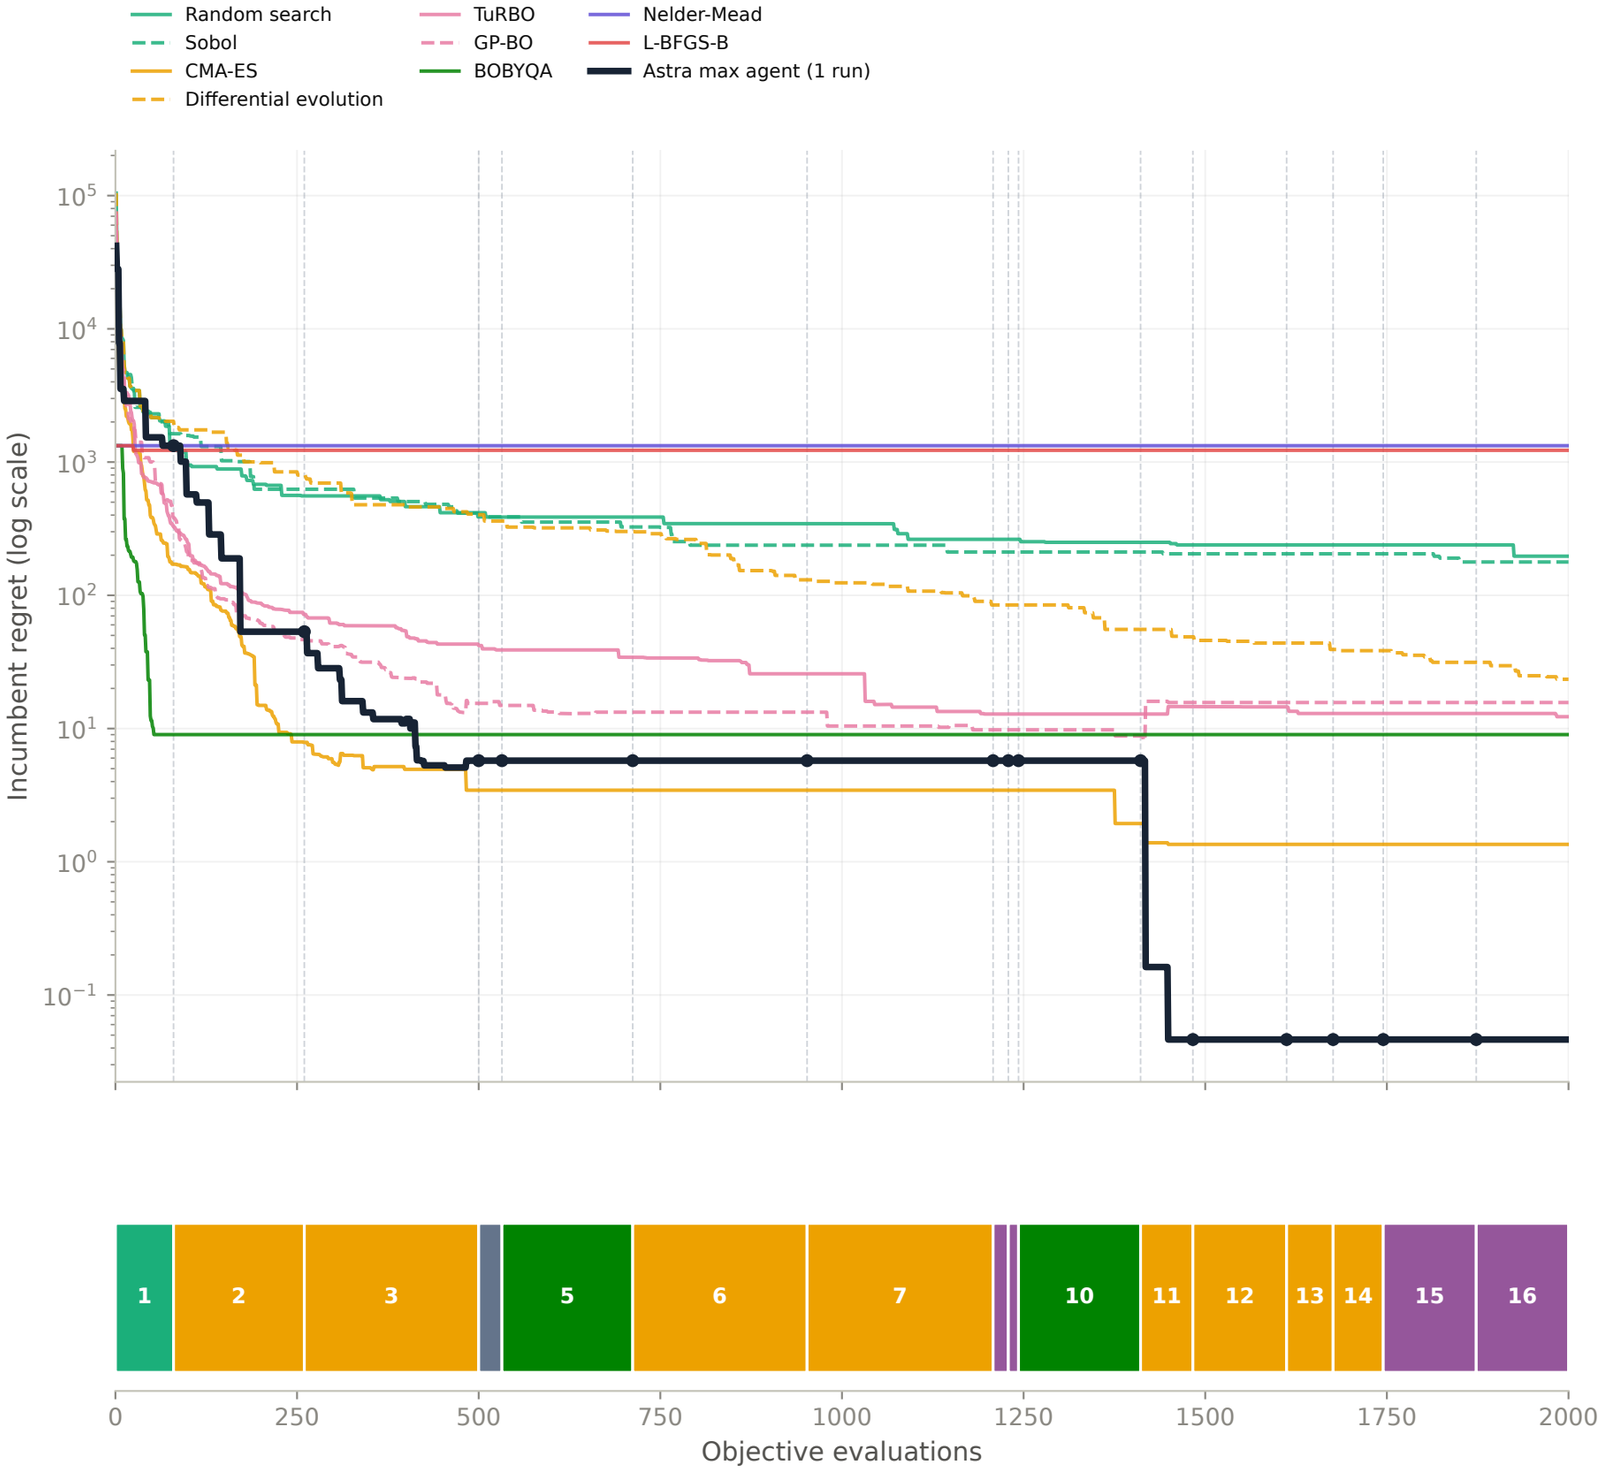

Block decisions

1. sobol_replicated
   80 calls · evaluations 1–80
2. cma_es
   180 calls · evaluations 81–260
3. cma_es
   240 calls · evaluations 261–500
4. replicate_check
   32 calls · evaluations 501–532
5. bobyqa_median3
   180 calls · evaluations 533–712
6. cma_restart
   240 calls · evaluations 713–952
7. cma_restart
   256 calls · evaluations 953–1208
8. quartic_validate
   21 calls · evaluations 1209–1229
9. quartic_trust
   14 calls · evaluations 1230–1243
10. bobyqa_median7
    168 calls · evaluations 1244–1411
11. fd_mode_newton
    72 calls · evaluations 1412–1483
12. fd_mode_newton
    129 calls · evaluations 1484–1612
13. fd_mode_bfgs
    64 calls · evaluations 1613–1676
14. fd_mode_bfgs
    69 calls · evaluations 1677–1745
15. replicate_refined
    128 calls · evaluations 1746–1873
16. replicate_refined
    127 calls · evaluations 1874–2000

Boundaries: evaluator snapshots of prospective decisions; method changes inside a block stay in that block.
Agent: one fresh run, 2,000/2,000 evaluations; GPT-6 Astra, max reasoning. Baselines: seed means (10 stochastic / 1 deterministic); 2,000-evaluation allowance.
Noisy task: score uses the noise-free value of the lowest-observed-y incumbent. Regret ≤ 10^{-12} is shown at 10^{-12}; early-stopped baseline incumbents are carried forward.