gallagher21 d10 i1 — what the agent chose, and when

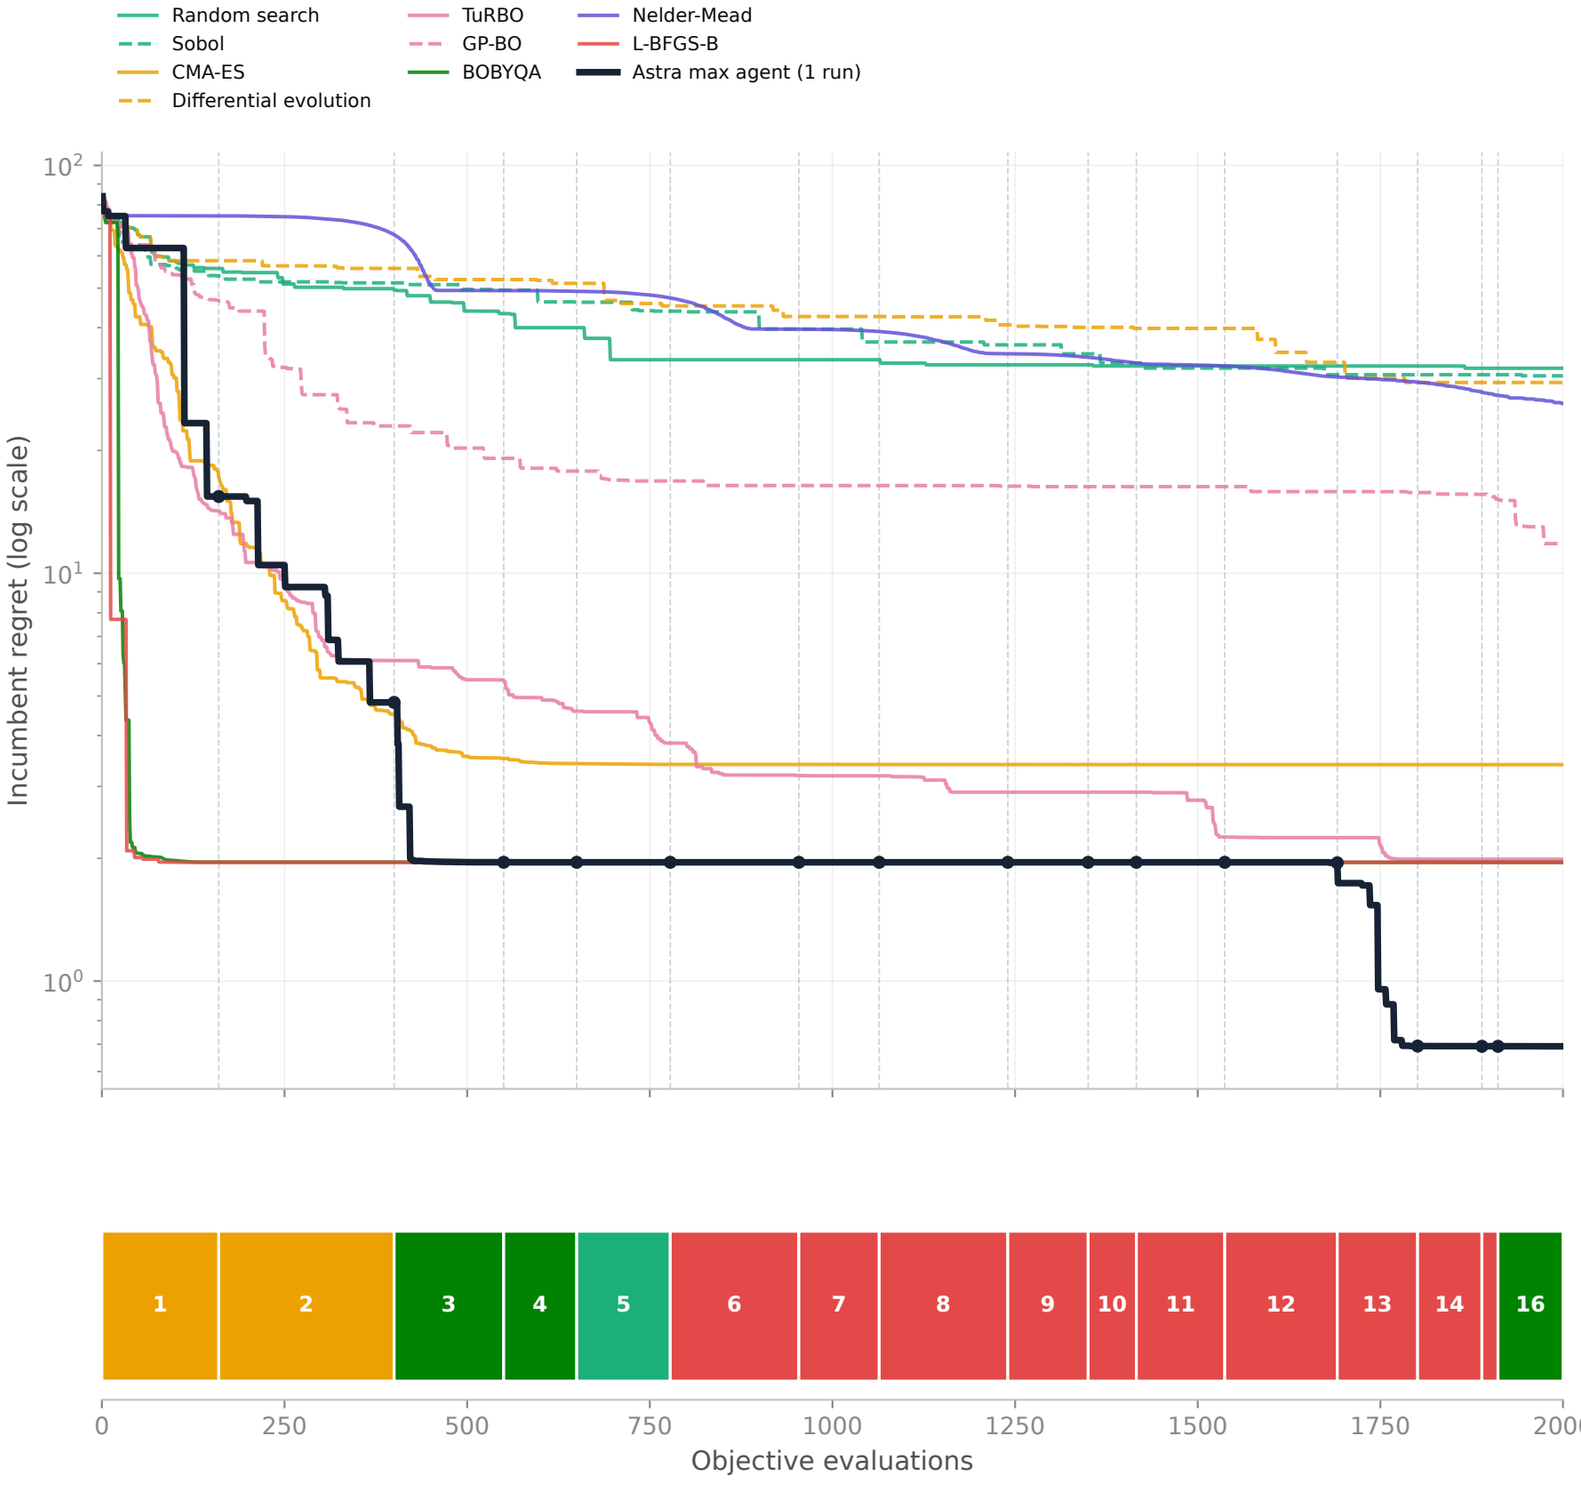

Block decisions

1. cma_es
   160 calls · evaluations 1–160
2. cma_es
   240 calls · evaluations 161–400
3. bobyqa_local
   150 calls · evaluations 401–550
4. bobyqa_local
   100 calls · evaluations 551–650
5. sobol_global
   128 calls · evaluations 651–778
6. lbfgsb_restart
   176 calls · evaluations 779–954
7. lbfgsb_restart
   110 calls · evaluations 955–1064
8. lbfgsb_restart2
   176 calls · evaluations 1065–1240
9. lbfgsb_restart2
   110 calls · evaluations 1241–1350
10. lbfgsb_multistart
    66 calls · evaluations 1351–1416
11. lbfgsb_restart4
    121 calls · evaluations 1417–1537
12. lbfgsb_restart5
    154 calls · evaluations 1538–1691
13. lbfgsb_restart5
    110 calls · evaluations 1692–1801
14. lbfgsb_restart5
    88 calls · evaluations 1802–1889
15. lbfgsb_restart5
    22 calls · evaluations 1890–1911
16. bobyqa_final_restart
    89 calls · evaluations 1912–2000

Boundaries: evaluator snapshots of prospective decisions; method changes inside a block stay in that block.
Agent: one fresh run, 2,000/2,000 evaluations; GPT-6 Astra, max reasoning. Baselines: seed means (10 stochastic / 1 deterministic); 2,000-evaluation allowance.
Regret ≤ 10^{-12} is shown at 10^{-12}; early-stopped baseline incumbents are carried forward.