nevergrad noisy rosenbrock d20 n0.1 — what the agent chose, and when

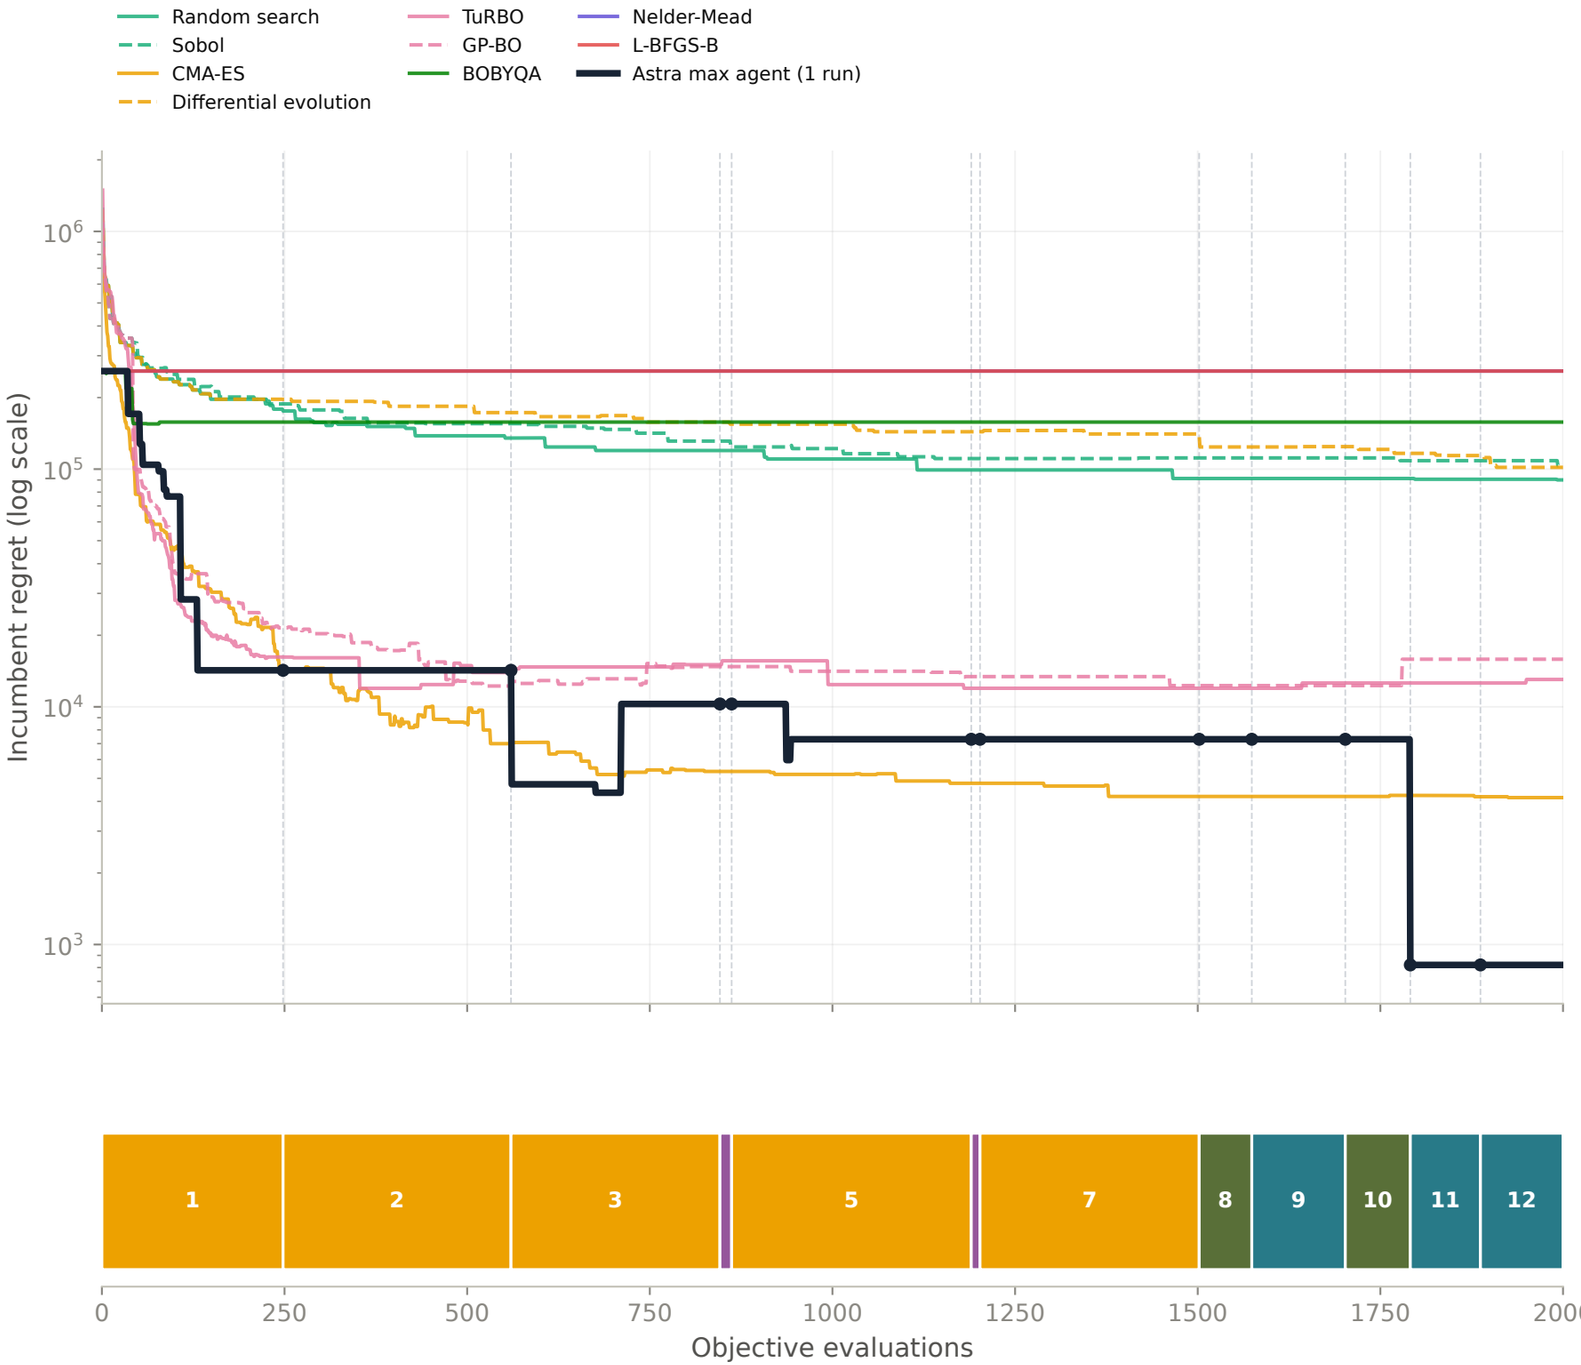

Block decisions

1. cma_es
   248 calls · evaluations 1–248
2. cma_es
   312 calls · evaluations 249–560
3. cma_es
   286 calls · evaluations 561–846
4. noise_check
   16 calls · evaluations 847–862
5. cma_es_mean2
   328 calls · evaluations 863–1190
6. noise_check
   12 calls · evaluations 1191–1202
7. cma_local_med3
   300 calls · evaluations 1203–1502
8. center_race
   72 calls · evaluations 1503–1574
9. midpoint_confirm
   128 calls · evaluations 1575–1702
10. center_race
    89 calls · evaluations 1703–1791
11. midpoint_confirm
    96 calls · evaluations 1792–1887
12. midpoint_confirm
    113 calls · evaluations 1888–2000

Boundaries: evaluator snapshots of prospective decisions; method changes inside a block stay in that block.
Agent: one fresh run, 2,000/2,000 evaluations; GPT-6 Astra, max reasoning. Baselines: seed means (10 stochastic / 1 deterministic); 2,000-evaluation allowance.
Noisy task: score uses the noise-free value of the lowest-observed-y incumbent. Regret ≤ 10^{-12} is shown at 10^{-12}; early-stopped baseline incumbents are carried forward.