schwefel d10 i1 — what the agent chose, and when

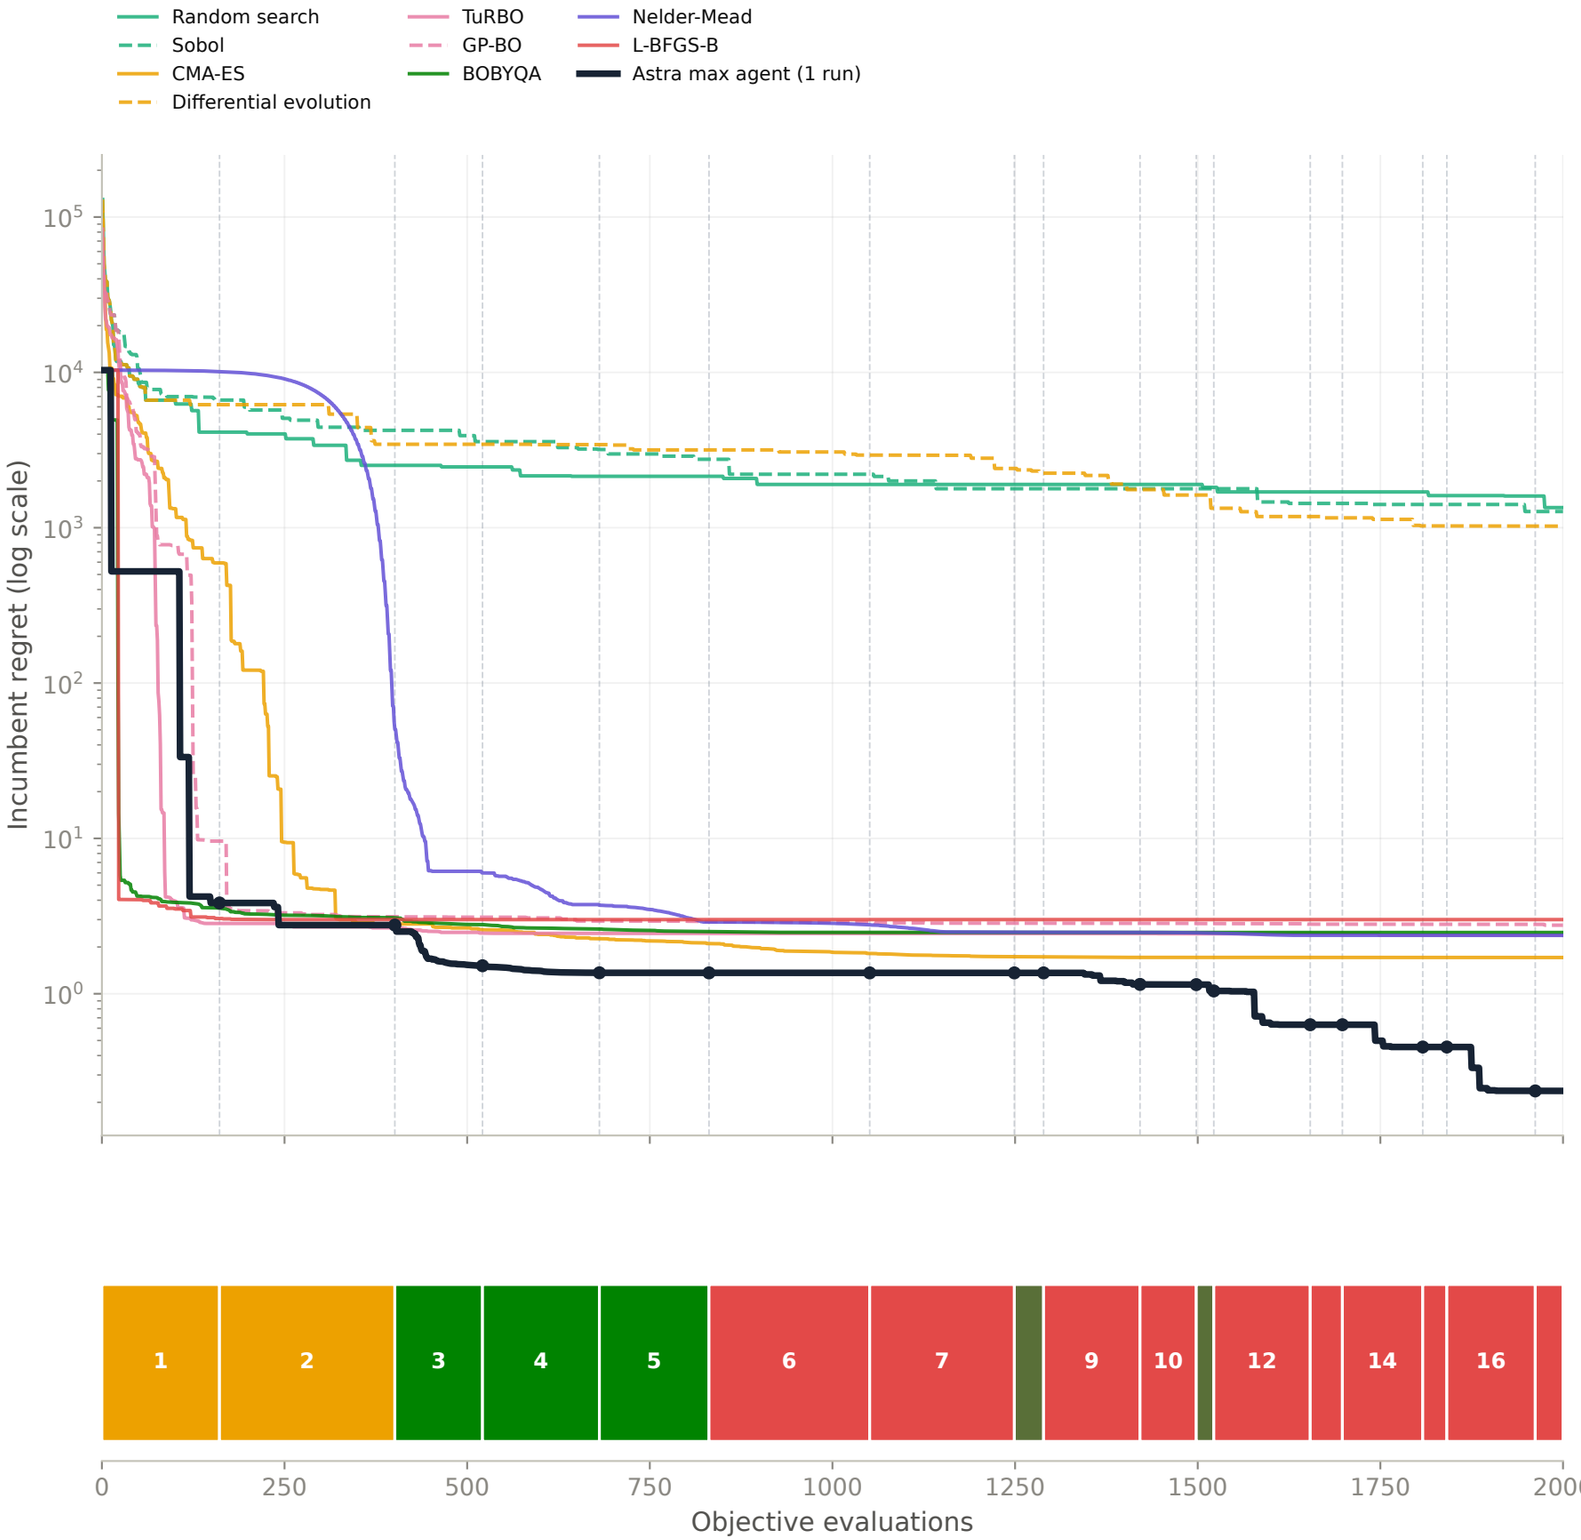

Block decisions

1. cma_es
   161 calls · evaluations 1–161
2. cma_es
   240 calls · evaluations 162–401
3. bobyqa_local
   120 calls · evaluations 402–521
4. bobyqa_local
   160 calls · evaluations 522–681
5. bobyqa_full
   150 calls · evaluations 682–831
6. lbfgsb_restart
   220 calls · evaluations 832–1051
7. lbfgsb_restart
   198 calls · evaluations 1052–1249
8. coordinate_escape
   40 calls · evaluations 1250–1289
9. lbfgsb_restart
   132 calls · evaluations 1290–1421
10. lbfgsb_restart
    77 calls · evaluations 1422–1498
11. coordinate_escape
    24 calls · evaluations 1499–1522
12. lbfgsb_restart
    132 calls · evaluations 1523–1654
13. lbfgsb_restart
    44 calls · evaluations 1655–1698
14. lbfgsb_restart
    110 calls · evaluations 1699–1808
15. lbfgsb_restart
    33 calls · evaluations 1809–1841
16. lbfgsb_restart
    121 calls · evaluations 1842–1962
17. lbfgsb_restart
    38 calls · evaluations 1963–2000

Boundaries: evaluator snapshots of prospective decisions; method changes inside a block stay in that block.
Agent: one fresh run, 2,000/2,000 evaluations; GPT-6 Astra, max reasoning. Baselines: seed means (10 stochastic / 1 deterministic); 2,000-evaluation allowance.
Regret ≤ 10^{-12} is shown at 10^{-12}; early-stopped baseline incumbents are carried forward.