sharp ridge d10 i1 — what the agent chose, and when

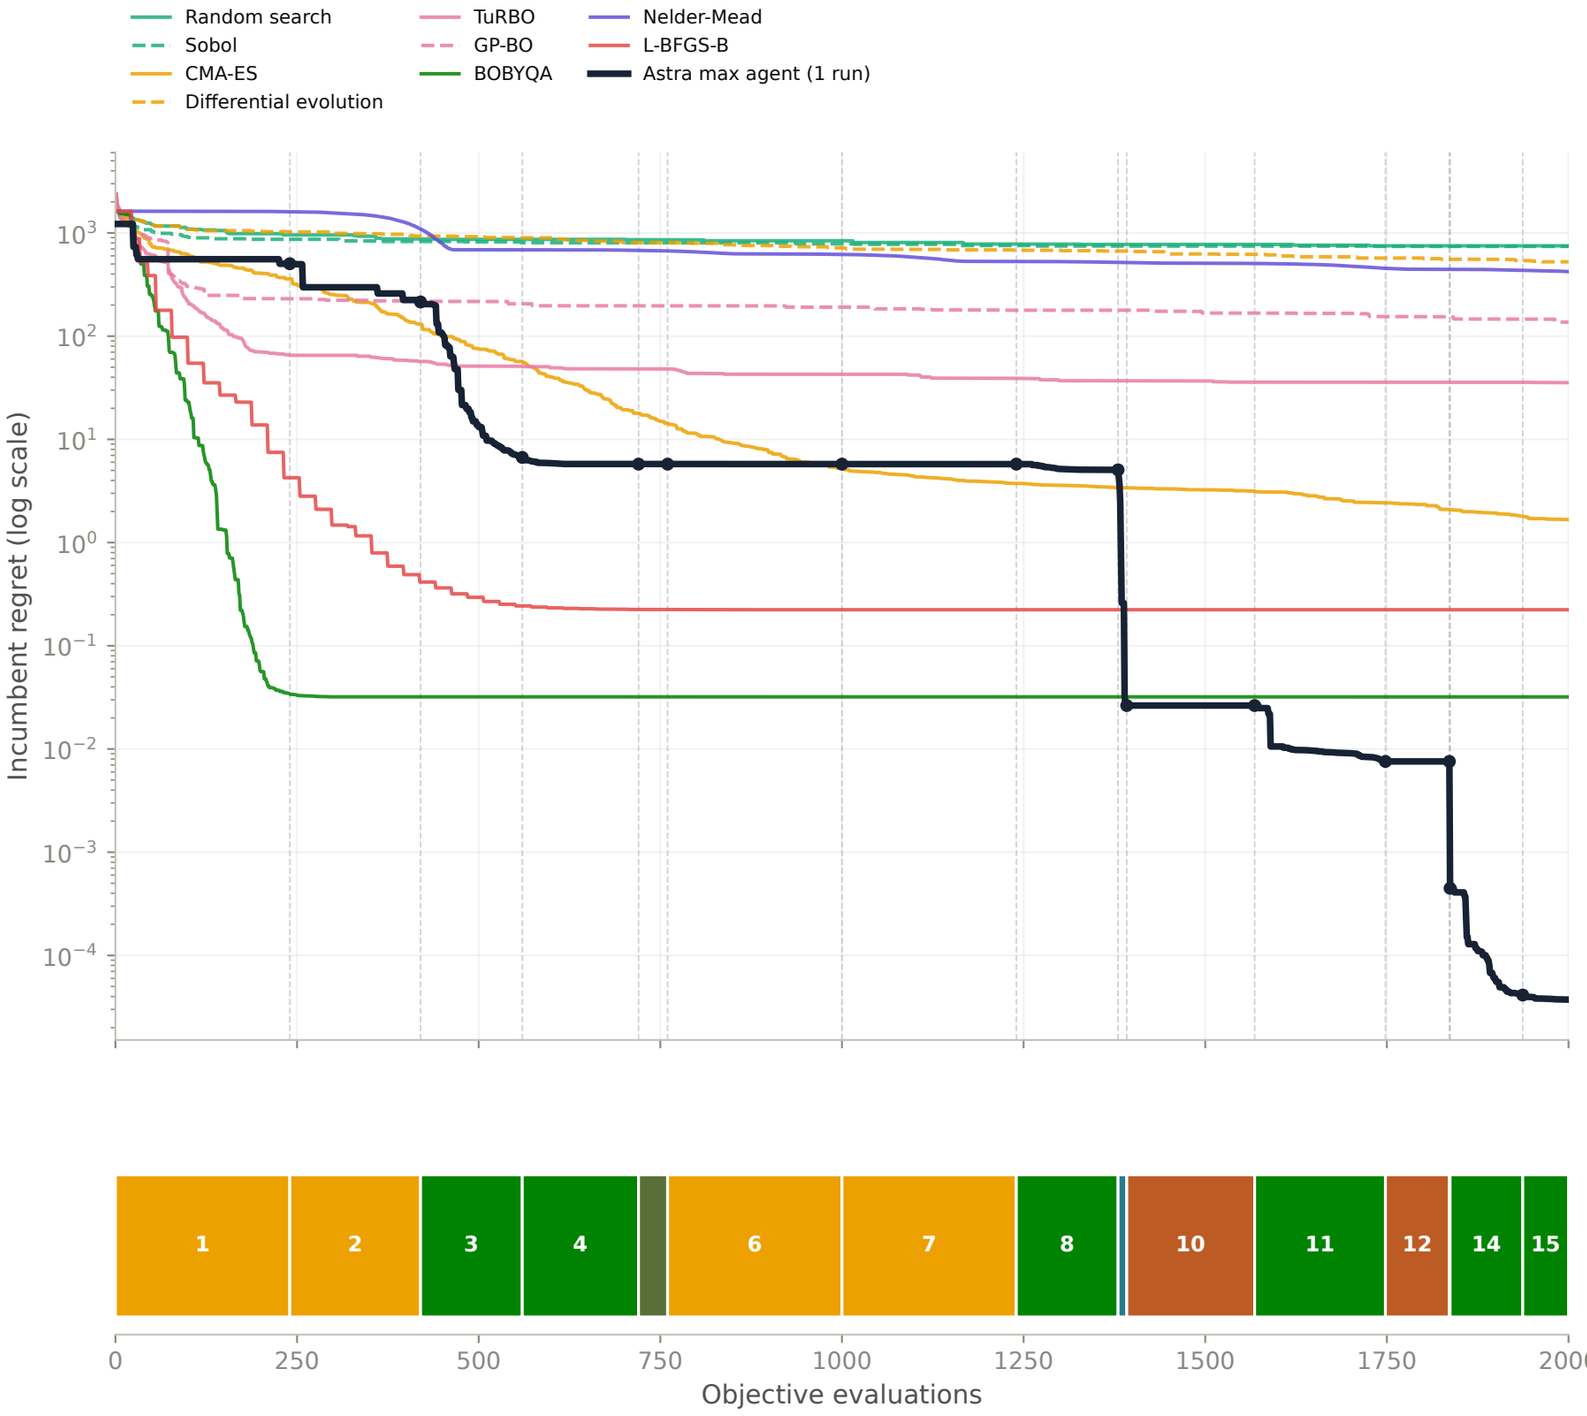

Boundaries: evaluator snapshots of prospective decisions; method changes inside a block stay in that block.
Agent: one fresh run, 2,000/2,000 evaluations; GPT-6 Astra, max reasoning. Baselines: seed means (10 stochastic / 1 deterministic); 2,000-evaluation allowance.
Regret ≤ 10^{-12} is shown at 10^{-12}; early-stopped baseline incumbents are carried forward.

Block decisions

1. cma_es
   240 calls · evaluations 1–240
2. cma_es
   180 calls · evaluations 241–420
3. bobyqa
   140 calls · evaluations 421–560
4. bobyqa
   160 calls · evaluations 561–720
5. coordinate_poll
   40 calls · evaluations 721–760
6. cma_es
   240 calls · evaluations 761–1000
7. cma_es
   240 calls · evaluations 1001–1240
8. bobyqa
   140 calls · evaluations 1241–1380
9. directional_brent
   12 calls · evaluations 1381–1392
10. local_gradient_probe
    176 calls · evaluations 1393–1568
11. rotated_bobyqa
    180 calls · evaluations 1569–1748
12. local_gradient_probe
    88 calls · evaluations 1749–1836
13. local_bundle
    1 calls · evaluations 1837–1837
14. rotated_bobyqa
    100 calls · evaluations 1838–1937
15. rotated_bobyqa
    63 calls · evaluations 1938–2000