weierstrass d10 i1 — what the agent chose, and when

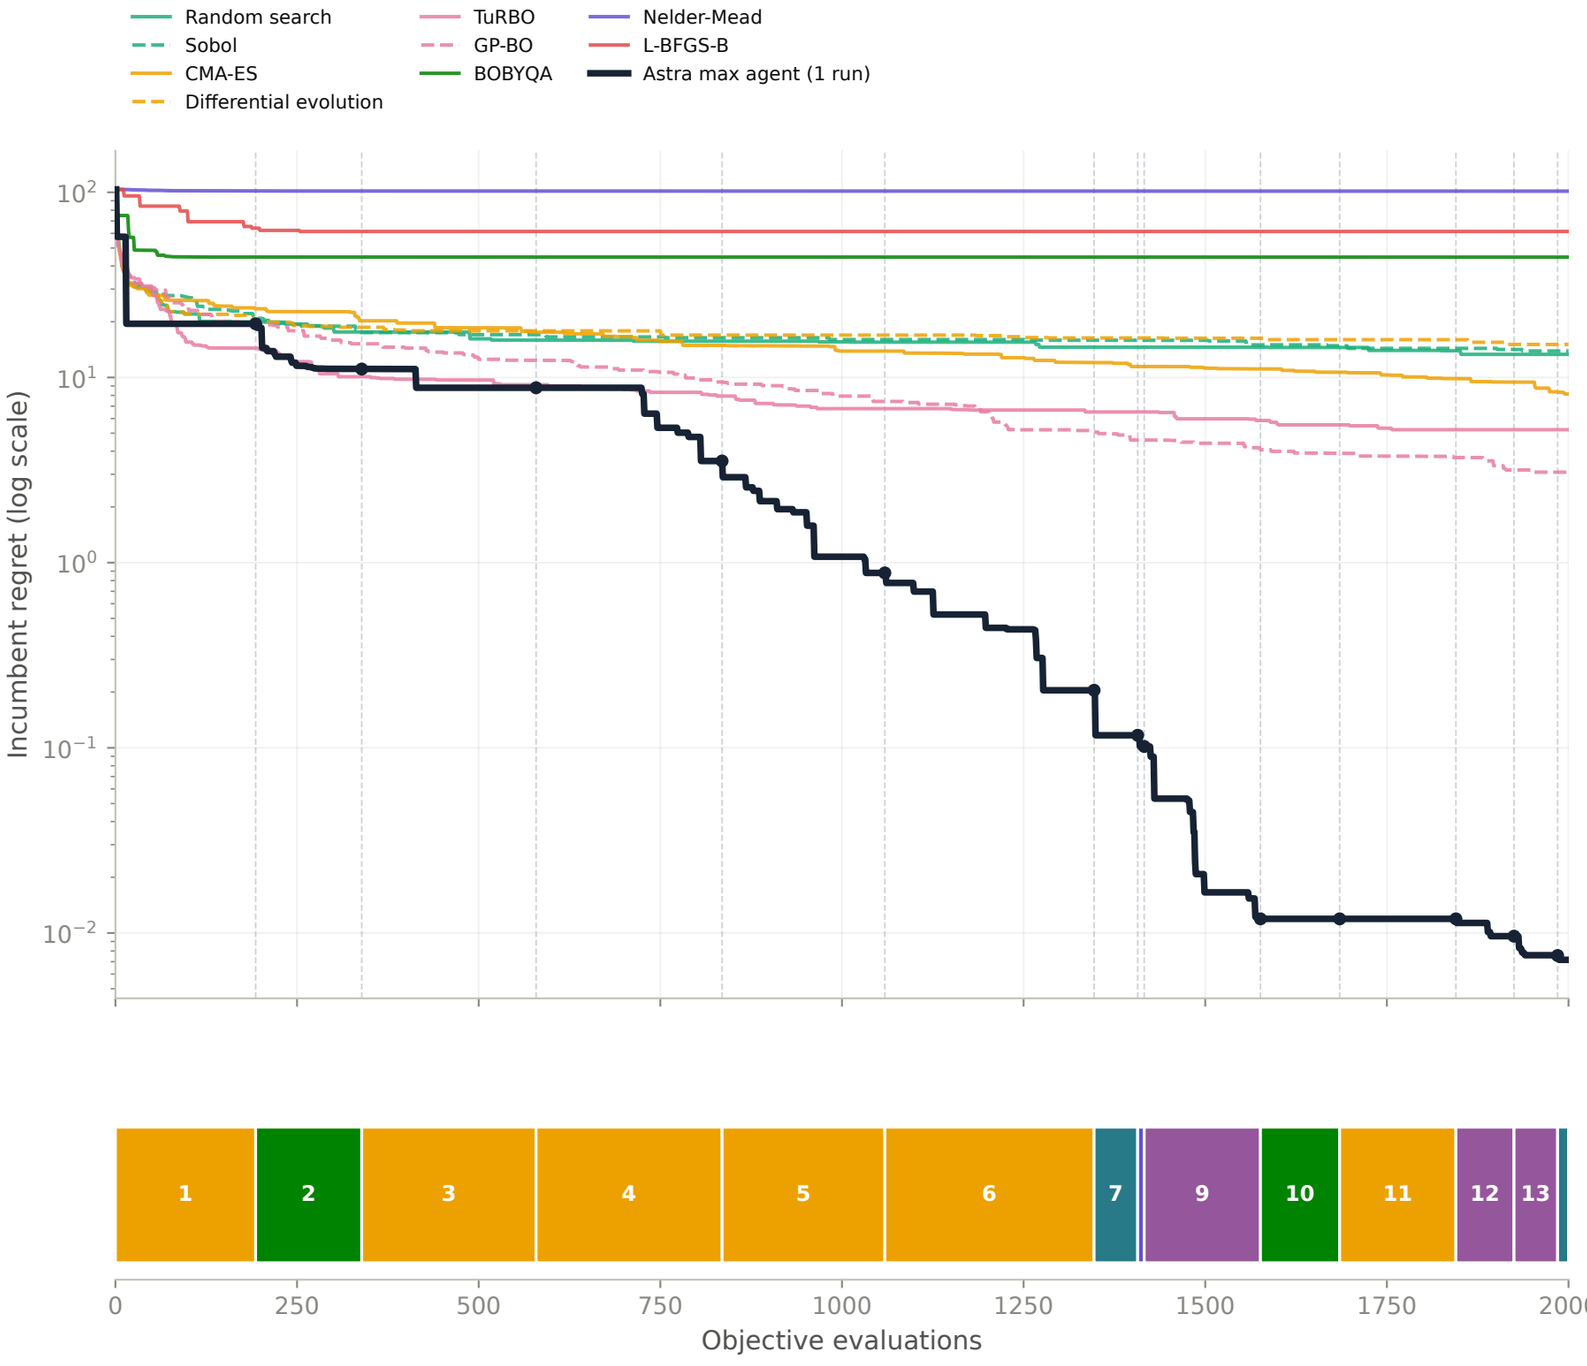

Boundaries: evaluator snapshots of prospective decisions; method changes inside a block stay in that block.
Agent: one fresh run, 2,000/2,000 evaluations; GPT-6 Astra, max reasoning. Baselines: seed means (10 stochastic / 1 deterministic); 2,000-evaluation allowance.
Regret ≤ 10^{-12} is shown at 10^{-12}; early-stopped baseline incumbents are carried forward.

Block decisions

1. cma_es
   193 calls · evaluations 1–193
2. bobyqa_local
   146 calls · evaluations 194–339
3. cma_local_restart
   240 calls · evaluations 340–579
4. cma_local_restart
   256 calls · evaluations 580–835
5. cma_local_restart
   224 calls · evaluations 836–1059
6. cma_local_restart
   288 calls · evaluations 1060–1347
7. covariance_poll
   60 calls · evaluations 1348–1407
8. surrogate_line_poll
   9 calls · evaluations 1408–1416
9. covariance_pattern
   160 calls · evaluations 1417–1576
10. bobyqa_challenger
    109 calls · evaluations 1577–1685
11. cma_injected_refine
    160 calls · evaluations 1686–1845
12. covariance_pattern
    80 calls · evaluations 1846–1925
13. covariance_pattern
    60 calls · evaluations 1926–1985
14. directional_polish
    15 calls · evaluations 1986–2000