MOF candidate pool — seed 0: decisions and progress

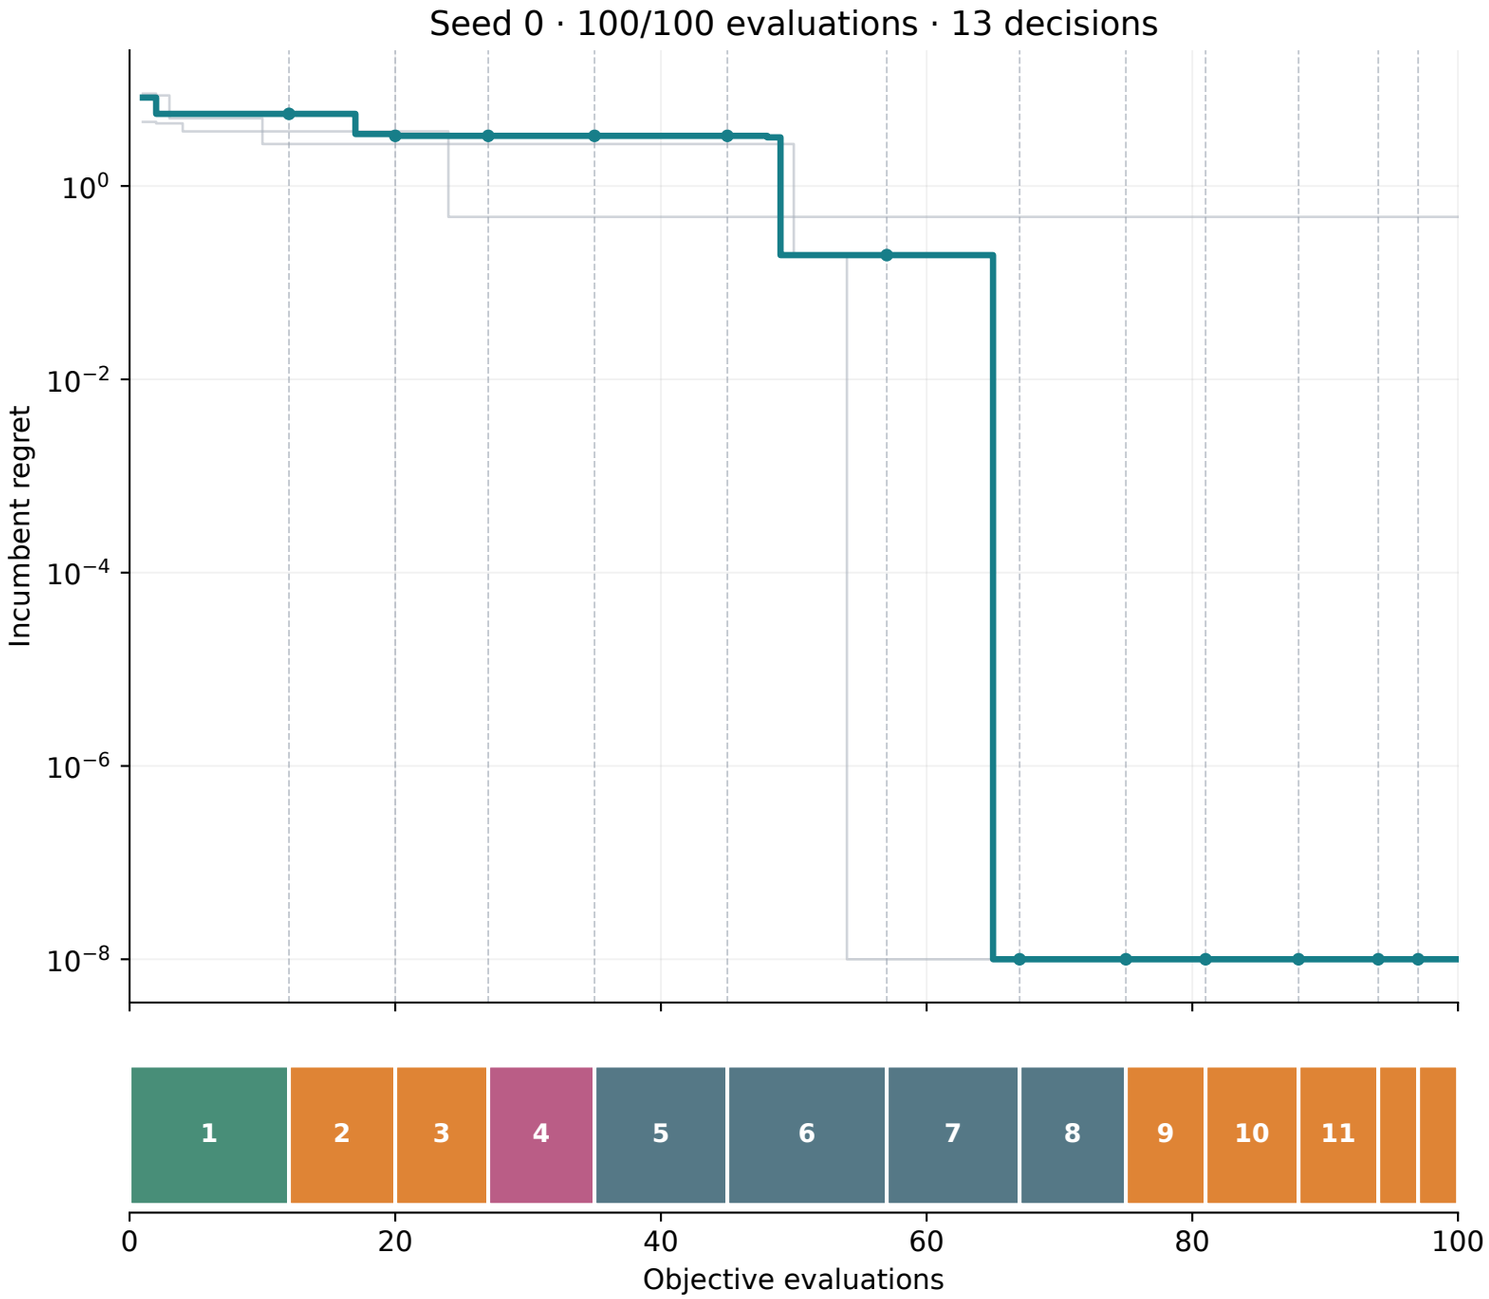

Block decisions

1. balanced pool design
   12 calls · evaluations 1–12
2. pool gp logei
   8 calls · evaluations 13–20
3. pool gp logei
   7 calls · evaluations 21–27
4. pool matern logei
   8 calls · evaluations 28–35
5. pool extratrees lcb
   10 calls · evaluations 36–45
6. pool extratrees lcb
   12 calls · evaluations 46–57
7. pool extratrees lcb
   10 calls · evaluations 58–67
8. pool extratrees lcb
   8 calls · evaluations 68–75
9. pool gp logei
   6 calls · evaluations 76–81
10. pool gp lcb
    7 calls · evaluations 82–88
11. pool gp tree lcb
    6 calls · evaluations 89–94
12. pool gp tree lcb
    3 calls · evaluations 95–97
13. pool gp tree lcb
    3 calls · evaluations 98–100

GPT-6 Astra · max reasoning · 100 evaluations per seed, including initialization. Seeds 0, 1, 2 are independent campaigns; model generation is not deterministic.
Agent seed traces; standalone baselines appear in the complete comparison figure. Regret = pool maximum − best measured score.
Boundaries come from prospective decision snapshots; gray curves are the other two agent seeds. Zero regret is drawn at 1e-08.