Crop Yield Prediction using Machine Learning Algorithm

D.Jayanarayana Reddy Research Scholar

Department of Computer Science And Engineering Jawaharlal Nehru Technological University

> Anantapur, AP, India djnreddy@gmail.com

> > Key Results

Methodology

Research Problem

Agriculture is the pillar of the Indian economy and more than 50% of India's population are dependent on agriculture for their survival. Variations in weather, climate, and other such environmental conditions have become a major risk for the healthy existence of agriculture. Machine learning (ML) plays a significant role as it has decision support tool for Crop Yield Prediction (CYP) including supporting decisions on what crops to grow and what to do during the growing season of the crops. The present research deals with a systematic ResearC leview that extracts and synthesize the features used for CYP Copiectivand furthermore, there are a variety of methods that were developed to analyze crop yield prediction using artificial intelligence techniques. The major limitations of the Neural Network are reduction in the relative error and decreased prediction efficiency of Crop Yield. Similarly, supervised learning techniques were incapable to capture the nonlinear bond between input and output variables faced a problem during the selection of fruits grading or sorting. Many studies were recommended for agriculture development and the goal was to create an accurate and efficient model for crop classification such as crop yield estimation based on the growing phase etc., This paper explores various ML techniques utilized in the field of crop yield estimation and provided a detailed analysis in terms of accuracy using the techniques. Letail Reywords—Agriculture, Artificial Neural Network, Convolution Neural Network, Crop yield prediction, Machine learning method.

Present your topic and get the reader interested

Agriculture is the backbone of India's economy since its plays a vital role in the survival of every human and animal in India [1]. The worldwide population was estimated at 1.8 billion in 2009 and is predicted to increase to 4.9 billion by 2030, leading to an extreme increase in demand for agricultural products. In the future, agricultural products will have higher demand among the human population, which will require efficient development of farmlands and growth in the yield of crops. Meanwhile, due to global warming, the crops were frequently spoiled by harmful climatic situations [2]. A single crop failure due to lack of soil fertility, climatic variation, floods, lack of soil fertility, lack of groundwater and other such factors destroy the crops which in turn affects the farmers. In other nations, the society advise what crops to grow and what to do during the growing season of the crops. The present research deals with a systematic Researcheview that extracts and synthesize the features used for CYP

Dr M. Rudra Kumar Professor and Head,

Department of Computer Science and Engineering, Annamacharya Institute of Technology and Sciences (Autonomous)

Rajampet, AP, India mrudrakumar@gmail.com

so the estimation and monitoring of crop production is necessary [4]. Accordingly, an appropriate method needs to be designed by considering the affecting features for the better selection of crops with respect to seasonal variation

Provide background or summarize existing research

The core objective of crop yield estimation is to achieve higher agricultural crop production and many established models are exploited to increase the yield of crop production. Nowadays, ML is being used worldwide due to its efficiency in various sectors such as forecasting, fault detection, pattern recognition, etc. The ML algorithms also help to improve the crop yield production rate when there is a loss in unfavorable conditions. The ML algorithms are applied for the crop selection method to reduce the losses crop yield production irrespective of distracting environmenesition your own approach

The existing model used SVM that classified the crop data based on the texture, shape, color of patterns on the diseased surface as it includes an unambiguous perception of the defects [6]. An existing technique used CNN that reduced the relative error as well as decreased the prediction of crop yield [7]. Similarly, the existing model used Back Propagation Neural Network (BPNNs) with the time series detailed analysis in terms of accuracy using the techniques. etail younded and used smaller dataset size gained lower Conclusion Specific Performance as less number of sample was used for Convolution Neural Network, Crop yield prediction, Machine Problem stability of selection and greater precision. ML provides several effective algorithms which are used to find the input and output connection in yield and crop prediction. There are various machine techniques used in agriculture for yield prediction, smart irrigation system, Crop disease prediction, crop selection, weather forecasting, deciding the minimum support price, etc. These techniques will enhance the productivity of the fields along with a reduction in the input efforts of the farmers. Besides, the advances in machines and technologies were accurate as they used significant data and played an important role. [10]. This research work analyses the various agricultural methods that utilize ML, along with the merits and limitations.

> This research paper is structured as follows: the stepwise process on crop yield analysis is explained in Section 2. The analysis of several ML methods used to examine Crop yield prediction is given in Section 3. The objectives and problem statement of crop yield prediction are shown in 4 and 5 and comparative analysis of several types of research are shown

> > Overview of the papers's structure

in Section 6. Section 7 describes the conclusion and future work.

II. BLOCK DIAGRAM

The steps that are involved in crop yield prediction using machine learning methodology are stated as follows. Firstly, the agriculture Data is utilized for the crop yield prediction, Next, the data is undergone for pre-processing to remove the noisy data. The pre-processed data is undergone for feature extraction process that includes features such as soil

information, nutrients, field management etc. which are used to perform the classification using ML algorithms. The results obtained by the existing models using ML algorithms are effectively described in the following section. Figure 1 shows the flow diagram of the crop yield prediction using ML algorithms.

Explain the approach you chose

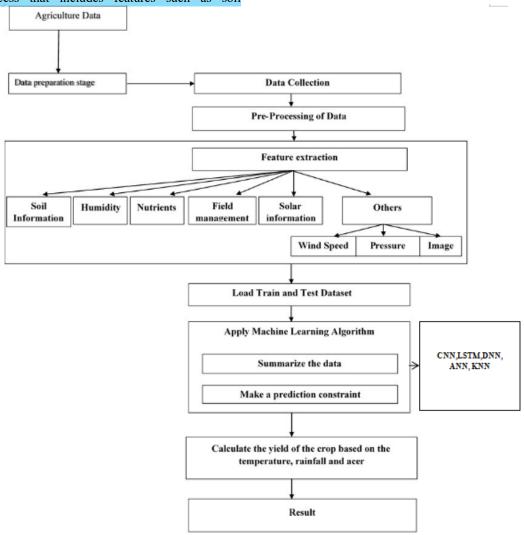


Fig. 1. Flow diagram of the crop yield prediction using ML algorithms

III. TAXONOMY FOR ANALYSING CROP YIELD USING VARIOUS MACHINE LEARNING ALGORITHMS.

Tseng [2] utilized intelligent agriculture Internet of Things (IoT) equipment to monitor the crop yield prediction. The crops were generally damaged by weather conditions and the existing models used big data in intelligent agriculture to predict the crop yield farm. The developed model utilized an IoT sensor device that monitored the overall agricultural farm and sensed the atmospheric pressure, humidity, moisture content, temperature and soil salinity. The objective of big data analysis in IoT was to analyze and understand crop growing methods practiced by the farmers along with examining environmental deviations. An advantage of the developed model was 3D cluster evaluated the relation between environmental factors and

Explain the approach you chose

subsequently examined the guidelines obtained from the farmers. However, the developed model showed unusual distribution when it was exposed to potential risk in air humidity, soil moisture content, and temperature.

Tiwari and Shukla [7] developed a model for crop yield Prediction by using CNN and Geographical Index. The existing model faced a problem during a continuous breakdown in agricultural drifts for crop cultivation which were not suitable with environmental factors like temperature, weather and soil condition. The developed CNN model which used spatial features as input were trained by BPNN for error prediction. An advantage of the developed model was that it was implemented on a real-time dataset that was taken from authentic geospatial resources. However, the developed model reduced the relative error but decreased the efficiency of crop yield prediction.

Fuentes et al. [11] utilized the Robust Deep-Learning method to identify the pest infestation and tomato plant infections in crops. The existing model faced a problem for crop yield prediction due to the presence of pests and diseases in crops which substantially gave rise to economic loss. The developed model introduces a deep metaarchitecture to predict the pests in plants. The developed model considers three key features of indicators: Single Shot Multibox Detector (SDD), Faster region-based CNN and Region-Based Fully CNN, which is known as deep metaarchitecture. The execution of the deep meta-architecture and feature extractors furthermore suggested a method for a global and local period explanation. The data growth increases the precision and also reduced the number of false positives in training. The benefit of the developed model was it successfully identified different kinds of pests and diseases by dealing with complex situations from a nearby area. Due to the usage of complex pre-processing techniques, the robust deep learning method consumes more time and high computational price.

Sun et al. [12] utilized the Deep CNN-LSTM method to predict the soybean yield estimation. The Yield prediction was an immense consequence for yield mapping, harvest management, crop insurance, crop market planning, and remote sensing. The developed CNN-LSTM approach improved its practicability and feasibility in order to forecast the Particulate Matter(PM2.5) concentration was also verified in the model. The DNN structure was developed that integrated LSTM and CNN based on the historical data such as cumulated wind speed, duration of rain, and concentration of PM 2.5The latest research in this area recommended that CNN could explore more spatial features and LSTM can reveal phonological features, which together play a significant role in crop yield prediction. However, the method employed histogram-based tensor alteration fused different remote sensing data which combined multisource data with a various resolution for feature extraction remained challenging,

Bondre and Mahagonkar [14] utilized ML techniques to predict the crop yield and manure recommendation. The yield prediction was a major issue in agriculture which was overcome by developing a machine learning algorithm. The performance of the developed model was evaluated for estimating crop production in agriculture. An advantage of the developed model was that earlier data was utilized for crop prediction and by applying ML algorithms like random forest and SVM the data also recommended a suitable fertilizer for every particular crop. However, the smart irrigation system for farms to get a higher yield method was not implemented.

Devika and Ananthi [15] utilized data mining techniques to predict the annual yield of major crops. Farmers were opposed to harvesting the yield because of insufficient availability of water sources and unpredictable weather variations but these issues were overcome by developing a data mining method. The developed model was gathering crop growing documents that used to be stored and analyzed for valuable crop yield prediction. In some of the data mining actions, the training data can be collected from the previous documents and the gathered documents were used in the phase of training which has to exploit. An advantage of the developed model was that the highest level of crop yield prediction was obtained only in sugarcane, cotton, and

turmeric. However, the range was low for other crops such as wheat, rice, etc.

Pandith et al. [16] utilized the calculation of ML technology for estimation of mustard crop yield from soil review. In agriculture, the soil is a significant factor for determining crop yield calculation and it was overcome by developing an ML technology. Several ML techniques were implemented to forecast mustard crop yield in advance from soil exploration, the techniques named multinomial logistic regression, K-nearest neighbor (KNN), ANN, random forest, Naive Bayes. An advantage of the developed model was that yield prediction was performed even in presence of fertilizer that also is implemented to support the soil analysis and farmers to take judgment accordingly in situations of low crop yield prediction. However, the developed model crop yield prediction with an enormous soil dataset was difficult in a big data environment that showed system complexity.

P.S. Maya Gopal and R. Bhargavi [17] developed a novel approach for an effective CYP. The crop yield was predicted using ANN, statistical and Multi Linear Regression (MLR) algorithms. The model examined the intrinsic behaviour that integrated MLR-ANN model for CYP that analyse the accuracy based on the coefficient generated from MLR and ANNs input layer weights and bias. The Feed forward ANN with back propagation model was used for predicting the crop yield. Similarly, Khaki, S., & Wang, L [18] studied about the DNN for CYP for determining an accurate yield prediction model. The model performed fundamental understanding for setting up the relation among the yield and the interactive factors with respect to the powerful and comprehensive algorithm. The results showed and suggested that the regression trees outperformed better when compared with existing supervised models. However, the main limitation was to look for more advanced models were not showing accurate results.

T. Vijayakumar [19] studied Posed Inverse Problem Rectification Using Novel Deep CNN. The existing methodologies showed an excellent outcome, but imposed challenges in terms of computational cost, parameter selection for adjoint operators and forward operators. The developed model used CNN directly was inverted found a solution for solving the convolution inverse problem. The developed model utilized physical model for analyzing direct inversion, but the combination of multi-resolution decomposition and the combination of residual learning led to artifact generation. Therefore, the model was declined as the noise level was high.

T. Senthil Kumar [20] developed a data mining-based marketing decision support system using hybrid ML techniques that solves the problem respective finance and marketing applications. The decision making is done based on the decision support system which enhanced the organization performance that analyses the ground reality. In the existing models, globalization, privatization, and liberalization dragged the organization more competitively. The competition is balanced and withstand for achieving marketing strategies planned, executed properly. However, an optimization model was required for the model as it posed difficulty during the process and showed lowered assessment performance.

By analyzing the studies, various feature groups related with soil information such as soil maps, soil type, and area

Explain the approach you chose

of production were discussed. The soil maps will give an information related to type of nutrients present in soil and also location of soil found. The features related to crop information is about the crops such as mustard crops, wheat, rice, tomato plants etc, were analysed in terms of crop density, growth process in terms of weight, leaf area index. Similarly, weather features such as humidity, rainfall, precipitation and forecaster rainfall. Based on these environmental factors, the nutrients components play an important role. The nutrients include, Nitrogen, potassium, magnesium, zinc, boron etc., The solar information includes features related with the temperature and radiation (gamma), shortwave radiation, solar radiation, degree days are utilized for calculation of features. The features used are less including wind speed, images, and pressure are calculated.

Pseudo code for CYP using ML

Learning phase:

Create a training instance data set

Classification phase:

For every unknown instance xⁿ

Identify $x^1,x^2,...x^n$ which are the most best instances obtained using ML algorithms from data set are the data points

Set class label until it is equal to the most repeated class

Return class;

End for Discuss any obstacles and their solutions

IV. PROBLEMS FACED IN EXISTING RESEARCHES

The problems faced in existing research for crop yield prediction using machine learning are stated below:

1. Creation, repair and maintenance of ML algorithms required huge costs as they are very complex.

- 2. ML technique used for Crop yield prediction (mustard, wheat) combined input and output data but failed to obtain better results statistically
- 3. Due to the nature of linear connection in the parameters, the regression model was failed to provide the exact prediction in a complex situation such as extreme value data and nonlinear data.
- 4. The existing K-NN models were used for classification for yield prediction but lowered the performance due to nonlinear and highly adaptable issues present in KNN. They were operated in a locality model that incremented the dimensionality of the input vector made confusion for classification.
- 5. An appropriate decision was not taken during classification because a fewer quantity of data was available for estimation of crop yield.
 - V. OBJECTIVES TO BE FOLLOWED IN FUTURE

Objectives to be followed in the future are given below:

- 1. Depending on the dissimilar crop feature divisions, the modulating factor values of ML algorithms differ to attain perfect approximation.
- 2. When the quantity of input elements is reduced, ANN is utilized. The optimal feature was being empirically selected for appropriate crop yield estimation.
- 3. The advantage of ML method regression is to avoid difficulties of using a linear function in large output sample space and optimization of complex problems transformed into simple linear function optimization.
- 4. ML algorithm can be executed with an enormous soil dataset for crop yield estimation.
- 5. The ML techniques, through observation of the agricultural fields, provided the necessary support to the farmers in increasing crop production to a great extent.

VI. COMPARATIVE ANALYSIS

Authors	Methodology	Advantage	Limitation	Performance Metrics
Kumar et al	SVM	The SVM method has implemented a	The developed model	Accuracy=97.77%
[6]		cascade of two SVM classifiers for	was not given the proper extensive analysis of	Sensitivity=96.55%
		achieving the accuracy, specificity	the defective outlines such as color, shapes and	Precision =99.24%
		and precision metrics	texture. Hence, it is failed to identify the infected	
			surface on the defective patterns	
Tiwari and	CNN,	The CNN model was developed	The developed model reduced the relative error	MCNN
Shukla	Modified	which utilized spatial features as input	as well as decreased the prediction efficiency of	RMSE value =
[7]	Convolutional	and trained by backpropagation that	crop yield.	1396.4
	Neural Network	reduced error of prediction as		Relative Error=9.8465
	(MCNN)	well.		
Shastry and	(H-ANN)	The developed (H-ANN) was used to	The developed model was incapable of capturing	RMSE=4.72
Sanjay	Hybridized	forecast agricultural data such as air	the nonlinear bond between input and output	
[13]	ANN,	temperature and crop yield estimation.	variables.	
		IN H-ANN, the LN algorithm was		
		used to train the ANN		
C 1 1	ANDI 1	771 1 1 1 1 1 1	T1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	MID
Gopal and	ANN and Multiple Linear	The developed model is a	The developed model showed difficulties in training the neural network model	MLR RMSE=9.8%
Bhargavi		combination of backpropagation algorithm with ANN to evaluate the	training the neural network model	MAE=6.9%
[17]	Regression (MLR).	exact crop yield.		R=89%
	(WILK).	cxact crop yield.		ANN
				RMSE=5.1%
				MAE=6.4%
				R=99%
	1			11-99/0

Khaki and Wang [18]	Deep Neural Network (DNN)	The DNN model was performed for the feature selection. Next, the DNN model has reduced the measurement of input space without affecting the accuracy.	The developed model had a black box which was shared through several ML methods	Training RMSE=10.55 Validation RMSE=12.79
------------------------	------------------------------	---	---	---

Restate your research topic VII. CONCLUSION:

The present research work discussed about the variety of features that are mainly dependent on the data availability and each of the research will investigated CYP using ML algorithms that differed from the features. The features were chosen based upon the geological position, scale, and crop features and these choices were mainly dependent upon the data-set availability, but the more features usage was not always giving better results. Therefore, finding the fewer Summa best performing features were tested that also have been rize the utilized for the studies. Most of the exiting models utilized Neural networks, random forests, KNN regression techniques for CYP and a variety of ML techniques were also used for best prediction. From the studies most of the common algorithms used were CNN, LSTM, DNN algorithms but still improvement was still required further in CYP. The present research shows several existing models State the that consider elements such as temperature, weather significa condition, performing models for the effective crop yield or result prediction. Ultimately, the experimental study showed the combination of ML with the agricultural domain field for improving the advancement in crop prediction. However, still more improvement in feature selection was required in

concentrated such as firstly the delay to border topographical areas required additional-explicit treatment. Next, a nonparametric portion of the model using machine learning algorithm and thirdly, using features from deterministic crop models to get perfect statistical CO_2 fertilization. By

following above-mentioned objectives, the crop yield estimation would be improved by further researchers. Additionally, in the crop yield estimation, fertilizer should also be considered for executing soil forecasts that agriculturalist to make a better judgment based on the situation of low crop yield estimation. Based on the outcomes obtained for the study further we need to build and develop a model based on DL for CYP.

terms of temperature variation aspects effects on agriculture.

In the further studies, the key possibility that should be

REFERENCES

- [1] R. Ghadge, J. Kulkarni, P. More, S. Nene, and R. L. Priya, "Prediction of crop yield using machine learning," Int. Res. J. Eng. Technolgy, vol. 5, 2018.
- [2] F. H. Tseng, H. H.Cho, and H. T. Wu, "Applying big data for agriculture-based crop selection analysis," IEEE Access, vol. 7, pp. 116965-116974, 2019.
- [3] A. Suresh, N. Manjunathan, P. Rajesh, and E. Thangadurai, "Crop Yield Prediction Using Linear Support Vector Machine," European Journal of Molecular & Clinical Medicine, vol. 7, no. 6, pp. 2189-2195, 2020.

- M. Alagurajan, and C. Vijayakumaran, "ML Methods for Crop Yield Prediction and Estimation: An Exploration," International Journal of Engineering and Advanced Technology, vol. 9 no. 3, 2020
- P. Kumari, S. Rathore, A. Kalamkar, and T. Kambale, "Predicition of Crop Yeild Using SVM Approch with the Facility of E-MART System" Easychair 2020.
- S. D. Kumar, S. Esakkirajan, S. Bama, and B. Keerthiveena, "A microcontroller based machine vision approach for tomato grading and sorting using SVM classifier," Microprocessors Microsystems, vol. 76, pp.103090, 2020
- P. Tiwari, and P. Shukla, "Crop yield prediction by modified convolutional neural network geographical indexes," International Journal of Computer Sciences Engineering, vol. 6, no. 8, pp. 503-513, 2018.
- [8] P. Sivanandhini, and J. Prakash, "Crop Yield Prediction Analysis using Feed Forward and Recurrent Neural Network," International Journal of Innovative Science and Research Technology, vol. 5, no. 5, pp. 1092-1096, 2020.
- N. Nandhini, and J. G. Shankar, "Prediction of crop growth using machine learning based on seed," Ictact journal on soft computing, vol. 11, no. 01, 2020
- [10] A. A. Alif, I. F. Shukanya, and T. N. Afee, "Crop prediction based on geographical and climatic data using machine learning and deep learning", Doctoral dissertation, BRAC University) 2018.
- [11] A. Fuentes, S. Yoon, S. C. Kim, and D. S. Park, "A robust deeplearning-based detector for real-time tomato plant diseases and pests' recognition," Sensors, vol. 17, no. 9, pp. 2022, 2017.
- [12] J. Sun, L, Di, Z. Sun, Y. Shen, and Z. Lai, "County-level soybean yield prediction using deep CNN-LSTM model," Sensors, vol. 19, no. 20, pp. 4363, 2019.
- [13] K. A. Shastry, and H. A. Sanjay, "Hybrid prediction strategy to predict agricultural information," Applied Soft Computing, vol. 98, pp. 106811, 2021.
- [14] D. A. Bondre, and S. Mahagaonkar, "Prediction of Crop Yield and Fertilizer Recommendation Using Machine Learning Algorithms," International Journal of Engineering Applied Sciences and Technology, vol. 4, no. 5, pp. 371-376, 2019.
- [15] B. Devika, and B. Ananthi, "Analysis of crop yield prediction using data mining technique to predict annual yield of major crops, International Research Journal of Engineering and Technology, vol. 5, no.12, pp. 1460-1465, 2018.
- [16] V. Pandith, H. Kour, S. Singh, J. Manhas, and V. Sharma, 'Performance Evaluation of Machine Learning Techniques for Mustard Crop Yield Prediction from Soil Analysis," Journal of Scientific Research, vol. 64, no. 2, 2020.
- [17] P. M. Gopal, and R. Bhargavi, "A novel approach for efficient crop yield prediction," Computers and Electronics in Agriculture, vol. 165, pp. 104968, 2019.
- [18] S. Khaki, and L. Wang, "Crop yield prediction using deep neural networks." Frontiers in plant science, vol. 10, pp. 621, 2019.
- [19] T. Vijayakumar, "Posed Inverse Problem Rectification Using Novel Deep Convolutional Neural Network," Journal of Innovative Image Processing (JIIP), vol. 2, no. 03, pp. 121-127, 2020.
- [20] T. Senthil Kumar, "Data Mining Based Marketing Decision Support System Using Hybrid Machine Learning Algorithm," Journal of Artificial Intelligence, vol. 2, no. 03, pp. 185-193, 2020.

main

point

Conclud your thoughts