



Project Title: Law Firm Internal Management System

Contributors
Maisha Haque
Nahian Tasnim
Mohammad Nazmus Saquib
Ahmad Zubair

Table of Contents

Section No	Content	Page No
1	Introduction	2
2	Functional Requirements	3
3	User Manual	4
4	Frontend Development	22
5	Backend Development	54
6	Technology (Framework, Languages)	70
7	Github Repo Link	70
8	Individual Contribution	70

Introduction

In the modern legal landscape, the importance of efficient management of legal operations, client relationships and administrative tasks is massive for the success of law firms. Our very own project The Law firm Management system works to deliver that quality usage to the users to enjoy the benefits of the brilliant software. The Law Firm Internal Management System is a comprehensive software solution aimed at optimizing the operational efficiency of a law firm by facilitating streamlined access to information, efficient case management, seamless communication, and effective financial oversight. The system targets distinct user roles including firm workers, firm leaders, lawyers, management/administration personnel, and the finance team.

Key Features:

Employee and Case Information Accessibility

- All firm workers will have access to comprehensive employee lists and detailed case information.
- Firm employees can view historical and current lists of employees and cases.
- Clear visibility of case assignments to respective lawyers.
- Real-time case status updates, including unassigned, ongoing, completed, withdrawn, etc.

Case Assignment and Management by Firm Leaders

- Firm leaders gain insights into categorized cases.
- Availability status of lawyers for new case assignments.
- Seamless assignment of lawyers to specific cases.
- Flexibility for firm leaders to modify assigned lawyers and make subsequent changes.

Lawyer-Centric Case Handling and Updates

- Lawyers will exclusively see and interact with their assigned case files.
- Comprehensive access to all pertinent case details.
- Capability for lawyers to update, modify, and manage case files.
- Authority to change the status of the assigned cases based on developments.

Administrative Empowerment

- Management and administrative personnel can efficiently intake new cases from clients and organize them within the unassigned section.
- Admins can update both case and lawyer details as needed.
- Administrators can do simple addition and management of new employees within the system.
- Dynamic control over workers' details for accurate records.
- Efficient room management and allocation for various office and meeting requirements.

Effective Financial Management

- The finance and accounts team is equipped to manage case fees with precision.
- Streamlined management of employees' salaries for accuracy and transparency.
- Comprehensive handling of diverse costs associated with the law firm's operations.
- Real-time monitoring of profits and losses for informed financial decision-making.
- The Law Firm Internal Management System amalgamates these features into a cohesive platform, enhancing the firm's internal processes and fostering better collaboration, communication, and data-driven decision-making. By catering to the unique needs of various user roles and centralizing critical information, the system contributes to improved productivity, client satisfaction, and overall organizational success within the law firm.

Functional Requirements


1. All the workers of the Law Firm will be able to access all the employee lists and case details through the system
2. The Firm Leader will be able to assign cases to the lawyers and change assigned lawyers if required.
3. Every lawyer will be able to see only assigned cases and case details and update those cases.
4. The management will be able to update cases and employee details with the eligibility of assigning room for the meetings.
5. Finance team will manage all monetary sections.

User Manual

There are four major portions of our web application. There is the lawyers user interface, firm leader interface, finance manager interface and admin interface. So the user manual is described in four sections.

Admin:

- Logging in to the system with proper credentials and authentication

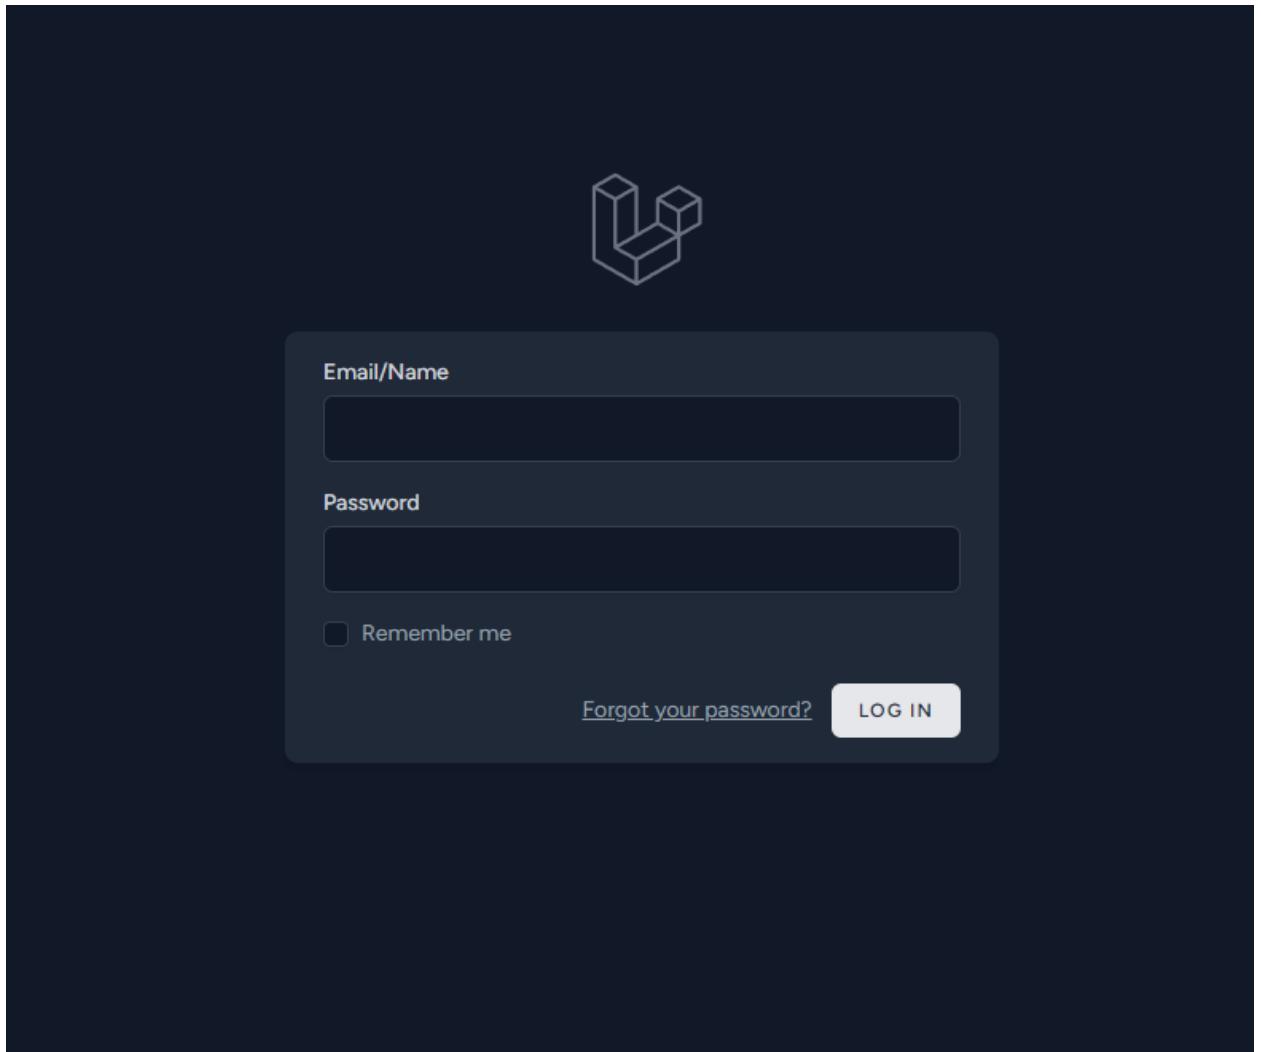

- Admin dashboard

The screenshot displays the PearsonHardman software interface. On the left, a dark sidebar contains navigation links for 'Dashboard', 'MANAGEMENT' (Case Details, Assign Case, Update case details, No Witness cases, Update case details), 'Assign Room', 'Add/Update employee', 'COMPONENTS' (UI Kit, Advanced UI), and 'DOCS' (Documentation). The main area is divided into three sections: 'TOTAL CASES' (412), 'OPEN CASES' (55), and 'CLOSED CASES' (357). Below these are 'INBOX' messages from Leonardo Payne, Carl Henson, Jensen Combs, Amiah Burton, and Yaretzi Mayo, each with a timestamp and a short message. To the right is a 'PROJECTS' section listing tasks with columns for #, PROJECT NAME, START DATE, DUE DATE, STATUS, and ASSIGN. The projects listed are: NobleUI jQuery (Released, Leonardo Payne), NobleUI Angular (Review, Carl Henson), NobleUI React.js (Testing, Jensen Combs), NobleUI Vue.js (Work in progress, Amiah Burton), NobleUI Laravel (Coming soon, Yaretzi Mayo), NobleUI Node.js (Coming soon, Carl Henson), and NobleUI Ember.js (Planning, Jensen Combs).


#	PROJECT NAME	START DATE	DU DATE	STATUS	ASSIGN
1	NobleUI jQuery	01/01/2022	26/04/2022	Released	Leonardo Payne
2	NobleUI Angular	01/01/2022	26/04/2022	Review	Carl Henson
3	NobleUI React.js	01/05/2022	10/09/2022	Testing	Jensen Combs
4	NobleUI Vue.js	01/01/2022	31/11/2022	Work in progress	Amiah Burton
5	NobleUI Laravel	01/01/2022	31/12/2022	Coming soon	Yaretzi Mayo
6	NobleUI Node.js	01/01/2022	31/12/2022	Coming soon	Carl Henson
7	NobleUI Ember.js	01/05/2022	10/11/2022	Planning	Jensen Combs

As we can see here in the sideboard all the features of the admin interface are included such as - the management panel can see all the cases that are assigned and unassigned and can assign the unassigned cases as per the lawyers' vacancy. Moreover, the more exciting feature that the admins are capable of is that they can assign any empty room to the users as per requisition and can cancel the room assigned slot as per needed. Besides these, with the click of Add/Update employee button, the management people can access all the information of the employees and can add new employees to the software or can update the information of an existing employee. Also, the management is capable of updating any case details (such as updating lawyer name, judge name, appending hearing date or removing lawyer etc) as per need of the users or the employees. In short, the admins are the main heart of the system and their role is inevitably important for the best usage of the software.

Lawyer:

- Login after authentication.

The lawyers of the firm will login with mail or username and password.

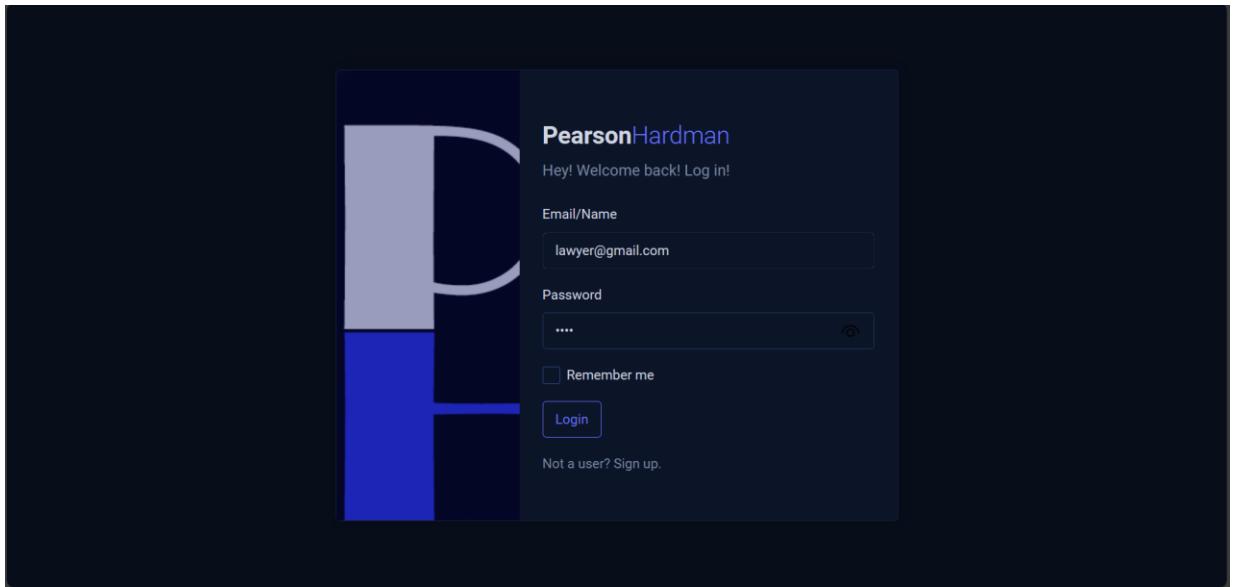

- Number of assigned cases, opened cases and closed cases.

This will be shown in the dashboard and there are navigation buttons.

A screenshot of a web-based dashboard titled "PearsonHardman". The top navigation bar shows the URL "127.0.0.1:8000/lawyer/dashboard". The dashboard has a dark blue theme. On the left, a sidebar menu includes "MAIN" (with "Dashboard" selected), "MANAGEMENT" (with "Case Details" listed), "COMPONENTS", and "DOCS". The main content area is divided into several sections: "Dashboard" with a "Welcome lawyer" message and a date "24-Aug-2023"; "ASSIGNED CASES" (3 cases); "OPEN CASES" (2 cases); "CLOSED CASES" (1 case); "TASKS" (listing "Contact Rachel Green", "Discuss about the case", "Partners Meeting", and "Case 1 hearing"); and a table titled "ASSIGNED CASES" with columns "CASE ID", "CLIENT NAME", and "STATUS".

- Case assigned to a lawyer as a list.

The screenshot shows a dark-themed web interface for PearsonHardman. On the left is a sidebar with navigation links: MAIN (Dashboard), MANAGEMENT (Case Details, Assigned Cases), COMPONENTS, and DOCS (Documentation). The main content area is titled "ASSIGNED CASES" and displays three rows of data:

CASE ID	CLIENT NAME	Actions
1	Client One	<button>Details</button> <button>Edit</button>
3	Sheldon Cooper	<button>Details</button> <button>Edit</button>
5	Jake Parella	<button>Details</button> <button>Edit</button>

At the bottom of the page, there is a footer note: "Property of PearsonHardman." and "Handcrafted With ❤".

- Further details of the assigned case.

The screenshot shows a detailed view of a case record for case ID 3, Sheldon Cooper. The sidebar remains the same as the previous screenshot. The main content area is divided into several sections:

- Opposition:** Leslie Winkle
- Opposition Lawyer:** Robert Zane
- Judge:** Leverne Holt
- ASSIGNED LAWYERS:**
 - LAWYER 1:** 2
 - LAWYER 2:** 3
 - PARALEGAL:**
- DATES:**
 - Next Court Date:**
 - Opening Date:** 08/12/2023
 - Closing Date:**

- Closing an assigned case.

The image consists of two vertically stacked screenshots of a web application interface. Both screenshots show a dark-themed sidebar on the left with a navigation menu and a main content area on the right containing a form for editing case details.

Screenshot 1 (Top): The sidebar menu includes sections for MAIN (Dashboard), MANAGEMENT (Case Details), COMPONENTS, and DOCS (Documentation). The main content area displays the following fields:

- Client Name: Robert Zane
- Next Court Date: (empty input field)
- Opposition: Leslie Winkle
- Witness: None
- Status: Ongoing

A blue "Save Changes" button is located at the bottom of the form.

Screenshot 2 (Bottom): The sidebar menu is identical. The main content area shows the same fields, but the Status field now contains the value "Completed". The "Save Changes" button is also present at the bottom.

- Updating relevant case information.

[←](#) [↻](#) [①](#) 127.0.0.1:8000/edit/case/3

PearsonHardman

MAIN
Dashboard

MANAGEMENT
Case Details

COMPONENTS

DOCS
Documentation

EDIT CASE

Client Name
Sheldon Cooper


Files

Judge
Leverne Holt

Opposition Lawyer
Robert Zane

Next Court Date

Opposition
Leslie Winkle

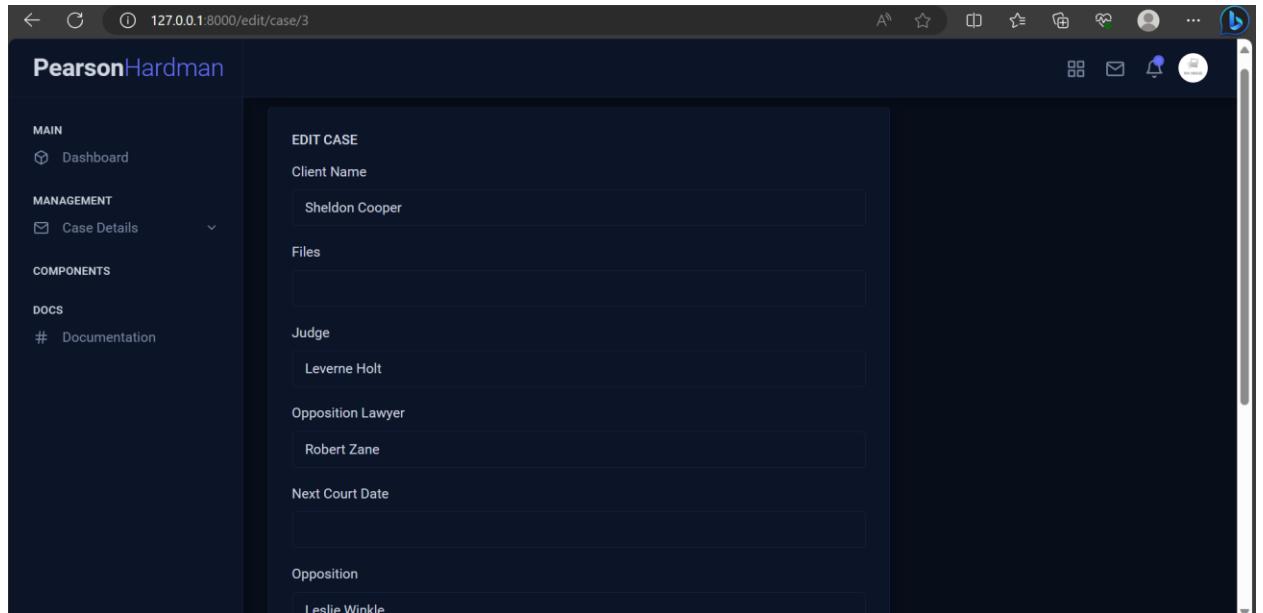

- View your own profile details and change passwords.

[←](#) [↻](#) [①](#) 127.0.0.1:8000/lawyer/profile

PearsonHardman

MAIN
Dashboard

MANAGEMENT
Case Details

COMPONENTS

DOCS
Documentation

Profile

lawyer

NO IMAGE

NAME:
lawyer

ID:
2

POSITION:
partner

EMAIL:
lawyer@gmail.com


PHONE:


ADDRESS:

Change Password

Switch User


Log Out

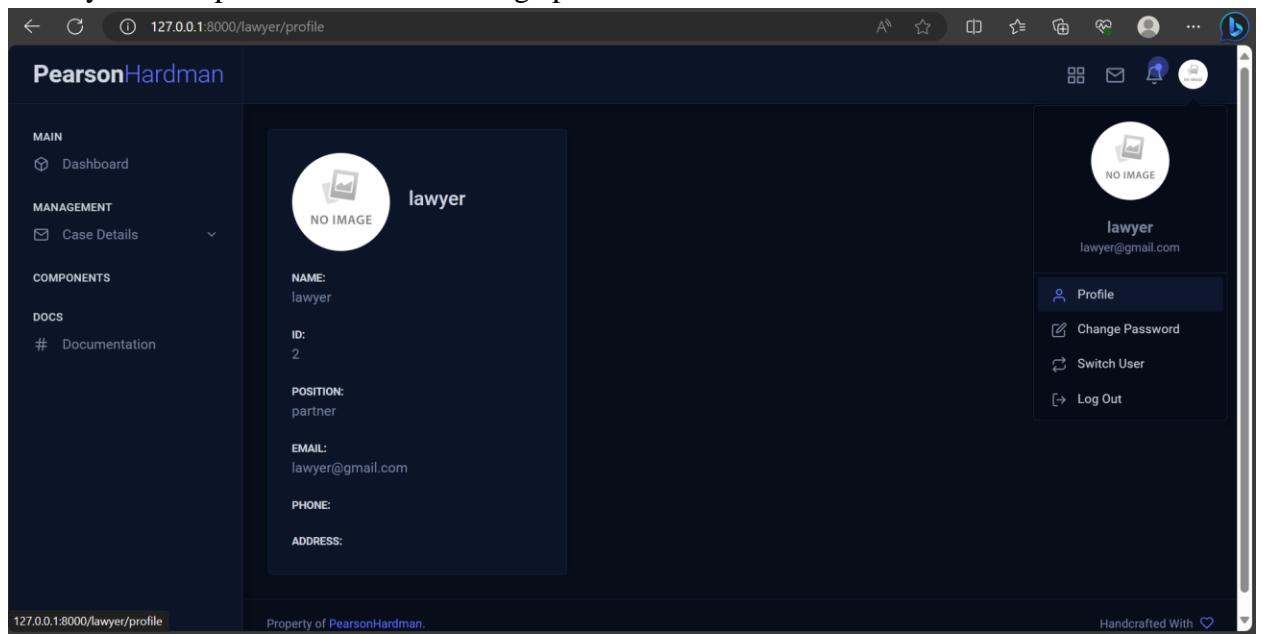

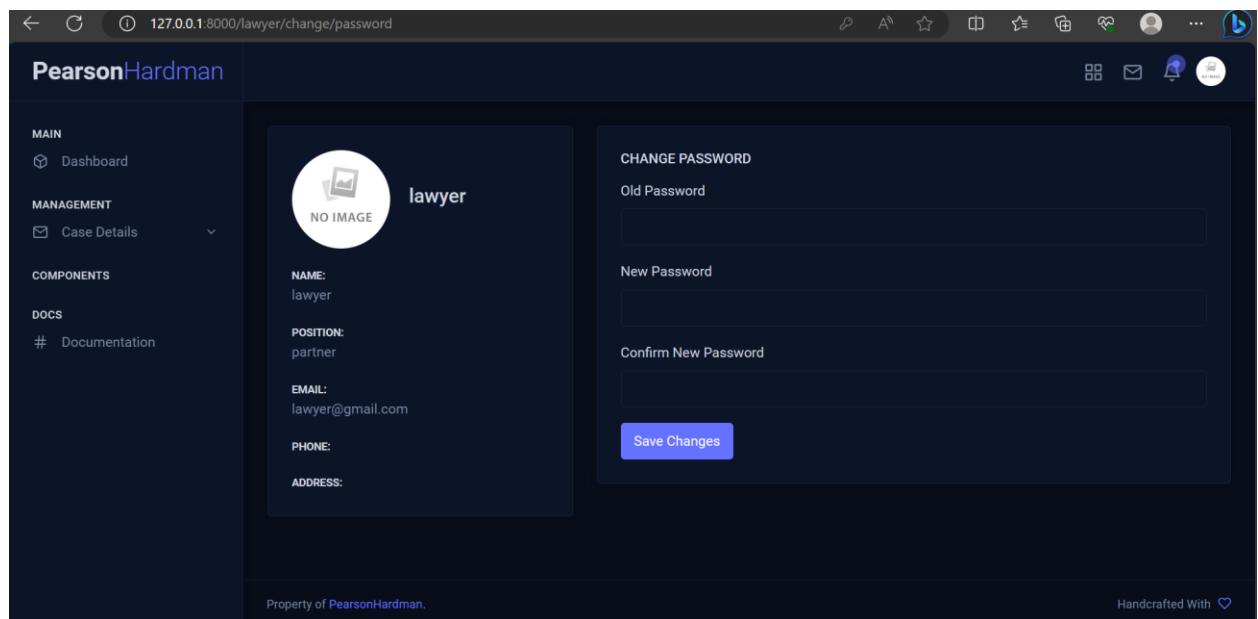

Firmleader:


- Logging in to the system with proper credentials and authentication

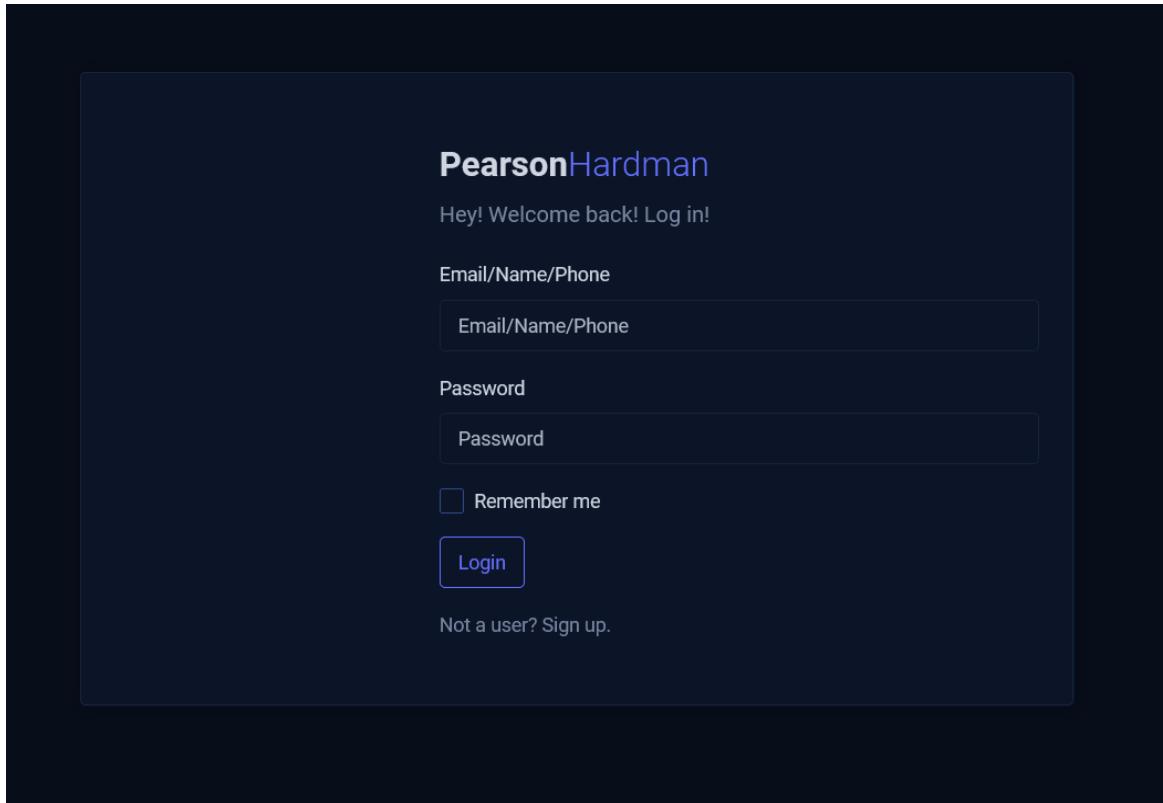

- Firm Leader dashboard

A screenshot of the Firm Leader dashboard for PearsonHardman. The dashboard has a dark theme. On the left is a sidebar with categories: MAIN (Dashboard), WEB APPS (Email, Chat, Calendar), and INFO (Lawyers, Cases, DOCS). The main area starts with a "Welcome Firmleader" message. It shows two summary boxes: "TOTAL CASES" (4) and "TOTAL LAWYERS" (5). Below these are sections for "TASKS" and "NOTIFICATIONS". The "TASKS" section lists: "Contact Rachel Green" (Dicuss about the upcoming projects), "Meeting with all lawyers" (Personnel meeting at 11 am.), and "Meet with Maisha Haque" (Attend a client at 3pm.). The "NOTIFICATIONS" section shows a count of 26. At the bottom, there's a copyright notice: "Copyright © 2023 Pearson Hardman." and a footer note: "Handcrafted With ❤".

- View notifications

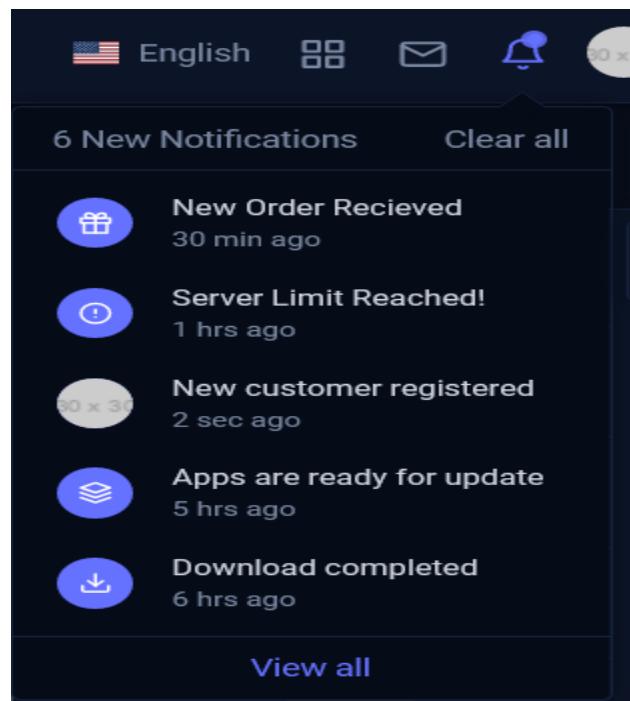

- View Lawyers list

PearsonHardman

Search here...

English

Dashboard

Email

Chat

Calendar

Lawyers

Cases

Documentation

Lawyers

ID	NAME	USER_NAME	EMAIL	PHONE	ROLE	ASSIGNED_CASES	STATUS
2	lawyer	lawyer	lawyer@gmail.com	lawyer	active		
3	Mike Ross	mikeross	mikeross@rys.c	lawyer	active		
4	lawyer1	lawyer1	lawyer1@g.com	lawyer	inactive		

Copyright © 2023 Pearson Hardman.

Handcrafted With ❤️

- View categorize case lists

The screenshot shows a dark-themed web application interface for PearsonHardman. On the left is a sidebar with navigation links: MAIN (Dashboard), WEB APPS (Email, Chat, Calendar), and INFO (Lawyers, Cases, DOCS). The main content area is titled "Case List". It contains a table with the following data:

ID	CLIENT_NAME	ASSIGNED_LAWYER_1_ID	ASSIGNED_LAWYER_2_ID	STATUS	Action
1	Client1	NULL	NULL	unassigned	<button>Edit</button>
2	Client2	1	NULL	assigned	<button>Edit</button>
3	Client3	NULL	NULL	unassigned	<button>Edit</button>
4	Client4	NULL	NULL	unassigned	<button>Edit</button>

At the bottom of the page, there is a footer bar with the text "Copyright © 2023 Pearson Hardman." and "Handcrafted With ❤️".

- Assign lawyers to unassigned case and update case status to assigned

The screenshot shows the "Edit Case" form. The sidebar on the left is identical to the previous screenshot. The main content area is titled "EDIT CASE" and contains the following fields:

- Assigned Lawyer 1 ID: A dropdown menu showing the value "2".
- Assigned Lawyer 2 ID: A dropdown menu showing the value "4".
- Status: A dropdown menu showing the value "assigned".

At the bottom of the form is a blue "Save Changes" button. The footer of the page includes the copyright notice "Copyright © 2023 Pearson Hardman." and the handcrafted message "Handcrafted With ❤️".

PearsonHardman		<input type="text"/> Search here...	English																															
MAIN Dashboard WEB APPS Email Chat Calendar		<h3>Case List</h3> <table border="1"> <thead> <tr> <th>ID</th><th>CLIENT_NAME</th><th>ASSIGNED_LAWYER_1_ID</th><th>ASSIGNED_LAWYER_2_ID</th><th>STATUS</th><th></th></tr> </thead> <tbody> <tr> <td>1</td><td>Client1</td><td>2</td><td>4</td><td>assigned</td><td></td></tr> <tr> <td>2</td><td>Client2</td><td>1</td><td>NULL</td><td>assigned</td><td></td></tr> <tr> <td>3</td><td>Client3</td><td>NULL</td><td>NULL</td><td>unassigned</td><td></td></tr> <tr> <td>4</td><td>Client4</td><td>NULL</td><td>NULL</td><td>unassigned</td><td></td></tr> </tbody> </table>			ID	CLIENT_NAME	ASSIGNED_LAWYER_1_ID	ASSIGNED_LAWYER_2_ID	STATUS		1	Client1	2	4	assigned		2	Client2	1	NULL	assigned		3	Client3	NULL	NULL	unassigned		4	Client4	NULL	NULL	unassigned	
ID	CLIENT_NAME	ASSIGNED_LAWYER_1_ID	ASSIGNED_LAWYER_2_ID	STATUS																														
1	Client1	2	4	assigned																														
2	Client2	1	NULL	assigned																														
3	Client3	NULL	NULL	unassigned																														
4	Client4	NULL	NULL	unassigned																														
INFO Lawyers Cases DOCS Documentation																																		
<small>Copyright © 2023 Pearson Hardman.</small> Handcrafted With 																																		

- Change assigned lawyers when required

PearsonHardman		<input type="text"/> Search here...	English						
MAIN Dashboard WEB APPS Email Chat Calendar		<h3>EDIT CASE</h3> <p>Assigned Lawyer 1 ID</p> <input type="text" value="2"/> <p>Assigned Lawyer 2 ID</p> <input type="text" value="1"/> <p>status</p> <input type="text" value="assigned"/> <p>Save Changes</p>							
INFO Lawyers Cases DOCS Documentation									
<small>Copyright © 2023 Pearson Hardman.</small> Handcrafted With 									

PearsonHardman		Search here...	updated successfully			
MAIN	Dashboard	Case List				
	WEB APPS	ID	CLIENT_NAME	ASSIGNED_LAWYER_1_ID	ASSIGNED_LAWYER_2_ID	STATUS
	Email	1	Client1	2	1	assigned
	Chat	2	Client2	1	NULL	assigned
	Calendar	3	Client3	NULL	NULL	unassigned
	Documentation	4	Client4	NULL	NULL	unassigned

Copyright © 2023 Pearson Hardman.

Handcrafted With ❤️

- Make a case unassigned by dropping all assigned lawyers

PearsonHardman		Search here...	English	✉️	👤	⚙️
MAIN	Dashboard	EDIT CASE				
	WEB APPS	Assigned Lawyer 1 ID	NULL	status	unassigned	Copyright © 2023 Pearson Hardman. Handcrafted With ❤️
	Email	Assigned Lawyer 2 ID	NULL			
	Chat					
	Calendar					
	Documentation					

PearsonHardman

Search here...

Case List


ID	CLIENT_NAME	ASSIGNED_LAWYER_1_ID	ASSIGNED_LAWYER_2_ID	STATUS	
1	Client1	NULL	NULL	unassigned	<button>Edit</button>
2	Client2	1	NULL	assigned	<button>Edit</button>
3	Client3	NULL	NULL	unassigned	<button>Edit</button>
4	Client4	NULL	NULL	unassigned	<button>Edit</button>

Copyright © 2023 Pearson Hardman.

Handcrafted With ❤️

Finance:

- Finance team login page

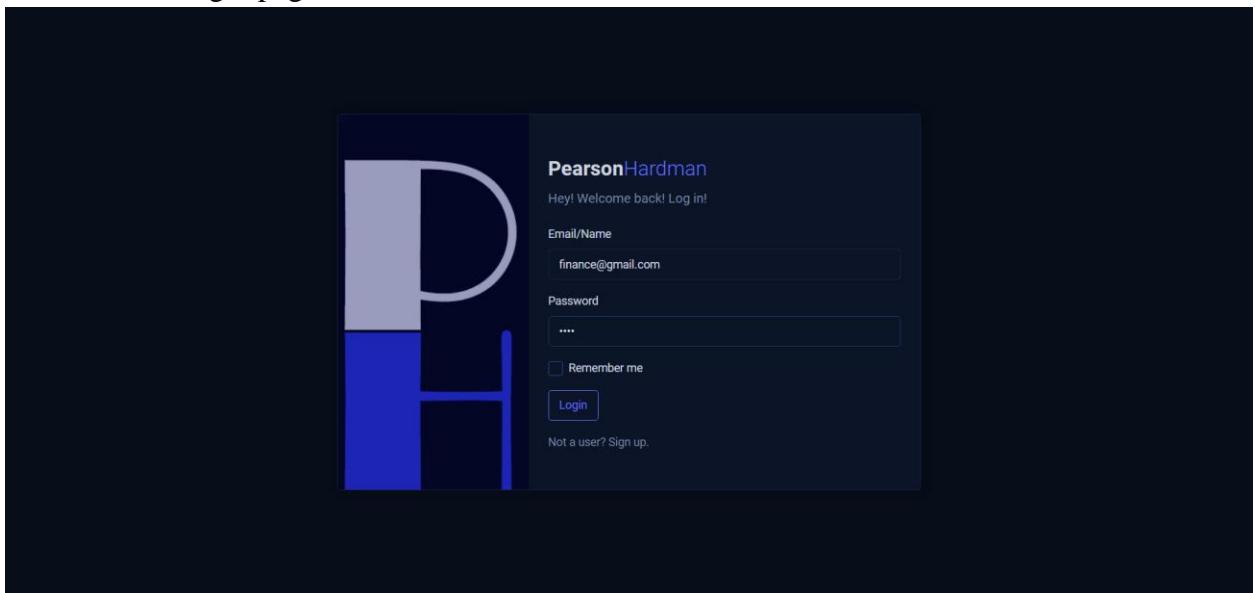

- Finance team dashboard

PearsonHardman

MAIN

- Dashboard

MANAGEMENT

- Case Details
- Salary
- Other expenses

COMPONENTS

DOCS

- Documentation

Dashboard
Welcome finance

INCOME
23000

EXPENSE
46170

PROFIT
-23170

TASKS

- Contact Rachel Green
Discuss about the case
- Partners Meeting
Partners meeting at 11 am.
- Case 1 hearing
Attend Case hearing at 3pm.

ASSIGNED CASES

CASE ID	CLIENT NAME	STATUS

Property of PearsonHardman. Handcrafted With ❤

PearsonHardman

MAIN

- Dashboard

MANAGEMENT

- Case Details
- Manage Case Fees
- Salary

 - Manage Lawyer Salary
 - Manage Admin Salary
 - Manage Managing Partner Salary
 - Manage Finance Team Salary

- Other expenses

 - Manage Expenses

COMPONENTS

DOCS

- Documentation

Dashboard
Welcome finance

INCOME
23000

EXPENSE
46170

PROFIT
-23170

TASKS

- Contact Rachel Green
Discuss about the case
- Partners Meeting
Partners meeting at 11 am.
- Case 1 hearing
Attend Case hearing at 3pm.

ASSIGNED CASES

CASE ID	CLIENT NAME	STATUS

Property of PearsonHardman. Handcrafted With ❤

- Case details panel where finance team can view details of each case, edit case fees

PearsonHardman

MAIN
Dashboard

MANAGEMENT
Case Details
Manage Case Fees

Salary
Other expenses

COMPONENTS

DOCS
Documentation

CASE FEES

Show 10 entries

CASE ID	CLIENT NAME	STATUS	ACTIONS
1	Client One	Unpaid	Details Update
2	Rachel Green	Unpaid	Details Update
3	Sheldon Cooper	Unpaid	Details Update

Showing 1 to 3 of 3 entries

Search

Previous 1 Next

Property of PearsonHardman. Handcrafted With ❤️

PearsonHardman

MAIN
Dashboard

MANAGEMENT
Case Details
Manage Case Fees

Salary
Manage Lawyer Salary
Manage Admin Salary
Manage Managing Partner Salary
Manage Finance Team Salary

Other expenses
Manage Expenses

COMPONENTS

DOCS
Documentation

Client One

CASE ID	Total Fees
1	10000

NAME	EMAIL
Client One	client1@rys.c

Paid
7000

Due
3000

ASSIGNED LAWYERS
LAWYER 1
LAWYER 2
PARALEGAL

DATES
Next Court Date
Opening Date
Closing Date

Property of PearsonHardman. Handcrafted With ❤️

PearsonHardman

MAIN
Dashboard

MANAGEMENT
Case Details
Manage Case Fees

Salary
Manage Lawyer Salary
Manage Admin Salary
Manage Managing Partner Salary
Manage Finance Team Salary

Other expenses
Manage Expenses

COMPONENTS
DOCS Documentation

EDIT CASE FEES

Client One

Total_Fees
10000

Paid
7000

Save Changes

Property of PearsonHardman.

Handcrafted With ❤

- Lawyer salary management panel where the finance team can view lawyer salary and details and manage lawyer salary. Salaries of other employees can be managed in the same manner.

PearsonHardman

MAIN
Dashboard

MANAGEMENT
Case Details
Salary
Manage Lawyer Salary
Manage Admin Salary
Manage Managing Partner Salary
Manage Finance Team Salary

Other expenses

COMPONENTS
DOCS Documentation

LAWYER SALARY

Show 10 entries

ID	NAME	ROLE	SALARY	STATUS	ACTIONS
1	lawyer	lawyer	1500	active	Details Update
2	Mike Ross	lawyer	5000	active	Details Update
3	Amina Rutherford	lawyer	1500	active	Details Update

Showing 1 to 3 of 3 entries

Previous 1 Next

Property of PearsonHardman.

Handcrafted With ❤

PearsonHardman

The screenshot shows a dark-themed user interface for the PearsonHardman application. On the left, a sidebar contains navigation links for MAIN (Dashboard), MANAGEMENT (Case Details, Salary, Other expenses), and COMPONENTS (DOCS). The main content area displays a lawyer's profile with the following details:

ID	Salary
2	1500

Below this, there are sections for NAME (lawyer), EMAIL (lawyer@gmail.com), POSITION (partner), and EMPLOYEE STATUS (active). A DATE section shows 'Joined'. At the bottom, a footer notes "Property of PearsonHardman." and "Handcrafted With ❤".

PearsonHardman

The screenshot shows a dark-themed user interface for the PearsonHardman application. On the left, a sidebar contains navigation links for MAIN (Dashboard), MANAGEMENT (Case Details, Salary, Other expenses), and COMPONENTS (DOCS). The main content area displays a modal titled "EDIT LAWYER SALARY" for a lawyer with a salary of 1500. A "Save Changes" button is visible at the bottom of the modal. At the bottom, a footer notes "Property of PearsonHardman." and "Handcrafted With ❤".

- Panel showing all other expenses of the firm

PearsonHardman

The screenshot shows a dark-themed application interface. On the left is a sidebar with navigation links: MAIN (Dashboard), MANAGEMENT (Case Details, Salary, Other expenses, Manage Expenses), COMPONENTS (UI Kit, Advanced UI), and DOCS (Documentation). The main content area has a header with an 'Add' button and a title 'OTHER EXPENSES'. It displays a table with three columns: CASE ID, EXPENDITURE, and AMOUNT. Two rows are listed: row 1 (CASE ID 1) with expenditure 'servers' and amount 70; row 2 (CASE ID 2) with expenditure 'room' and amount 2200. At the bottom of the page, there is a footer note 'Property of PearsonHardman.' and a 'Handcrafted With ❤️' link.

CASE ID	EXPENDITURE	AMOUNT
1	servers	70
2	room	2200

Property of PearsonHardman. Handcrafted With ❤️

PearsonHardman

The screenshot shows a dark-themed application interface. On the left is a sidebar with navigation links: MAIN (Dashboard), MANAGEMENT (Case Details, Chat, Calendar), COMPONENTS (UI Kit, Advanced UI), and DOCS (Documentation). The main content area has a search bar at the top right. Below it is a form titled 'ADD NEW EXPENSE' with fields for 'Expenditure' (containing 'server') and 'Amount' (containing '210000'). A blue 'Save Changes' button is at the bottom of the form. At the bottom of the page, there is a footer note 'Property of PearsonHardman.' and a 'Handcrafted With ❤️' link.

Search here...

ADD NEW EXPENSE

Expenditure
server

Amount
210000

Save Changes

Property of PearsonHardman. Handcrafted With ❤️

Frontend Development

We have skillfully built a fascinating user interface for our project, which is based on the NOBLE UI frontend template, by utilizing the HTML and CSS capacity. We have developed the foundational structure through HTML, carefully arranging the elements of content and circumstance. In the meantime, CSS has been crucial in giving the design life by enabling precise control over colors, typography, spacing, and responsive layouts. The integration of technology has advanced development and given us the creative flexibility to customize each problem in accordance with the distinct features of our assignment. These 2 languages have been used to show the charts and lists, making interactive buttons and an attractive look for the user. Along with that, forms to update and add data , dropdown box has been added to use navigation.

Lawyer Interface:

```
<!DOCTYPE html>

<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <meta http-equiv="X-UA-Compatible" content="ie=edge">
    <meta name="description" content="Responsive HTML Admin Dashboard
Template based on Bootstrap 5">
    <meta name="author" content="NobleUI">
    <meta name="keywords" content="nobleui, bootstrap, bootstrap 5,
bootstrap5, admin, dashboard, template, responsive, css, sass, html,
theme, front-end, ui kit, web">

    <title>Lawyer Dashboard</title>

    <!-- Fonts -->
    <link rel="preconnect" href="https://fonts.googleapis.com">
    <link rel="preconnect" href="https://fonts.gstatic.com" crossorigin>
    <link
        href="https://fonts.googleapis.com/css2?family=Roboto:wght@300;400;500;700
;900&display=swap" rel="stylesheet">
    <!-- End fonts -->
```

```

<!-- Plugin css for this page -->
<link rel="stylesheet" href="{!!
asset(' ../../../../assets/vendors/datatables.net-
bs5/dataTables.bootstrap5.css') !!}">
<!-- End plugin css for this page -->

<!-- core:css -->
<link rel="stylesheet" href="{!!
asset('../../../assets/vendors/core/core.css') !!}">
<!-- endinject -->

<!-- Plugin css for this page -->
<link rel="stylesheet" href="{!!
asset(' ../../../../assets/vendors/flatpickr/flatpickr.min.css') !!}">
<!-- End plugin css for this page -->

<!-- inject:css -->
<link rel="stylesheet" href="{!! asset(' ../../../../assets/fonts/feather-
font/css/iconfont.css') !!}">
<link rel="stylesheet" href="{!! asset(' ../../../../assets/vendors/flag-
icon-css/css/flag-icon.min.css') !!}">
<!-- endinject -->

<!-- Layout styles -->
<link rel="stylesheet" href="{!!
asset(' ../../../../assets/css/demo2/style.css') !!}">
<!-- End layout styles -->

<link rel="shortcut icon" href="{!!
asset(' ../../../../assets/images/favicon.png') !!}">

<!-- Notification -->
<link rel="stylesheet" type="text/css"
href="https://cdnjs.cloudflare.com/ajax/libs/toastr.js/latest/toastr.css"
>

</head>

```

```

<body>
  <div class="main-wrapper">

    <!-- partial:partials/_sidebar.html -->
    @include('lawyer.body.sidebar')
    <!-- partial -->

    <div class="page-wrapper">

      <!-- partial:partials/_navbar.html -->
      @include('lawyer.body.header')
      <!-- partial -->

      @yield('lawyer')
      <!-- partial:partials/_footer.html -->
      @include('lawyer.body.footer')
      <!-- partial -->

    </div>
  </div>

  <!-- core:js -->
  <script src="{{ asset(' ../../../../assets/vendors/core/core.js') }}></script>
  <!-- endinject -->

  <!-- Plugin js for this page -->
  <script src="{{ asset(' ../../../../assets/vendors/flatpickr/flatpickr.min.js') }}></script>
  <script src="{{ asset(' ../../../../assets/vendors/apexcharts/apexcharts.min.js') }}></script>
  <!-- End plugin js for this page -->

  <!-- inject:js -->
  <script src="{{ asset(' ../../../../assets/vendors/feather-icons/feather.min.js') }}></script>
  <script src="{{ asset(' ../../../../assets/js/template.js') }}></script>
  <!-- endinject -->

```

```

<!-- Custom js for this page -->
<script src="{!! asset(' ../../../../assets/js/dashboard-dark.js') }" ></script>
<!-- End custom js for this page -->

<script type="text/javascript"
src="https://cdnjs.cloudflare.com/ajax/libs/toastr.js/latest/toastr.min.js"
></script>

<script>
@if(Session::has('message'))
var type = "{{ Session::get('alert-type','info') }}"
switch(type) {
    case 'info':
        toastr.info(" {{ Session::get('message') }} ");
        break;

    case 'success':
        toastr.success(" {{ Session::get('message') }} ");
        break;

    case 'warning':
        toastr.warning(" {{ Session::get('message') }} ");
        break;

    case 'error':
        toastr.error(" {{ Session::get('message') }} ");
        break;
}
@endif
</script>

<!-- Plugin js for this page datatabl-->
<script src="{!! asset(' ../../../../assets/vendors/datatables.net/jquery.dataTables.js') }" ></script>
<script src="{!! asset(' ../../../../assets/vendors/datatables.net-bs5/dataTables.bootstrap5.js') }" ></script>
<!-- End plugin js for this page -->

```

```

<!-- Custom js for this page -->
<script src="{!! asset(' ../../../../assets/js/data-table.js') }" ></script>
<!-- End custom js for this page datatable -->

</body>
</html>

```

```

@extends('lawyer.lawyer_dashboard')
@section('lawyer')


@php
        $id= Auth::user()->id;
        $profileData= App\Models\User::find($id);

    @endphp
    <div class="d-flex justify-content-between align-items-center flex-wrap grid-margin">
        <div>
            <h4 class="mb-3 mb-md-0">Dashboard</h4>
            <h5 class="mb-3 mb-md-0">Welcome {{ $profileData->name }}</h5>
        </div>
        <div class="d-flex align-items-center flex-wrap text-nowrap">
            <div class="input-group flatpickr wd-200 me-2 mb-2 mb-md-0" id="dashboardDate">
                <span class="input-group-text input-group-addon bg-transparent border-primary" data-toggle><i data-feather="calendar" class="text-primary"></i></span>
                <input type="text" class="form-control bg-transparent border-primary" placeholder="Select date" data-input>
            </div>
        </div>
    </div>
    <div class="row">
        <div class="col-12 col-xl-12 stretch-card">
            <div class="row flex-grow-1">


```

```

<div class="col-md-4 grid-margin stretch-card">
    <div class="card">
        <div class="card-body">
            <div class="d-flex justify-content-between align-
items-baseline">
                <h6 class="card-title mb-0">Assigned Cases</h6>
                <div class="dropdown mb-2">

                    </div>
                </div>
                <div class="row">
                    <div class="col-6 col-md-12 col-xl-5">
                        <h3 class="mb-2">{{ $totalacases }}</h3>
                        <!--<div class="d-flex align-items-baseline">
                            <p class="text-success">
                                <span>+3.3%</span>
                                <i data-feather="arrow-up" class="icon-sm mb-
1"></i>
                            </p>
                        </div> -->
                    </div>
                    <!--<div class="col-6 col-md-12 col-xl-7">
                        <div id="customersChart" class="mt-md-3 mt-xl-
0"></div>
                        </div> -->
                    </div>
                    </div>
                </div>
                <div class="col-md-4 grid-margin stretch-card">
                    <div class="card">
                        <div class="card-body">
                            <div class="d-flex justify-content-between align-
items-baseline">
                                <h6 class="card-title mb-0">Open Cases</h6>
                                <div class="dropdown mb-2">

                                    </div>
                            </div>
                        </div>
                    </div>
                
```

```

<div class="row">
  <div class="col-6 col-md-12 col-xl-5">
    <h3 class="mb-2">{{ $totalcases }}</h3>
    <!--<div class="d-flex align-items-baseline">
      <p class="text-danger">
        <span>-2.8%</span>
        <i data-feather="arrow-down" class="icon-sm mb-1"></i>
      </p>
    </div>-->
  </div>
  <!--<div class="col-6 col-md-12 col-xl-7">
    <div id="ordersChart" class="mt-md-3 mt-xl-0"></div>
  </div> -->
  </div>
  </div>
  </div>
</div>
<div class="col-md-4 grid-margin stretch-card">
  <div class="card">
    <div class="card-body">
      <div class="d-flex justify-content-between align-items-baseline">
        <h6 class="card-title mb-0">Closed Cases</h6>
        <div class="dropdown mb-2">
          </div>
        </div>
      </div>
      <div class="row">
        <div class="col-6 col-md-12 col-xl-5">
          <h3 class="mb-2">{{ $totalccases }}</h3>
          <!--<div class="d-flex align-items-baseline">
            <p class="text-success">
              <span>+2.8%</span>
              <i data-feather="arrow-up" class="icon-sm mb-1"></i>
            </p>
          </div>-->
        </div>
      </div>
    </div>
  </div>

```

```

        <!--<div class="col-6 col-md-12 col-xl-7">
            <div id="growthChart" class="mt-md-3 mt-xl-
0"></div>
        </div>-->
    </div>
</div>
</div>
</div>
</div>
</div>
</div>
</div>
</div> <!-- row -->

</div>

@endsection

```

```

@extends('lawyer.lawyer_dashboard')
@section('lawyer')
<script
src="https://ajax.googleapis.com/ajax/libs/jquery/3.6.4/jquery.min.js"></s
cript>

<div class="page-content">
    <div class="row profile-body">
        <!-- left wrapper start -->
        <!-- left wrapper end -->

        <!-- middle wrapper start -->
        <div class="col-md-8 col-xl-8 middle-wrapper">
            <div class="row">
                <div class="col-md-12 grid-margin">
                    <!-- Newly added-->
                    <div class="card">
                        <div class="card-body">

                            <h6 class="card-title"> Edit Case </h6>

```

```

        <form method= "POST" action= "{{ route('editas.case') }}"
class="forms-sample" >
    @csrf

        <input type="hidden" name="id"
value="{{ $ecases->id }}>

        <div class="mb-3">
            <label for="exampleInputEmail1" class="form-
label">Client Name</label>
            <input type="text" name="Client_Name" class="form-
control @error('Client_Name') is-invalid @enderror" value="{{ $ecases-
>Client_Name }}>
                @error('Client_Name')
                    <span class="text-danger"> {{
$message }} </span>
                @enderror
            </div>

            <div class="mb-3">
                <label for="exampleInputEmail1" class="form-
label">Files</label>
                <input type="text" name="Files" class="form-control
@error('Files') is-invalid @enderror" value="{{ $ecases->Files }}>
                    <!-- @error('Files')
                    <span class="text-danger"> {{
$message }} </span>
                    @enderror -->
            </div>

            <div class="mb-3">
                <label for="exampleInputEmail1" class="form-
label">Judge</label>
                <input type="text" name="Judge" class="form-control
@error('Judge') is-invalid @enderror" value="{{ $ecases->Judge }}>
                    <!-- @error('Judge')
                    <span class="text-danger"> {{
$message }} </span>

```

```

        @enderror -->
    </div>

    <div class="mb-3">
        <label for="exampleInputEmail1" class="form-
label">Opposition Lawyer</label>
        <input type="text" name="Opposition_Lawyer"
class="form-control @error('Opposition_Lawyer') is-invalid @enderror"
value="{{ $ecases->Opposition_Lawyer }}">
        <!-- @error('Opposition_Lawyer') -->
        <span class="text-danger"> {{
$message }} </span>
        @enderror -->
    </div>

    <div class="mb-3">
        <label for="exampleInputEmail1" class="form-
label">Next Court Date</label>
        <input type="text" name="Next_Court_Date" class="form-
control @error('Next_Court_Date') is-invalid @enderror" value="{{ $ecases-
>Next_Court_Date }}">
        <!-- @error('Next_Court_Date') -->
        <span class="text-danger"> {{
$message }} </span>
        @enderror -->
    </div>

    <div class="mb-3">
        <label for="exampleInputEmail1" class="form-
label">Opposition</label>
        <input type="text" name="Opposition" class="form-
control @error('Opposition') is-invalid @enderror" value="{{ $ecases-
>Opposition }}">
        <!-- @error('Opposition') -->
        <span class="text-danger"> {{
$message }} </span>
        @enderror -->
    </div>

```

```

        <div class="mb-3">
            <label for="exampleInputEmail1" class="form-
label">Witness</label>
                <input type="text" name="Witness" class="form-control
@error('Witness') is-invalid @enderror" value="{{ $ecases->Witness }}>
                    <!-- @error('Witness')
                    <span class="text-danger"> {{

$message }} </span>
                    @enderror -->
            </div>

            <div class="mb-3">
                <label for="exampleInputEmail1" class="form-
label">Status</label>
                <input type="text" name="Assign_Status" class="form-
control @error('Assign_Status') is-invalid @enderror" value="{{ $ecases-
>Assign_Status }}>
                    @error('Assign_Status')
                    <span class="text-danger"> {{

$message }} </span>
                    @enderror
            </div>

            <!--<div class="mb-3">
                <label class="form-label">Status</label>
                <div>

                    <div class="form-check form-check-inline">
                        <input type="radio" class="form-check-input"
name="Assign_Status" id="Assign_Status" value="{{ $ecases->Assign_Cases
}}">
                            <label class="form-check-label"
for="Assign_Status1">
                                {{ $ong }}
                            </label>
                </div>

                <div class="form-check form-check-inline">

```

```

        <input type="radio" class="form-check-input"
name="Assign_Status" id="Assign_Status" value="{{ $ecases->Assign_Cases
}}">
            <label class="form-check-label"
for="Assign_Status" >
                {{ $comp }}
            </label>
        </div> -->

                </div>
            </div>
        <!--<div class="mb-3">
            <label class="form-label">Status</label>
            <select class="js-example-basic-single form-select"
data-width="100%" name="Assign_Status">
                <option value="{{ $ecases->Assign_Status }}>{{ $ong
}}</option>
                <option value="{{ $ecases->Assign_Status }}>{{
$comp }}</option>
            </select>
        </div> -->

                <button type="submit" class="btn btn-primary me-2">Save
Changes</button>
        <!-- <button class="btn btn-secondary">Cancel</button> --
->
    </form>

</div>
</div>

```

```
    </div>
</div>

    </div>
<!-- middle wrapper end --&gt;
<!-- right wrapper start --&gt;

    &lt;/div&gt;

&lt;/div&gt;

@endsection</pre>
```

Admin interface

```
<div class="mb-3">
    <label for="exampleInputEmail1" class="form-label">Files</label>
    <input type="text" name="Files" class="form-control">
    <!-- @error('Files') -->
    <span class="text-danger"> {{ $message }} </span>
    @enderror -->
</div>

<div class="mb-3">
    <label for="exampleInputEmail1" class="form-label">Judge</label>
    <input type="text" name="Judge" class="form-control">
    <!-- @error('Judge') -->
    <span class="text-danger"> {{ $message }} </span>
    @enderror -->
</div>

<div class="mb-3">
    <label for="exampleInputEmail1" class="form-label">Opposition Lawyer</label>
    <input type="text" name="Opposition_Lawyer" class="form-control">
    <!-- @error('Opposition_Lawyer') -->
    <span class="text-danger"> {{ $message }} </span>
    @enderror -->
</div>

<div class="mb-3">
    <label for="exampleInputEmail1" class="form-label">Next Court Date</label>
    <input type="text" name="Next_Court_Date" class="form-control">
    <!-- @error('Next_Court_Date') -->
    <span class="text-danger"> {{ $message }} </span>
    @enderror -->
</div>

<div class="mb-3">
    <label for="exampleInputEmail1" class="form-label">Opposition</label>
    <input type="text" name="Opposition" class="form-control">
    <!-- @error('Opposition') -->
```

(Front end code snippet of assigning unassigned case)

```

</head>
<body>
    <header class="py-5">
        <div class="container px-lg-5">
            <div class="p-4 p-lg-5 bg-light rounded-3 text-center">
                <div class="m-4 m-lg-4">
                    <h1 class="display-7 fw-bold">Add/Update Employee</h1>
                    <form id="addEmployeeForm" method="POST" action="{{ route('admin.addEmployee') }}>
                        @csrf
                        <div class="mb-4">
                            <label for="actionType" class="font-semibold">Choose Action:</label>
                            <select id="actionType" name="actionType" class="border rounded p-2">
                                <option value="add">Add New Employee</option>
                                <option value="update">Update Existing Employee</option>
                            </select>
                        </div>

                        <!-- Hidden dropdown for updating existing employee -->
                        <div id="selectEmployeeDiv" class="mb-4 hidden-dropdown">
                            <label for="employeeName" class="font-semibold">Select Employee:</label>
                            <select id="employeeName" name="employeeName" class="border rounded p-2">
                                <option value="" selected disabled>Select an Employee</option>
                                @foreach ($employees as $employee)
                                    <option value="{{ $employee->id }}>{{ $employee->name }}</option>
                                @endforeach
                            </select>
                        </div>

                        <div class="mb-4">
                            <label for="employeeNameInput" class="font-semibold">Employee Name:</label>
                            <input type="text" id="employeeNameInput" name="employeeNameInput" class="border rounded p-2">
                        </div>
                </div>
            </div>
        </div>
    </header>

```

(Code snippet of Add/Update employee)

```

<div class= container px-1g->
    <div class="p-4 p-lg-5 bg-light rounded-3 text-center">
        <div class="m-4 m-lg-4">
            <h1 class="display-7 fw-bold">Manage and Assign Rooms</h1>
            <form action="{{ route('admin.assignRoom') }}" method="POST">
                @csrf
                <div class="mb-4">
                    <label for="roomName" class="font-semibold">Select a Room:</label>
                    <select id="roomName" name="roomName" class="border rounded p-2">
                        <option value="" selected disabled>Select a Room</option>
                        @foreach ($availableRooms as $room)
                            @if ($room->assign_state == 0)
                                <option value="{{ $room->id }}>{{ $room->name }}</option>
                            @else
                                <option value="{{ $room->id }}>{{ $room->name }} (Booked)</option>
                            @endif
                        @endforeach
                    </select>
                </div>
                <div id="assignForSection" class="mb-4 hidden-dropdown" style="display: none;">
                    <label for="assignFor" class="font-semibold">Assign For:</label>
                    <input type="text" id="assignFor" name="assignFor" class="border rounded p-2">
                </div>
                <div id="eventDateSection" class="mb-4 hidden-dropdown" style="display: none;">
                    <label for="eventDate" class="font-semibold">Event Date:</label>
                    <input type="date" id="eventDate" name="eventDate" class="border rounded p-2">
                </div>

                <button type="submit" id="assignRoomButton" class="btn btn-primary">Assign Room</button>
                <button type="button" id="unassignRoomButton" class="btn btn-secondary hidden-dropdown">Unassign Room</button>
            </form>
        </div>
        @if(session('success'))
            <div class="alert alert-success">
                {{ session('success') }}
            </div>
        @endif
        @if(session('error'))

```

(Code snippet of Assign Room feature)

```

<div class="m-4 m-lg-4">
    <h1 class="display-7 fw-bold">Update Case Details</h1>
    <form id="updateCaseForm" method="POST" action="{{ route('admin.performUpdate', ['caseId' => '']) }}" id="updateCaseForm">
        @csrf
        <div class="mb-4">
            <label for="caseId" class="font-semibold">View all Cases:</label>
            <select id="caseId" name="caseId" class="border rounded p-2">
                <option value="" selected disabled>Select a Case</option>
                @foreach ($cases as $case)
                    <option value="{{ $case->id }}>{{ $case->Client_Name }}</option>
                @endforeach
            </select>
        </div>
        <div class="mb-4">
            <label for="clientName" class="font-semibold">Client Name:</label>
            <input type="text" id="clientName" name="clientName" class="border rounded p-2">
        </div>
        <div class="mb-4">
            <label for="assignedJudge" class="font-semibold">Assigned Judge:</label>
            <input type="text" id="assignedJudge" name="assignedJudge" class="border rounded p-2">
        </div>
        <div class="mb-4">
            <label for="oppositionLawyer" class="font-semibold">Opposition Lawyer:</label>
            <input type="text" id="oppositionLawyer" name="oppositionLawyer" class="border rounded p-2">
        </div>
        <div class="mb-4">
            <label for="nextCourtDate" class="font-semibold">Upcoming Court Date:</label>
            <input type="date" id="nextCourtDate" name="nextCourtDate" class="border rounded p-2">
        </div>
        <div class="mb-4">
            <label for="oppositionName" class="font-semibold">Opposition Name:</label>
            <input type="text" id="oppositionName" name="oppositionName" class="border rounded p-2">
        </div>
        <div class="mb-4">
            <label for="witness" class="font-semibold">Witness:</label>
            <input type="text" id="witness" name="witness" class="border rounded p-2">
        </div>
        <button type="submit" class="btn btn-primary">Update</button>
    </form>

```

(Code snippet of Update Case Details)

- Firm leader interface:

```

1  <!DOCTYPE html>
2
3  <html lang="en">
4  <head>
5      <meta charset="UTF-8">
6      <meta name="viewport" content="width=device-width, initial-scale=1.0">
7      <meta http-equiv="X-UA-Compatible" content="ie=edge">
8      <meta name="description" content="Responsive HTML Admin Dashboard Template based on Bootstrap 5">
9      <meta name="author" content="NobleUI">
10     <meta name="keywords" content="nobleui, bootstrap, bootstrap 5, bootstrap5, admin, dashboard, template, responsive, css, sass, html, theme, front-end, ui kit, web">
11
12     <title>Firmleader Dashboard</title>
13
14     <!-- Fonts -->
15     <link rel="preconnect" href="https://fonts.googleapis.com">
16     <link rel="preconnect" href="https://fonts.gstatic.com" crossorigin>
17     <link href="https://fonts.googleapis.com/css2?family=Roboto:wght@300;400;500;700;900&display=swap" rel="stylesheet">
18     <!-- End fonts -->
19
20     <!-- Plugin css for this page -->
21     <link rel="stylesheet" href="{{ asset('backend/assets/vendors/datatables.net-bs5/dataTables.bootstrap5.css') }}>
22         <!-- End plugin css for this page -->
23
24     <!-- core:css -->
25     <link rel="stylesheet" href="{{ asset('../assets/vendors/core/core.css') }}>
26     <!-- endinject -->
27
28     <!-- Plugin css for this page -->
29     <link rel="stylesheet" href="{{ asset('../..../assets/vendors/flatpickr/flatpickr.min.css') }}>
30     <!-- End plugin css for this page -->
31
32     <!-- inject:css -->
33     <link rel="stylesheet" href="{{ asset('..../..../assets/fonts/feather-font/css/iconfont.css') }}>
34     <link rel="stylesheet" href="{{ asset('..../..../assets/vendors/flag-icon-css/css/flag-icon.min.css') }}>
35     <!-- endinject -->
36
37     <!-- Layout styles -->
38     <link rel="stylesheet" href="{{ asset('..../..../assets/css/demo2/style.css') }}>
39     <!-- End layout styles -->
40
41     <link rel="shortcut icon" href="{{ asset('..../..../assets/images/favicon.png') }}.>
42
43
44     <!-- Notification -->
45     <link rel="stylesheet" type="text/css" href="https://cdnjs.cloudflare.com/ajax/libs/toastr.js/latest/toastr.css" >
46
47
48 </head>
49 <body>
50     <div class="main-wrapper">
51
52         <!-- partial:partials/_sidebar.html -->
53         @include('firmleader.body.sidebar')
54         <!-- partial -->
55
56         <div class="page-wrapper">
57
58             <!-- partial:partials/_navbar.html -->
59             @include('firmleader.body.header')
60             <!-- partial -->
61
62             @yield('firmleader')
63             <!-- partial:partials/_footer.html -->
64             @include('firmleader.body.footer')
65             <!-- partial -->
66
67         </div>
68     </div>
69
70     <!-- core:js -->
71     <script src="{{ asset('..../..../assets/vendors/core/core.js') }}></script>
72     <!-- endinject -->
73
74     <!-- Plugin js for this page -->
75     <script src="{{ asset('..../..../assets/vendors/flatpickr/flatpickr.min.js') }}></script>
76     <script src="{{ asset('..../..../assets/vendors/apexcharts/apexcharts.min.js') }}></script>
77         <!-- End plugin js for this page -->
78
79

```

```

79      <!-- inject:js -->
80      <script src="{{ asset('...../assets/vendors/fontawesome/fontawesome.min.js') }}"></script>
81      <script src="{{ asset('...../assets/js/template.js') }}"></script>
82      <!-- endinject -->
83
84      <!-- Custom js for this page -->
85      <script src="{{ asset('...../assets/js/dashboard-dark.js') }}"></script>
86      <!-- End custom js for this page -->
87
88      <script type="text/javascript" src="https://cdnjs.cloudflare.com/ajax/libs/toastr.js/latest/toastr.min.js"></script>
89
90      <script>
91      @if(Session::has('message'))
92      var type = "{{ Session::get('alert-type','info') }}"
93      switch(type){|
94          case 'info':
95              toastr.info(" {{ Session::get('message') }} ");
96              break;
97
98          case 'success':
99              toastr.success(" {{ Session::get('message') }} ");
100             break;
101
102          case 'warning':
103              toastr.warning(" {{ Session::get('message') }} ");
104             break;
105
106          case 'error':
107              toastr.error(" {{ Session::get('message') }} ");
108             break;
109      }
110      @endif
111      </script>
112
113
114      <!-- Plugin js for this page datatable-->
115      <script src="{{ asset('backend/assets/vendors/datatables.net/jquery.dataTables.js') }}"></script>
116      <script src="{{ asset('backend/assets/vendors/datatables.net-bs5/dataTables.bootstrap5.js') }}"></script>
117      <!-- End plugin js for this page -->
118
119      <!-- Custom js for this page -->
120      <script src="{{ asset('backend/assets/js/data-table.js') }}"></script>
121      <!-- End custom js for this page datatable -->
122
123      </body>
124      </html>

```

```

1  @extends('firmleader.firmleader_dashboard')
2  @section('firmleader')
3  <div class="page-content">
4      @php
5          $id= Auth::user()->id;
6          $profileData= App\Models\User::find($id);
7
8      @endphp
9      <div class="d-flex justify-content-between align-items-center flex-wrap grid-margin">
10         <div>
11             <h9 class="mb-3 mb-md-0">Welcome {{ $profileData->name }} </h9>
12         </div>
13         <div class="d-flex align-items-center flex-wrap text-nowrap">
14             <div class="input-group flatpickr wd-200 me-2 mb-2 mb-md-0" id="dashboardDate">
15                 <span class="input-group-text input-group-addon bg-transparent border-primary" data-toggle=<i data-feather="calendar" class="text-primary"></i></span>
16                 <input type="text" class="form-control bg-transparent border-primary" placeholder="Select date" data-input>
17             </div>
18
19         </div>
20     </div>
21
22     <div class="row">
23         <div class="col-12 col-xl-14 stretch-card">
24             <div class="row flex-grow-1">
25                 <div class="col-md-4 grid-margin stretch-card">
26                     <div class="card">
27                         <div class="card-body">
28                             <div class="d-flex justify-content-between align-items-baseline">
29                                 <h6 class="card-title mb-0">Total Cases</h6>
30                                 <div class="dropdown mb-2">
31
32
33
34                                 </div>
35                             </div>
36                         <div class="row">
37                             <div class="col-6 col-md-12 col-xl-12">

```

```

38                                 <h3 class="mb-2">4</h3>
39                                 <!--<div class="d-flex align-items-baseline">
40                                     <p class="text-success">
41                                         <span>+3.3%</span>
42                                         <i data-feather="arrow-up" class="icon-sm mb-1"></i>
43                                     </p>
44                                 </div> -->
45                                 </div>
46                                 <!--<div class="col-6 col-md-12 col-xl-7">
47                                     <div id="customersChart" class="mt-md-3 mt-xl-0"></div>
48                                 </div> -->
49                                 </div>
50                                 </div>
51                             </div>
52                         </div>
53
54                         <div class="col-md-4 grid-margin stretch-card">
55                             <div class="card">
56                                 <div class="card-body">
57                                     <div class="d-flex justify-content-between align-items-baseline">
58                                         <h6 class="card-title mb-0">Total Lawyers</h6>
59                                         <div class="dropdown mb-2">
60
61                                         </div>
62                                     </div>
63                                     <div class="row">
64                                         <div class="col-6 col-md-12 col-xl-12">
65                                             <h3 class="mb-2">5</h3>
66                                             <!--<div class="d-flex align-items-baseline">
67                                                 <p class="text-success">
68                                                     <span>+3.3%</span>
69                                                     <i data-feather="arrow-up" class="icon-sm mb-1"></i>
70                                                 </p>
71                                             </div> -->
72                                         </div>
73                                     </div>

```

```

77          </div>
78      </div>
79      </div>
80      </div>
81      </div>
82  </div>
83
84
85  </div> <!-- row -->
86
87  <div class="row">
88      <div class="col-lg-8 col-xl-10 grid-margin grid-margin-xl-0 stretch-card">
89          <div class="card">
90              <div class="card-body">
91                  <div class="d-flex justify-content-between align-items-baseline mb-2">
92                      <h6 class="card-title mb-0">Tasks</h6>
93
94                  </div>
95                  <div class="d-flex flex-column">
96                      <a href="javascript:;" class="d-flex align-items-center border-bottom pb-3">
97
98                          <div class="w-100">
99                              <div class="d-flex justify-content-between">
100                                  <h6 class="text-body mb-2">Contact Rachel Green</h6>
101
102                                  </div>
103                                  <p class="text-muted tx-13">Dicuss about the upcoming projects</p>
104                          </div>
105                      </a>
106
107
108                      <a href="javascript:;" class="d-flex align-items-center border-bottom py-3">
109
110                          <div class="w-100">
111                              <div class="d-flex justify-content-between">
112                                  <h6 class="text-body mb-2">Meeting with all lawyers</h6>
113
114                                  </div>
115                                  <p class="text-muted tx-13">Personnel meetinng at 11 am.</p>
116                          </div>
117                      </a>
118
119                      <a href="javascript:;" class="d-flex align-items-center border-bottom py-3">
120
121                          <div class="w-100">
122                              <div class="d-flex justify-content-between">
123                                  <h6 class="text-body mb-2">Meet with Maisha Haque</h6>
124
125                                  </div>
126                                  <p class="text-muted tx-13">Attend a client at 3pm.</p>
127                          </div>
128                      </a>
129
130
131
132                      </div>
133                  </div>
134              </div>
135          </div>
136      </div> <!-- row -->
137
138
139
140
141      </div>
142
143  @endsection

```

```

1  @extends('firmleader.firmleader_dashboard')
2  @section('firmleader')
3  <script src="https://ajax.googleapis.com/ajax/libs/jquery/3.6.4/jquery.min.js"></script>
4
5  <div class="page-content">
6      <div class="row profile-body">
7          <!-- left wrapper start -->
8          <!-- left wrapper end -->
9
10         <!-- middle wrapper start -->
11         <div class="col-md-8 col-xl-8 middle-wrapper">
12             <div class="row">
13
14                 <div class="card">
15                     <div class="card-body">
16
17                         <h6 class="card-title"> Edit Case </h6>
18
19                         <form method= "POST" action= "{{ route('update.case') }}" class="forms-sample" >
20                             @csrf
21
22                             <input type="hidden" name="id" value="{{ $data->id }}>
23
24
25
26
27
28
29                         <div class="mb-3">
30                             <label for="exampleInputEmail1" class="form-label">Assigned Lawyer 1 ID</label>
31                             <input type="text" name="Assigned_Lawyer_1_ID" class="form-control"
32                             @error('Assigned_Lawyer_1_ID') is-invalid @enderror value="{{ $data->Assigned_Lawyer_1_ID }}"
33                             >
34                                 @error('Assigned_Lawyer_1_ID')
35                                     <span> {{ $message }} </span>
36                                 @enderror
37                         </div>
38
39                         <div class="mb-3">
40                             <label for="exampleInputEmail1" class="form-label">Assigned Lawyer 2 ID</label>
41                             <input type="text" name="Assigned_Lawyer_2_ID" class="form-control"
42                             @error('Assigned_Lawyer_2_ID') is-invalid @enderror value="{{ $data->Assigned_Lawyer_2_ID }}"
43                             >
44                                 @error('Assigned_Lawyer_2_ID')
45                                     <span> {{ $message }} </span>
46                                 @enderror
47                         </div>
48
49                         <div class="mb-3">
50                             <label for="exampleInputEmail1" class="form-label">status</label>
51                             <input type="text" name="status" class="form-control @error('status') is-invalid @enderror"
52                             value="{{ $data->status }}"
53                                 @error('status')
54                                     <span> {{ $message }} </span>
55                                 @enderror
56                         </div>
57
58
59
60                         <button type="submit" class="btn btn-primary me-2">Save Changes</button>
61                         <!-- <button class="btn btn-secondary">Cancel</button> -->
62                         </form>
63
64                     </div>
65                 </div>
66
67             </div>
68         </div>
69
70     </div>
71 </div>
72 </div>

```

```

1  <nav class="sidebar">
2      <div class="sidebar-header">
3          <a href="#" class="sidebar-brand">
4              PearsonHardman
5          </a>
6          <div class="sidebar-toggler not-active">
7              <span></span>
8              <span></span>
9              <span></span>
10             </div>
11         </div>
12         <div class="sidebar-body">
13             <ul class="nav">
14                 <li class="nav-item nav-category">Main</li>
15                 <li class="nav-item">
16                     <a href="{{ route('firmleader.dashboard')}}" class="nav-link">
17                         <i class="link-icon" data-feather="box"></i>
18                         <span class="link-title">Dashboard</span>
19                     </a>
20                 </li>
21                 <li class="nav-item nav-category">web apps</li>
22                 <li class="nav-item">
23                     <a class="nav-link" data-bs-toggle="collapse" href="#emails" role="button" aria-expanded="false" aria-controls="emails">
24                         <i class="link-icon" data-feather="mail"></i>
25                         <span class="link-title">Email</span>
26                         <i class="link-arrow" data-feather="chevron-down"></i>
27                     </a>
28                     <div class="collapse" id="emails">
29                         <ul class="nav sub-menu">
30                             <li class="nav-item">
31                                 <a href="pages/email/inbox.html" class="nav-link">Inbox</a>
32                             </li>
33                             <li class="nav-item">
34                                 <a href="pages/email/read.html" class="nav-link">Read</a>
35                             </li>
36                             <li class="nav-item">
37                                 <a href="pages/email/compose.html" class="nav-link">Compose</a>
38                             </li>
39                         </ul>
40                     </div>
41                 </li>
42                 <li class="nav-item">
43                     <a href="pages/apps/chat.html" class="nav-link">
44                         <i class="link-icon" data-feather="message-square"></i>
45                         <span class="link-title">Chat</span>
46                     </a>
47                 </li>
48                 <li class="nav-item">
49                     <a href="pages/apps/calendar.html" class="nav-link">
50                         <i class="link-icon" data-feather="calendar"></i>
51                         <span class="link-title">Calendar</span>
52                     </a>
53                 </li>
54                 <li class="nav-item nav-category">Info</li>
55                 <li class="nav-item">
56                     <a class="nav-link" data-bs-toggle="collapse" href="#uiComponents" role="button" aria-expanded="false" aria-controls="uiComponents">
57                         <a href="{{ route('lawyers')}}" class="nav-link">Lawyers</a>
58                         <a href="{{ route('case.lists')}}" class="nav-link">Cases</a>
59                     </a>
60                 </li>
61             </ul>
62         </div>
63     </div>
64 
```

<li class="nav-item nav-category">Docs

<li class="nav-item">

<i class="link-icon" data-feather="hash"></i>

Documentation


```

73          </li>
74      </ul>
75  </div>
76 </nav>
77 <nav class="settings-sidebar">
78     <div class="sidebar-body">
79         <a href="#" class="settings-sidebar-toggler">
80             <i data-feather="settings"></i>
81         </a>
82         <div class="theme-wrapper">
83             <h6 class="text-muted mb-2">Light Theme:</h6>
84             <a class="theme-item" href="demo1/dashboard.html">
85                 
86             </a>
87             <h6 class="text-muted mb-2">Dark Theme:</h6>
88             <a class="theme-item active" href="demo2/dashboard.html">
89                 
90             </a>
91         </div>
92     </div>
93 </nav>

1 <footer class="footer d-flex flex-column flex-md-row align-items-center justify-content-between px-4 py-3 border-top small">
2     <p class="text-muted mb-1 mb-md-0">Copyright © 2023 <a href="https://www.nobleui.com" target="_blank">Pearson Hardman</a>.</p>
3     <p class="text-muted">Handcrafted With <i class="mb-1 text-primary ms-1 icon-sm" data-feather="heart"></i></p>
4 </footer>

1 <nav class="navbar">
2     <a href="#" class="sidebar-toggler">
3         <i data-feather="menu"></i>
4     </a>
5     <div class="navbar-content">
6         <form class="search-form">
7             <div class="input-group">
8                 <div class="input-group-text">
9                     <i data-feather="search"></i>
10                </div>
11                <input type="text" class="form-control" id="navbarForm" placeholder="Search here..."/>
12            </div>
13        </form>
14        <ul class="navbar-nav">
15            <li class="nav-item dropdown">
16                <a class="nav-link dropdown-toggle" href="#" id="languageDropdown" role="button" data-bs-toggle="dropdown" aria-haspopup="true" aria-expanded="false">
17                    <i class="flag-icon flag-icon-us mt-1" title="us"></i> <span class="ms-1 me-1 d-none d-md-inline-block">English</span>
18                </a>
19                <div class="dropdown-menu" aria-labelledby="languageDropdown">
20                    <a href="javascript:;" class="dropdown-item py-2"><i class="flag-icon flag-icon-us" title="us" id="us"></i> <span class="ms-1"> English </span></a>
21                    <a href="javascript:;" class="dropdown-item py-2"><i class="flag-icon flag-icon-fr" title="fr" id="fr"></i> <span class="ms-1"> French </span></a>
22                    <a href="javascript:;" class="dropdown-item py-2"><i class="flag-icon flag-icon-de" title="de" id="de"></i> <span class="ms-1"> German </span></a>
23                    <a href="javascript:;" class="dropdown-item py-2"><i class="flag-icon flag-icon-pt" title="pt" id="pt"></i> <span class="ms-1"> Portuguese </span></a>
24                    <a href="javascript:;" class="dropdown-item py-2"><i class="flag-icon flag-icon-es" title="es" id="es"></i> <span class="ms-1"> Spanish </span></a>
25                </div>
26            </li>
27            <li class="nav-item dropdown">
28                <a class="nav-link dropdown-toggle" href="#" id="appsDropdown" role="button" data-bs-toggle="dropdown" aria-haspopup="true" aria-expanded="false">
29                    <i data-feather="grid"></i>
30                </a>

```

```

31      <div class="dropdown-menu p-0" aria-labelledby="appsDropdown">
32          <div class="px-3 py-2 d-flex align-items-center justify-content-between border-bottom">
33              <p class="mb-0 fw-bold">Web Apps</p>
34              <a href="javascript:;" class="text-muted">Edit</a>
35          </div>
36          <div class="row g-0 p-1">
37              <div class="col-3 text-center">
38                  <a href="pages/apps/chat.html" class="dropdown-item d-flex flex-column align-items-center justify-content-center wd-70 ht-70"><i data-feather="message-square" class="icon-lg mb-1">
39                      </i><p class="tx-12">Chat</p></a>
40              </div>
41              <div class="col-3 text-center">
42                  <a href="pages/apps/calendar.html" class="dropdown-item d-flex flex-column align-items-center justify-content-center wd-70 ht-70"><i data-feather="calendar" class="icon-lg mb-1"></i><p class="tx-12">Calendar</p></a>
43              </div>
44              <div class="col-3 text-center">
45                  <a href="pages/email/inbox.html" class="dropdown-item d-flex flex-column align-items-center justify-content-center wd-70 ht-70"><i data-feather="mail" class="icon-lg mb-1"></i><p class="tx-12">Email</p></a>
46              </div>
47              <div class="col-3 text-center">
48                  <a href="pages/general/profile.html" class="dropdown-item d-flex flex-column align-items-center justify-content-center wd-70 ht-70"><i data-feather="instagram" class="icon-lg mb-1"></i><p class="tx-12">Profile</p></a>
49              </div>
50          <div class="px-3 py-2 d-flex align-items-center justify-content-center border-top">
51              <a href="javascript:;">View all</a>
52          </div>
53      </div>
54  </li>
55  <li class="nav-item dropdown">
56      <a class="nav-link dropdown-toggle" href="#" id="messageDropdown" role="button" data-bs-toggle="dropdown" aria-haspopup="true" aria-expanded="false">
57          <i data-feather="mail"></i>
58      </a>
59      <div class="dropdown-menu p-0" aria-labelledby="messageDropdown">
60          <div class="px-3 py-2 d-flex align-items-center justify-content-between border-bottom">
61              <p>9 New Messages</p>
62              <a href="javascript:;" class="text-muted">Clear all</a>
63          </div>
64          <div class="p-1">
65              <a href="javascript:;" class="dropdown-item d-flex align-items-center py-2">
66                  <div class="me-3">
67                      
68                  </div>
69                  <div class="d-flex justify-content-between flex-grow-1">
70                      <div class="me-4">
71                          <p>Leonardo Payne</p>
72                          <p class="tx-12 text-muted">Project status</p>
73                      </div>
74                      <p class="tx-12 text-muted">2 min ago</p>
75                  </div>
76              </a>
77              <a href="javascript:;" class="dropdown-item d-flex align-items-center py-2">
78                  <div class="me-3">
79                      
80                  </div>
81                  <div class="d-flex justify-content-between flex-grow-1">
82                      <div class="me-4">
83                          <p>Carl Henson</p>
84                          <p class="tx-12 text-muted">Client meeting</p>
85                      </div>
86                      <p class="tx-12 text-muted">30 min ago</p>
87                  </div>
88              </a>
89              <a href="javascript:;" class="dropdown-item d-flex align-items-center py-2">
90                  <div class="me-3">
91                      
92                  </div>

```

```

93      <div class="d-flex justify-content-between flex-grow-1">
94        <div class="me-4">
95          <p>Jensen Combs</p>
96          <p class="tx-12 text-muted">Project updates</p>
97        </div>
98        <p class="tx-12 text-muted">1 hrs ago</p>
99      </div>
100    </a>
101    <a href="javascript:;" class="dropdown-item d-flex align-items-center py-2">
102      <div class="me-3">
103        
104      </div>
105      <div class="d-flex justify-content-between flex-grow-1">
106        <div class="me-4">
107          <p>Amiah Burton</p>
108          <p class="tx-12 text-muted">Project deatline</p>
109        </div>
110        <p class="tx-12 text-muted">2 hrs ago</p>
111      </div>
112    </a>
113    <a href="javascript:;" class="dropdown-item d-flex align-items-center py-2">
114      <div class="me-3">
115        
116      </div>
117      <div class="d-flex justify-content-between flex-grow-1">
118        <div class="me-4">
119          <p>Yaretzi Mayo</p>
120          <p class="tx-12 text-muted">New record</p>
121        </div>
122        <p class="tx-12 text-muted">5 hrs ago</p>
123      </div>
124    </a>
125  </div>
126  <div class="px-3 py-2 d-flex align-items-center justify-content-center border-top">
127    <a href="javascript:;"/>View all</a>
128  </div>
129</div>
130</li>
131<li class="nav-item dropdown">
132  <a class="nav-link dropdown-toggle" href="#" id="notificationDropdown" role="button"
133    data-bs-toggle="dropdown" aria-haspopup="true" aria-expanded="false">
134    <i data-feather="bell"></i>
135    <div class="indicator">
136      <div class="circle"></div>
137    </div>
138  </a>
139  <div class="dropdown-menu p-0" aria-labelledby="notificationDropdown">
140    <div class="px-3 py-2 d-flex align-items-center justify-content-between border-bottom">
141      <p>6 New Notifications</p>
142      <a href="javascript:;" class="text-muted">Clear all</a>
143    </div>
144    <div class="p-1">
145      <a href="javascript:;" class="dropdown-item d-flex align-items-center py-2">
146        <div class="wd-30 ht-30 d-flex align-items-center justify-content-center bg-primary
147          rounded-circle me-3">
148          <i class="icon-sm text-white" data-feather="gift"></i>
149        </div>
150        <div class="flex-grow-1 me-2">
151          <p>New Order Recieved</p>
152          <p class="tx-12 text-muted">30 min ago</p>
153        </div>
154      </a>
155      <a href="javascript:;" class="dropdown-item d-flex align-items-center py-2">
156        <div class="wd-30 ht-30 d-flex align-items-center justify-content-center bg-primary
157          rounded-circle me-3">
158          <i class="icon-sm text-white" data-feather="alert-circle"></i>
159        </div>
160        <div class="flex-grow-1 me-2">
161          <p>Server Limit Reached!</p>
162          <p class="tx-12 text-muted">1 hrs ago</p>
163        </div>
164      </a>
165    <div class="px-3 py-2 d-flex align-items-center justify-content-center bg-primary">
166
```

```

164     rounded-circle me-3">
165         
166     </div>
167     <div class="flex-grow-1 me-2">
168         <p>New customer registered</p>
169         <p class="tx-12 text-muted">2 sec ago</p>
170     </div>
171     <a href="javascript:;" class="dropdown-item d-flex align-items-center py-2">
172         <div class="wd-30 ht-30 d-flex align-items-center justify-content-center bg-primary rounded-circle me-3">
173             <i class="icon-sm text-white" data-feather="layers"></i>
174         </div>
175         <div class="flex-grow-1 me-2">
176             <p>Apps are ready for update</p>
177             <p class="tx-12 text-muted">5 hrs ago</p>
178         </div>
179     </a>
180     <a href="javascript:;" class="dropdown-item d-flex align-items-center py-2">
181         <div class="wd-30 ht-30 d-flex align-items-center justify-content-center bg-primary rounded-circle me-3">
182             <i class="icon-sm text-white" data-feather="download"></i>
183         </div>
184         <div class="flex-grow-1 me-2">
185             <p>Download completed</p>
186             <p class="tx-12 text-muted">6 hrs ago</p>
187         </div>
188     </a>
189     </div>
190     <div class="px-3 py-2 d-flex align-items-center justify-content-center border-top">
191         <a href="javascript:;">View all</a>
192     </div>
193     </div>
194 </li>
195 <li class="nav-item dropdown">
196     <a class="nav-link dropdown-toggle" href="#" id="profileDropdown" role="button" data-bs-toggle="dropdown" aria-haspopup="true" aria-expanded="false">
197         
198     </a>
199     <div class="dropdown-menu p-0" aria-labelledby="profileDropdown">
200         <div class="d-flex flex-column align-items-center border-bottom px-5 py-3">
201             <div class="mb-3">
202                 
203             </div>
204             <div class="text-center">
205                 <p class="tx-16 fw-bolder">firmleader</p>
206                 <p class="tx-12 text-muted">firmleader@g.com</p>
207             </div>
208         </div>
209         <ul class="list-unstyled p-1">
210             <li class="dropdown-item py-2">
211                 <a href="pages/general/profile.html" class="text-body ms-0">
212                     <i class="me-2 icon-md" data-feather="user"></i>
213                     <span>Profile</span>
214                 </a>
215             </li>
216             <li class="dropdown-item py-2">
217                 <a href="javascript:;" class="text-body ms-0">
218                     <i class="me-2 icon-md" data-feather="edit"></i>
219                     <span>Edit Profile</span>
220                 </a>
221             </li>
222             <li class="dropdown-item py-2">
223                 <a href="javascript:;" class="text-body ms-0">
224                     <i class="me-2 icon-md" data-feather="repeat"></i>
225                     <span>Switch User</span>
226                 </a>
227             </li>
228             <li class="dropdown-item py-2">
229                 <a href="{{ route('firmleader.logout') }}" class="text-body ms-0">
230                     <i class="me-2 icon-md" data-feather="log-out"></i>
231                     <span>Log Out</span>
232                 </a>
233             </li>
234         </ul>
235         </div>
236     </li>
237     </ul>
238     </div>
239 </nav>
```

Finance interface:

```
24      <div class="row">
25        <div class="col-12 col-xl-12 stretch-card">
26          <div class="row flex-grow-1">
27            <div class="col-md-4 grid-margin stretch-card">
28              <div class="card">
29                <div class="card-body">
30                  <div class="d-flex justify-content-between align-items-baseline">
31                    <h6 class="card-title mb-0">Income</h6>
32                    <div class="dropdown mb-2">
33
34                      </div>
35                    </div>
36                  <div class="row">
37                    <div class="col-6 col-md-12 col-xl-5">
38                      <h3 class="mb-2">{{ $calc[0] }}</h3>
39                      <!--<div class="d-flex align-items-baseline">
40                        <p class="text-success">
41                          <span>+3.3%</span>
42                          <i data-feather="arrow-up" class="icon-sm mb-1"></i>
43                        </p>
44                      </div> -->
45                    </div>
46                  <!--<div class="col-6 col-md-12 col-xl-7">
47                    <div id="customersChart" class="mt-md-3 mt-xl-0"></div>
48                  </div> -->
49                </div>
50              </div>
51            </div>
52          </div>
53        <div class="col-md-4 grid-margin stretch-card">
54          <div class="card">
55            <div class="card-body">
56              <div class="d-flex justify-content-between align-items-baseline">
57                <h6 class="card-title mb-0">Expense</h6>
58                <div class="dropdown mb-2">
59
60                  </div>
61                </div>
62              </div>
63            </div>
64          <div class="card">
65            <div class="card-body">
66              <div class="d-flex justify-content-between align-items-baseline">
67                <h6 class="card-title mb-0">Expense</h6>
68                <div class="dropdown mb-2">
69
70                  </div>
71                </div>
72              </div>
73            </div>
74          <div class="col-6 col-md-12 col-xl-5">
75            <h3 class="mb-2">{{ $calc[1] }}</h3>
76            <!--<div class="d-flex align-items-baseline">
77              <p class="text-danger">
78                <span>-2.8%</span>
79                <i data-feather="arrow-down" class="icon-sm mb-1"></i>
80              </p>
81            </div>-->
82          </div>
83        <!--<div class="col-6 col-md-12 col-xl-7">
84          <div id="ordersChart" class="mt-md-3 mt-xl-0"></div>
85        </div> -->
86      </div>
87    </div>
88  </div>
89  <div class="col-md-4 grid-margin stretch-card">
90    <div class="card">
91      <div class="card-body">
92        <div class="d-flex justify-content-between align-items-baseline">
93          <h6 class="card-title mb-0">Profit</h6>
94          <div class="dropdown mb-2">
95
96            </div>
97          </div>
98        </div>
99      </div>
100    <div class="row">
101      <div class="col-6 col-md-12 col-xl-5">
102        <h3 class="mb-2">{{ $calc[2] }}</h3>
103        <!--<div class="d-flex align-items-baseline">
104          <p class="text-success">
```

(code snippet for dashboard)

```

1  @extends('finance.finance_dashboard')
2  @section('finance')
3
4
5  <div class="page-content">
6
7      <nav class="page-breadcrumb">
8          <ol class="breadcrumb">
9
10             <!-- <li class="breadcrumb-item"><a href="#">Tables</a></li>
11             <li class="breadcrumb-item active" aria-current="page">Data Table</li> -->
12         </ol>
13     </nav>
14
15     <div class="row">
16         <div class="col-md-12 grid-margin stretch-card">
17             <div class="card">
18                 <div class="card-body">
19                     <h6 class="card-title">Case Fees</h6>
20
21                     <div class="table-responsive">
22                         <table id="dataTableExample" class="table">
23                             <thead>
24                                 <tr>
25                                     <th>Case ID</th>
26                                     <th>Client Name</th>
27                                     <th>Status</th>
28                                     <th>Actions</th>
29
30                                 </tr>
31                             </thead>
32                             <tbody>
33
34
35                         @foreach($afcases as $key => $item)
36                             <tr>
37                                 <td>{{ $key+1 }}</td>
38                                 <td>{{ $item->Client_Name }}</td>
39                                 <td class="btn btn-outline-primary">{{ $item->Payment_Status }}</td>

```

```

26             |         <li class="ms-3 ps-3 border-start d-flex align-items-center"> </li>
27             |
28             </ul>
29         </div>
30     </div>
31 </div>
32 </div>
33 <div class="row profile-body">
34
35
36     <!-- left wrapper start -->
37     <div class="d-none d-md-block col-md-4 col-xl-3 left-wrapper">
38         <div class="card rounded">
39             <div class="card-body">
40                 <div class="d-flex align-items-center justify-content-between mb-2">
41                     <h6 class="card-title mb-0">Case ID</h6>
42
43                     </div>
44                     <p>{{ $dfcases->id }}</p>
45                     <div class="mt-3">
46                         <label class="tx-11 fw-bolder mb-0 text-uppercase">Name</label>
47                         <p class="text-muted">{{ $dfcases->Client_Name }}</p>
48                     </div>
49                     <div class="mt-3">
50                         <label class="tx-11 fw-bolder mb-0 text-uppercase">Email</label>
51                         <p class="text-muted"> {{ $dfcases->Client_Email }}</p>
52                     </div>
53
54                     </div>
55                 </div>
56             </div>
57             <!-- left wrapper end -->
58             <!-- middle wrapper start -->
59             <div class="col-md-8 col-xl-6 middle-wrapper">
60                 <div class="row">
61
62                     <div class="col-md-12 grid-margin">
63                         <div class="card rounded">

```

```

15      <div class="card">
16        <div class="card-body">
17
18          <h6 class="card-title"> Edit Case Fees </h6>
19          <p class="text-muted mb-3">{{ $efcases->Client_Name }}</p>
20          <div class="row mb-3">
21
22            <form method= "POST" action= "{{ route('upfees.case') }}" class="forms-sample" >
23              @csrf
24
25              <input type="hidden" name="id" value="{{ $efcases->id }}>
26
27
28
29
30              <div class="mb-3">
31                <label for="exampleInputEmail1" class="form-label">Total_Fees</label>
32                <input type="text" name="Total_Fees" class="form-control" @error('Total_Fees') is-invalid
33                  <!-- @error('Files') -->
34                  <span class="text-danger"> {{ $message }} </span>
35                  @enderror -->
36              </div>
37
38              <div class="mb-3">
39                <label for="exampleInputEmail1" class="form-label">Paid</label>
40                <input type="text" name="Paid" class="form-control" @error('Paid') is-invalid @enderror
41                  <!-- @error('Judge') -->
42                  <span class="text-danger"> {{ $message }} </span>
43                  @enderror -->
44              </div>
45
46              <div class="mb-3">
47
48                <input type="hidden" name="Due" class="form-control" @error('Due') is-invalid @enderror
49                  <!-- @error('Opposition_Lawyer') -->
50                  <span class="text-danger"> {{ $message }} </span>
51                  @enderror -->
52
53            </div>

```

(code snippet for case details, editing case fees)

```

19      <h6 class="card-title">Lawyer Salary</h6>
20
21      <div class="table-responsive">
22        <table id="dataTableExample" class="table">
23          <thead>
24            <tr>
25              <th> ID</th>
26              <th>Name</th>
27              <th>Role</th>
28              <th>Salary</th>
29              <th>Status</th>
30              <th>Actions</th>
31
32
33            </tr>
34          </thead>
35          <tbody>
36
37
38          @foreach($alllawfees as $key => $item)
39            <tr>
40              <td>{{ $key+1 }}</td>
41              <td>{{ $item->name }}</td>
42              <td>{{ $item->role }}</td>
43              <td>{{ $item->salary }}</td>
44              <td class="btn btn-outline-primary">{{ $item->status }}</td>
45
46              <td>
47                <a href="{{ route('detailslawfees.case', $item->id) }}" class="btn btn-inverse-info"> Detail
48                <a href="{{ route('editlawfees.case', $item->id) }}" class="btn btn-inverse-warning"> Update
49
50
51                </td>
52            </tr>
53          @endforeach()
54          </tbody>
55        </table>
56      </div>
57

```

```

47     </div>
48     <div class="row profile-body">
49
50         <!-- left wrapper start -->
51         <div class="d-none d-md-block col-md-4 col-xl-3 left-wrapper">
52             <div class="card rounded">
53                 <div class="card-body">
54                     <div class="d-flex align-items-center justify-content-between mb-2">
55                         <h6 class="card-title mb-0">ID</h6>
56
57                     </div>
58                     <p>{{ $dlfcases->id }}</p>
59                     <div class="mt-3">
60                         <label class="tx-11 fw-bolder mb-0 text-uppercase">Name</label>
61                         <p class="text-muted">{{ $dlfcases->name }}</p>
62                     </div>
63                     <div class="mt-3">
64                         <label class="tx-11 fw-bolder mb-0 text-uppercase">Email</label>
65                         <p class="text-muted"> {{ $dlfcases->email }}</p>
66                     </div>
67
68                 </div>
69             </div>
70         </div>
71         <!-- left wrapper end -->
72         <!-- middle wrapper start -->
73         <div class="col-md-8 col-xl-6 middle-wrapper">
74             <div class="row">
75
76                 <div class="col-md-12 grid-margin">
77                     <div class="card rounded">
78                         <div class="card-header">
79                             <div class="d-flex align-items-center justify-content-between">
80                                 <div class="d-flex align-items-center">
81
82                                     <div class="ms-2">
83
84
85

```

```

1     extends('finance.finance_dashboard')
2     action('finance')
3     script src="https://ajax.googleapis.com/ajax/libs/jquery/3.6.4/jquery.min.js"></script>
4
5     iv class="page-content">
6         <div class="row profile-body">
7             <!-- left wrapper start -->
8             <!-- left wrapper end -->
9
10            <!-- middle wrapper start -->
11            <div class="col-md-8 col-xl-8 middle-wrapper">
12                <div class="row">
13                    <div class="col-md-12 grid-margin">
14                        <!-- Newly added-->
15                        <div class="card">
16                            <div class="card-body">
17
18                                <h6 class="card-title"> Edit Lawyer Salary </h6>
19                                <p class="text-muted mb-3">{{ $elfcases->name }}</p>
20                                <div class="row mb-3">
21
22                                    <form method= "POST" action= "{{ route('uplawyerfees.case') }}" class="forms-sample" >
23                                        @csrf
24
25                                        <input type="hidden" name="id" value="{{ $elfcases->id }}>
26
27
28
29
30
31
32
33
34
35
36
37
38
39

```

(code snippet for viewing lawyer salary, editing lawyer salary)

```

15
16     <div class="row">
17         <div class="col-md-12 grid-margin stretch-card">
18             <div class="card">
19                 <div class="card-body">
20                     <h6 class="card-title">Other Expenses</h6>
21
22                     <div class="table-responsive">
23                         <table id="dataTableExample" class="table">
24                             <thead>
25                                 <tr>
26                                     <th>Case ID</th>
27                                     <th>Expenditure</th>
28                                     <th>Amount</th>
29
30                                 </tr>
31                             </thead>
32                             <tbody>
33
34
35                         @foreach($allexp as $key => $item)
36                             <tr>
37                                 <td>{{ $key+1 }}</td>
38                                 <td>{{ $item->Expenditure }}</td>
39                                 <td>{{ $item->Amount }}</td>
40
41                                 <td>
42                                     <a href="{{ route('add.exp', $item->id) }}" class="btn btn-inverse-warning"> Add </a>
43
44
45                                 </td>
46                             </tr>
47                         @endforeach()
48                     </tbody>
49                 </table>
50             </div>
51         </div>
52     </div>
53 
```

```

1 @extends('admin.admin_dashboard')
2 @section('admin')
3 <script src="https://ajax.googleapis.com/ajax/libs/jquery/3.6.4/jquery.min.js"></script>
4
5 <div class="page-content">
6     <div class="row profile-body">
7         <!-- left wrapper start -->
8         <!-- left wrapper end -->
9
10        <!-- middle wrapper start -->
11        <div class="col-md-8 col-xl-8 middle-wrapper">
12            <div class="row">
13                <div class="col-md-12 grid-margin">
14                    <!-- Newly added-->
15                    <div class="card">
16                        <div class="card-body">
17
18                            <h6 class="card-title"> Add New Expense </h6>
19
20                            <form method="POST" action="{{ route('store.exp') }}" class="forms-sample" >
21                                @csrf
22
23                                    <div class="mb-3">
24                                        <label for="exampleInputEmail1" class="form-label">Expenditure</label>
25                                        <input type="text" name="Expenditure" class="form-control" @error('Client_Name') is-invalid @enderror
26                                            <span class="text-danger"> {{ $message }} </span>
27                                            @enderror
28
29                                    </div>
30
31                                    <div class="mb-3">
32                                        <label for="exampleInputEmail1" class="form-label">Amount</label>
33                                        <input type="text" name="Amount" class="form-control" >
34                                            <!-- @error('Assigned_Lawyer_1_ID') -->
35                                            <span class="text-danger"> {{ $message }} </span>
36                                            @enderror -->
37
38                                    <button type="submit" class="btn btn-primary me-2">Save Changes</button>
39                                    <!-- <button class="btn btn-secondary">Cancel</button> -->

```

(code snippet for viewing other expense details, adding new expense)

Backend Development

Backend development is the key to the smooth operation and data administration of our law firm management system. We put up a server-side architecture that controls user interactions and data transactions using tools including PHP, JavaScript, and MySQL. Dynamic syntax is made easier using PHP, which also serves as a link between the front end and the MySQL database. In the front end, JavaScript improves user interaction and experience, and MySQL, an effective relational database system, efficiently stores, retrieves, and maintains data. By combining PHP, basic JavaScript, and MySQL, we can ensure that the front end of our business not only has a stunning look but is also simple to use and offers a satisfying user experience. The controllers and the routes have been written using PHP. The database uses MySQL and connects them to the web with JavaScript.

Lawyer Interface:

```
<?php

namespace App\Http\Controllers;

use Illuminate\Http\Request;
use Illuminate\Support\Facades\Auth;
use App\Models\User;
use Illuminate\Support\Facades\Hash;
use Illuminate\Http\RedirectResponse;

class LawyerController extends Controller
{
    public function LawyerDashboard() {
        return view('lawyer.index');
    } //end method

    public function LawyerLogout(Request $request) {
        Auth::guard('web')->logout();

        $request->session()->invalidate();

        $request->session()->regenerateToken();
    }
}
```

```

        return redirect('/admin/login');

    } //End method

    public function LawyerLogin() {
        return view('');
    } //End method

    public function LawyerProfile() {
        $id= Auth::user()->id;
        $profileData= User::find($id);
        return view('lawyer.lawyer_profile_view',compact('profileData'));
    }

} //End Method

public function LawyerChangePassword() {

    $id= Auth::user()->id;
    $profileData= User::find($id);

    return
    view('lawyer.lawyer_change_password',compact('profileData'));

} //end method

public function LawyerUpdatePassword(Request $request) {
    //Validation
    $request->validate([
        'old_password' => 'required',
        'new_password' => 'required|confirmed'
    ]);

    //Match The Old Password

    if (!Hash::check($request->old_password,auth::user()->password)) {

        $notification = array(
            'message' => 'Old Password Does not Match!!!!',

```

```

        'alert-type' => 'error'
    );
return back() ->with($notification);

}

//Update the New Password

User::whereId(auth() ->user() ->id) ->update([
    'password' => Hash::make($request->new_password)
]);

$notification = array(
    'message' => 'Password Change Successfully!!!',
    'alert-type' => 'success'
);
return back() ->with($notification);

}//End Method

}

```

```

public function assignedCase(){
    $data=CaseDetails::select('Client_Name', 'Client_Email') ->get();
    return $data;
}

public function CountCases(){
    $id= Auth::user() ->id;

    $totalacases = CaseDetails::where('Assigned_Lawyer_1_ID', $id)-
>orwhere('Assigned_Lawyer_2_ID', $id) ->count();

    $totalolcases = CaseDetails::where('Assigned_Lawyer_1_ID', $id)-
>where('Assign_Status', "Ongoing") ->count();
    $totalo2cases = CaseDetails::where('Assigned_Lawyer_2_ID', $id)-
>where('Assign_Status', "Ongoing") ->count();
    $totalocases=$totalolcases+$totalo2cases;
}

```

```

        $totalc1cases = CaseDetails::where('Assigned_Lawyer_1_ID', $id)-
>where('Assign_Status', "Completed")->count();
        $totalc2cases = CaseDetails::where('Assigned_Lawyer_2_ID', $id)-
>where('Assign_Status', "Completed")->count();
        $totalccases=$totalc1cases+$totalc2cases;
        return view('lawyer.index',
compact('totalacases','totalccases','totalccases'));
    }

public function AssignedCases() {
    $id= Auth::user()->id;
    $asscases= CaseDetails::where('Assigned_Lawyer_1_ID', $id)-
>orwhere('Assigned_Lawyer_2_ID', $id)->get();
    // $users = DB::select('select * from users where active = ?', [1]);
    //return view('user.index', ['users' => $users]);
    return
view('lawyer.backend.cases.\assigned_cases',compact('asscases'));
}

// 

public function EditCase($id) {
    $ecases=CaseDetails::findOrFail($id);
    $comp="Completed";
    $ong="Ongoing";
    return
view('lawyer.backend.cases.edit_case',compact('ecases','ong','comp','id'))
;
} // end method

public function EditAssignedCase(Request $request) {
    //Validation

    $pid=$request->id;

```

```

CaseDetails::where('id', $pid) -> update([
    'Client_Name' => $request->Client_Name,
    'Files' => $request->Files,
    'Judge' => $request->Judge,
    'Opposition_Lawyer' => $request->Opposition_Lawyer,
    'Next_Court_Date' => $request->Next_Court_Date,
    'Opposition' => $request->Opposition,
    'Witness' => $request->Witness,
    'Assign_Status' => $request->Assign_Status,
]) ;

$notification = array(
    'message' => 'Case Updated Successfully!!!',
    'alert-type' => 'success'
) ;

return redirect()->route('assigned.cases')->with($notification);

}

public function InfoCase($id) {

    $dcases=CaseDetails::findOrFail($id);
    // $dcases= CaseDetails::latest()->get($id);
    return
view('lawyer.backend.cases.details_case', compact('dcases'));
    //return view('lawyer.backend.cases.edit_case', compact('ecases'));

}

```

```

Route::middleware(['auth', 'role:lawyer'])->group(function() {
    Route::get('/lawyer/dashboard', [CaseDetailsController::class,
    'CountCases'])->name('lawyer.dashboard'); #lawyer dashboard

```

```

    Route::get('/lawyer/logout', [LawyerController::class,
'LawyerLogout'])->name('lawyer.logout'); #lawyer logout

    Route::get('/lawyer/profile', [LawyerController::class,
'LawyerProfile'])->name('lawyer.profile'); #lawyer profile

    Route::get('/lawyer/change/password', [LawyerController::class,
'LawyerChangePassword'])->name('lawyer.change.password'); #lawyer change
pass

    Route::post('/lawyer/update/password', [LawyerController::class,
'LawyerUpdatePassword'])->name('lawyer.update.password'); #lawyer pass
update
}); //end group lawyer middleware

```

```

Route::middleware(['auth', 'role:lawyer'])->group(function() {

    Route::controller(CaseDetailsController::class)->group(function(){

        Route::post('/edit/assignedcase', 'EditAssignedCase')-
>name('editas.case'); #update assigned case to db
        Route::get('/edit/case/{id}', 'EditCase')->name('edit.case');
#edit case to db
        Route::get('/details/case/{id}', 'InfoCase')->name('info.case');
#case details
        Route::get('/assigned/cases', 'AssignedCases')-
>name('assigned.cases'); #assigned case list
    });

}); //end group Lawyer middleware

```

Admin Interface

```
$newEmployee = new User();
$newEmployee->name = $request->input('employeeNameInput');
$newEmployee->email = str_replace(' ', '', strtolower($newEmployee->name)) . '_lawfirm@gmail.com';
$newEmployee->password = bcrypt('12345678');
$newEmployee->phone = $request->input('phone');
$newEmployee->address = $request->input('address');
$newEmployee->role = $request->input('role');
$newEmployee->position = $request->input('position');
$newEmployee->save();
}

// If "Update Existing Employee" is selected
elseif ($actionType === 'update') {
    $employeeId = $request->input('employeeName');
    $employee = User::find($employeeId);
    $employeeNameInputValue = $request->input('employeeNameInput');
    Log::info("Employee Name Input Value: " . $employeeNameInputValue);

    if ($request->filled('employeeNameInput')) {
        $employeeNameInputValue = $request->input('employeeNameInput');
        $employee->name = $employeeNameInputValue;
    }

    if ($employee) {
        if ($request->filled('phone')) {
            $employee->phone = $request->input('phone');
        }

        if ($request->filled('address')) {
            $employee->address = $request->input('address');
        }

        if ($request->filled('role')) {
```

(Code snippet of the add/update employee section [backend])

In this code section the developers did some amazing error handling. If the user chooses the update employee details option, the dropdown menu will only show the available employee names which means it will only show the existing employee list.

```

1 reference | 0 overrides
public function updateCaseDetails(Request $request)
{
    $request->validate([
        'unassignedCases' => 'required',
    ], [
        'unassignedCases.required' => 'One or more fields haven\'t been selected.',
    ]);

    // Check if either of the lawyer dropdowns has been selected
    if (!$request->has('assignLawyer1') && !$request->has('assignLawyer2')) {
        return redirect()->back()->withErrors(['message' => 'One or more fields haven\'t been selected.']);
    }

    $clientId = $request->input('unassignedCases');
    $lawyer1Id = $request->input('assignLawyer1');
    $lawyer2Id = $request->input('assignLawyer2');

    // Update the case details with the selected lawyer IDs
    $case = CaseDetails::findOrFail($clientId);
    $case->Assigned_Lawyer_1_ID = $lawyer1Id;
    $case->Assigned_Lawyer_2_ID = $lawyer2Id;
    $case->save();

    // Redirect back to the admin dashboard or any other appropriate route
    return redirect()->route('admin.assignCases')->with('success', 'Lawyers have been successfully assigned to the case.');
}

}

```

(Code snippet of the update case info section [backend])

Here, the developers also maintained some rules such as - while updating the case details , if any admin wants to assign a new lawyer to the case, the dropdown menu will only show the available lawyers only.

```

1 reference | 0 overrides
public function unassignRoom(Request $request)
{
    $roomId = $request->input('roomName');
    $room = Room::find($roomId);

    if ($room) {
        $room->assign_state = 0;
        $room->assigned_for = null;
        $room->event_date = null;
        $room->save();

        return redirect()->back()->with('success', 'Room unassigned successfully.');
    }

    return redirect()->back()->with('error', 'Failed to unassign room.');
}

```

(Code snippet of the assign room section [backend])

In this section, if any admin wants to assign an unassigned room for an upcoming meeting, the drop down menu will only show the available rooms that are unassigned in the present state. The developers maintained this one by only using a simple logic , assign_state 0 (false) → unassigned, otherwise assign_state 1 (true) → assigned.

Firm leader Interface:

```
1 <?php
2
3 namespace App\Http\Controllers;
4
5 use Illuminate\Http\Request;
6 use Illuminate\Support\Facades\Auth;
7
8 class FirmleaderController extends Controller
9 {
10     //
11     public function FirmleaderDashboard(){
12         return view('firmleader.index');
13     }
14
15
16     public function FirmleaderLogout(Request $request){
17         Auth::guard('web')->logout();
18
19         $request->session()->invalidate();
20
21         $request->session()->regenerateToken();
22
23         return redirect('/firmleader/login');
24     }
25
26     public function FirmleaderLogin(){
27         return view('firmleader.firmleader_login');
28     }
29
30     public function FirmleaderProfile(){
31         $id=Auth::user()->id;
32         $profileData= User::find($id);
33         return view('firmleader.firmleader_profile_view',compact('profileData'));
34
35
36     }//End Method
37
38     public function FirmleaderChangePassword(){
```

```

37
38     public function FirmleaderChangePassword(){
39
40         $id= Auth::user()->id;
41         $profileData= User::find($id);
42
43         return view('firmleader.firmleader_change_password',compact('profileData'));
44
45     } //end method
46
47
48
49
50     public function FirmleaderUpdatePassword(Request $request){
51
52         //Validation
53         $request->validate([
54             'old_password' => 'required',
55             'new_password' => 'required|confirmed'
56         ]);
57
58         //Match The Old Password
59
60         if (!Hash::check($request->old_password,auth::user()->password)) {
61
62             $notification = array(
63                 'message' => 'Old Password Does not Match!!!',
64                 'alert-type' => 'error'
65             );
66             return back()->with($notification);
67
68         }
69
70         //Update the New Password
71
72         User::whereId(auth()->user()->id)->update([
73             'password' => Hash::make($request->new_password)
74         ]);
75
76             $notification = array(
77                 'message' => 'Password Change Successfully!!!',
78                 'alert-type' => 'success'
79             );
80             return back()->with($notification);
81
82         }//End Method
83
84
85
86     }

```

```

1  <?php
2
3  namespace App\Http\Controllers\Backend;
4
5  use App\Http\Controllers\Controller;
6  use Illuminate\Http\Request;
7  use Illuminate\Support\Facades\Auth;
8  use App\Models\CaseList;
9  use App\Models\User;
10
11 class CasesController extends Controller
12 {
13     //
14     public function Lawyers(){
15         $data = User::where('role', 'lawyer')->latest()->get();
16         return view('firmleader.backend.lawyers',compact('data'));
17     }
18
19     public function CaseList(){
20         $value = CaseList::latest()->get();
21         return view('firmleader.backend.case_lists',compact('value'));
22     }
23
24     public function EditCase($id){
25         $data = CaseList::findOrFail($id);
26         return view('firmleader.backend.edit_cases',compact('data'));
27     }
28
29     public function UpdateCase(Request $request){
30
31
32         $pid = $request->id;
33
34
35         $CaseList::findOrFail($pid)->update([
36
37             'Assigned_Lawyer_1_ID' => $request->Assigned_Lawyer_1_ID,
38             'Assigned_Lawyer_2_ID' => $request->Assigned_Lawyer_2_ID,
39             'status' => $request->status
40         ]);
41
42
43         $notification = array(
44             'message' => 'Updated successfully!'
45         );
46
47         return redirect()->route('case.lists')->with($notification);
48     }
49
50 }
51 }
```

```
1 <?php
2
3 use Illuminate\Database\Migrations\Migration;
4 use Illuminate\Database\Schema\Blueprint;
5 use Illuminate\Support\Facades\Schema;
6
7 return new class extends Migration
8 {
9     /**
10      * Run the migrations.
11      */
12     public function up(): void
13     {
14         Schema::create('case_lists', function (Blueprint $table) {
15             $table->id();
16             $table->string('Client_Name');
17             $table->string('Assigned_Lawyer_1_ID')->nullable();
18             $table->string('Assigned_Lawyer_2_ID')->nullable();
19             $table->enum('status', ['assigned', 'unassigned'])->default('unassigned');
20
21             $table->timestamps();
22         });
23     }
24
25     /**
26      * Reverse the migrations.
27      */
28     public function down(): void
29     {
30         Schema::dropIfExists('case_lists');
31     }
32 };
```

Finance interface:

```
159     }
160 
161 //=====Finances=====
162 public function Calc(){
163     $totalInc = CaseDetails::sum('Paid');
164     $totalSal = User::sum('Salary');
165     $totalSpent = OtherExpense::sum('Amount');
166 
167     $totalExp = $totalSal + $totalSpent;
168     $profit = $totalInc - $totalExp;
169     $calc = [$totalInc, $totalExp, $profit];
170     return view('finance.index', compact('calc'));
171 }
172 
173 //case fees ++++++
174 public function AllCasesFees(){
175     $efcases= CaseDetails::latest()->get();
176     return view('finance.backend.cases.all_cases_fees',compact('efcases'));
177 }
178 
179 public function EditFeesCase($id){
180     $efcases=CaseDetails::findOrFail($id);
181     return view('finance.backend.cases.edit_case_fees',compact('efcases'));
182 } // end method
183 
184 public function UpdateCaseFees(Request $request){
185     //Validation
186 
187     $fid=$request->id;
188     //dd($request);
189     CaseDetails::where('id',$fid)->update([
190         'Total_Fees' => $request->Total_Fees,
191         'Paid' => $request->Paid,
192         'Due' => $request->Total_Fees - $request->Paid,
193     ]);
194     //dd($request);
195 }
196 
197 
```

```
1 <?php
2 
3 namespace App\Http\Controllers;
4 
5 use Illuminate\Http\Request;
6 use Illuminate\Support\Facades\Auth;
7 use App\Models\User;
8 use Illuminate\Support\Facades\Hash;
9 use Illuminate\Http\RedirectResponse;
10 use App\Models\CaseDetails;
11 
12 class FinanceController extends Controller
13 {
14     public function FinanceDashboard(){
15         $totalInc = CaseDetails::sum('Paid');
16         return view('finance.index', compact('totalInc'));
17     }
18 
19     public function FinanceLogout(Request $request){
20         // dd($request);
21         Auth::guard('web')->logout();
22 
23         $request->session()->invalidate();
24 
25         $request->session()->regenerateToken();
26 
27         return redirect('/admin/login');
28     } //End method
29 
30     public function FinanceLogin(){
31         return view('admin.admin_login');
32     } //End method
33 
34 
35     public function FinanceProfile(){
36         $id= Auth::user()->id;
37         $profileData= User::find($id);
38         return view('finance.finance_profile_view',compact('profileData'));
39     }
40 }
```

```

43     public function FinanceChangePassword(){
44
45         $id= Auth::user()->id;
46         $profileData= User::find($id);
47
48         return view('finance.finance_change_password',compact('profileData'));
49
50     } //end method
51
52
53     public function FinanceUpdatePassword(Request $request){
54         //Validation
55         $request->validate([
56             'old_password' => 'required',
57             'new_password' => 'required|confirmed'
58         ]);
59
60         //Match The Old Password
61
62         if (!Hash::check($request->old_password,auth::user()->password)) {
63
64             $notification = array(
65                 'message' => 'Old Password Does not Match!!!',
66                 'alert-type' => 'error'
67             );
68             return back()->with($notification);
69
70         }
71
72         //Update the New Password
73
74         User::whereId(auth()->user()->id)->update([
75             'password' => Hash::make($request->new_password)
76         ]);
77
78         $notification = array(
79             'message' => 'Password Change Successfully!!!',
80             'alert-type' => 'success'
81         );
82
83         return back();
84     }

```

```

155 //Finance Group Middleware-----
156 Route::middleware(['auth','role:finance'])->group(function(){
157
158
159
160
161     Route::controller(CaseDetailsController::class)->group(function(){
162
163         //case fees
164         Route::get('/all/casesfees','AllCasesFees')->name('allcase.fees'); #all case list
165         //Route::get('/add/case','AddCase')->name('add.case'); #add case page
166         //Route::post('/edit/assignedcase','EditAssignedCase')->name('editas.case'); #add new case to db
167         Route::post('/update/casefees','UpdateCaseFees')->name('upfees.case'); #update case fees to db
168         Route::get('/edit/casefees/{id}','EditFeesCase')->name('editfees.case'); #edit case fees to db
169         Route::get('/details/casefees/{id}','InfoCaseFees')->name('detailsfees.case'); #case fee details
170         //Route::get('/assigned/cases','AssignedCases')->name('assigned.cases'); #assigned case list
171
172         //employee salaries
173         //Lawyer fees
174         Route::get('/all/lawyerfees','AllLawyerFees')->name('alllaw.fees'); #all employee fees
175         Route::get('/details/lawfees/{id}','InfoLawyerFees')->name('detailslawfees.case'); #law fee details
176         Route::get('/edit/lawyerfees/{id}','EditFeesLawyer')->name('editlawfees.case'); #edit admin fees to db
177         Route::post('/update/lawyerfees','UpdateLawyerFees')->name('uplawyerfees.case'); #update case fees to db
178
179         //Admin fees
180         Route::get('/all/adminfees','AllAdminFees')->name('alladmin.fees'); #all admin fees
181         Route::get('/details/adminfees/{id}','InfoAdminFees')->name('detailsadminfees.case'); #admin fee details
182         Route::get('/edit/adminfees/{id}','EditFeesAdmin')->name('editadminfees.case'); #edit admin fees to db
183         Route::post('/update/adminfees','UpdateAdminFees')->name('upadminfees.case'); #update case fees to db
184
185         //Manager fees
186         Route::get('/all/managefees','AllManageFees')->name('allmanp.fees'); #all managing partner fees
187         Route::get('/details/managefees/{id}','InfoManageFees')->name('detailsmanagefees.case'); #manager fee details
188         Route::get('/edit/managefees/{id}','EditFeesManage')->name('editmanagefees.case'); #edit manager fees to db
189         Route::post('/update/managefees','UpdateManageFees')->name('upmanagefees.case'); #update manager fees to db
190
191         //Finance fees finance
192         Route::get('/all/finfees','AllFinFees')->name('allfin.fees'); #all finance team fees
193         Route::get('/details/financefees/{id}','InfoFinanceFees')->name('detailsfinancefees.case'); #finance fee details
194         Route::get('/edit/financefees/{id}','EditFeesFinance')->name('editfinancefees.case'); #edit finance fees to db
195         Route::post('/update/financefees','UpdateFinanceFees')->name('upfinancefees.case'); #update finance fees to db
196
197     });
198
199 
```

```

173
174 //case fees ++++++
175 public function AllCasesFees(){
176     $fcases= CaseDetails::latest()->get();
177     return view('finance.backend.cases.all_cases_fees',compact('fcases'));
178 }
179
180 public function EditFeesCase($id){
181     $fcases=CaseDetails::findOrFail($id);
182     return view('finance.backend.cases.edit_case_fees',compact('fcases'));
183 } // end method
184
185
186 public function UpdateCaseFees(Request $request){
187     //Validation
188
189     $fid=$request->id;
190     //dd($request);
191     CaseDetails::where('id',$fid)->update([
192         'Total_Fees' => $request->Total_Fees,
193         'Paid' => $request->Paid,
194         'Due' => $request->Total_Fees - $request->Paid,
195     ]);
196
197     $notification = array(
198         'message' => ' Updated Successfully!!!',
199         'alert-type' => 'success'
200     );
201     return redirect()->route('allcase.fees')->with($notification);
202 } //end method
203
204
205 public function InfoCaseFees($iid){
206
207     $dfcases=CaseDetails::findOrFail($iid);
208     return view('finance.backend.cases.details_case',compact('dfcases'));
209
210
211

```

```

215 //All employee ++++++
216
217 //lawyer fees functions ****
218 public function AllLawyerFees(){
219     $alllawfees= User::where('role', "lawyer")->get();
220     return view('finance.backend.employee.lawyer.all_law_fees',compact('alllawfees'));
221 } //end method
222
223
224 public function InfoLawyerFees($ld){
225
226     $dlfcases=User::findOrFail($ld);
227     return view('finance.backend.employee.lawyer.details_law_case',compact('dlfcases'));
228 } //end method
229
230
231 public function EditFeesLawyer($id){
232     $elfcases=User::findOrFail($id);
233     return view('finance.backend.employee.lawyer.edit_lawyer_fees',compact('elfcases'));
234 } //end method
235
236
237 public function UpdateLawyerFees(Request $request){
238     //Validation
239     $fid=$request->id;
240     User::where('id',$fid)->update([
241         'salary' => $request->salary,
242         'position' => $request->position,
243     ]);
244
245     $notification = array(
246         'message' => ' Salary Updated Successfully!!!',
247         'alert-type' => 'success'
248     );
249     return redirect()->route('alllaw.fees')->with($notification);
250 } //end method
251
252
253 //admin fees functions ****
254 public function AllAdminFees(){
255     $alladfees= User::where('role', "admin")->get();
256

```

```

250
251 //admin fees functions ****
252 public function AllAdminFees(){
253     $alladfees= User::where('role', "admin")->get();
254     return view('finance.backend.employee.admin.all_admin_fees',compact('alladfees'));
255 } //end method
256
257 public function InfoAdminFees($ad){
258
259     $dafcases=User::findOrFail($ad);
260     return view('finance.backend.employee.admin.details_admin_case',compact('dafcases'));
261 } //end method
262
263
264 public function EditFeesAdmin($id){
265     $eafcases=CaseDetails::findOrFail($id);
266     return view('finance.backend.employee.admin.edit_admin_fees',compact('eafcases'));
267 } // end method
268
269 public function UpdateAdminFees(Request $request){
270     //Validation
271     $fid=$request->id;
272     User::where('id',$fid)->update([
273         'salary' => $request->salary,
274         'position' => $request->position,
275     ]);
276
277     $notification = array(
278         'message' => ' Salary Updated Successfully!!!',
279         'alert-type' => 'success'
280     );
281     return redirect()->route('alladmin.fees')->with($notification);
282 } //end method
283
284 //Managing Partner fees functions ****
285 public function AllManageFees(){
286
287     $allmnfees= User::where('role', "managing partner")->get();
288
289

```

```

359
360     public function AllOtherExp(){
361         $allexp = OtherExpense::get();
362         return view('finance.backend.otherExp.all_other_exp', compact('allexp'));
363     }
364
365     public function AddExp(){
366         return view('finance.backend.otherExp.add_exp');
367     }
368
369     public function StoreExp(Request $request){
370         OtherExpense::insert([
371             'Expenditure' => $request->Expenditure,
372             'Amount'=> $request->Amount
373         ]);
374
375         $notification = array(
376             'message' => 'Expense Added Successfully!!!',
377             'alert-type' => 'success'
378         );
379
380         return redirect()->route('all.exp')->with($notification);
381     }
382
383 }
384

```

Technology (Framework, Languages)

Framework: Laravel

The Law Firm Internal Management System leverages the Laravel framework, a versatile PHP framework, to build a robust and user-friendly solution. Laravel's MVC architecture structured the codebase, while its routing system enabled intuitive URL creation. The Eloquent ORM simplified database interactions, ensuring data consistency. Blade templating facilitated dynamic UI creation, and Laravel's authentication ensure data security. Leveraging Laravel's ecosystem, the project incorporated additional tools seamlessly. Overall, the integration of Laravel streamlined development, resulting in an efficient and comprehensive system for managing law firm operations.

Programming language: PHP, JavaScript

Markup language: HTML

Style-sheet language: CSS

Database: MySQL

Github Repository

Link: <https://github.com/MaishaHaque/Law-Firm-Management-Website>

Individual Contribution

Name	Contribution
Maisha Haque	Lawyer interface
Nahian Tasnim	Firm Leader interface
Mohammad Nazmus Saquib	Admin/Management interface
Ahmad Zubair	Finance team interface