

EXPT NO : 2 A python program to implement simple

DATE:30/08/2024 Regression using Least Square Method

AIM:

To write a python program to implement Simple linear regression using Least Square Method.

PROCEDURE:

Implementing Simple linear regression using Least Square method using the headbrain dataset involve the following steps:

Step 1: Import Necessary Libraries

First, import the libraries that are essential for data manipulation, visualization, and model building.

```
import pandas as pd

import matplotlib.pyplot as plt

import numpy as np
```

Step 2: Load the Iris Dataset

The HeadBrain dataset can be loaded.

```
data = pd.read_csv('/content/headbrain.csv')
```

Step 3: Data Preprocessing

Ensure the data is clean and ready for modeling. Since the Iris dataset is clean, minimal preprocessing is needed.

```
x,y=np.array(list(data['Head Size(cm^3)']),np.array(list(data['Brain
Weight(grams)'])))

print(x[:5],y[:5])
```

OUTPUT :

⇒ [4512 3738 4261 3777 4177] [1530 1297 1335 1282 1590]

Step 4 :Compute the Least Squares Solution

Apply the least squares formula to find the regression coefficients.

```
def get_line(x,y):  
  
    x_m,y_m = np.mean(x), np.mean(y)  
  
    print(x_m,y_m)  
  
    x_d,y_d=x-x_m,y-y_m  
  
    m = np.sum(x_d*y_d)/np.sum(x_d**2)  
  
    c = y_m - (m*x_m)  
  
    print(m, c)  
  
    return lambda x : m*x+c  
  
lin=get_line(x,y)
```

OUTPUT :

⇒ 3633.9915611814345 1282.873417721519
0.2634293394893993 325.5734210494428

Step 5 : Make Predictions

Use the model to make predictions based on the independent variable.

```
def get_error(line_fuc, x, y):  
  
    y_m = np.mean(y)  
  
    y_pred = np.array([line_fuc(_) for _ in x])  
  
    ss_t = np.sum((y-y_m)**2)  
    ss_r = np.sum((y-y_pred)**2)
```

```

    return 1-(ss_r/ss_t)

get_error(lin, x, y)

from sklearn.linear_model import LinearRegression

x = x.reshape((len(x),1))

reg=LinearRegression()

reg=reg.fit(x, y)

print(reg.score(x, y))

```

OUTPUT :

⇒ 1.0

⇒ 1.0

Step 6 :Visualize the Results

Plot the original data points and the fitted regression line.

```

x=np.linspace(np.min(x)-100,np.max(x)+100,1000)

y=np.array([lin(x) for x in x])

plt.plot(x, y, color='red', label='Regression line')

plt.scatter(x, y, color='green', label='Scatter plot')

plt.xlabel('Head Size(cm^3)')


plt.ylabel('Brain Weight(grams)')

plt.legend()

plt.show()

```

OUTPUT :

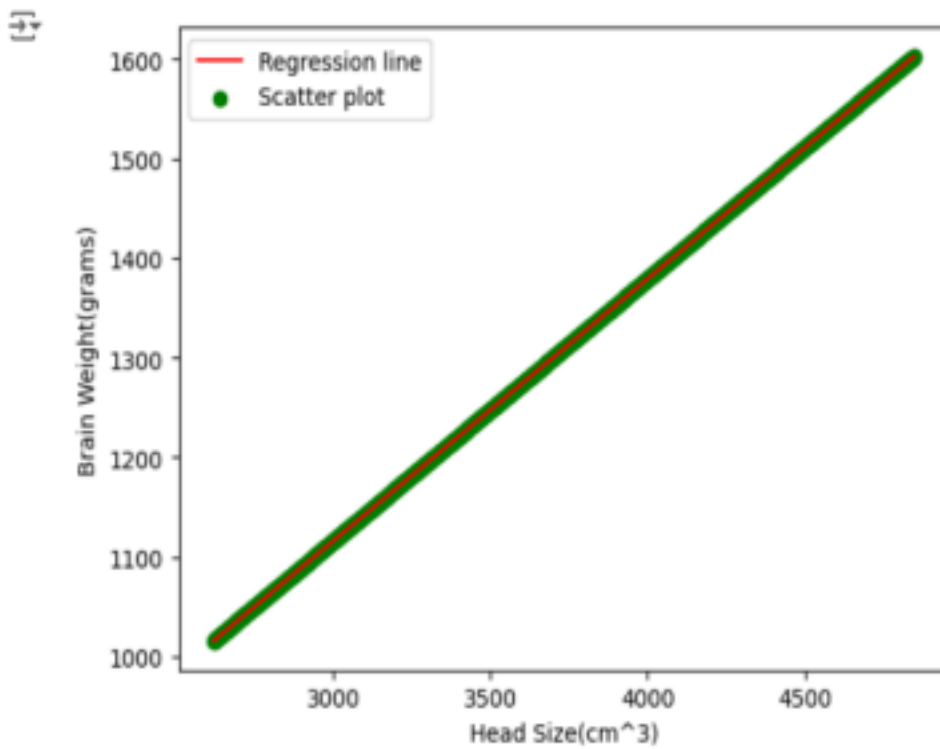

RESULT:

This step-by-step process will help us to implement least square regression models using the HeadBrain dataset and analyze their performance.