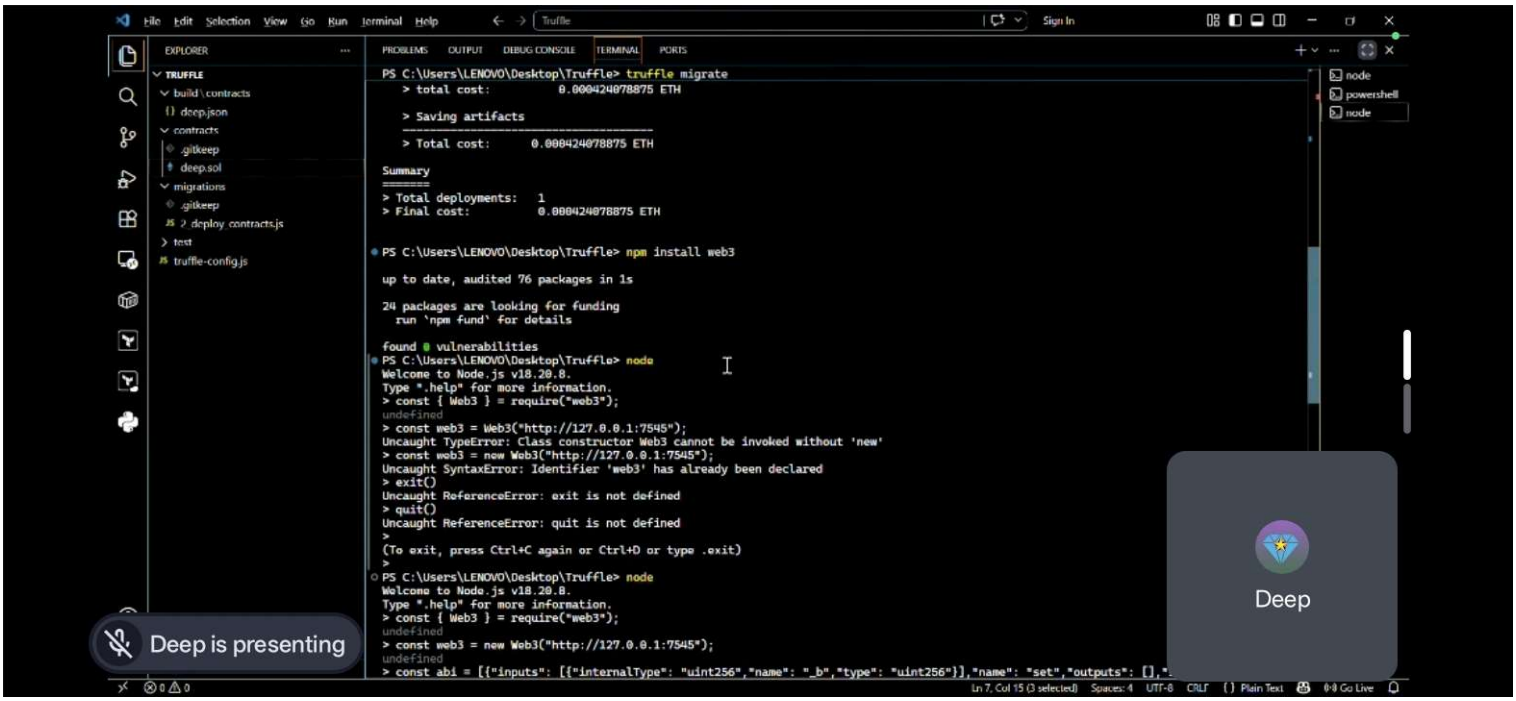
File Edit Selection View Go Run Terminal Help
Truffle
Sign In
EXPLORER
TRUFFLE
build\contracts
deep.json
contracts
.gitkeep
deep.sol
migrations
.gitkeep
2_deploy_contracts.js
test
truffle-config.js
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS
PS C:\Users\LENOVO\Desktop\Truffle> truffle migrate
> total cost: 0.000424078875 ETH
> Saving artifacts
> Total cost: 0.000424078875 ETH
Summary
> Total deployments: 1
> Final cost: 0.000424078875 ETH
PS C:\Users\LENOVO\Desktop\Truffle> npm install web3
up to date, audited 76 packages in 1s
24 packages are looking for funding
run 'npm fund' for details
found 0 vulnerabilities
PS C:\Users\LENOVO\Desktop\Truffle> node
Welcome to Node.js v18.20.8.
Type ".help" for more information.
> const { Web3 } = require("web3");
undefined
> const web3 = Web3("http://127.0.0.1:7545");
Uncaught TypeError: Class constructor Web3 cannot be invoked without 'new'
> const web3 = new Web3("http://127.0.0.1:7545");
Uncaught SyntaxError: Identifier 'web3' has already been declared
> exit()
Uncaught ReferenceError: exit is not defined
> quit()
Uncaught ReferenceError: quit is not defined
>
(To exit, press Ctrl+C again or Ctrl+D or type .exit)
>
PS C:\Users\LENOVO\Desktop\Truffle> node
Welcome to Node.js v18.20.8.
Type ".help" for more information.
> const { Web3 } = require("web3");
undefined
> const web3 = new Web3("http://127.0.0.1:7545");
undefined
> const abi = [{"inputs": [{"internalType": "uint256","name": "_b","type": "uint256"}],"name": "set","outputs": [],"
node
powershell
node
Deep
Deep is presenting
Ln 7, Col 15 (3 selected) Spaces: 4 UTF-8 CRLF {} Plain Text Go Live

File Edit Selection View Go Run Terminal Help

Truffle

Sign In

EXPLORER

TRUFFLE

build \ contracts

{} deep.json

contracts

.gitkeep

deep.sol

migrations

.gitkeep

2_deploy_contracts.js

test

truffle-config.js

truffle-config.js | deep.sol | {} deep.json | 2_deploy_contracts.js

build > contracts > {} deep.json > [] abi

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

node

powershell

node

```
PS C:\Users\LENOVO\Desktop\Truffle> node
> const web3 = new Web3("http://127.0.0.1:7545");
undefined
> const abi = [{"inputs": [{"internalType": "uint256","name": "_b","type": "uint256"}],"name": "set","outputs": [],"stateMutability": "n
onpayable","type": "function"},{"inputs": [],"name": "get","outputs": [{"internalType": "uint256","name": "","type": "uint256"}],"stateM
utability": "view","type": "function","constant": true}];
undefined
> const address = "0x50A153d10CB8722414fAD788826f9E697fA5F1E4";
undefined
> const contract = new web3.eth.Contract(abi, address);
undefined
> await contract.methods.a().call()
Uncaught TypeError: contract.methods.a is not a function
    at REPL33:1:56
> await contract.methods.set(36).send({ from: "0x798c1c3c47EC3666371e41E1A39990dEaf565496", gas: 300000})
{
  transactionHash: '0x1260bc35beaf3afd5a88716df5629649789fd6d9d4b80c1773b8b32fe1306664',
  transactionIndex: 0n,
  blockNumber: 2n,
  blockHash: '0x0b043e1777c55f77292dec9e914af380d15d7a942f6f2f20b3c4e45881304a19',
  from: '0x798c1c3c47ec3666371e41e1a39990deaf565496',
  to: '0x50a153d10cb8722414fad788826f9e697fa5f1e4',
  cumulativeGasUsed: 43702n,
  gasUsed: 43702n,
  logs: [],
  logsBloom: '0x0000000000
```

File Edit Selection View Go Run Terminal Help Truffle Sign In

EXPLORER

TRUFFLE
- build\contracts
  - deep.json
- contracts
  - .gitkeep
  - deep.sol
- migrations
  - .gitkeep
  - 2_deploy_contracts.js
- test
- truffle-config.js

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

```
PS C:\Users\LENOVO\Desktop\Truffle> node
> exit()
Uncaught ReferenceError: exit is not defined
> quit()
Uncaught ReferenceError: quit is not defined
>
(To exit, press Ctrl+C again or Ctrl+D or type .exit)
>
PS C:\Users\LENOVO\Desktop\Truffle> node
Welcome to Node.js v18.20.8.
Type ".help" for more information.
> const { Web3 } = require("web3");
undefined
> const web3 = new Web3("http://127.0.0.1:7545");
undefined
> const abi = [{"inputs": [{"internalType": "uint256","name": "_b","type": "uint256"}],"name": "set","outputs": [],"stateMutability": "n
onpayable","type": "function"},{"inputs": [],"name": "get","outputs": [{"internalType": "uint256","name": "","type": "uint256"}],"stateM
utability": "view","type": "function","constant": true}];
undefined
> const address = "0x50A153d10CB8722414FAD788826f9E697fA5F1E4";
undefined
> const contract = new web3.eth.Contract(abi, address);
undefined
> await contract.methods.a().call()
Uncaught TypeError: contract.methods.a is not a function
    at REPL33:1:56
> await contract.methods.set(36).send({ from: "0x798c1c3c47EC3666371e41E1A39990dEaf565496", gas: 300000})
{
  transactionHash: '0x1260bc35beaf3afd5a88716df562964978 9fd6d9d4b80c1773b8b32fe130666d',
  transactionIndex: 0n,
  blockNumber: 2n,
  blockHash: '0x0b043e1777c55477292dec9a914af388d15d7a942f6f2f20b3c4e45881384a19',
  from: '0x798c1c3c47ec3666371e41e1a39990deaf565496',
  to: '0x50a153d10cb8722414fad788826f9e697fa5f1e4',
  cumulativeGasUsed: 43702n,
  gasUsed: 43702n,
  logs: [],
  logsBloom: '0x0000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000
0000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000
0000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000
0000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000
  status: 1n,
  effectiveGasPrice: 3269714066n,
  type: 2n
}
```

node
powershell
node

Deep is presenting

Deep

Ln 7, Col 15 (3 selected) Spaces: 4 UTF-8 CRLF {} Plain Text Go Live

Q1 Perform and write web3 program

① follow all Steps of Program 2

② truffle compile => build

③ truffle migrate => contract address, account } hash value

④ npm install web3

⑤ node => enter into node

> const {Web3} = require("web3");

> const web3 = new Web3("http://127.0.0.1:7545");

Ganache http

Take this code from build api

> const abi = [. . .]

> const address = "0x"

> const contract = new web3.eth.Contract(abi, address);

> await contract.methods.set(36).send({
from: "Take the hash value of Account",
gas: 300000})

(5) terminal
↳ write command.
↳ truffle compile. } build folder will create
↳ truffle migrate.

(P3 Q3) Metamask installation / It is ~~active~~ only used in Online when PC is there.
↳ It is used Deploy contract like ganache
↳ It is used to set ~~co~~ wallet.

Step ① Open chrome install Metamask.
Step ② write metamask Install.
Step ③ click link ⇒ select Browse ⇒ Click Add to ch
⇒ Create new wallet ⇒ google Id

(P4) Q4 write Smart contract using Metamask and Remix

> contracts → file
> deep.sol → filename

```
// SPDX-License-Identifier: MIT
// SPDX-License-Identifier: UNLICENSED

pragma solidity ^0.8.0; #JS version

contract deep {
    uint256 private a;
    function set(uint256 _value) public {
        a = _value;
    }
}
```

filename or contract name should same

Open Source

> migrations → filename
> 2_deploy_contracts.js

code
```
Const a = artifacts.require("deep")

module.exports = function (deployer) {
    deployer.deploy(a)
}
```

code
> truffle.config.js

* make changes in in

network → development → host
Port → take Port no from ganache.

compiler → Setting → evmVersion: "London"