



1. Learning Git – Step by Step with Makarand

- **Remote repository is already created, and you want to clone it (section#1)**
-

1. Consider we have already created git repository (e.g. <https://github.com/MakarandBhoir/LearningGitRepository1.git>)
2. Open cmd in any folder. Clone the repository you have created.

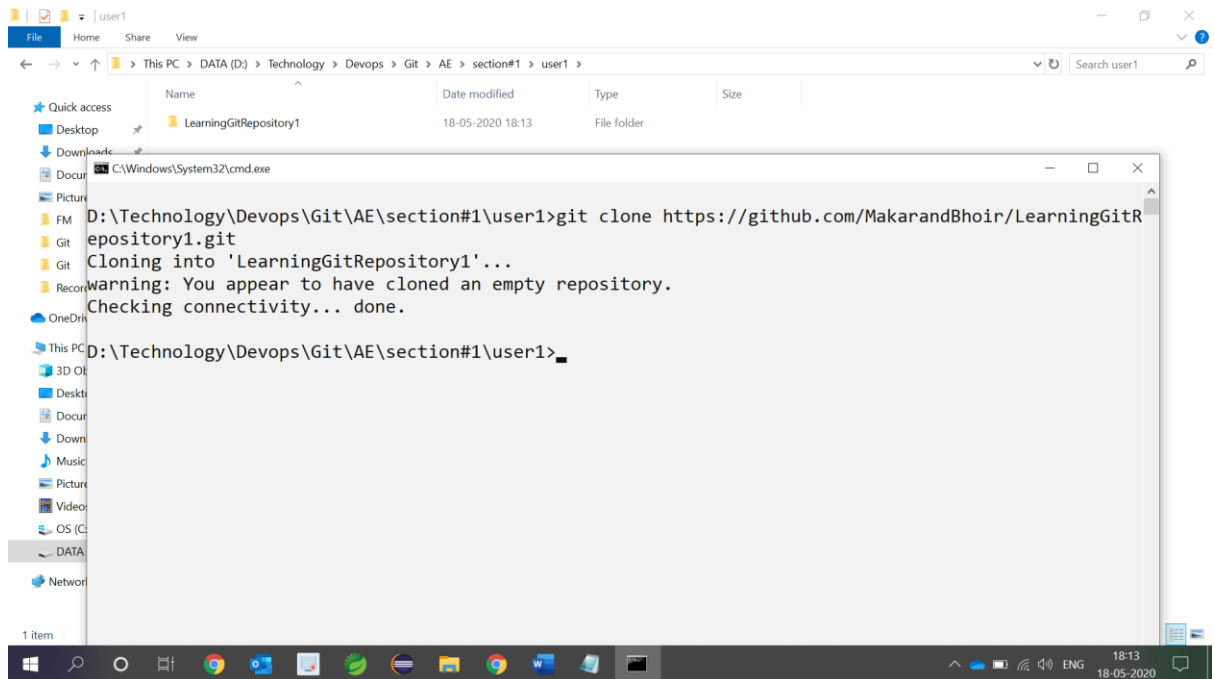


3. Add any file to working repository (folder). We are adding ReadMe.txt to LearningGitRepository1 folder

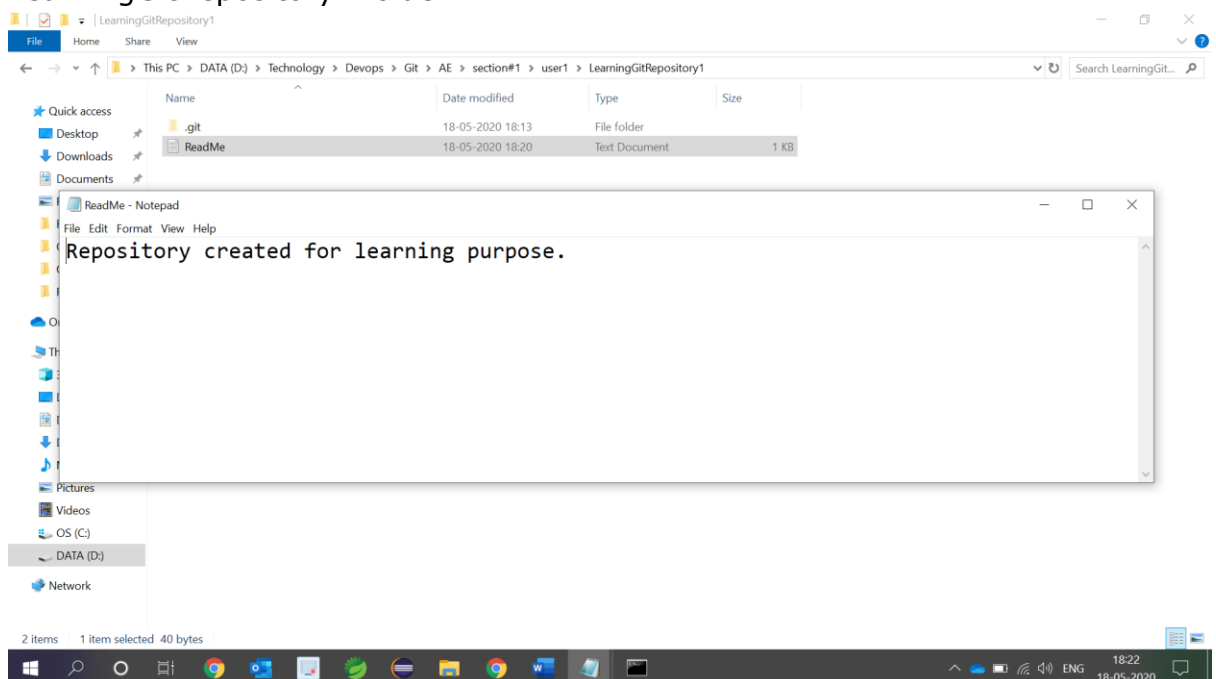

2. Learning Git – Step by Step with Makarand

4. Check whether any untrack file present in working tree (in this case we have one ReadMe.txt file)

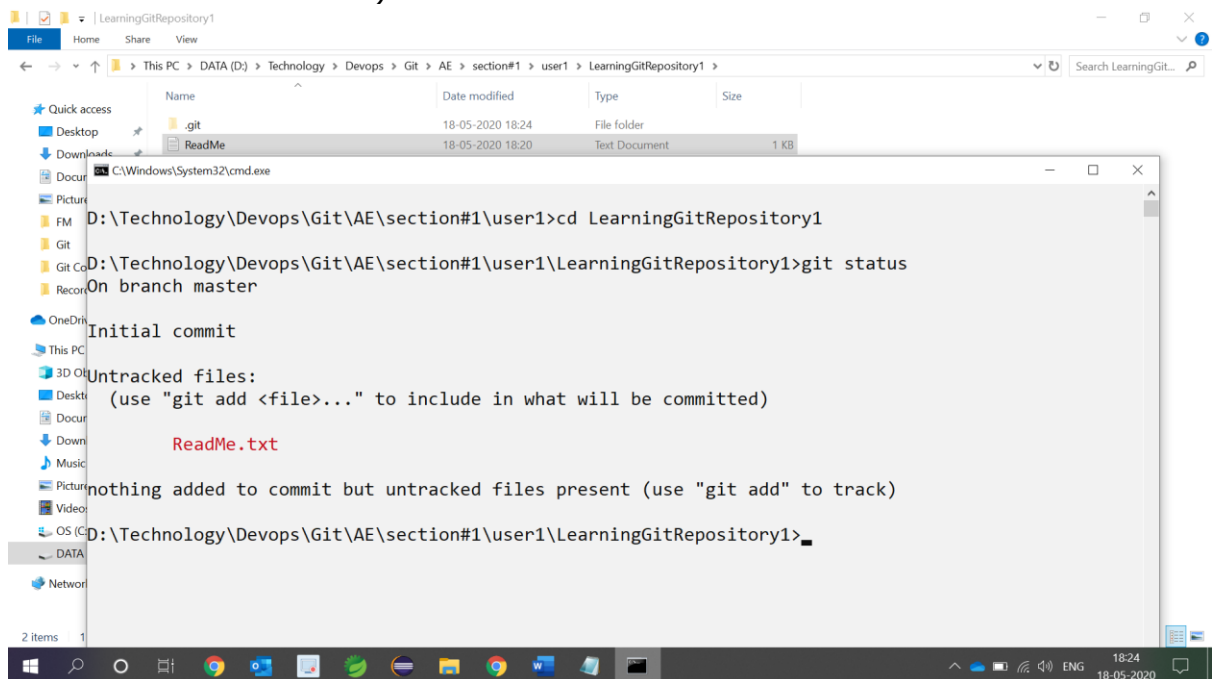


```
D:\Technology\Devops\Git\AE\section#1\user1>cd LearningGitRepository1
D:\Technology\Devops\Git\AE\section#1\user1\LearningGitRepository1>git status
On branch master
Initial commit
Untracked files:
  (use "git add <file>..." to include in what will be committed)

        ReadMe.txt

nothing added to commit but untracked files present (use "git add" to track)
D:\Technology\Devops\Git\AE\section#1\user1\LearningGitRepository1>
```

5. Add the files to staging area using following command (git add filename)

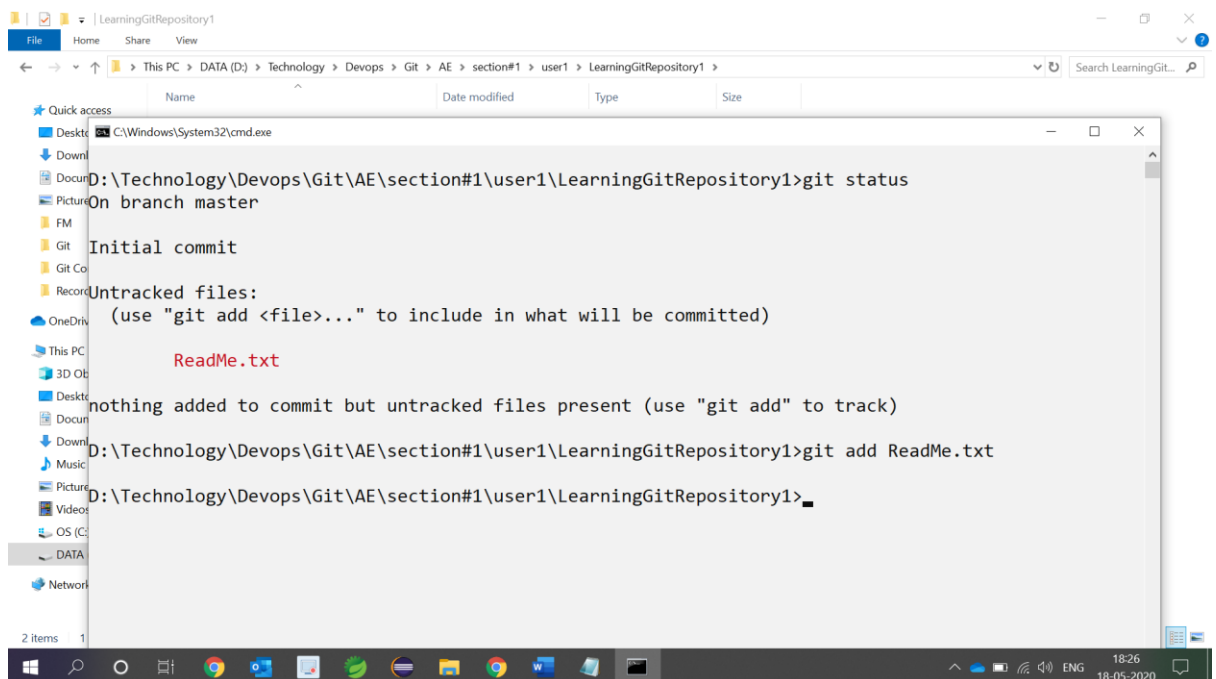


```
D:\Technology\Devops\Git\AE\section#1\user1\LearningGitRepository1>git status
On branch master
Initial commit
Untracked files:
  (use "git add <file>..." to include in what will be committed)

        ReadMe.txt

nothing added to commit but untracked files present (use "git add" to track)
D:\Technology\Devops\Git\AE\section#1\user1\LearningGitRepository1>git add ReadMe.txt
D:\Technology\Devops\Git\AE\section#1\user1\LearningGitRepository1>
```

3. Learning Git – Step by Step with Makarand

6. To save the changes to local repository use (git commit -m "message")

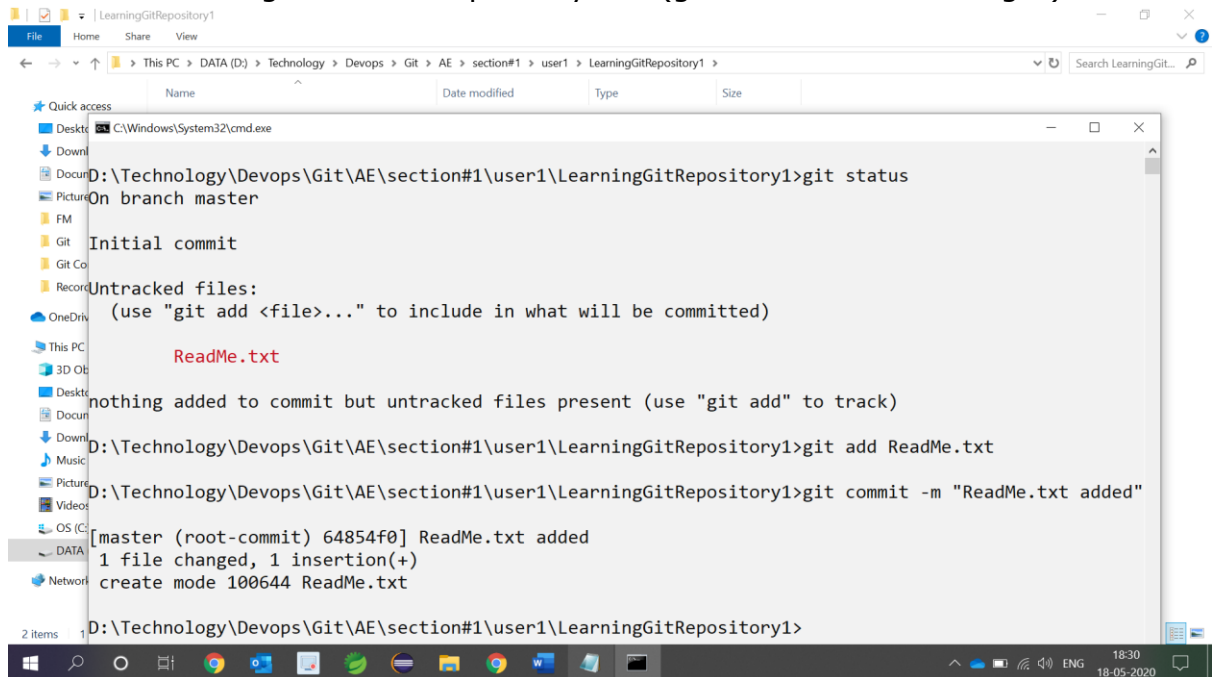

```
D:\Technology\Devops\Git\AE\section#1\user1\LearningGitRepository1>git status
On branch master


Initial commit

Untracked files:
  (use "git add <file>..." to include in what will be committed)

        ReadMe.txt

nothing added to commit but untracked files present (use "git add" to track)
D:\Technology\Devops\Git\AE\section#1\user1\LearningGitRepository1>git add ReadMe.txt
D:\Technology\Devops\Git\AE\section#1\user1\LearningGitRepository1>git commit -m "ReadMe.txt added"
[master (root-commit) 64854f0] ReadMe.txt added
1 file changed, 1 insertion(+)
create mode 100644 ReadMe.txt
D:\Technology\Devops\Git\AE\section#1\user1\LearningGitRepository1>
```


7. To save the changes to remote repository use (git push). First time you may have to enter git credential

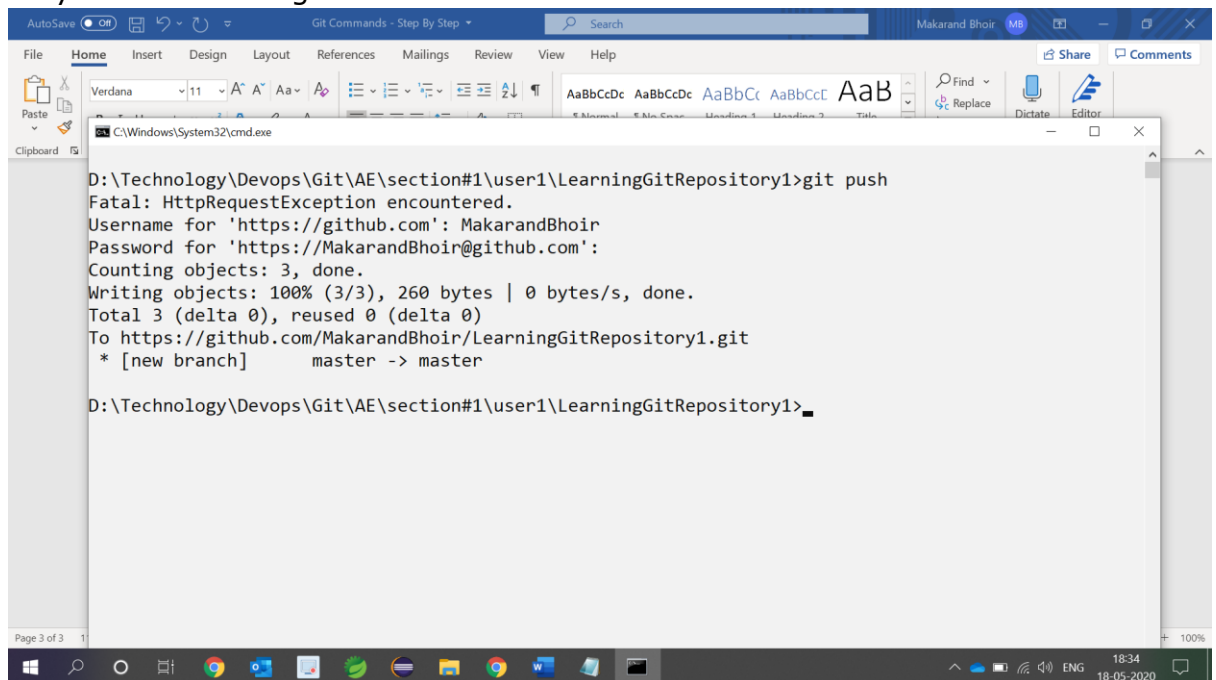

```
D:\Technology\Devops\Git\AE\section#1\user1\LearningGitRepository1>git push
Fatal: HttpRequestException encountered.
Username for 'https://github.com': MakarandBhoir
Password for 'https://MakarandBhoir@github.com':
Counting objects: 3, done.
Writing objects: 100% (3/3), 260 bytes | 0 bytes/s, done.
Total 3 (delta 0), reused 0 (delta 0)
To https://github.com/MakarandBhoir/LearningGitRepository1.git
 * [new branch]      master -> master
D:\Technology\Devops\Git\AE\section#1\user1\LearningGitRepository1>
```

4. Learning Git – Step by Step with Makarand


8. Go to github and confirm the change that we have made

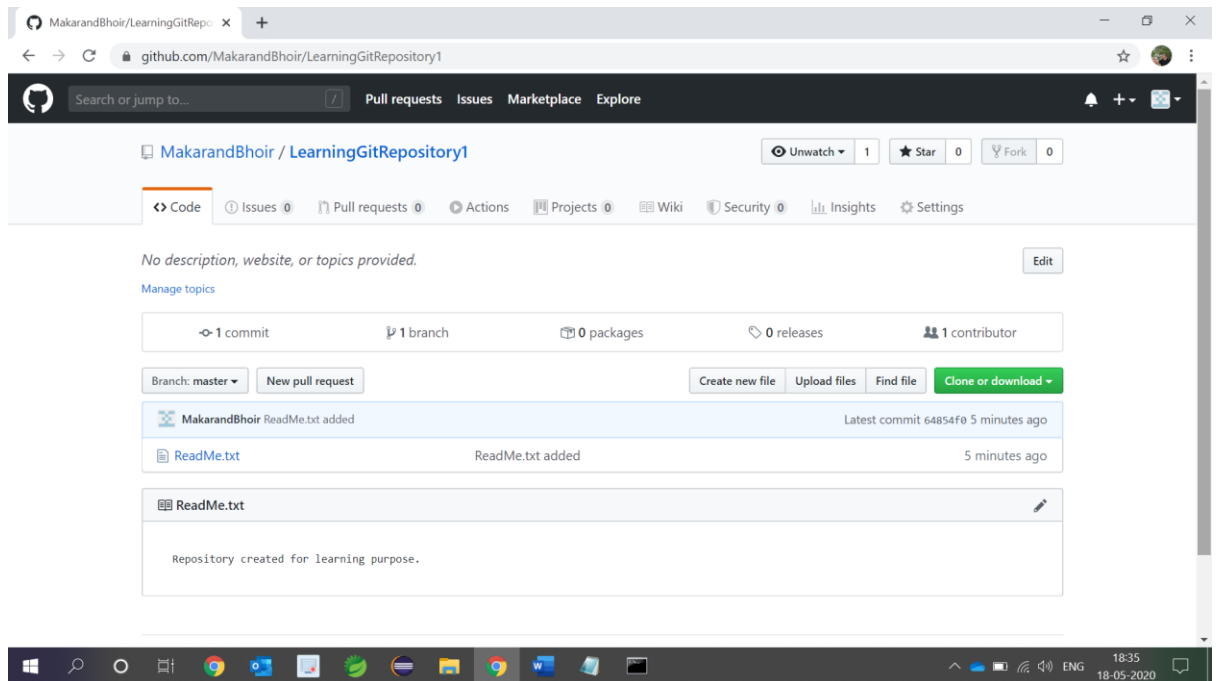


5. Learning Git – Step by Step with Makarand

- **Create first local repository and then push the contents to remote repository (section#2)**

1. Create empty local repository in any folder

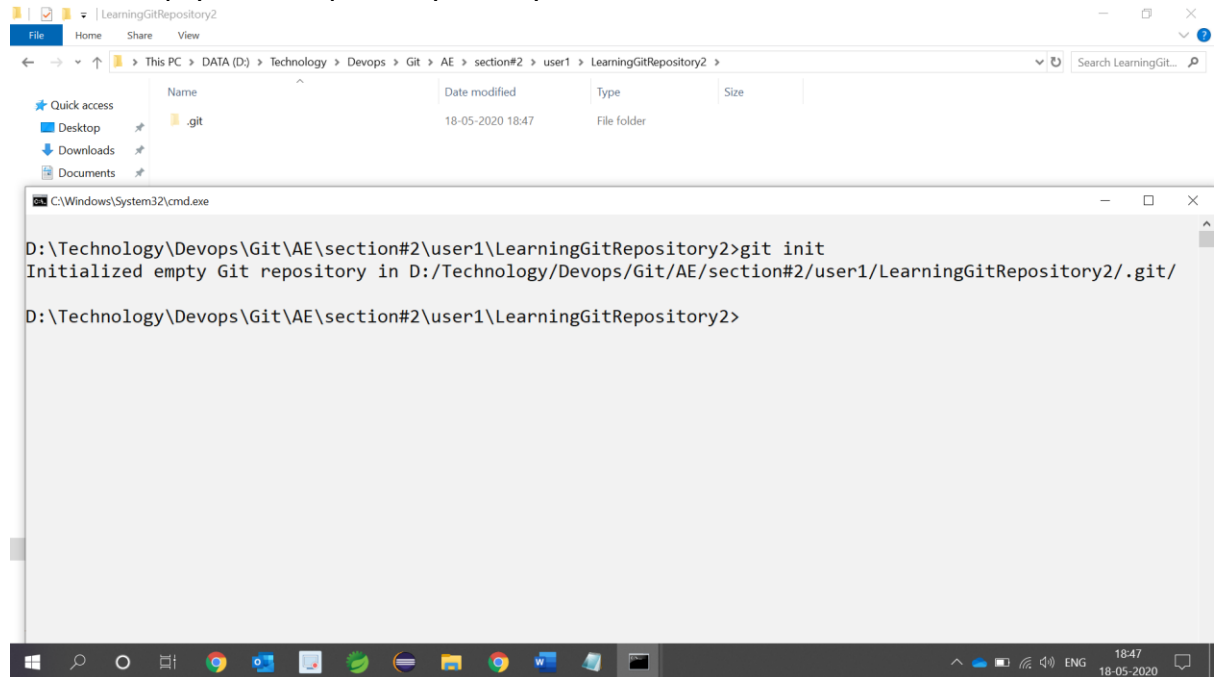


2. Add ReadMe.txt file to LearningGitRepository2 folder

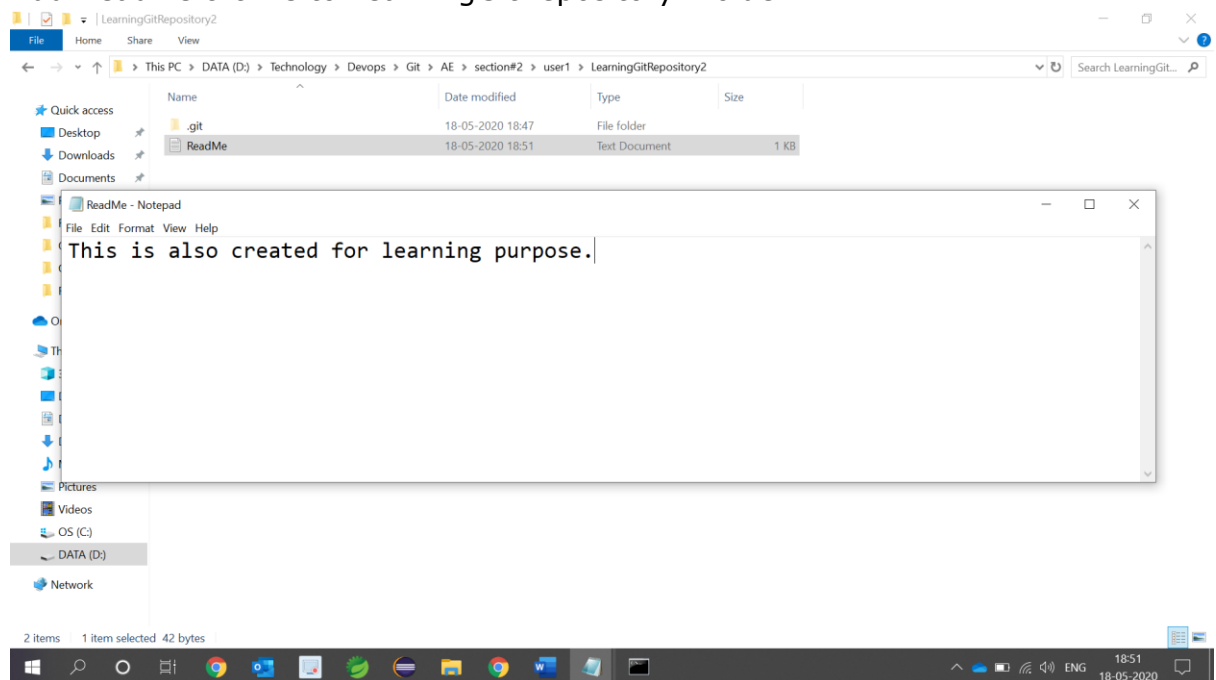

3. Add file to staging area using (git add .)

6. Learning Git – Step by Step with Makarand

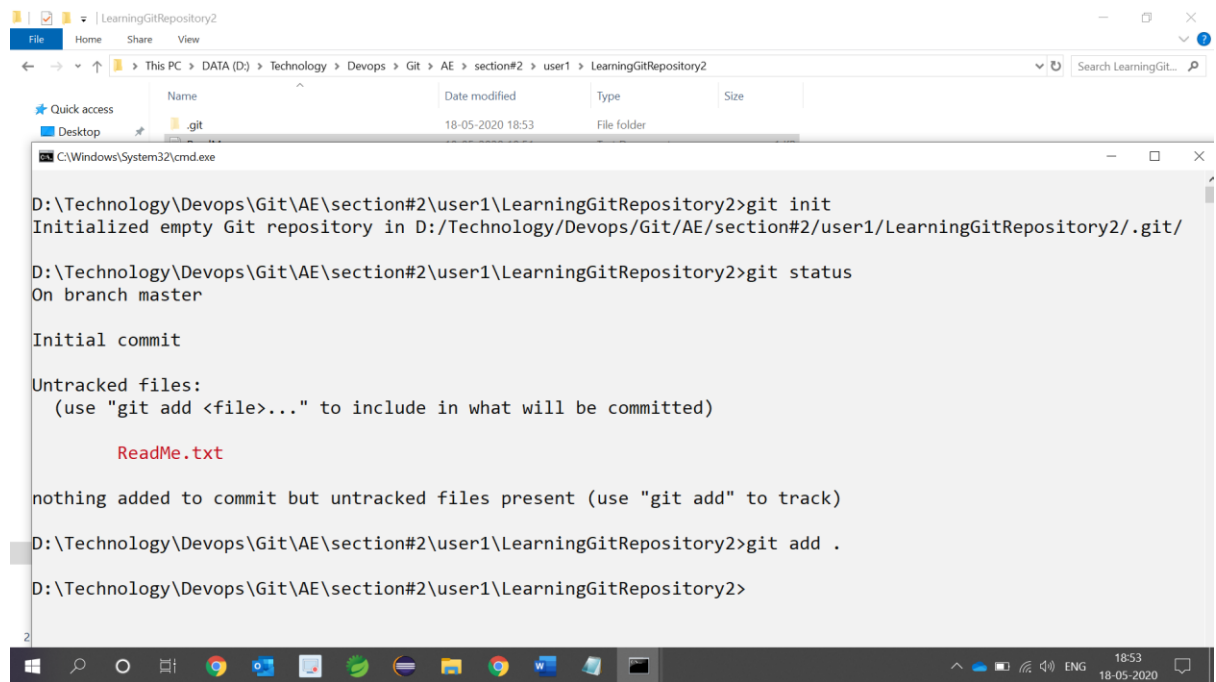

The screenshot shows a Windows File Explorer window with the address bar set to 'D:\Technology\Devops\Git\AE\section#2\user1\LearningGitRepository2'. The file list shows a folder named '.git' with a date modified of '18-05-2020 18:53'. Overlaid on this is a Command Prompt window with the following text:

```
D:\Technology\Devops\Git\AE\section#2\user1\LearningGitRepository2>git init
Initialized empty Git repository in D:/Technology/Devops/Git/AE/section#2/user1/LearningGitRepository2/.git/

D:\Technology\Devops\Git\AE\section#2\user1\LearningGitRepository2>git status
On branch master

Initial commit

Untracked files:
  (use "git add <file>..." to include in what will be committed)


        ReadMe.txt

nothing added to commit but untracked files present (use "git add" to track)

D:\Technology\Devops\Git\AE\section#2\user1\LearningGitRepository2>git add .

D:\Technology\Devops\Git\AE\section#2\user1\LearningGitRepository2>
```

4. Save the file(s) to local repository using (git commit -m "message")

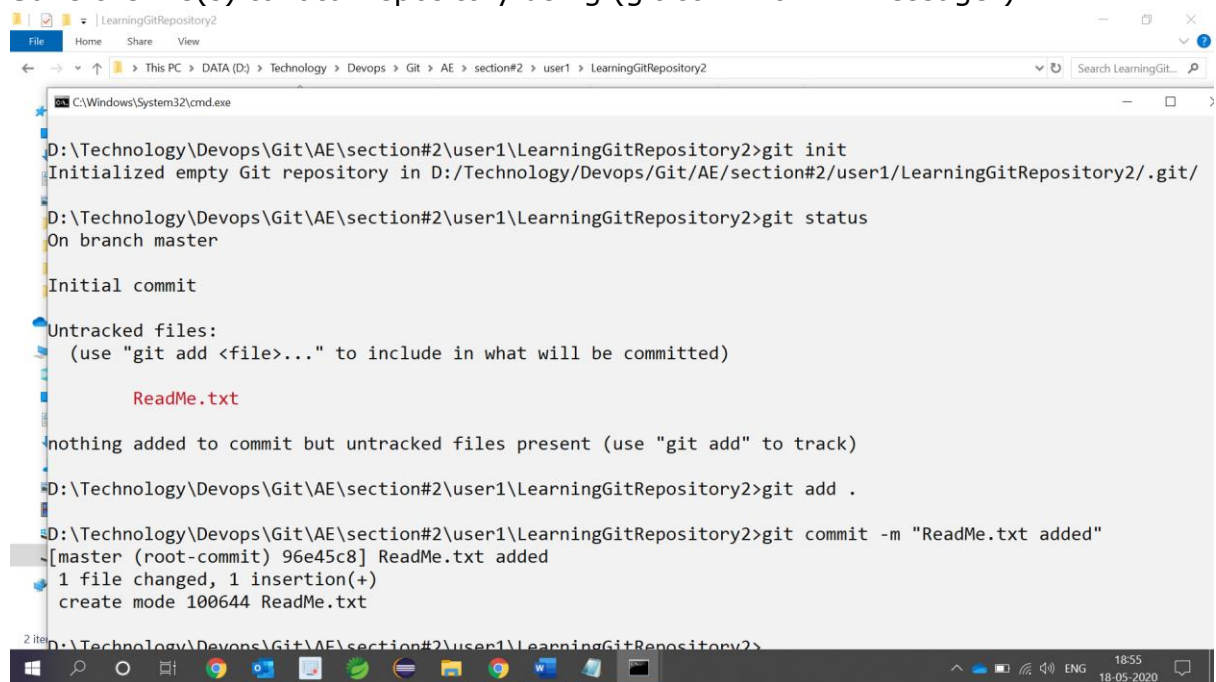

The screenshot shows the same Windows File Explorer window as before. The Command Prompt window now shows the following text:

```
D:\Technology\Devops\Git\AE\section#2\user1\LearningGitRepository2>git init
Initialized empty Git repository in D:/Technology/Devops/Git/AE/section#2/user1/LearningGitRepository2/.git/

D:\Technology\Devops\Git\AE\section#2\user1\LearningGitRepository2>git status
On branch master

Initial commit

Untracked files:
  (use "git add <file>..." to include in what will be committed)

        ReadMe.txt

nothing added to commit but untracked files present (use "git add" to track)


D:\Technology\Devops\Git\AE\section#2\user1\LearningGitRepository2>git add .

D:\Technology\Devops\Git\AE\section#2\user1\LearningGitRepository2>git commit -m "ReadMe.txt added"
[master (root-commit) 96e45c8] ReadMe.txt added
1 file changed, 1 insertion(+)
create mode 100644 ReadMe.txt


D:\Technology\Devops\Git\AE\section#2\user1\LearningGitRepository2>
```

5. Create git remote repository (<http://github.com>). Log In and create one repository

7. Learning Git – Step by Step with Makarand

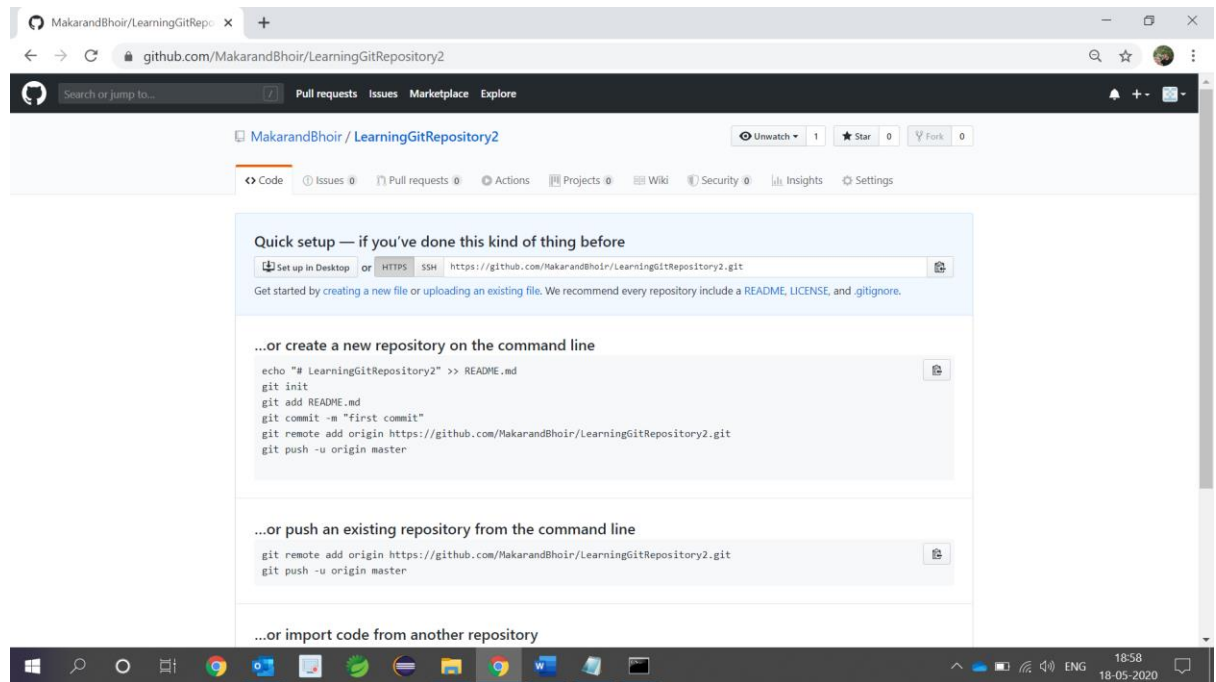


6. Set push url to <https://github.com/MakarandBhoir/LearningGitRepository2.git>.

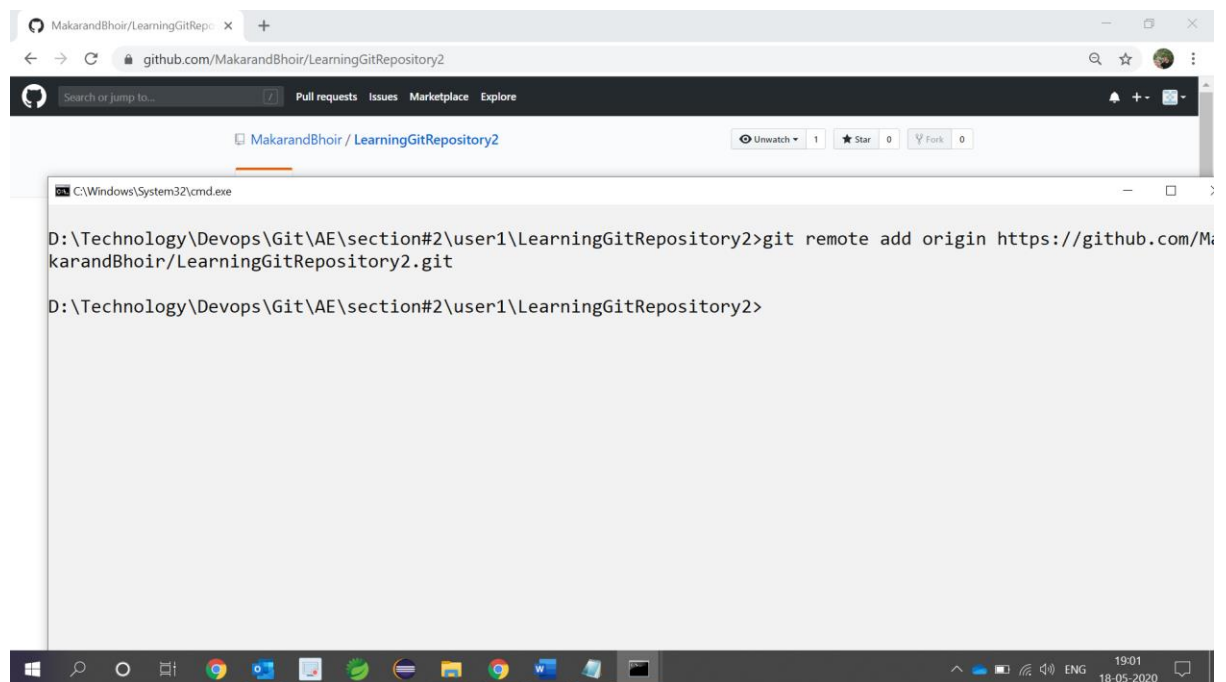

7. Push the files to remote repository using (git push)

8. Learning Git – Step by Step with Makarand

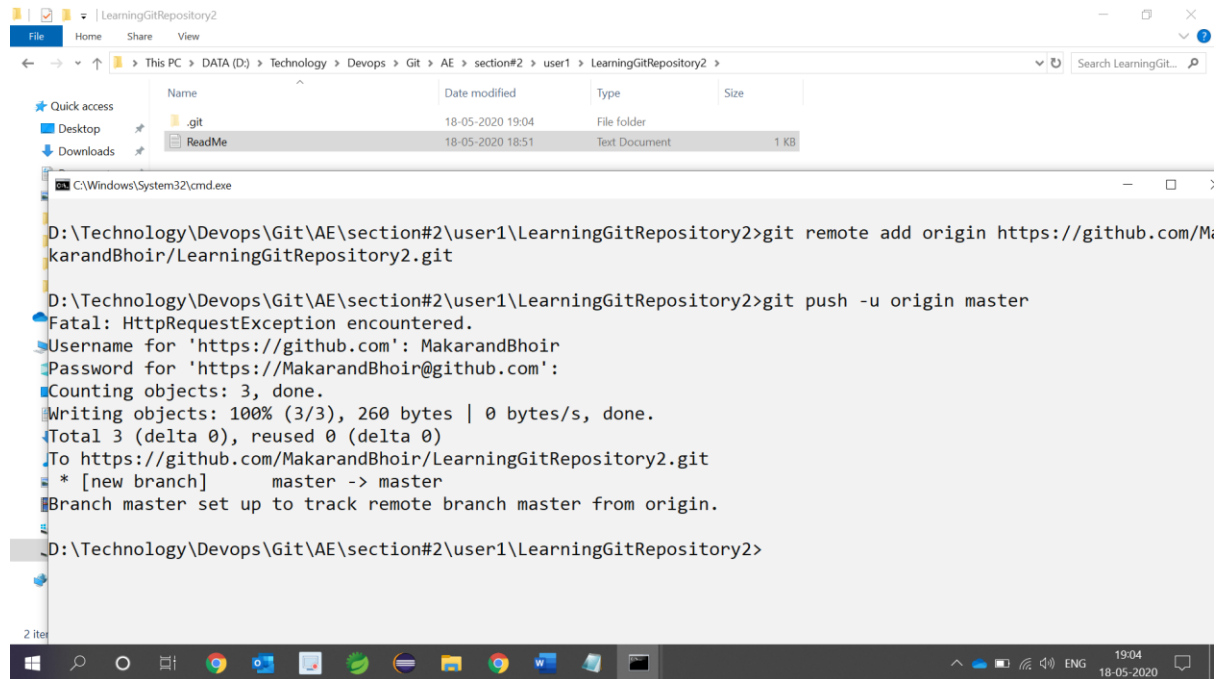

The screenshot shows a Windows File Explorer window titled 'LearningGitRepository2' with a table of files:

Name	Date modified	Type	Size
.git	18-05-2020 19:04	File folder	
ReadMe	18-05-2020 18:51	Text Document	1 KB


Below the File Explorer is a Command Prompt window showing the following commands and output:

```
D:\Technology\Devops\Git\AE\section#2\user1\LearningGitRepository2>git remote add origin https://github.com/MakarandBhoir/LearningGitRepository2.git

D:\Technology\Devops\Git\AE\section#2\user1\LearningGitRepository2>git push -u origin master
Fatal: HttpRequestException encountered.
Username for 'https://github.com': MakarandBhoir
Password for 'https://MakarandBhoir@github.com':
Counting objects: 3, done.
Writing objects: 100% (3/3), 260 bytes | 0 bytes/s, done.
Total 3 (delta 0), reused 0 (delta 0)
To https://github.com/MakarandBhoir/LearningGitRepository2.git
 * [new branch]      master -> master
Branch master set up to track remote branch master from origin.

D:\Technology\Devops\Git\AE\section#2\user1\LearningGitRepository2>
```

8. Confirm the contents of github remote repository

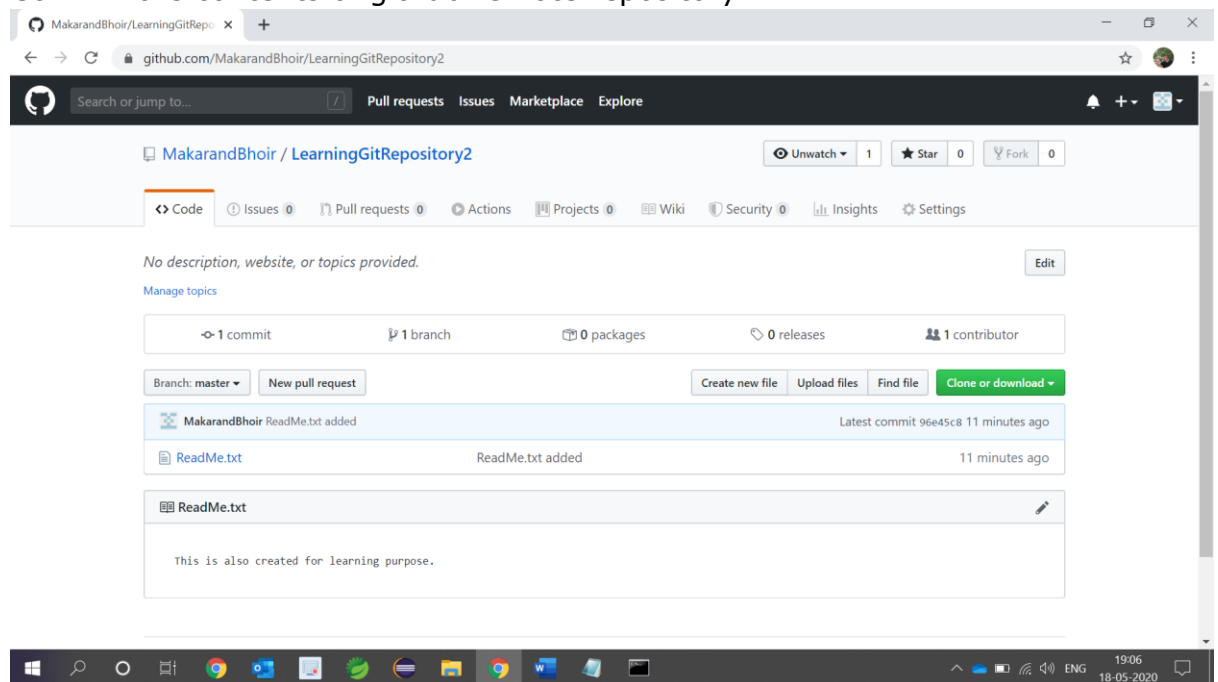


The screenshot shows the GitHub repository page for 'MakarandBhoir / LearningGitRepository2'. The page includes a search bar, navigation tabs (Code, Issues, Pull requests, Actions, Projects, Wiki, Security, Insights, Settings), and repository statistics (1 commit, 1 branch, 0 packages, 0 releases, 1 contributor). The 'Code' tab is selected, showing the 'master' branch and a 'New pull request' button. The repository content is displayed as a list of files, including 'ReadMe.txt' and 'ReadMe.txt'. The 'ReadMe.txt' file is expanded, showing the text: 'This is also created for learning purpose.'


9. Learning Git – Step by Step with Makarand

▪ Working with branch

1. Create new branch called as new_branch (git branch new_branch)

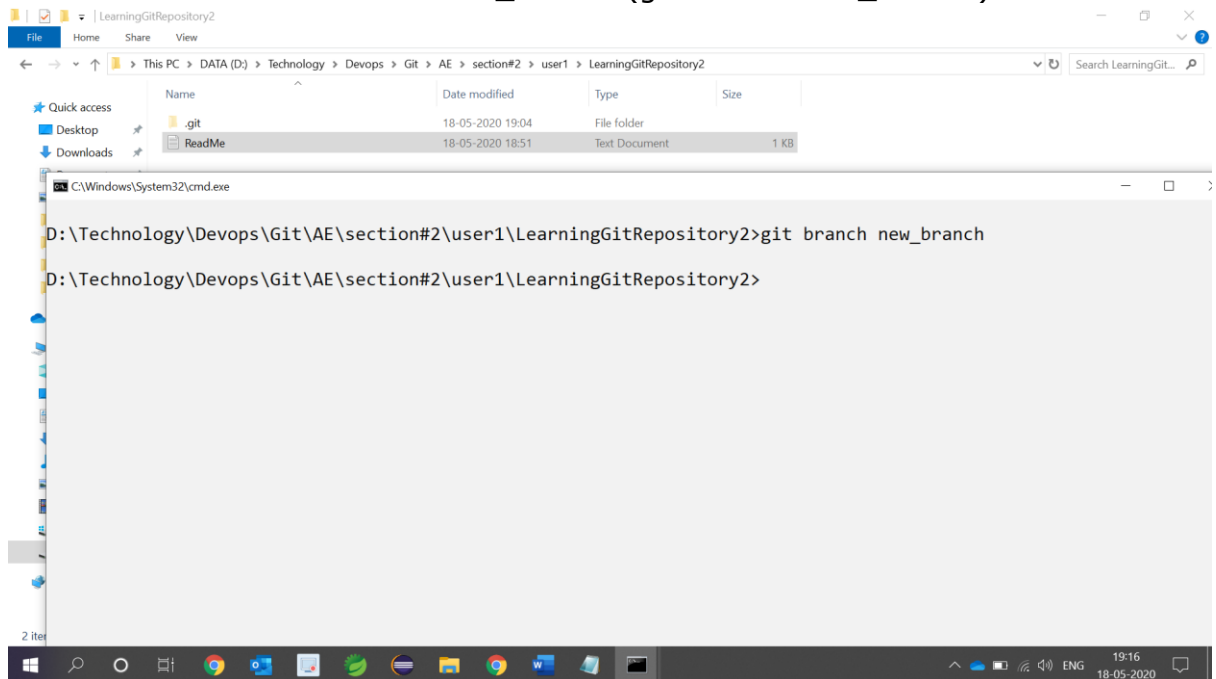


2. Checkout new_branch using (git checkout new_branch)

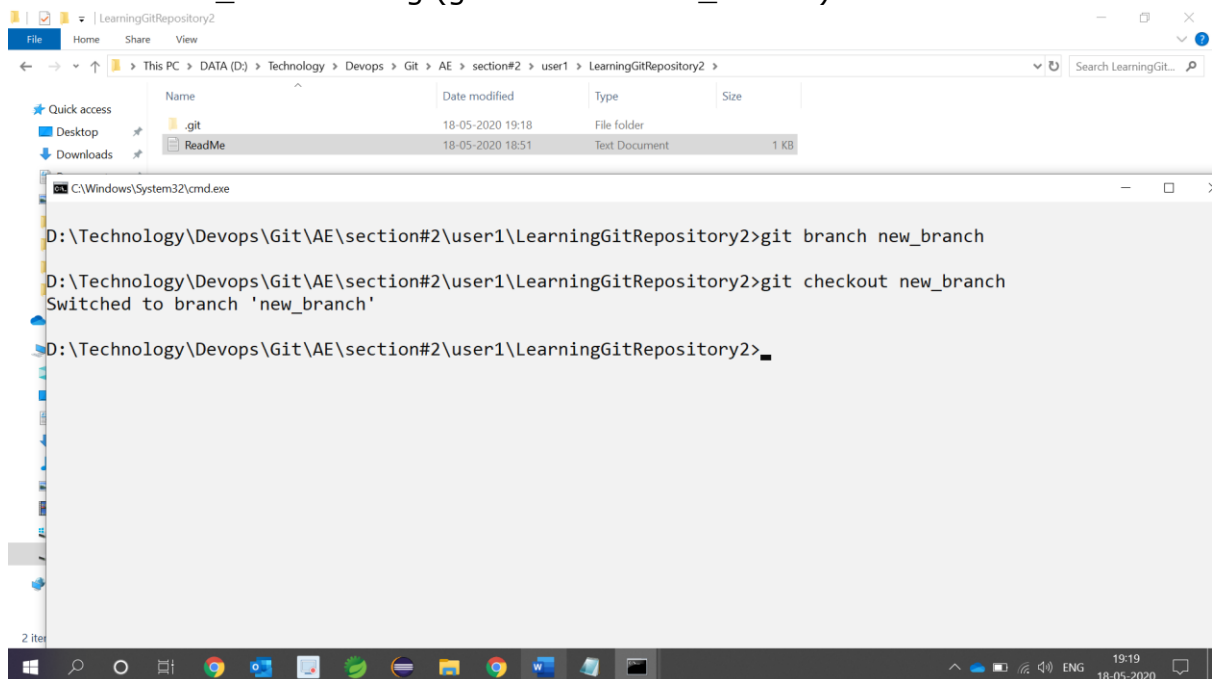


3. Add one new file to new_branch

10. Learning Git – Step by Step with Makarand

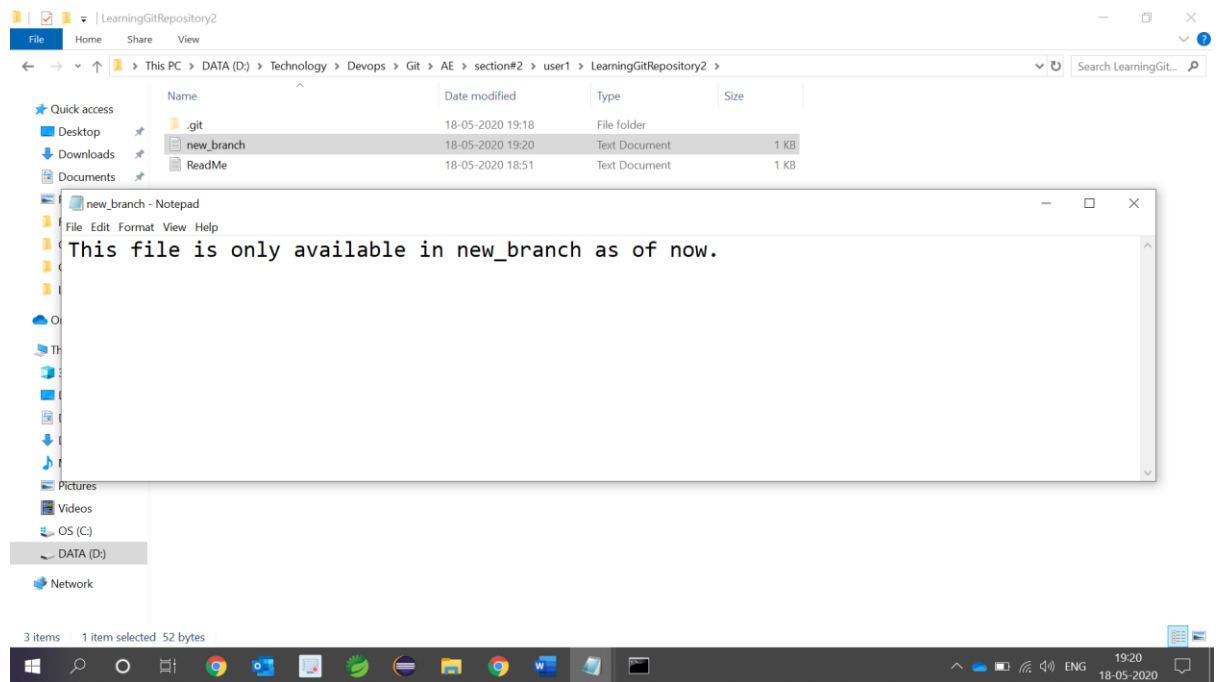


4. Add the file to staging area and local repository

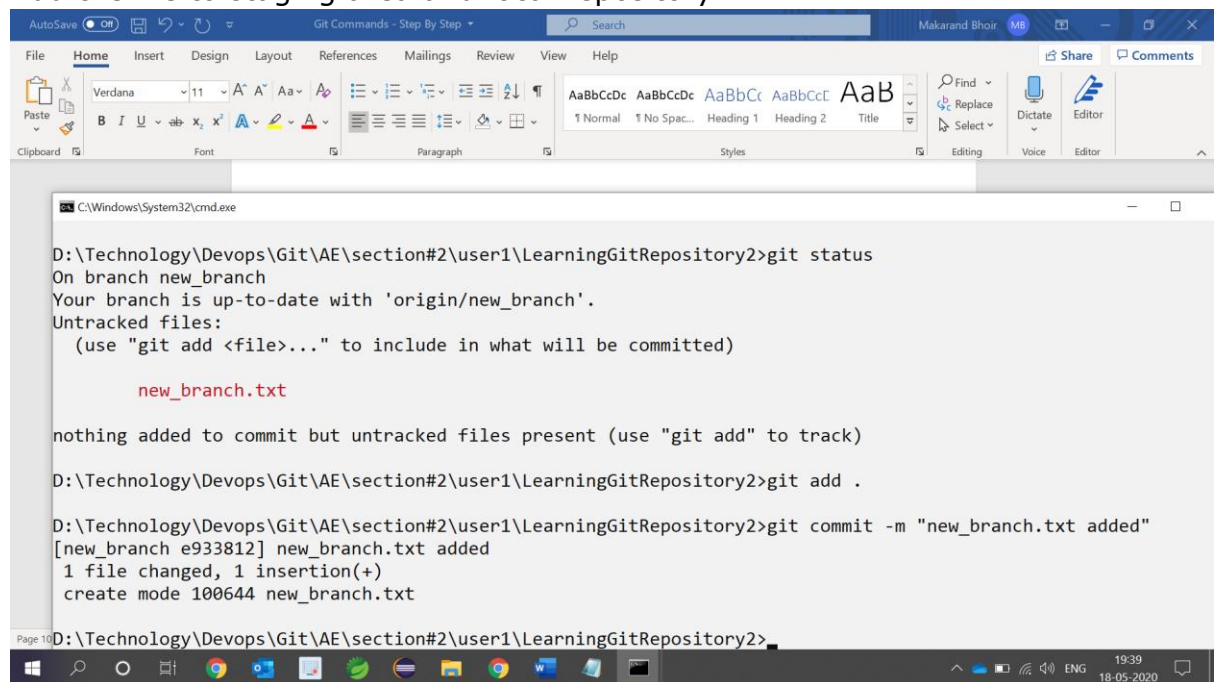

5. Push the branch to remote (github) location, so new_branch will be available using (git push -u origin new_branch)

11. Learning Git – Step by Step with Makarand

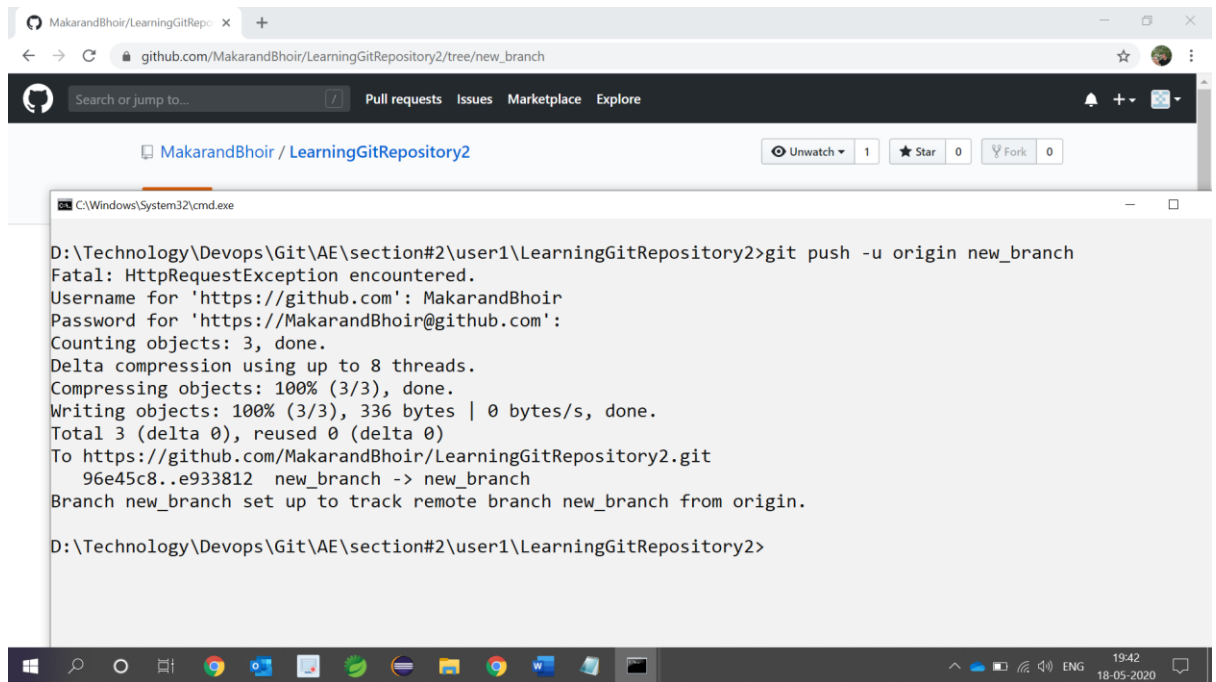


```
C:\Windows\System32\cmd.exe

D:\Technology\Devops\Git\AE\section#2\user1\LearningGitRepository2>git push -u origin new_branch
Fatal: HttpRequestException encountered.
Username for 'https://github.com': MakarandBhoir
Password for 'https://MakarandBhoir@github.com':
Counting objects: 3, done.
Delta compression using up to 8 threads.
Compressing objects: 100% (3/3), done.
Writing objects: 100% (3/3), 336 bytes | 0 bytes/s, done.
Total 3 (delta 0), reused 0 (delta 0)
To https://github.com/MakarandBhoir/LearningGitRepository2.git
 96e45c8..e933812 new_branch -> new_branch
Branch new_branch set up to track remote branch new_branch from origin.


D:\Technology\Devops\Git\AE\section#2\user1\LearningGitRepository2>
```

6. Confirm branch is added to github

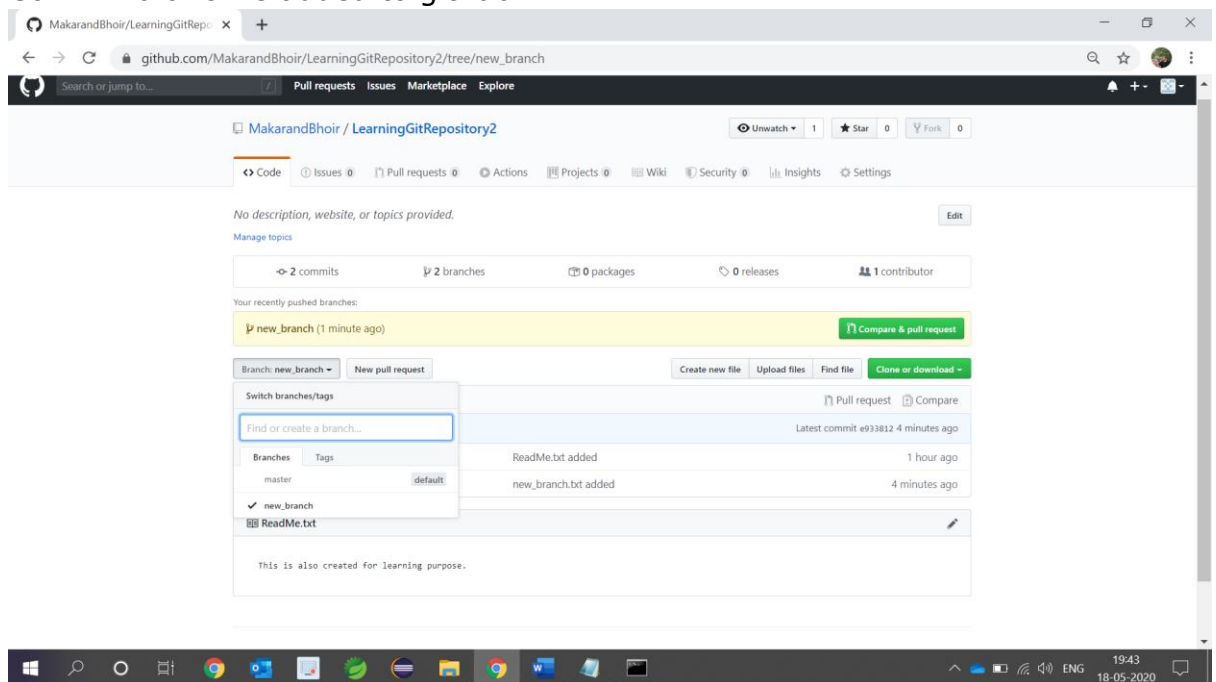


7. This point our active branch is new_branch and there are two files present

12. Learning Git – Step by Step with Makarand

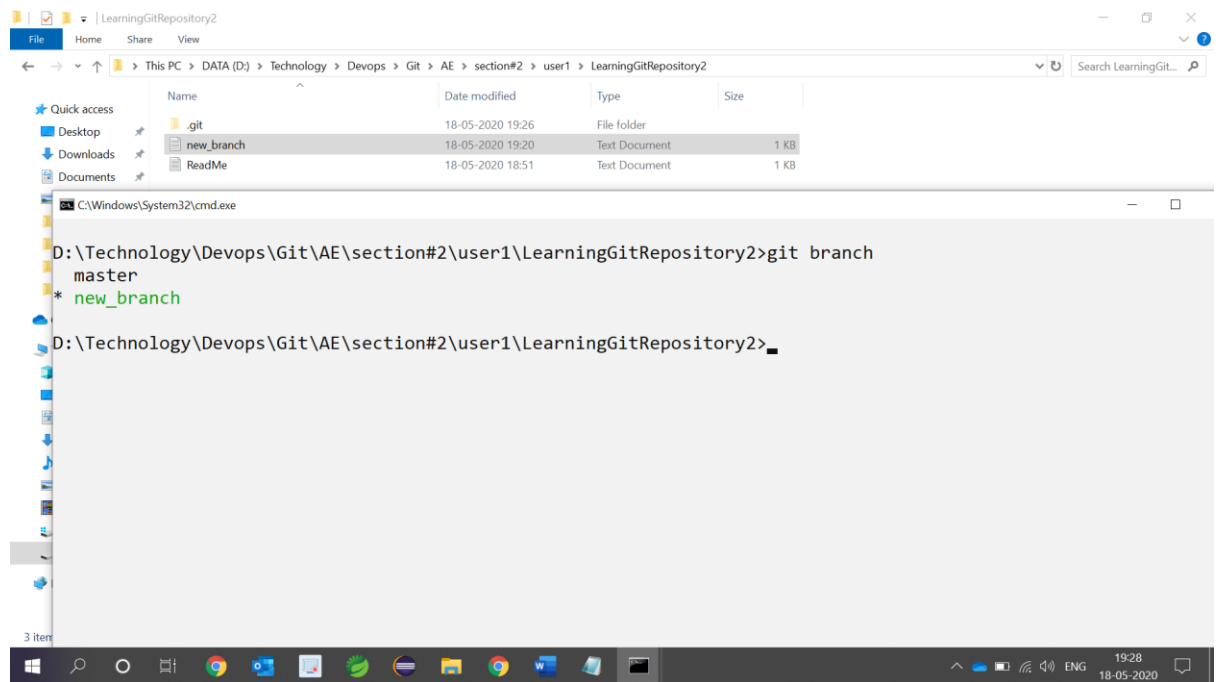


8. Switch to the master branch using (git checkout master) and you should see only ReadMe.txt

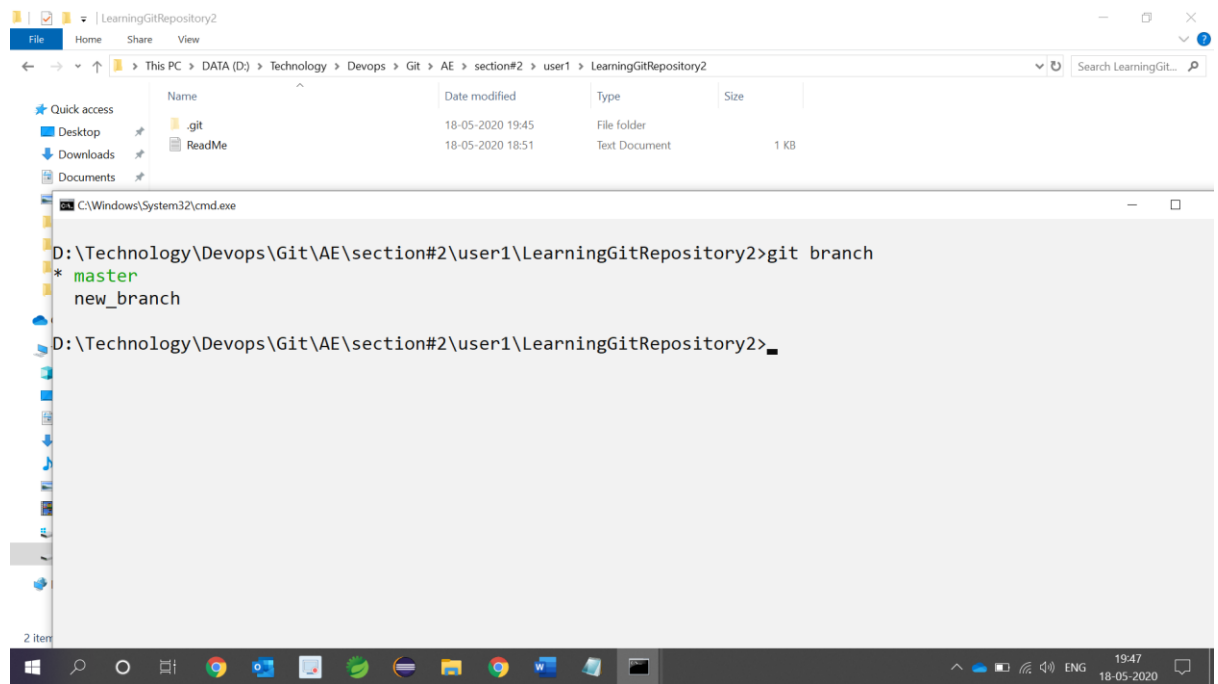

9. Merge new_branch to the master branch (the effect will happen in local repository) and you should see both file in local folder but not in the remote.

13. Learning Git – Step by Step with Makarand

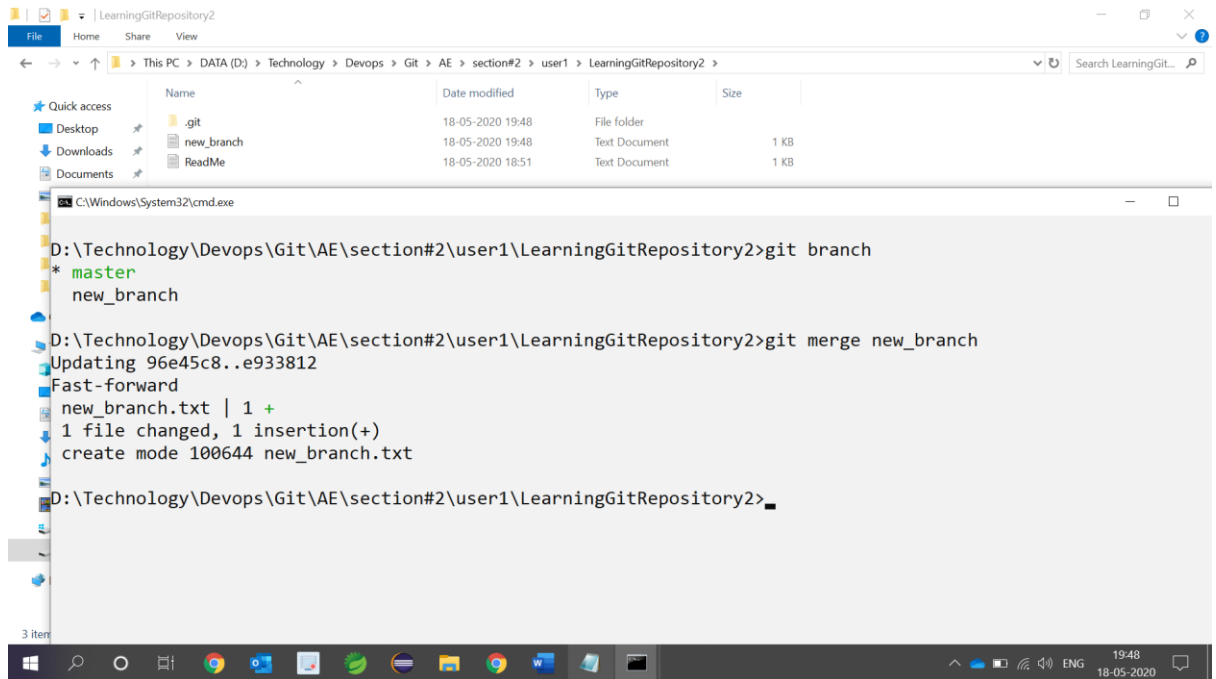


```
D:\Technology\Devops\Git\AE\section#2\user1\LearningGitRepository2>git branch
* master
  new_branch

D:\Technology\Devops\Git\AE\section#2\user1\LearningGitRepository2>git merge new_branch
Updating 96e45c8..e933812
Fast-forward
 new_branch.txt | 1 +
 1 file changed, 1 insertion(+)
 create mode 100644 new_branch.txt

D:\Technology\Devops\Git\AE\section#2\user1\LearningGitRepository2>
```


10. Push branch to remote i.e. merge it with master branch

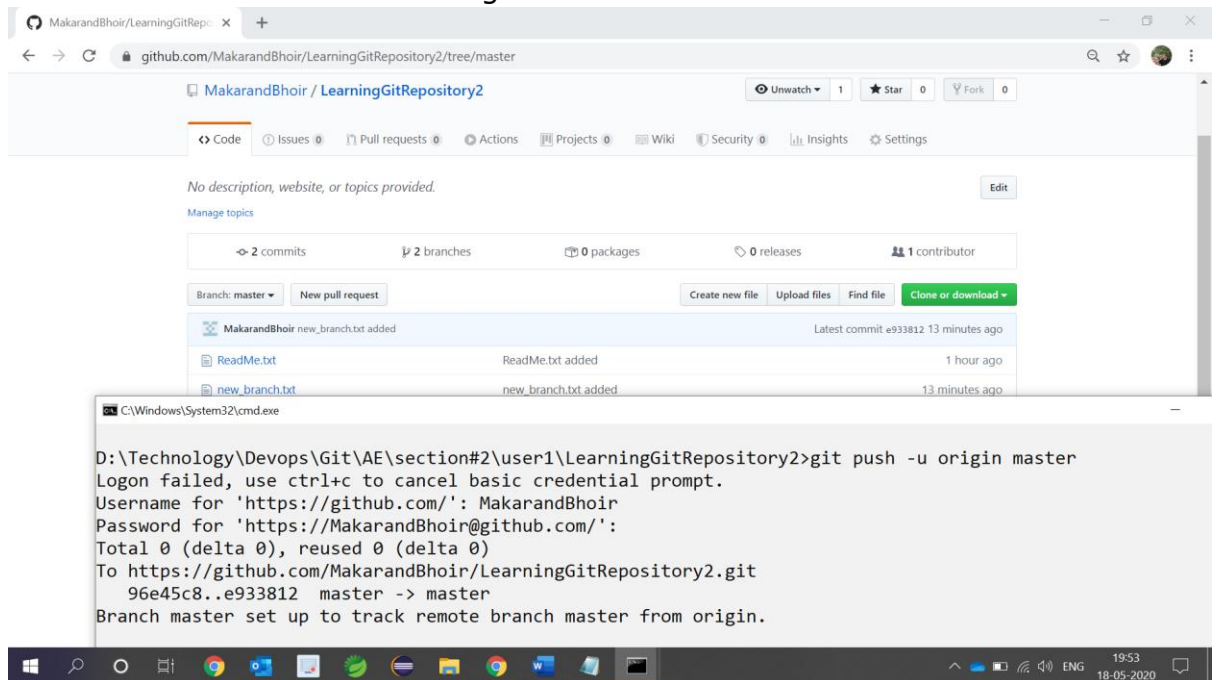


```
D:\Technology\Devops\Git\AE\section#2\user1\LearningGitRepository2>git push -u origin master
Logon failed, use ctrl+c to cancel basic credential prompt.
Username for 'https://github.com/': MakarandBhoir
Password for 'https://MakarandBhoir@github.com/':
Total 0 (delta 0), reused 0 (delta 0)
To https://github.com/MakarandBhoir/LearningGitRepository2.git
 96e45c8..e933812 master -> master
Branch master set up to track remote branch master from origin.
```

11. Delete branch new_branch from local

14. Learning Git – Step by Step with Makarand

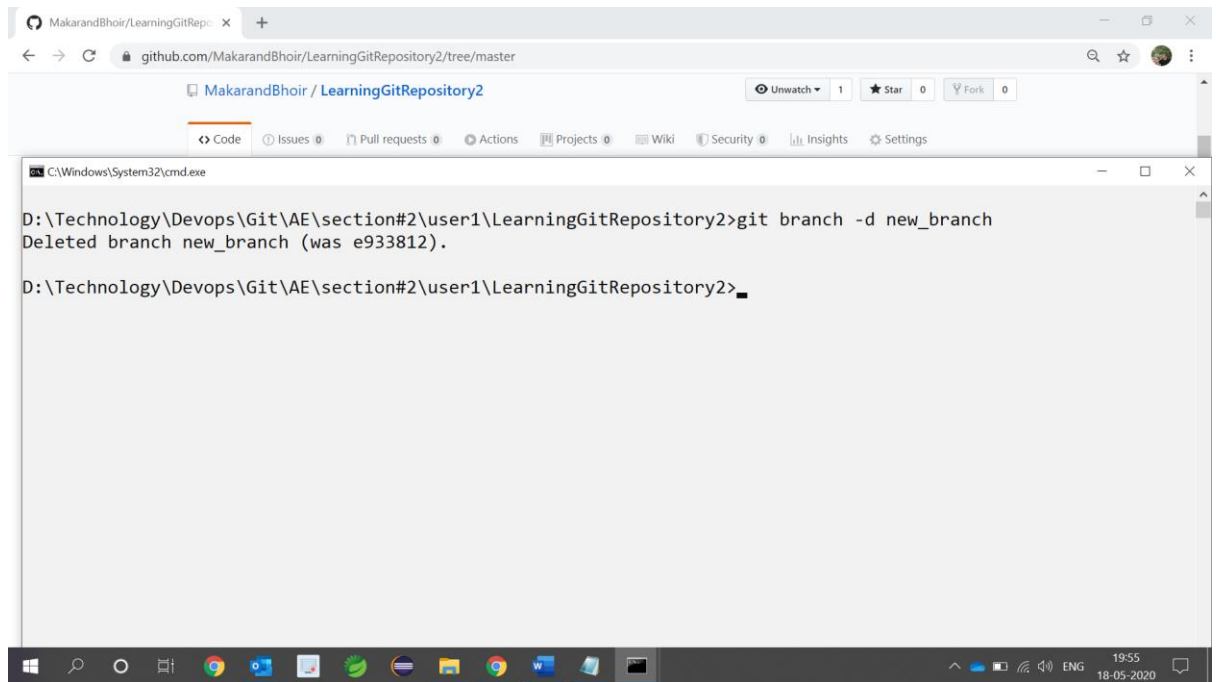


12. Delete branch new_branch from remote

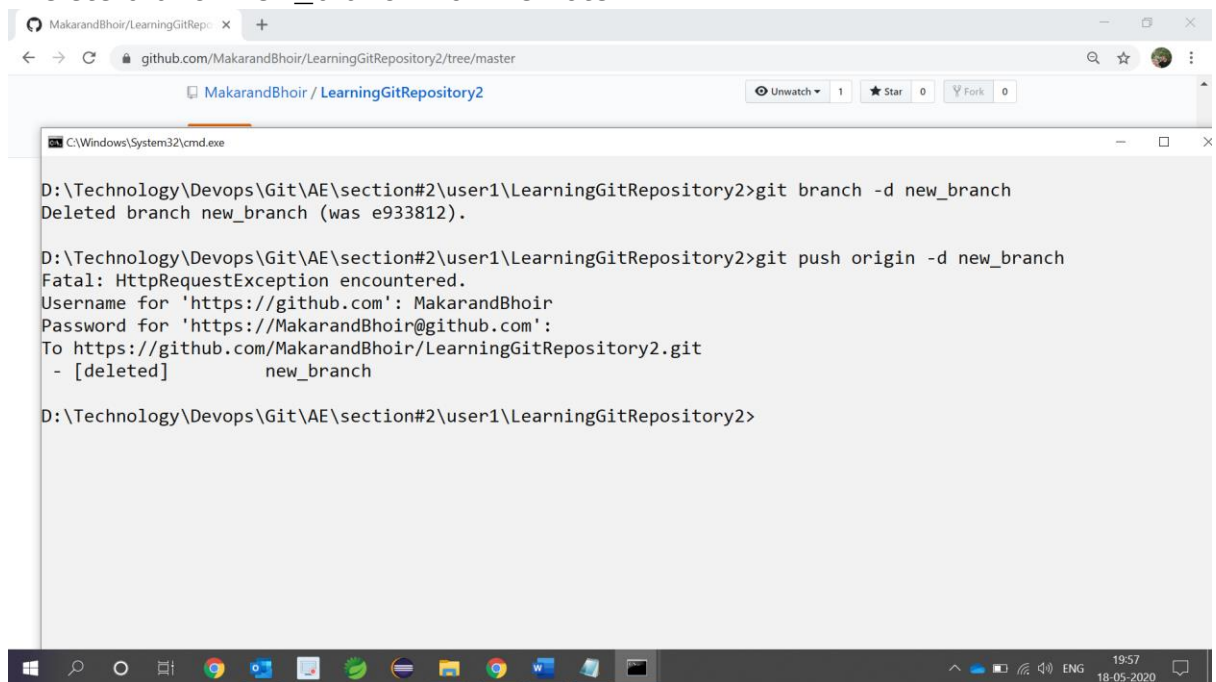


13. Confirm remote repository

15. Learning Git – Step by Step with Makarand

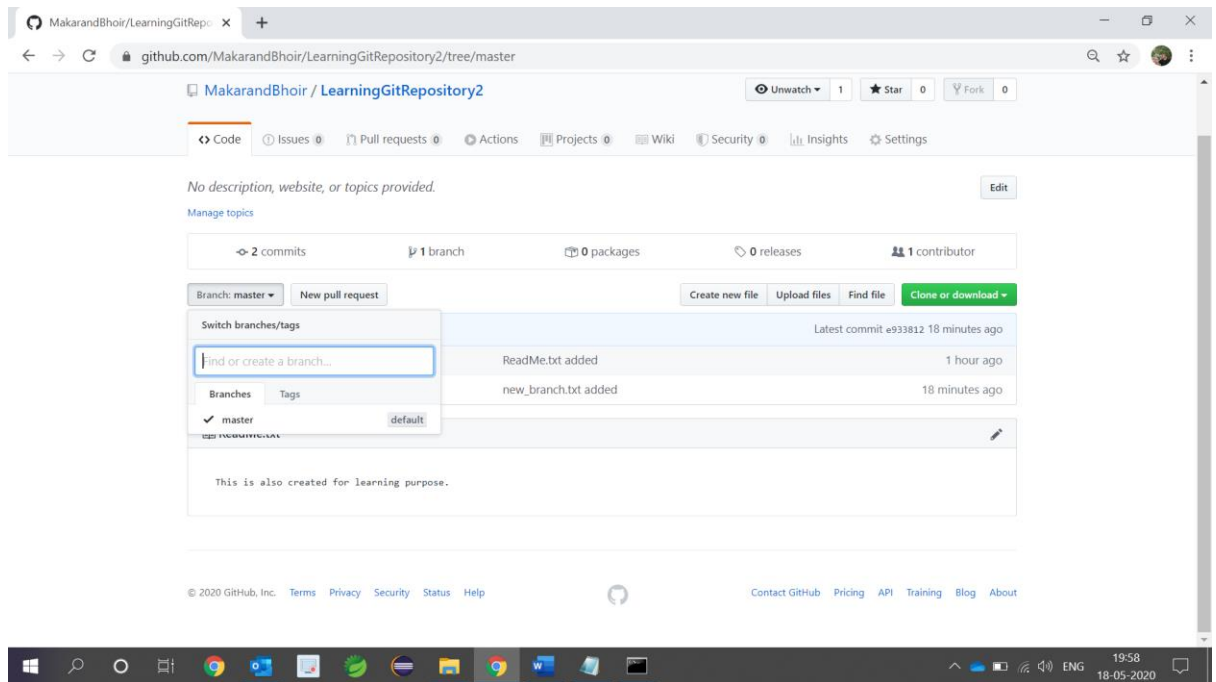

▪ Adding file(s) to more than one repository (section#3)


1. We have 2 repositories LearningGitRepository1 & LearningGitRepository2
URL 1:- <https://github.com/MakarandBhoir/LearningGitRepository1.git>
URL 2:- <https://github.com/MakarandBhoir/LearningGitRepository2.git>
2. Create new folder multiuser under section#3 and execute git init

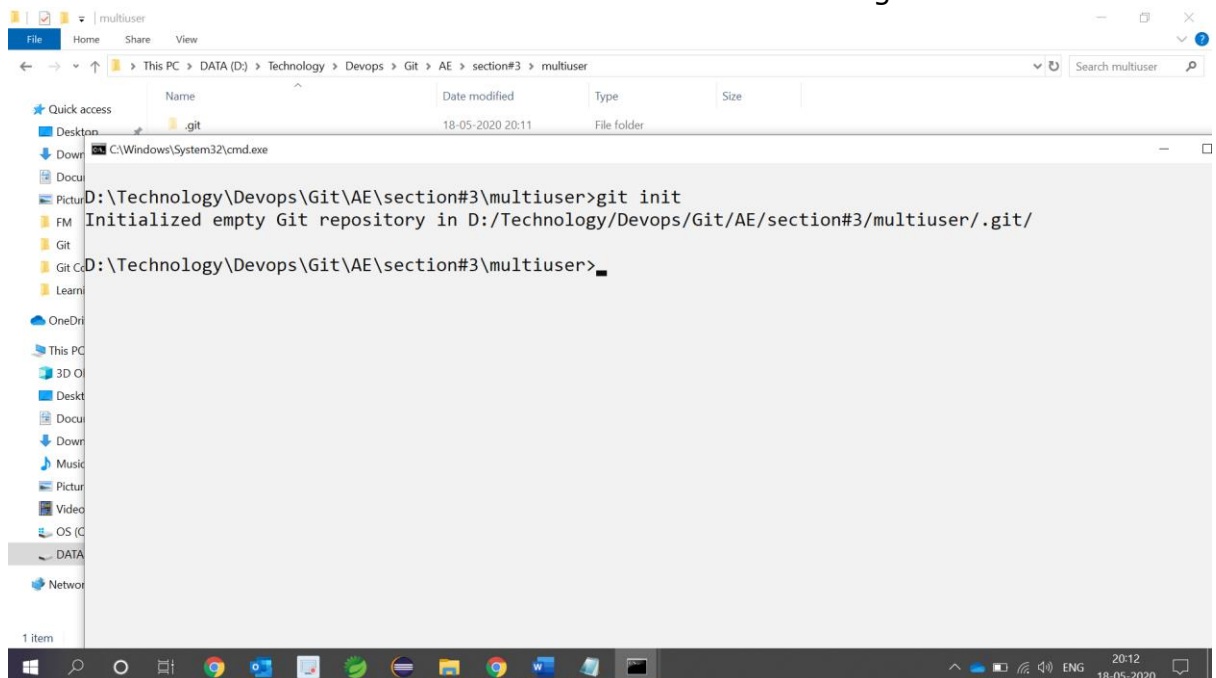

16. Learning Git – Step by Step with Makarand

3. Adding first repo URL to variable (all)
git remote add all <https://github.com/MakarandBhoir/LearningGitRepository1.git>
4. Register LearningGitRepository1 URL as push URL

```
git remote set-url --add --push all  
https://github.com/MakarandBhoir/LearningGitRepository1.git
```

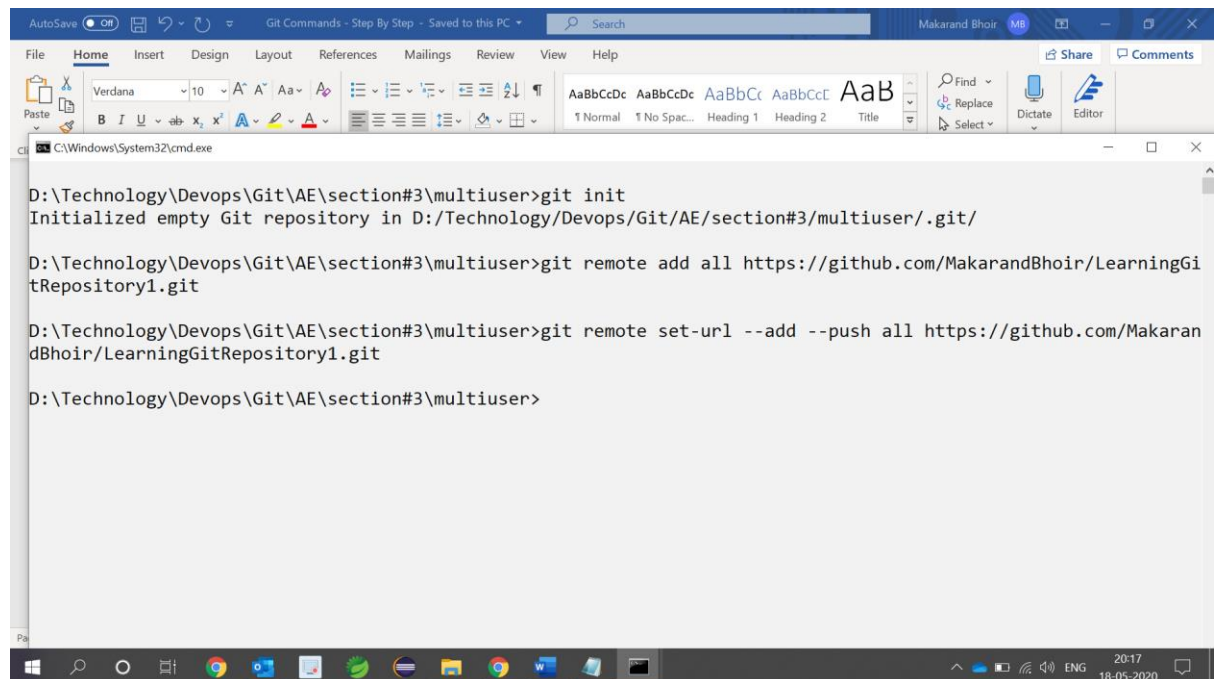

The screenshot shows a Windows command prompt window titled "C:\Windows\System32\cmd.exe". The window displays the following commands and their output:


```
D:\Technology\Devops\Git\AE\section#3\multiuser>git init  
Initialized empty Git repository in D:/Technology/Devops/Git/AE/section#3/multiuser/.git/  
  
D:\Technology\Devops\Git\AE\section#3\multiuser>git remote add all https://github.com/MakarandBhoir/LearningGitRepository1.git  
  
D:\Technology\Devops\Git\AE\section#3\multiuser>git remote set-url --add --push all https://github.com/MakarandBhoir/LearningGitRepository1.git  
  
D:\Technology\Devops\Git\AE\section#3\multiuser>
```

The background of the command prompt window shows a Microsoft Word document titled "Git Commands - Step By Step - Saved to this PC". The document is open to the "Home" tab, and the text "AaBbCcDc" is visible in the background.

5. Add another git URL as push URL

```
git remote set-url --add --push all  
https://github.com/MakarandBhoir/LearningGitRepository2.git
```


17. Learning Git – Step by Step with Makarand

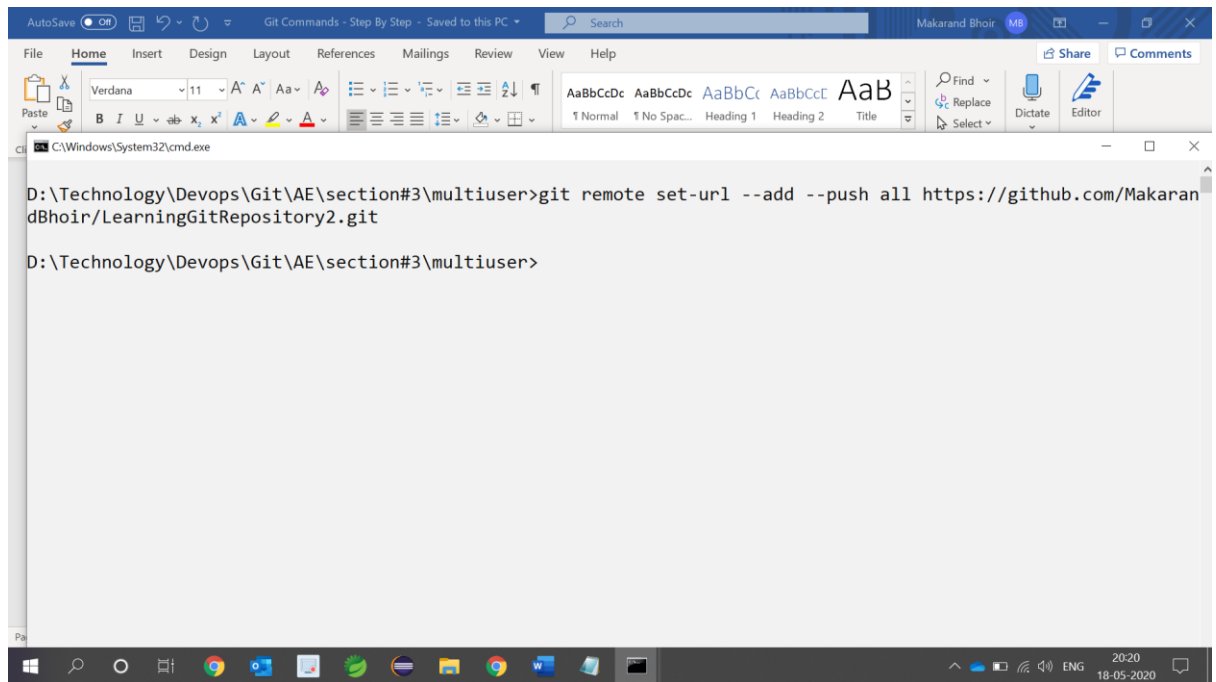


The screenshot shows a Windows command prompt window titled "C:\Windows\System32\cmd.exe". The command entered is:

```
D:\Technology\Devops\Git\AE\section#3\multiuser>git remote set-url --add --push all https://github.com/MakarandBhoir/LearningGitRepository2.git
```

The prompt then shows the command being executed again:


```
D:\Technology\Devops\Git\AE\section#3\multiuser>
```

6. Add new file called as file.txt

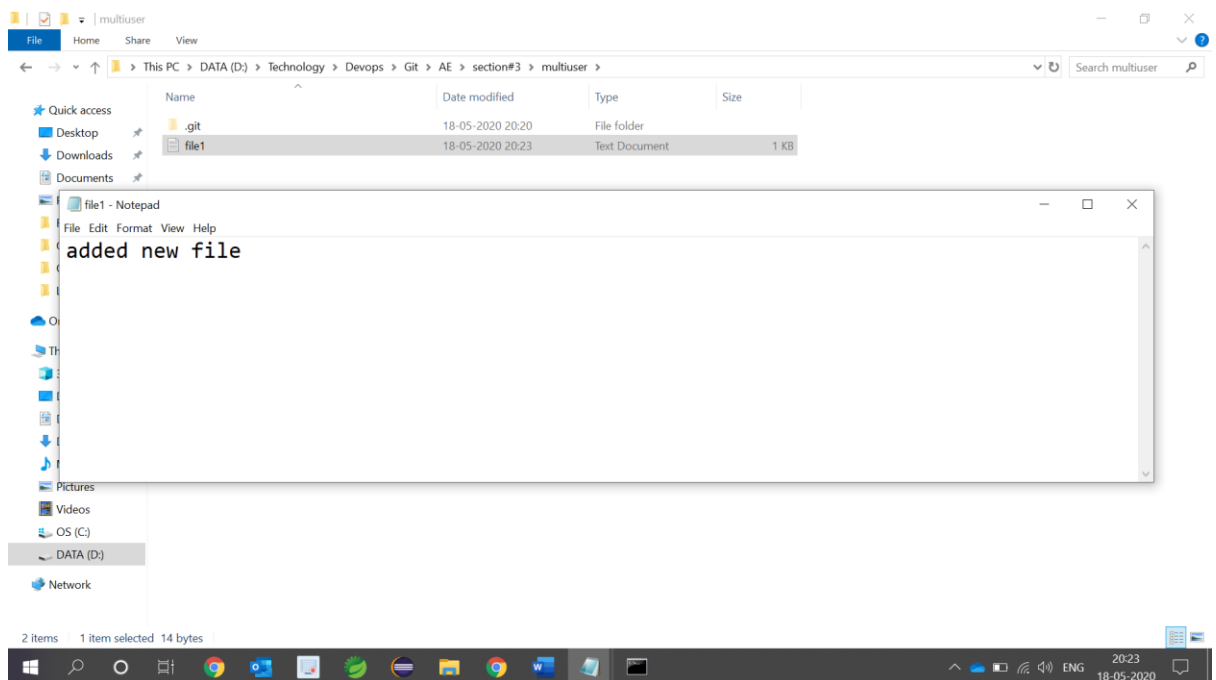

7. Pull the contains of remote using (git pull all master)

18. Learning Git – Step by Step with Makarand

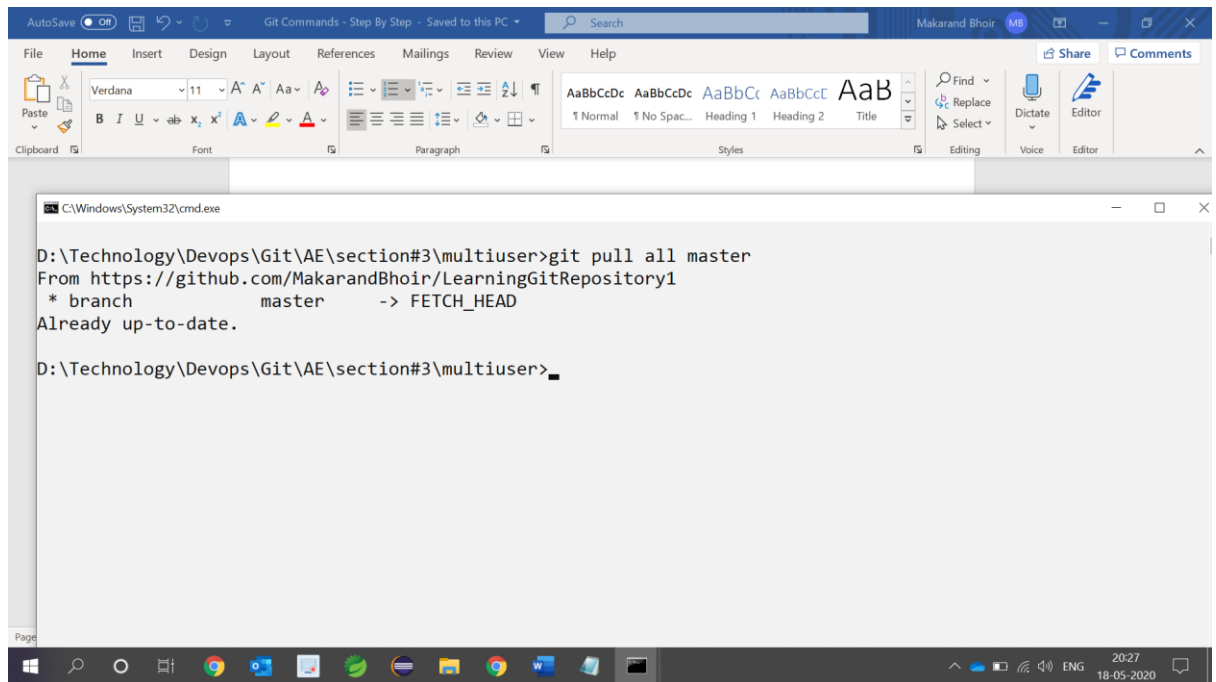


The screenshot shows a Windows command prompt window titled "C:\Windows\System32\cmd.exe". The user is in the directory "D:\Technology\Devops\Git\AE\section#3\multiuser". They have executed the command "git pull all master" to pull updates from the remote repository "https://github.com/MakarandBhoir/LearningGitRepository1". The output indicates that the local repository is already up-to-date with the remote master branch. The Windows taskbar at the bottom shows the time as 20:27 on 18-05-2020.

```
D:\Technology\Devops\Git\AE\section#3\multiuser>git pull all master
From https://github.com/MakarandBhoir/LearningGitRepository1
* branch      master      -> FETCH_HEAD
Already up-to-date.

D:\Technology\Devops\Git\AE\section#3\multiuser>
```

8. Add file to staging area and local repository

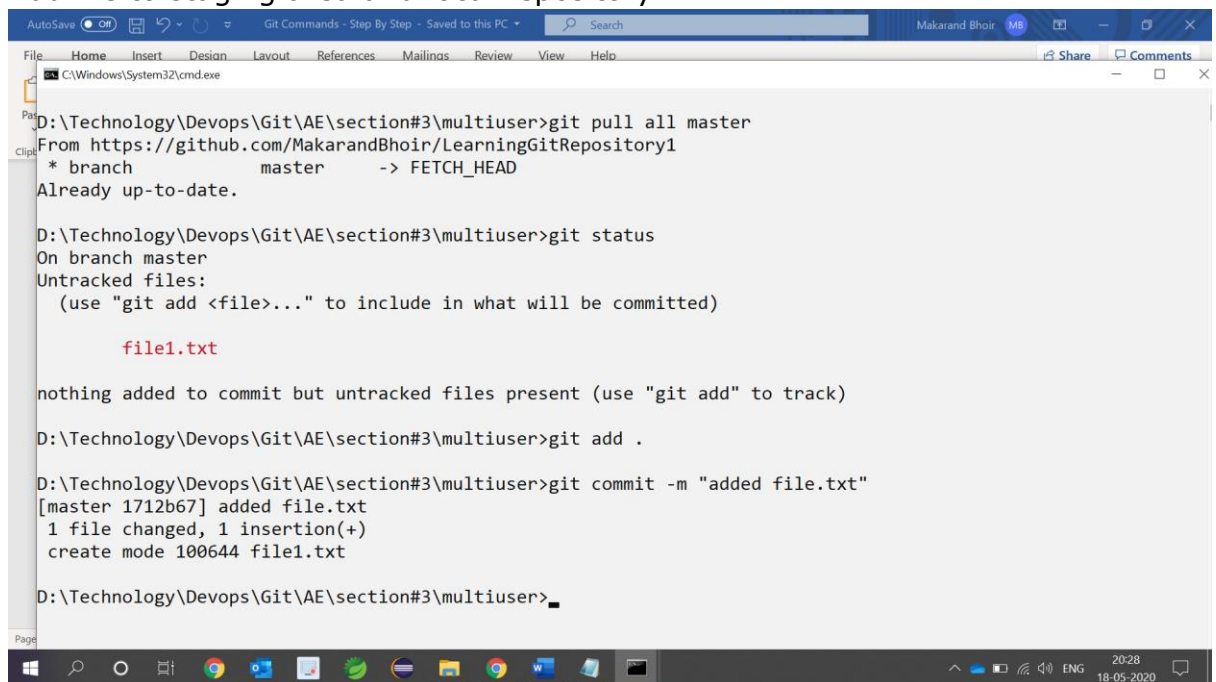

The screenshot shows a Windows command prompt window titled "C:\Windows\System32\cmd.exe". The user is in the directory "D:\Technology\Devops\Git\AE\section#3\multiuser". They have first executed "git pull all master", which shows the repository is up-to-date. Then, they run "git status", which shows that there are untracked files, specifically "file1.txt". The user then runs "git add ." to stage the file. Finally, they run "git commit -m 'added file.txt'", which successfully commits the file to the local repository. The output shows the commit hash [master 1712b67] and details of the file addition. The Windows taskbar at the bottom shows the time as 20:28 on 18-05-2020.

```
D:\Technology\Devops\Git\AE\section#3\multiuser>git pull all master
From https://github.com/MakarandBhoir/LearningGitRepository1
* branch      master      -> FETCH_HEAD
Already up-to-date.

D:\Technology\Devops\Git\AE\section#3\multiuser>git status
On branch master
Untracked files:
  (use "git add <file>..." to include in what will be committed)

        file1.txt

nothing added to commit but untracked files present (use "git add" to track)


D:\Technology\Devops\Git\AE\section#3\multiuser>git add .

D:\Technology\Devops\Git\AE\section#3\multiuser>git commit -m "added file.txt"
[master 1712b67] added file.txt
1 file changed, 1 insertion(+)
create mode 100644 file1.txt

D:\Technology\Devops\Git\AE\section#3\multiuser>
```

9. Push it to remote repository. So you should be able to see file in both repository

19. Learning Git – Step by Step with Makarand

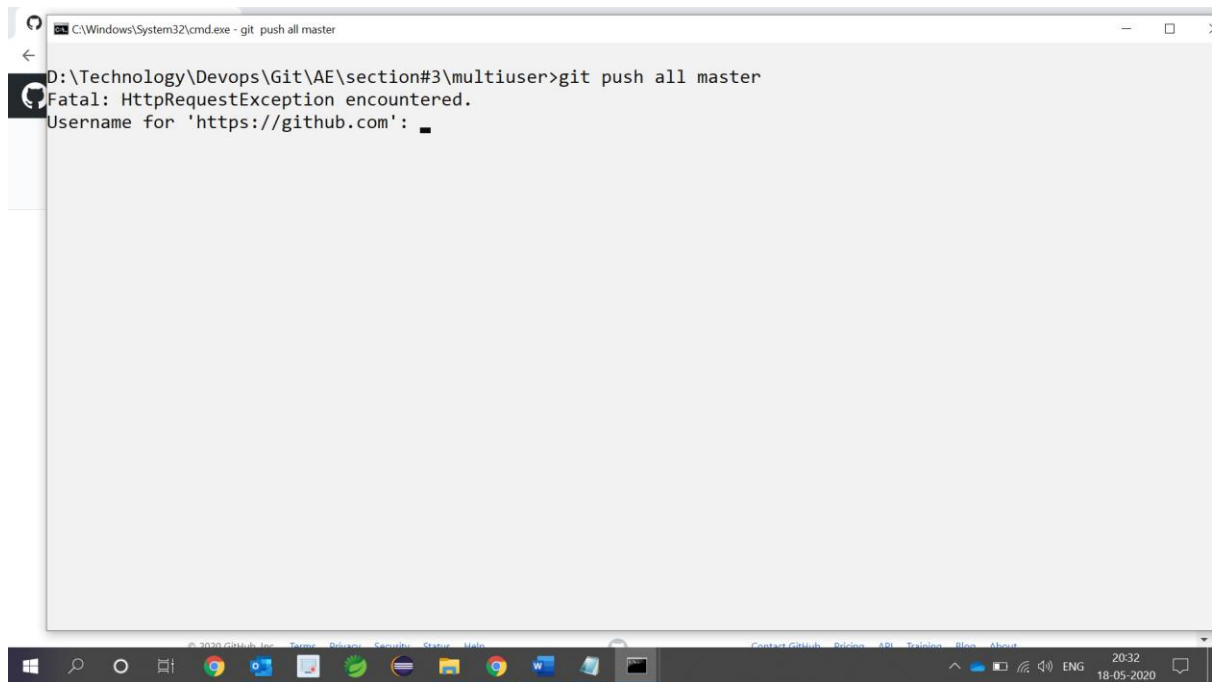

A screenshot of a Windows command prompt window. The title bar reads "C:\Windows\System32\cmd.exe - git push all master". The command prompt shows the following text:

```
D:\Technology\Devops\Git\AE\section#3\multiuser>git push all master
Fatal: HttpRequestException encountered.
Username for 'https://github.com':
```

The window is set against a dark background. The Windows taskbar is visible at the bottom, showing various application icons and the system clock indicating 20:32 on 18-05-2020.