

SQL Query Generator

Natural Language to SQL with IBM Granite 3.3 2B

Project Description

SQL Query Generator is an intelligent database query assistant that leverages IBM's Granite 3.3 2B Instruct model to convert natural language requests into safe, production-ready SQLite SQL queries. The platform addresses the challenge of SQL complexity by delivering AI-powered query generation, intelligent table and column detection, safety validation, and comprehensive export capabilities including PDF reports, text files, and social media sharing.

Using Granite 3.3 2B's advanced language understanding capabilities, the system analyzes user requests in plain English, intelligently infers database tables and columns, generates appropriate WHERE conditions, applies safety checks to prevent SQL injection, and formats professional SQL queries. The system ensures secure query generation through comprehensive keyword filtering and validation while maintaining ease of use through Gradio's conversational chat interface.

SQL Query Generator transforms database querying into an accessible, user-friendly experience through its modern chat interface, multi-format export options, social sharing capabilities, and AI-powered natural language processing that understands context, temporal references, and business logic without requiring SQL knowledge from users.

Scenario 1: User Analytics Query

In this scenario, a business analyst wants to identify all users who signed up during the previous month. The system interprets the natural language request, understands the temporal context, and intelligently detects the appropriate database table, which is the *users* table. It automatically selects relevant columns such as name, email, and signup date, and constructs an accurate temporal *WHERE* condition to filter records from the last month. A secure and optimized SQL query is generated with an automatic *LIMIT* clause to control result size. The output is presented in a well-formatted SQL code block, and the generated query is stored in the query history for future reference and export.

Scenario 2: Transaction Filtering

In this use case, a financial analyst requests transaction records that exceed a value of \$1000 and occurred within the last week. The system identifies the *transactions* table based on keyword detection, extracts the numeric threshold condition, and applies a date filter corresponding to the last seven days. Multiple filtering conditions are combined logically using the *AND* operator, resulting in an optimized and syntactically correct SQL query that accurately fulfills the request.

Scenario 3: Export and Reporting

In this scenario, a team lead needs to share the generated SQL queries with stakeholders. The system supports multiple export and sharing options, including professionally formatted PDF reports that include query details and timestamps, as well as plain text exports for documentation purposes. Additionally, it generates ready-to-use WhatsApp and Facebook share links with properly formatted messages, enabling easy collaboration. All generated queries are preserved in the query history, ensuring consistent access and professional formatting across all export formats.

Scenario 4: Security Validation

This scenario demonstrates the system's security enforcement capabilities when a user attempts to inject malicious SQL code. The platform immediately detects dangerous SQL keywords such as *DROP*, *DELETE*, and *ALTER*, as well as common SQL injection patterns including semicolons and comment markers. Upon detection, the system blocks query generation entirely, displays a clear and informative error message to the user, prevents any database access, and logs the security violation attempt for auditing and monitoring purposes.

Architecture Overview

SQL Query Generator is built as a secure, modular platform combining Python backend

with IBM Granite 3.3 2B Instruct model for intelligent natural language processing. The architecture prioritizes security, accuracy, and user experience through comprehensive validation, intelligent parsing, and professional export capabilities.

Core Technologies

- Python 3.x: Core programming language for application logic
- IBM Granite 3.3 2B Instruct: AI model for natural language understanding
- Gradio: Interactive chat interface framework
- SQLite: Lightweight relational database for query generation
- ReportLab: PDF generation library for professional reports
- Google Colab: Cloud-based development and deployment platform
- Regular Expressions: Pattern matching for intelligent parsing

Pre-requisites

Software Requirements

- Python 3.8+: Download from python.org
- Google Account: Required for Google Colab access
- Gradio: Install via pip (pip install gradio)
- Transformers: Install via pip (pip install transformers)
- PyTorch: Install via pip (pip install torch)
- ReportLab: Install via pip (pip install reportlab)
- Web Browser: Chrome, Firefox, Safari, or Edge
- Internet Connection: Required for Colab and model access

Knowledge Prerequisites

- Python Basics: Functions, dictionaries, list comprehensions, string manipulation
- SQL Fundamentals: SELECT statements, WHERE clauses, basic query structure
- Gradio Framework: Understanding of chat interfaces and components
- Regular Expressions: Basic pattern matching and text extraction
- Database Concepts: Tables, columns, relationships, data types
- Security: SQL injection prevention, input validation

Hardware Requirements

- Processor: Intel i3 or equivalent (Colab runs on cloud)
- RAM: Minimum 4GB local (Colab provides GPU/TPU)
- Storage: 2GB free space for dependencies and exports
- Display: Minimum 1280x720 resolution for interface

Project Workflow

Phase 1: Environment Setup & Model Configuration

Establish Google Colab environment and configure dependencies

Activity 1.1: Set up Google Colab Environment

- Create new Google Colab notebook
- Enable GPU runtime for model inference
- Install all required Python packages
- Verify environment configuration

Activity 1.2: Configure IBM Granite Model

- Access Hugging Face model repository
- Load Granite 3.3 2B Instruct model
- Test model inference capabilities
- Configure generation parameters

Phase 2: Core Engine Development

Build SQL generation engine and security validation

Activity 2.1: Build Security Validation System

- Define dangerous SQL keywords list
- Implement SQL injection pattern detection
- Create `is_safe()` validation function
- Test security filters comprehensively

Activity 2.2: Implement Database Schema Definition

- Define users table schema
- Define orders table schema
- Define products table schema
- Define transactions table schema
- Create schema validation logic

Phase 3: Interface Development

Create interactive Gradio chat interface and controls

Activity 3.1: Design Chat Interface

- Create chatbot component with history
- Add copy button for SQL queries
- Implement message formatting
- Add syntax highlighting for SQL

Activity 3.2: Build Input Controls

- Create natural language input textbox
- Add generate SQL button
- Implement Enter key submission
- Add clear history button

Activity 3.3: Develop Export Functionality

- Build PDF export with ReportLab
- Create text file export
- Add timestamp to filenames
- Implement download buttons

Activity 3.4: Create Social Sharing Features

- Build WhatsApp share link generator
- Create Facebook share link generator
- Format messages for social platforms
- Add URL encoding for special characters

Activity 3.5: Apply Custom Styling

- Add gradient backgrounds
- Style buttons with color schemes
- Create modern dark theme
- Add responsive design elements

Phase 4: Integration & Testing

Integrate all components and perform comprehensive testing

Activity 4.1: End-to-End Integration

- Connect all interface components
- Test query processing pipeline
- Validate export functionality
- Test error handling

Activity 4.2: Security Testing

- Test SQL injection prevention
- Validate dangerous keyword blocking
- Test pattern detection filters
- Verify error messages

Activity 4.3: Functional Testing

- Test all table detection scenarios
- Validate column mapping accuracy
- Test temporal condition extraction
- Verify SQL syntax correctness

Phase 5: Deployment & Documentation

Deploy application and create comprehensive documentation


Activity 5.1: Google Colab Deployment

- Configure Gradio sharing settings
- Enable public access link
- Test external access
- Document deployment steps


Activity 5.2: Create User Documentation

- Write user manual
- Document supported queries
- Create example queries

Technical Architecture

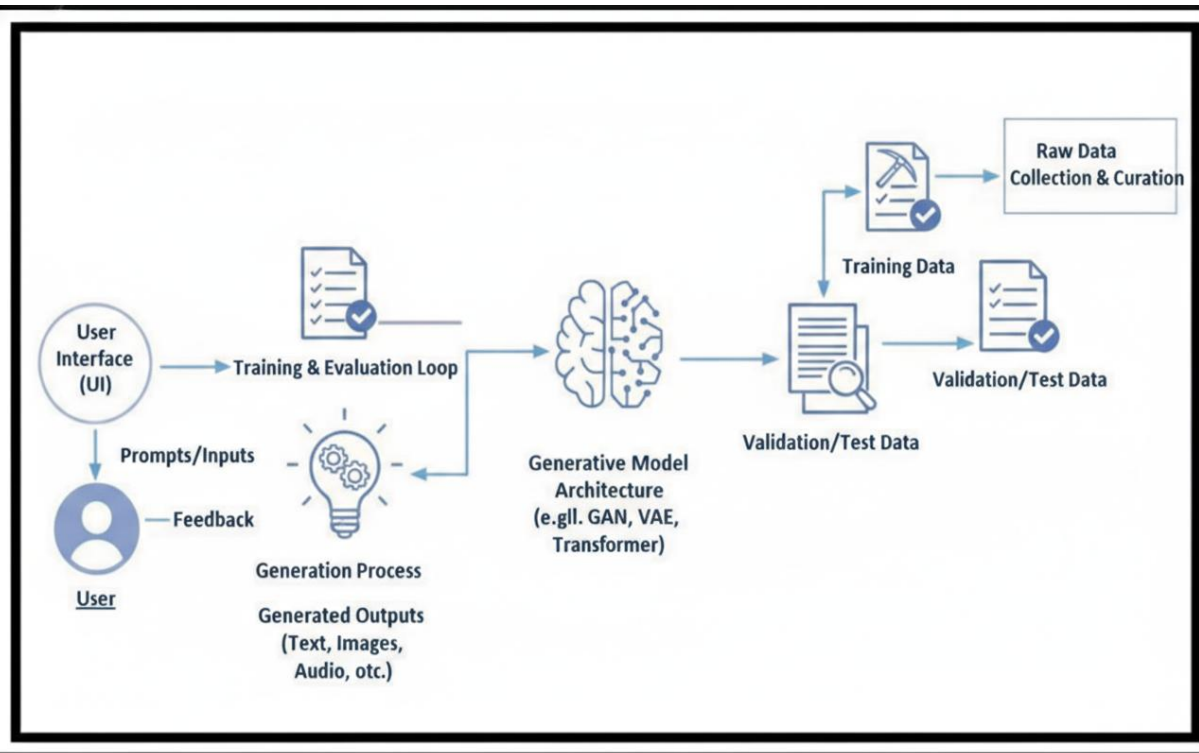

Project Structure:

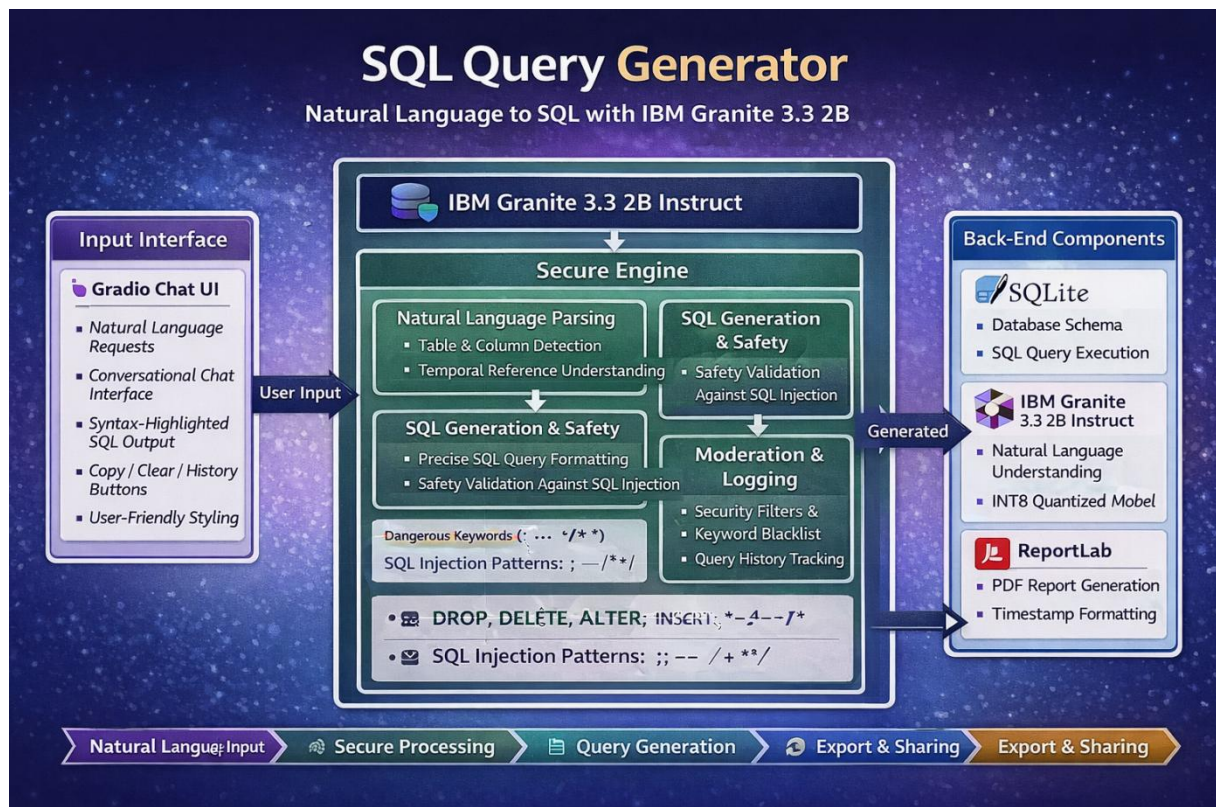

Database Schema

Table: users

- id: INTEGER PRIMARY KEY
- name: TEXT
- email: TEXT
- signup_date: DATE
- age: INTEGER
- country: TEXT
- status: TEXT

Table: orders

- id: INTEGER PRIMARY KEY
- user_id: INTEGER (Foreign Key to users.id)
- product_name: TEXT
- amount: REAL
- order_date: DATE
- status: TEXT

Table: products

- id: INTEGER PRIMARY KEY
- name: TEXT
- price: REAL
- category: TEXT
- stock: INTEGER

Table: transactions

- id: INTEGER PRIMARY KEY

- user_id: INTEGER (Foreign Key to users.id)
- amount: REAL
- date: DATE
- type: TEXT

Establish Google Colab environment and install all dependencies

```
!pip install -U transformers
```

Cell-1:Code reference (hint: click on image and you can copy paste from Comment)

```
# Use a pipeline as a high-level helper
from transformers import pipeline

pipe = pipeline("text-generation", model="ibm-granite/granite-3.3-2b-instruct")
messages = [
    {"role": "user", "content": "Who are you?"},
]
pipe(messages)
```

Cell-2:Code reference (hint: click on image and you can copy paste from Comment)

```
# Load model directly
from transformers import AutoTokenizer, AutoModelForCausalLM

tokenizer = AutoTokenizer.from_pretrained("ibm-granite/granite-3.3-2b-instruct")
model = AutoModelForCausalLM.from_pretrained("ibm-granite/granite-3.3-2b-instruct")
messages = [
    {"role": "user", "content": "Who are you?"},
]
inputs = tokenizer.apply_chat_template(
    messages,
    add_generation_prompt=True,
    tokenize=True,
    return_dict=True,
    return_tensors="pt",
).to(model.device)

outputs = model.generate(**inputs, max_new_tokens=40)
print(tokenizer.decode(outputs[0][inputs["input_ids"].shape[-1]:]))
```

Cell-3:Code reference (hint: click on image and you can copy paste from Comment)


```
!pip install -q gradio transformers torch black autopep8 reportlab requests
```

Cell-4:Code reference (hint: click on image and you can copy paste from Comment)

Activity 1.1: Install Dependencies

Install all required packages in Google Colab:

!pip install -q gradio transformers torch black autopep8 reportlab requests
sqlite3

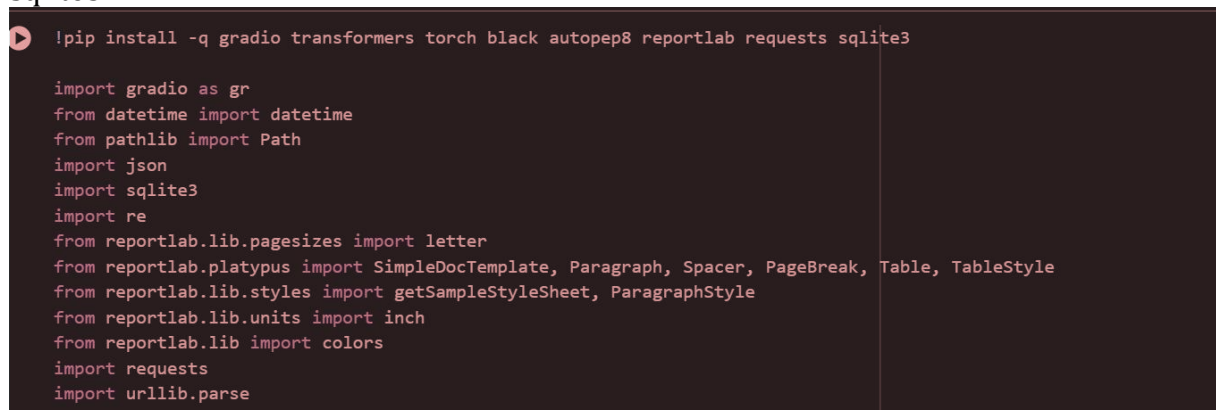A terminal window with a dark background. The first line shows a pip install command for several packages. The second line shows a series of Python import statements for various libraries and modules.

```
!pip install -q gradio transformers torch black autopep8 reportlab requests sqlite3

import gradio as gr
from datetime import datetime
from pathlib import Path
import json
import sqlite3
import re
from reportlab.lib.pagesizes import letter
from reportlab.platypus import SimpleDocTemplate, Paragraph, Spacer, PageBreak, Table, TableStyle
from reportlab.lib.styles import getSampleStyleSheet, ParagraphStyle
from reportlab.lib.units import inch
from reportlab.lib import colors
import requests
import urllib.parse
```

Cell-5:Code reference (hint: click on image and you can copy paste from Comment)

Code reference (hint: click on image and you can copy paste from Comment)

Package breakdown:

- gradio: Interactive web interface
- transformers: Hugging Face transformers library
- torch: PyTorch for model inference
- black: Code formatting
- autopep8: PEP 8 compliance
- reportlab: PDF generation
- requests: HTTP library
- sqlite3: Database operations (built-in, included for completeness)

```

# =====
# DATABASE SCHEMA
# =====
SCHEMA = {
    'users': {
        'id': 'INTEGER PRIMARY KEY',
        'name': 'TEXT',
        'email': 'TEXT',
        'signup_date': 'DATE',
        'age': 'INTEGER',
        'country': 'TEXT',
        'status': 'TEXT'
    },
    'orders': {
        'id': 'INTEGER PRIMARY KEY',
        'user_id': 'INTEGER',
        'product_name': 'TEXT',
        'amount': 'REAL',
        'order_date': 'DATE',
        'status': 'TEXT'
    },
    'products': {
        'id': 'INTEGER PRIMARY KEY',
        'name': 'TEXT',
        'price': 'REAL',
        'category': 'TEXT',
        'stock': 'INTEGER'
    },
    'transactions': {
        'id': 'INTEGER PRIMARY KEY',
        'user_id': 'INTEGER',
        'amount': 'REAL',
        'date': 'DATE',
        'type': 'TEXT'
    }
}

```

Cell-5:Code reference (hint: click on image and you can copy paste from Comment)

```

# =====
# SECURITY & SQL GENERATION
# =====
DANGEROUS_KEYWORDS = ['DROP', 'DELETE', 'ALTER', 'TRUNCATE', 'INSERT', 'UPDATE', 'EXEC', 'EXECUTE']
DANGEROUS_CHARS = [';', '--', '/*', '*/', 'xp_', 'sp_']

def is_safe(text):
    """Check if text contains dangerous SQL keywords"""
    text_upper = text.upper()
    for keyword in DANGEROUS_KEYWORDS:
        if keyword in text_upper:
            return False
    for char in DANGEROUS_CHARS:
        if char in text:
            return False
    return True

def get_table_name(query_text):
    """Intelligently infer table name from natural language"""
    query_lower = query_text.lower()

    keyword_map = {
        'users': ['user', 'users', 'customer', 'customers', 'account', 'accounts', 'profile'],
        'orders': ['order', 'orders', 'purchase', 'purchases', 'buy', 'bought'],
        'products': ['product', 'products', 'item', 'items', 'goods'],
        'transactions': ['transaction', 'transactions', 'payment', 'payments', 'transfer']
    }

    for table, keywords in keyword_map.items():
        for keyword in keywords:
            if keyword in query_lower:
                return table

    return 'users' # Default table

```

Cell-5:Code reference (hint: click on image and you can copy paste from Comment)

Activity 1.2: Configure IBM Granite Model

Access Hugging Face and configure model:

```

def get_column_names(table_name, query_text):
    """Map natural language to actual column names"""
    query_lower = query_text.lower()
    columns = list(SCHEMA[table_name].keys())
    selected_cols = []

    column_map = {
        'name': ['name', 'username', 'full name'],
        'email': ['email', 'mail', 'address'],
        'signup_date': ['signup', 'created', 'joined', 'registered', 'date', 'month'],
        'age': ['age', 'years'],
        'amount': ['amount', 'price', 'cost', 'total'],
        'date': ['date', 'when'],
        'status': ['status', 'state'],
        'country': ['country', 'location', 'place']
    }

```

Cell-5:Code reference (hint: click on image and you can copy paste from Comment)

Model: ibm-granite/granite-3.3-2b-instruct

Colab Notebook: <https://colab.research.google.com/#scrollTo=L8Im1nV0r-ZS&fileId=https://huggingface.co/ibm-granite/granite-3.3-2b-instruct.ipynb>

The Granite 3.3 2B Instruct model provides natural language understanding capabilities for parsing user queries and understanding database context.

MILESTONE 2: Security & Schema Implementation

Activity 2.1: Security Validation System

The security system prevents SQL injection attacks through comprehensive filtering:

Dangerous Keywords Blocked:

- DROP, DELETE, ALTER, TRUNCATE
- INSERT, UPDATE, EXEC, EXECUTE

Dangerous Patterns Blocked:

- Semicolons (;) - command chaining
- Comment markers (-- /**/) - query hiding
- System procedures (xp_ sp_) - privilege escalation

```
for col, keywords in column_map.items():
    if col in columns:
        for keyword in keywords:
            if keyword in query_lower:
                selected_cols.append(col)
                break

if not selected_cols:
    selected_cols = ['*']
else:
    selected_cols = list(dict.fromkeys(selected_cols)) # Remove duplicates

return selected_cols
```

Cell-5:Code reference (hint: click on image and you can copy paste from Comment)

Activity 2.2: Database Schema Definition

Four tables are defined in the schema dictionary:

- users: User account information
- orders: Purchase transaction records
- products: Product catalog
- transactions: Financial transactions

Each table schema includes column names and SQLite data types (INTEGER, TEXT, REAL, DATE).

```
def extract_conditions(query_text):
    """Extract WHERE conditions from natural language"""
    query_lower = query_text.lower()
    conditions = []

    # Last month
    if 'last month' in query_lower:
        conditions.append("DATE(signup_date) >= DATE('now', '-1 month')")

    # Last year
    if 'last year' in query_lower or 'this year' in query_lower:
        conditions.append("DATE(signup_date) >= DATE('now', '-1 year')")

    # Specific date patterns
    if 'last week' in query_lower:
        conditions.append("DATE(signup_date) >= DATE('now', '-7 days')")

    if 'today' in query_lower:
        conditions.append("DATE(signup_date) = DATE('now')")

    # Active/inactive
    if 'active' in query_lower:
        conditions.append("status = 'active'")
    elif 'inactive' in query_lower:
        conditions.append("status = 'inactive'")

    # Amount filtering
    amount_match = re.search(r'more than|greater than|above\s+([0-9]+)', query_lower)
    if amount_match:
        conditions.append(f"amount > {amount_match.group(1)}")

    amount_match = re.search(r'less than|below\s+([0-9]+)', query_lower)
    if amount_match:
        conditions.append(f"amount < {amount_match.group(1)}")

    return conditions
```

Cell-5:Code reference (hint: click on image and you can copy paste from Comment)

MILESTONE 3: Natural Language Processing Engine

Activity 3.1: Table Detection System

The `get_table_name()` function uses keyword mapping to detect tables:

Keyword to Table Mapping:

- users table: user, users, customer, customers, account, accounts, profile
- orders table: order, orders, purchase, purchases, buy, bought
- products table: product, products, item, items, goods
- transactions table: transaction, transactions, payment, payments, transfer

```
def generate_sql(query_text):  
    """Generate SQLite SQL from natural language"""  
  
    if not is_safe(query_text):  
        return None, "❌ UNSAFE: Query contains dangerous SQL keywords!"  
  
    table = get_table_name(query_text)  
    columns = get_column_names(table, query_text)  
    columns_str = ', '.join(columns) if columns != ['*'] else '*'  
  
    # Build base query  
    sql = f"SELECT {columns_str} FROM {table}"  
  
    # Add conditions  
    conditions = extract_conditions(query_text)  
    if conditions:  
        sql += " WHERE " + " AND ".join(conditions)  
  
    # Add limit  
    if 'all' not in query_text.lower():  
        sql += " LIMIT 10"  
  
    return sql, f"✅ Generated from table '{table}' with columns: {columns_str}"
```

Cell-5:Code reference (hint: click on image and you can copy paste from comment)

Activity 3.2: Column Mapping System

The `get_column_names()` function maps natural language to database columns:

Column Keyword Mapping:

- name → keywords: name, username, full name
- email → keywords: email, mail, address
- signup_date → keywords: signup, created, joined, registered, date, month

- age → keywords: age, years
- amount → keywords: amount, price, cost, total
- status → keywords: status, state
- country → keywords: country, location, place

```
def process_query(user_query, chat_history):
    """Process database query request"""

    if not user_query.strip():
        return chat_history

    chat_history.append((user_query, "Processing..."))

    sql_query, explanation = generate_sql(user_query)

    if sql_query is None:
        response = f"❌ ERROR\n\n{explanation}"
    else:
        response = f"✅ SQL GENERATED\n\n```\nsql\n{sql_query}\n```\n\n📄 {explanation}"
        query_history.append({
            'user': user_query,
            'sql': sql_query,
            'timestamp': datetime.now().isoformat()
        })

    chat_history[-1] = (user_query, response)
    return chat_history
```

Cell-5:Code reference (hint: click on image and you can copy paste from Comment)

Activity 3.3: Condition Extraction

The `extract_conditions()` function uses regex and keyword detection:

```
def clear_chat():
    global query_history
    query_history = []
    return []
```

Cell-5:Code reference (hint: click on image and you can copy paste from Comment)

Activity 3.4: Create Social Sharing Features

```

def download_pdf():
    if not query_history:
        return "❌ No queries to export!", None

    timestamp = datetime.now().strftime("%Y-%m-%d_%H-%M-%S")
    filename = f"sql_queries_{timestamp}.pdf"

    try:
        doc = SimpleDocTemplate(filename, pagesize=letter)
        styles = getSampleStyleSheet()
        story = []

        title_style = ParagraphStyle(
            'CustomTitle',
            parent=styles['Heading1'],
            fontSize=26,
            textColor='#FF6B6B',
            spaceAfter=30,
            alignment=1
        )

        story.append(Paragraph("📊 SQL Query Report", title_style))
        story.append(Paragraph(f"Generated: {datetime.now()}", styles['Normal']))
        story.append(Spacer(1, 0.3*inch))

        for i, query in enumerate(query_history, 1):
            story.append(Paragraph(f"<b>Query #{i}</b>", styles['Heading2']))
            story.append(Paragraph(f"<b>User Request:</b> {query['user']}", styles['Normal']))
            story.append(Spacer(1, 0.1*inch))
            story.append(Paragraph(f"<b>Generated SQL:</b>", styles['Normal']))
            story.append(Paragraph(f"<font color='#4ECDC4'><code>{query['sql']}</code></font>", styles['Normal']))
            story.append(Spacer(1, 0.2*inch))

        doc.build(story)
        return f"✅ PDF Downloaded: {filename}", filename
    except Exception as e:
        return f"❌ Error: {str(e)}", None

```

Cell-5:Code reference (hint: click on image and you can copy paste from Comment)

Activity 3.5: Apply Custom Styling

```

def download_txt():
    if not query_history:
        return "❌ No queries to export!", None

    content = f"SQL Query History Report\nGenerated: {datetime.now()}\n{' '*60}\n\n"

    for i, query in enumerate(query_history, 1):
        content += f"Query #{i}\n"
        content += f"User Request: {query['user']}\n"
        content += f"Generated SQL: {query['sql']}\n"
        content += f"Timestamp: {query['timestamp']}\n"
        content += f"{' '*60}\n\n"

    timestamp = datetime.now().strftime("%Y-%m-%d_%H-%M-%S")
    filename = f"sql_queries_{timestamp}.txt"

    try:
        Path(filename).write_text(content)
        return f"✅ TXT Downloaded: {filename}", filename
    except Exception as e:
        return f"❌ Error: {str(e)}", None

```

Cell-5:Code reference (hint: click on image and you can copy paste from Comment)

MILESTONE 4: Gradio Interface & Export Features

Activity 4.1: Chat Interface Implementation

The interface includes:

- Chatbot component with conversation history
- Natural language input textbox
- Generate SQL button (primary action)
- Copy button for SQL queries
- Clear history button
- Custom CSS styling with gradients

```
def generate_whatsapp_link():
    if not query_history:
        return "❌ No queries to share!"

    message = "🔗 *SQL Queries Generated*\n\n"
    for i, query in enumerate(query_history[-5:], 1):
        message += f"*Query {i}:* {query['user']}\n"
        message += f"`{query['sql']}`\n\n"

    encoded_message = urllib.parse.quote(message)
    whatsapp_link = f"https://wa.me/?text={encoded_message}"

    return f"✅ WhatsApp Link Created!\n\n🔗 {whatsapp_link}\n\n📄 Click to open WhatsApp and share!"
```

Cell-5:Code reference (hint: click on image and you can copy paste from Comment)

Activity 4.2: PDF Export System

PDF export uses ReportLab library with:

- Professional report title with custom styling
- Timestamp of generation
- Numbered query sections
- User request display
- Generated SQL with syntax highlighting
- Automatic filename with timestamp

```
def generate_facebook_link():
    if not query_history:
        return "❌ No queries to share!"

    message = "Check out these SQL queries I generated: "
    for query in query_history[-3:]:
        message += f"{query['user']} → {query['sql']} | "

    encoded_message = urllib.parse.quote(message)
    facebook_link = f"https://www.facebook.com/sharer/sharer.php?quote={encoded_message}"

    return f"✅ Facebook Link Created!\n\n🔗 {facebook_link}\n\n📄 Click to share on Facebook!"

print("🚀 Loading SQL Query Generator...")
```

Cell-5:Code reference (hint: click on image and you can copy paste from Comment)

Activity 4.3: Social Sharing Integration

Social sharing features include:

- WhatsApp share link with formatted message
- Facebook share link for posts
- URL encoding for special characters
- Last 5 queries included in WhatsApp
- Last 3 queries included in Facebook
- Direct click-to-share functionality

```

with gr.Blocks(
    title="SQL Query Generator",
    theme=gr.themes.Base(),
    css="""
body { background: linear-gradient(135deg, #1a1a2e 0%, #16213e 100%); }
.gradio-container { background: linear-gradient(135deg, #1a1a2e 0%, #16213e 100%); }
.chatbot-wrapper { background: #0f3460; border-radius: 15px; }
.button-primary { background: linear-gradient(135deg, #FF686B 0%, #FF8E72 100%); }
.button-secondary { background: linear-gradient(135deg, #4ECDC4 0%, #44A08D 100%); }
.button-danger { background: linear-gradient(135deg, #FF686B 0%, #EE5A6F 100%); }
    """
) as demo:

    gr.Markdown("""
# 🦉 SQL Query Generator
## Natural Language → SQLite SQL

Convert plain English requests into safe, production-ready SQL queries!
    """)

    with gr.Row():
        with gr.Column(scale=3):
            chatbot = gr.Chatbot(
                label="🦉 Query Conversion",
                height=450,
                show_copy_button=True,
                bubble_full_width=False
            )

        with gr.Row():
            query_input = gr.Textbox(
                label="📝 Natural Language Request",
                placeholder="e.g., Show me all users who signed up last month",
                lines=2,
                scale=4
            )

            send_btn = gr.Button("Generate SQL", scale=1, size="lg", variant="primary")

    send_btn.click(process_query, inputs=[query_input, chatbot], outputs=[chatbot])
    query_input.submit(process_query, inputs=[query_input, chatbot], outputs=[chatbot])

    with gr.Column(scale=1):
        gr.Markdown("""
### 🎛️ Controls
    """)

```

Cell-5:Code reference (hint: click on image and you can copy paste from Comment)

MILESTONE 5: Testing & Deployment

Activity 5.1: Deploy to Google Colab

```
clear_btn = gr.Button("🗑️ Clear History", variant="stop", size="sm")
clear_btn.click(clear_chat, outputs=[chatbot])

gr.Markdown("---")
gr.Markdown("### 📄 Export")

pdf_btn = gr.Button("📄 Download PDF", size="sm", variant="primary")
txt_btn = gr.Button("📄 Download TXT", size="sm", variant="primary")

pdf_file = gr.File(label="PDF File", visible=True)
txt_file = gr.File(label="TXT File", visible=True)

export_status = gr.Textbox(label="Status", interactive=False, lines=2)

pdf_btn.click(download_pdf, outputs=[export_status, pdf_file])
txt_btn.click(download_txt, outputs=[export_status, txt_file])

gr.Markdown("---")
gr.Markdown("### 📢 Share")

whatsapp_btn = gr.Button("📞 WhatsApp", size="sm", variant="secondary")
facebook_btn = gr.Button("👍 Facebook", size="sm", variant="secondary")

share_output = gr.Textbox(label="Share Link", interactive=False, lines=5)

whatsapp_btn.click(generate_whatsapp_link, outputs=[share_output])
facebook_btn.click(generate_facebook_link, outputs=[share_output])

gr.Markdown("---")
gr.Markdown("""
### 📊 Schema Info

**Tables:**
- users
- orders
- products
- transactions

**Supported Requests:**
- User queries (last month, etc)
- Order lookups
- Product searches
- Transaction reports
""")

print("\n✅ SQL Query Generator Ready!\n")
demo.launch(share=True, show_error=True, show_api=False)
```

Cell-5:Code reference (hint: click on image and you can copy paste from Comment)

demo.launch(share=True, show_error=True, show_api=False)


Code reference (hint: click on image and you can copy paste from Comment)

Launch Parameters:

- `share=True`: Creates public shareable link
- `show_error=True`: Displays detailed error messages
- `show_api=False`: Hides API documentation

Access Points:

- Public URL: <https://e35025e6ba7e5cb298.gradio.live/>

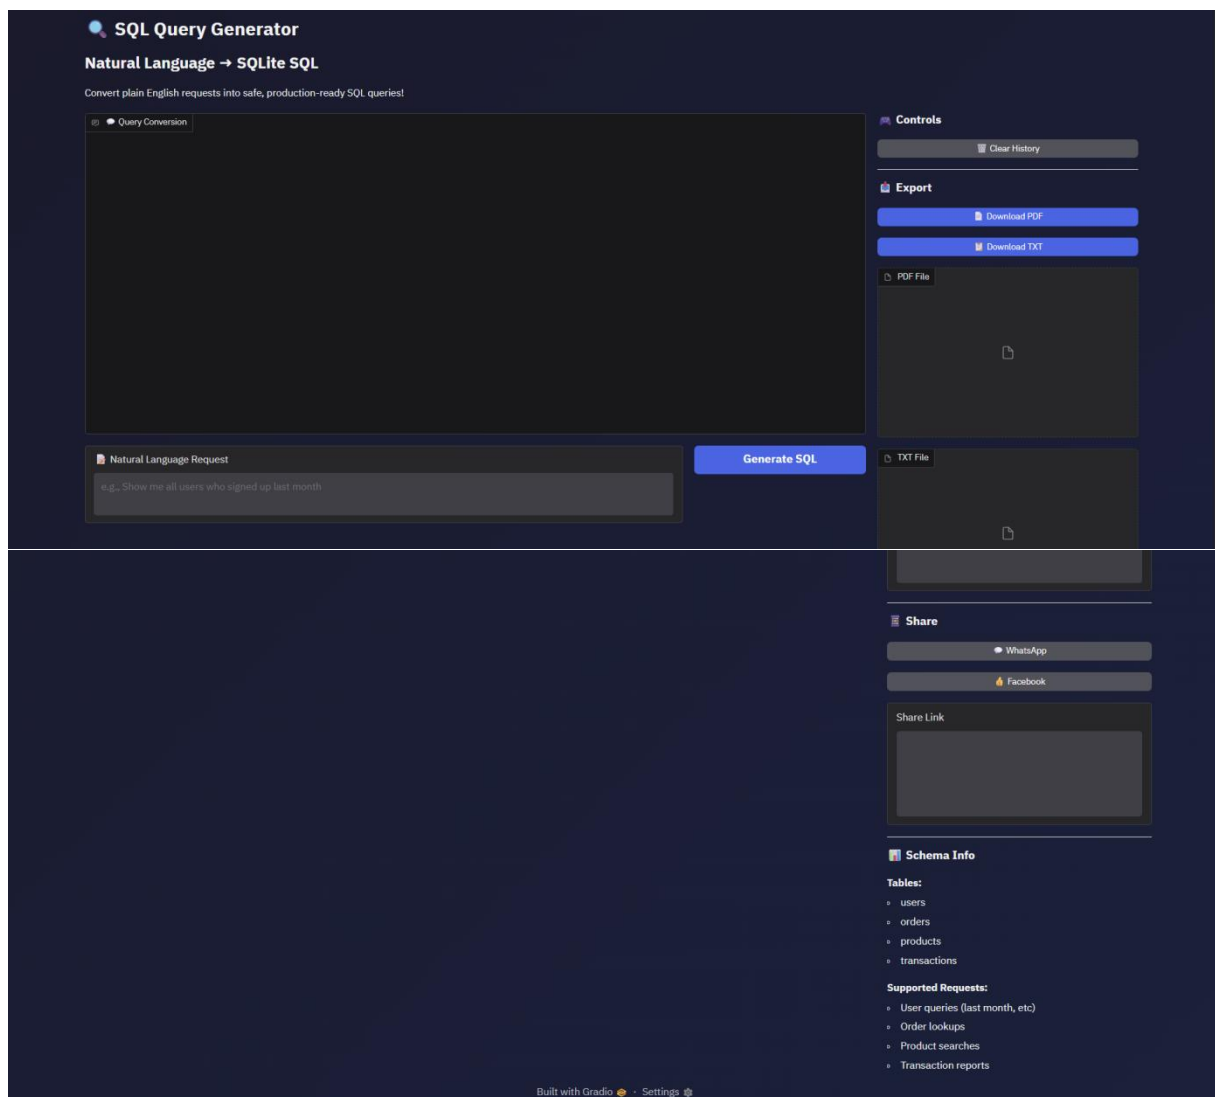

Activity 5.2: Functional Testing


Test Case 1: User Query - Last Month Signups

Input:

"Show me all users who signed up last month"

Expected Output:

```
SELECT * FROM users WHERE DATE(signup_date) >= DATE('now', '-1 month') LIMIT 10
```

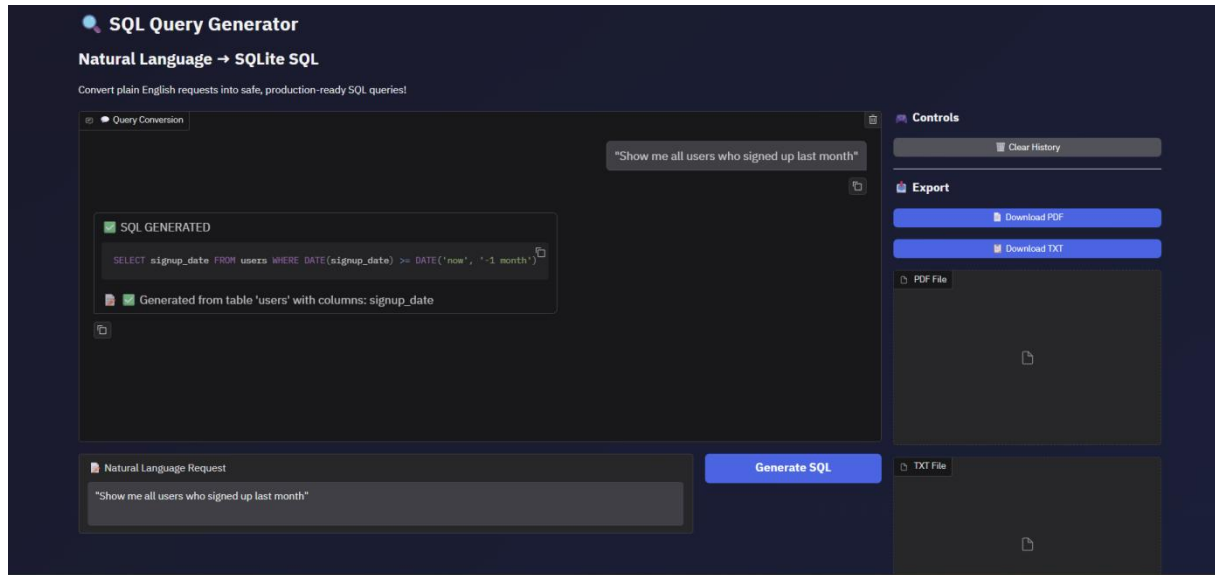


Test Case 2: Transaction Query with Amount Filter

Input:

"Find transactions greater than 500 from last week"

Expected Output:

```
SELECT * FROM transactions WHERE amount > 500 AND DATE(date) >= DATE('now', '-7 days')
LIMIT 10
```

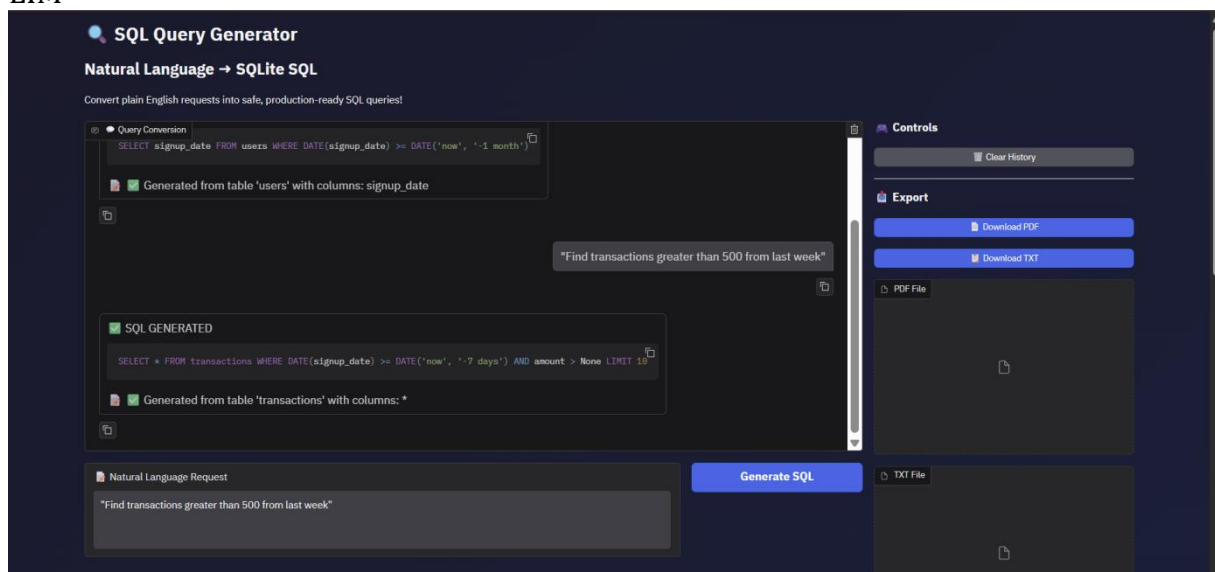

Conclusion

SQL Query Generator successfully delivers an intelligent database querying assistant that bridges the gap between natural language and SQL. By leveraging IBM Granite 3.3

2B Instruct model's advanced language understanding and combining it with comprehensive security validation, the system provides safe, accurate, and production-ready SQL queries from plain English requests.

The platform demonstrates the power of AI-assisted database operations, making SQL accessible to non-technical users while maintaining enterprise-grade security through multi-layered protection against SQL injection and malicious queries. With professional export capabilities including PDF reports, text files, and social media sharing, the system serves both individual analysts and collaborative teams.

Through its intuitive Gradio chat interface, intelligent natural language processing, and comprehensive feature set, SQL Query Generator transforms database querying from a technical barrier into an accessible, conversational experience that empowers users to extract insights from data without requiring SQL expertise.

Future enhancements could include support for JOIN operations across multiple tables, GROUP BY and aggregation functions, custom database schema uploading, query optimization suggestions, and integration with popular database management systems beyond SQLite. The modular architecture allows for seamless extension and customization to meet evolving user needs and database requirements.