

Machine Learning E16 - Handin 2

OCR with SVM and (Dep) Neural Networks

Mark Medum Bundgaard, Morten Jensen, Martin Sand Nielsen
Aarhus University


November 2, 2016

1 SVM with SciKit-Learn

Several Support Vector Machine-classifier has been trained on the *AUtrain*-digits with different kernels. See Table 1 for the achieved classification results. The implementation of SVMs from Scikit-learn ¹ is used for these experiments.

1.1 Polynomial kernels

A linear(1st order polynomial), a 2nd and 3rd order polynomial has been trained with various values for the hyperparameter, C . This parameter defines how much it should cost for each support vector, that is not kept outside the SVM margins. Too large C and the SVM will tend to overfit the training data to avoid any support vectors in margins. Too low C results in no penalty for not fitting the training data well. The optimal value for this hyperparameter is found by evaluation with a separate validation set. See the comparison of these *in sample* and *out of sample* classification accuracies for various C values in Figure 1, 2 and 3.

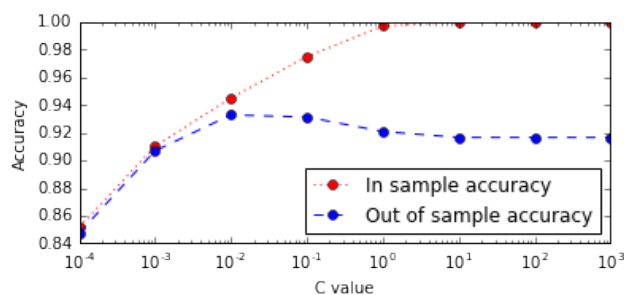

FiXme Fatal:
should we
measure or
mention training
time? (mention
multithreaded
solution?)

Figure 1: *SVM performance with a simple linear(1st order polynomial) kernel for various C values(cost).*

¹ <http://scikit-learn.org/stable/modules/generated/sklearn.svm.SVC.html>

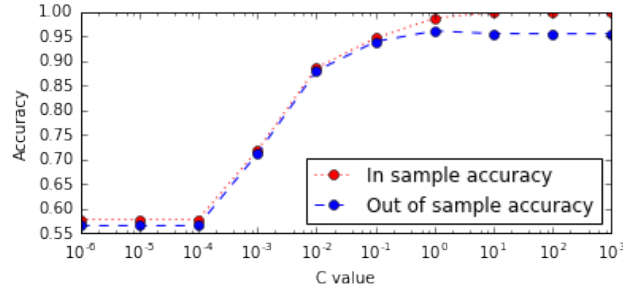


Figure 2: *SVM performance with a second-order polynomial kernel for various C values(cost).*

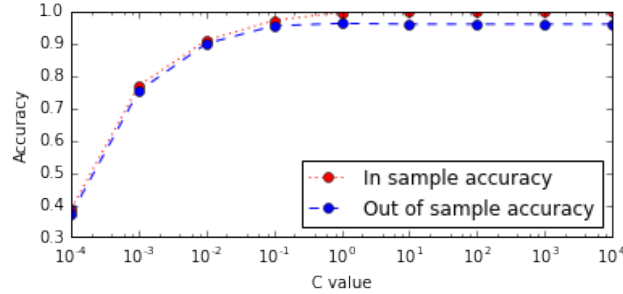


Figure 3: *SVM performance with a third-order polynomial kernel for various C values(cost).*

1.2 RBF kernel

A more general kernel that is often used, is the Radial Basis Function (RBF). Which expands the raw input feature dimensions (vector of pixel values) to infinite many feature dimensions, such that they results in a similarity measure between images. Beside the usual C cost hyper parameter, RBF also has a γ hyper parameter defining the width of the bell shape for each data point(image).

The results of a coarse grid search for the optimum combination of these parameters can be seen in Figure 5. For comparing the RBF kernel with the polynomial kernels, the optimal $\gamma = 0.01$ has been used in Figure 4.

A comparison of the kernels can be found in Table 1. RBF is the best with a validation classification accuracy of 96.94%. The search for hyper parameters was only coarse with big step sizes, so there is clearly room for improvements. A better parameter search has to be evaluated by yet another separate validation set, so as to avoid overfitting the hyper parameters to the validation set.

The two dimensional hyper parameter fit for RBF results in many more SVM trainings. In some situations a less complex kernel with faster training time would be preferable.

FiXme Fatal:
Explain this better...
FiXme Fatal:
Comment on overfitting and the different 'areas' on the 3D plot, Morten

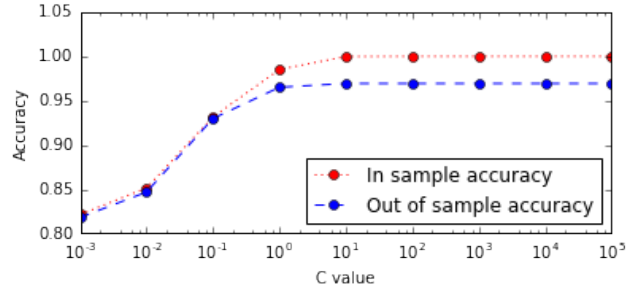


Figure 4: *SVM classification accuracy with a RBF kernel with $\gamma = 0.01$ for various C values(cost).*

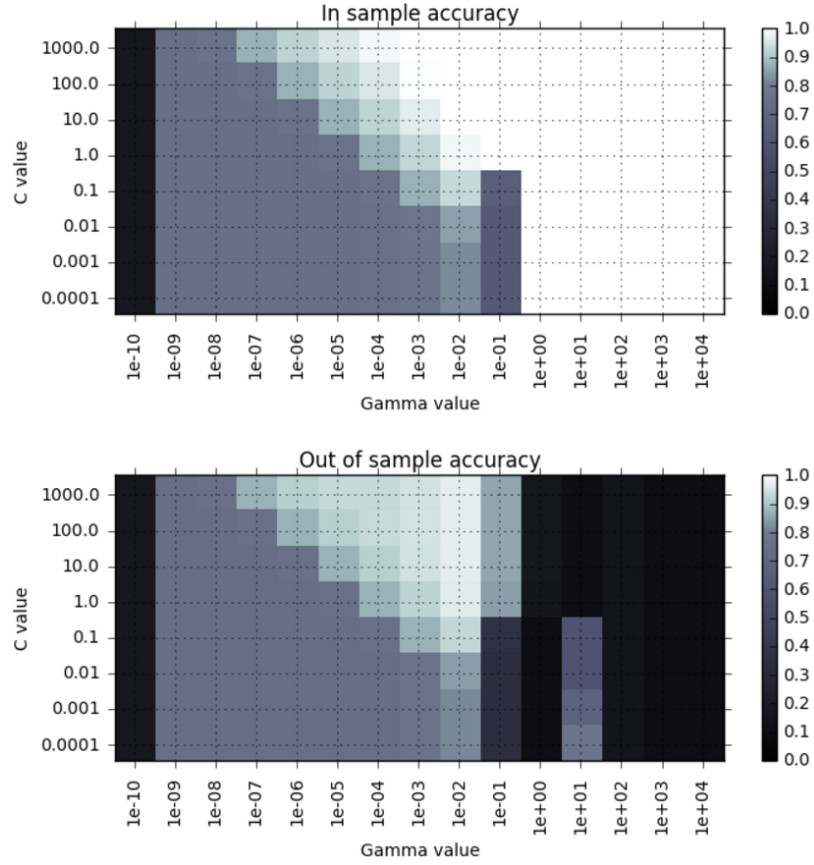


Figure 5: *SVM classification accuracy with a RBF kernel with various γ - and C values(cost).*

Table 1: *Classification accuracy with different kernels for the found optimal hyperparameters.*

SVM kernel	Validation accuracy	Training accuracy	C-value
Linear	93.29%	94.52%	0.01
2nd order poly.	96.16%	98.74%	1
3rd order poly.	96.28%	99.73%	1
RBF ($\gamma = 0.01$)	96.94%	99.98%	10

2 Neural Nets with TensorFlow

The TensorFlow² computation library has been used for implementing two neural networks.

A simple neural network (NN) with one hidden fully connected layer (and an input and output layer) has been implemented. See Figure 6. The input images is represented by a feature vector of size 784 equal to the number of pixels. The hidden layer has 1024 fully connected nodes, with weight-matrix and biases-vector as parameters. The fully connected output layer consists of 10 nodes with a dropout rate of 0.5. The dropout can introduce a redundancy so that no single node in the hidden layer is indicator for one output class. No dropout is performed when evaluating the network.

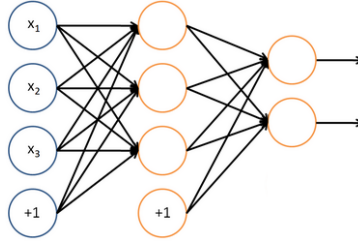


Figure 6: *Illustration of a small NN, with one hidden layer. In our case the input vector consists of the 784 pixel values for an image, the hidden layer has 1024 nodes, and the output layer has 10 nodes, one for each digit-class. Biases are added for both computational layers.*

2.1 Improved (combined) training set

To improve training, the AUtrain and MNIST dataset have been combined into one for training. The training set of 65000 images should be even more resistant to over fitting the CNN during training. The original AUtest set is still used for validation while finding the optimal hyper parameters. Then for the final model training the test set is included in the training set.

²<https://www.tensorflow.org/>

2.2 Training

The training was done with TensorFlow on GPU with a batchsize of 512. For every 100 iterations an evaluation of the accuracy was performed. The learning rate was set as a exponential decreasing learning rate, starting at 0.001 and dropping by a factor of 0.96 every 100 iterations. The parameters was randomly initialized by standard procedures.

Furthermore a snapshot of the layer parameters was saved when evaluating the model. When no increase in out of sample accuracy is observed the training is stopped. Maximum number of iterations was set at 10000 to leave the computations overnight. The snapshot corresponding to the highest accuracy is saved, and now define the final trained model. The validation accuracy of the trained neural network was ???.

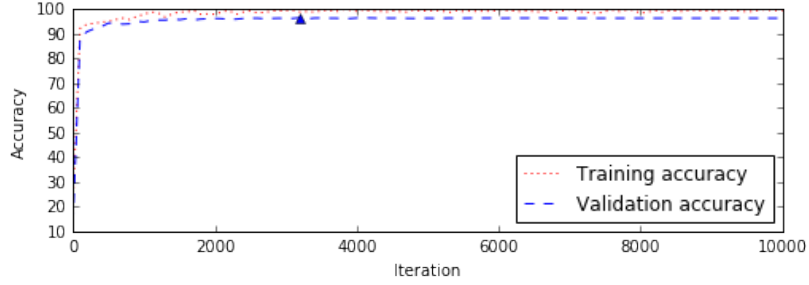


Figure 7: *Learning curve for the simple neural network. The triangle marks maximum.*

3 Making the best classifier in 2016 ML Class

In an attempt to make a even better classifier the simple neural network has been expanded by adding two convolution layers and max pooling layers before the two fully connected layers. See Figure 8.

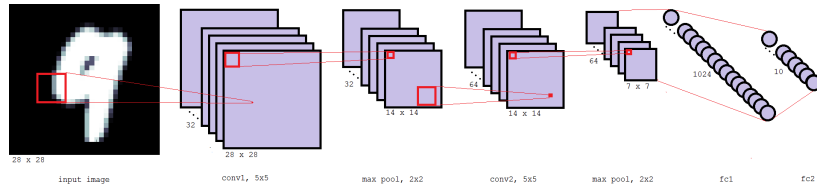


Figure 8: *Illustration of the CNN. Two 5x5 convolution layers and 2x2 max pooling layers before a fully connected layer of 1024nodes and the fully connected output layer of 10 nodes. Input monochrome images of 28x28 pixels assumed.*

The input feature(pixel) vector is reshaped to a two dimensional matrix. The first convolution has 32 filters with size 5x5 with stride 1. Padding is used to allow convolutions on the outer parts of the image and keep resolution. A max pool layer over 2x2 areas effectively halves the resolution before yet

another similar convolution with 64 filters. A similar max pool reduce the data to $7 \times 7 \times 64$ scalars. Then a fully connected layer of 1024 nodes and a output layer with dropout rate 0.5 similar to the previously explained simple NN takes the convolution layer output into outputs for the 10 classes.

3.1 Training

Training was performed like the the simple neural network, but with a factor 0.94 in learning rate every 100 steps. The learning progression is plotted in Figure 9. The maximum validation accuracy of $xx.xx\%$ was reached at ??? iterations.

This result can be compared to the other models in Figure 2.

FiXme Fatal: res
her!

3.2 Hyperparameters

Figure 9: *Learning curve for the convolution neural network. The triangle marks maximum.*

FiXme Fatal:
Hyperparam-
eters: learning
rate, batchsize,
epochs to run,
FiXme Fatal:
results

Table 2: *Classification accuracy for the RBF kernel SVM, simple neural network with one hidden layer, and convolution neural network, all trained on the combined AUtrain and MNIST set, and validated with AUtest.*

Classifier	Validation accuracy
SVM with RBF	96.78%
NN	96.47%
CNN	0%