

Inside the solver

Ashutosh Gupta

IITB India

Compile date: 2025-03-11

Topic 1.1

Supporting tools

Tools

Let us install a few tools.

- ▶ linux
- ▶ emacs
- ▶ git
- ▶ python3
- ▶ g++
- ▶ make
- ▶ gdb
- ▶ VS code + C++ debugger extension
- ▶ z3 source <https://github.com/Z3Prover/z3>
 - ▶ compile in debug and trace mode

Z3 in debug mode[2025]

Please follow these commands to compile z3 in debug mode

```
git clone https://github.com/Z3Prover/z3.git
cd z3
mkdir build
cd build
cmake -G "Unix Makefiles" -DCMAKE_BUILD_TYPE=Debug ../
make -j3
cd ..
code .
```

The last command will open VS Code. Click on run > Add Configurations // it will create a json file
Copy paste this to the file

```
{
  "version": "0.2.0",
  "configurations": [
    {
      "type": "cppdbg",
      "request": "launch",
      "name": "Launch Program",
      "program": "${workspaceFolder}/build/z3",
      "cwd": "${workspaceFolder}",
      "args": ["/build/class.smt2"]
    }
  ]
}
```

Download class.smt2 from the CS433 2024 course page and save it inside ./build
click Run> start debugging // it should start debugging

IDE and gdb

We need to learn to use an IDE and a debugger before start looking inside Z3

Here, we will use VS Code and gdb on linux.

You may choose any other IDE and debugger combination.

Setting VS code for Z3

- ▶ start VS code from Z3 folder

```
cd ..  
code .
```

- ▶ Go to Extensions (blocky icon in left). Search C/C++ debugger extension and add the extension
- ▶ Go to Run > Add configurations > C/C++ :(gdb) attach, which creates launch.json. Please paste the following content in the launch.json

```
{  
  "version": "0.2.0",  
  "configurations": [  
    {  
      "type": "cppdbg",  
      "request": "launch",  
      "name": "Launch Program",  
      "program": "${workspaceFolder}/build/z3",  
      "cwd": "${workspaceFolder}",  
      "args": ["/class.smt2"]  
    }  
  ]  
}
```

- ▶ Download class.py and save in the z3-z3-4.12.5 folder

```
wget https://www.cse.iitb.ac.in/~akg/courses/2021-ar/class.smt2
```

- ▶ Press F5

Debugging using VS code

Some commands in gdb

- ▶ F5 runs the program in debug mode
 - ▶ Inserting breakpoints
 - ▶ Navigate to source in left pane Project-explorer → Source directory
 - ▶ By double clicking on left of source line number
 - ▶ F11 // steps in the program
 - ▶ F10 // steps over the function calls
 - ▶ Shift-F11 // finish current function
 - ▶ F5 // continue to next breakpoint
- code // executes the code written in Debug Console

Topic 1.2

Engineering for CDCL(T)

Engineering CDCL(T)

Now we will look into the internals of Z3.


Key ideas to learn in implementation design

- ▶ term management in Z3
- ▶ tactics layer
- ▶ CDCL implementation
- ▶ base theory(QF_EUF) implementation

Key ideas to learn in software design

- ▶ be comfortable with large code base
- ▶ memory management
- ▶ customized library support

CDCL(T) architecture

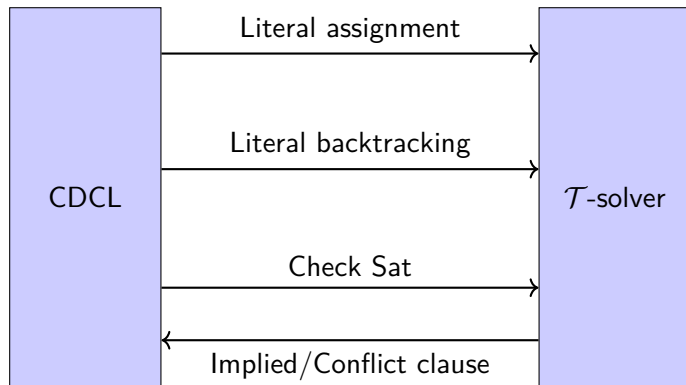

Running Z3 in emacs gdb

- Consider the following SMT problem in *class.smt2*

```
(declare-sort U 0)
(declare-fun f (U) U)
(declare-const a U)

(assert (or (= (f(f a)) a) (= (f(f(f(f a)))) a) ) )
(assert (or (= (f(f(f a))) a) (= (f a) (f(f a)) ) ) )
(assert (not (= (f a) a) ) )

(check-sat)
```

Exercise 1.1

- Is the above sat?
- Run z3 with the above input by pressing F11 and then F8

Start of solving: `setup_and_check`

- ▶ `setup_and_check` is entry the point of SMT solver
- ▶ Some simplification are applied to the input before reaching here

Find the function in `[Source directory]/src/smt/smt_context.cpp`

Exercise 1.2

- place a breakpoint there and rerun the binary till the breakpoint.
- Go to debugger console in the bottom pane and give command

`display(std::cerr)`

- Observe callstack, explain the 20+ long call stack before start solving

Internalize

- ▶ Every atom gets a Boolean variable
- ▶ Every term gets an enode (nodes for equality reasoning)

Exercise 1.3

- Go to debugger console in the bottom pane and give command


```
p display(std::cerr)
```

- Identify the number of declared enodes and their types
- Identify boolean encoder variables and their corresponding terms

Allocating enode

We need variable-sized enode to store pointer to arguments

1. Allocated a big chunk of memory
2. Declare initial part to be enode
3. Keep a pointer at the end of enode
4. Allocate extra space for the argument pointers
5. Access the rest of the space in the chunk via array access



For details look at

- ▶ `src/smt/smt_enode.h:121`
- ▶ `src/smt/smt_enode.h:158`
- ▶ `src/smt/smt_enode.cpp:68`

CDCL - search

- ▶ propagates
- ▶ decides
- ▶ pushes to the theory - base theory is implemented within the file

Look at at `z3/src/smt/smt_context.cpp:3869`

Exercise 1.4

- Place a breakpoint there and go there
- find the function for Boolean propagation
- find the function for variable decisions
- find the function for push in the theory of equality

Boolean propagation

- ▶ Uses watched literals for unit propagation

Look at

z3/src/smt/smt_context.cpp:1707

z3/src/smt/smt_context.cpp:342

Exercise 1.5

- ▶ Find where watched literal is implemented
- ▶ What are the special cases depending on the type of the clauses?
- ▶ Where propagated atoms are passed to equality engine?

Decision

- Maintains a priority queue

Look at at `z3/src/smt/smt_context.cpp:1817`

Exercise 1.6

- Find which data structure contains the the priority queue?
- How priority is managed?

Equality propagation

- ▶ Equivalence classes are stored as circular linked lists over endoes
- ▶ Parents of classes are “exogenously” stored at the root
- ▶ Congruence table is used to find quick matches

Look at at `z3/src/smt/smt_context.cpp:492`

Exercise 1.7

find the place where

- classes are merged
- congruence on the parents are applied

Congruence

- ▶ Iterates over parents of the loser root
- ▶ Copies the parents to the winner
- ▶ Identifies new congruences and propagate them

Look at at `z3/src/smt/smt_context.cpp:675`

Exercise 1.8

- find the place where the new congruences are identified
- Explain the mechanism

Clause learning

- ▶ Clause learning learns clauses from the conflict
- ▶ Adds new clauses in the

Look at `z3/src/smt/smt_context.cpp:3650`

- ▶ Where conflicts are resolved?
- ▶ What is the state after the conflict analysis?

Topic 1.3

Problems

Problem

Exercise 1.9 (2.5 points)

Read Z3 code for maintenance of parent relation in EUF solving.

Write a short explanation of optimizations implemented to achieve efficient operations on the parent relation.

Files of interest are:

- ▶ `z3/src/smt/smt_enode.cpp` // class for nodes in union-find
- ▶ `z3/src/smt/smt_enode.h`
- ▶ `z3/src/smt/smt_cg_table.cpp` // class for parent relation
- ▶ `z3/src/smt/smt_cg_table.h`
- ▶ `z3/src/smt/smt_context.cpp` // class for smt solver
- ▶ `z3/src/smt/smt_context.h`
- ▶ `z3/src/smt/smt_internalizer.cpp:902`
- ▶ `z3/src/smt/smt_internalizer.cpp:968`

SMT solving begins at `z3/src/smt/smt_context.cpp:3100`

context object in `smt_context.h` has many display functions. Use them to print current state

End of Lecture 1