Hawk update on sle12/sle15

Dario Maiocchi <dmaiocchi@suse.com>



Maintainance Process o hawk highlights:

```
Mon Nov 16 10:14:26 UTC 2020 - dmaiocchi@suse.com


- Update to version hawk2-2.2.1+git.1604928548.070a8e0c.tar.bz2

* Allow user to disable TLS 1.0 and TLS 1.1 in puma webserver for SLE12 (jsc#SLE-6965)

* Fix server error after authentication if a resource has the same name as a node (bsc#1163381)

* Allow also users in haclient group to view history explorer(jsc#SLE-7358)
```


Different architecture

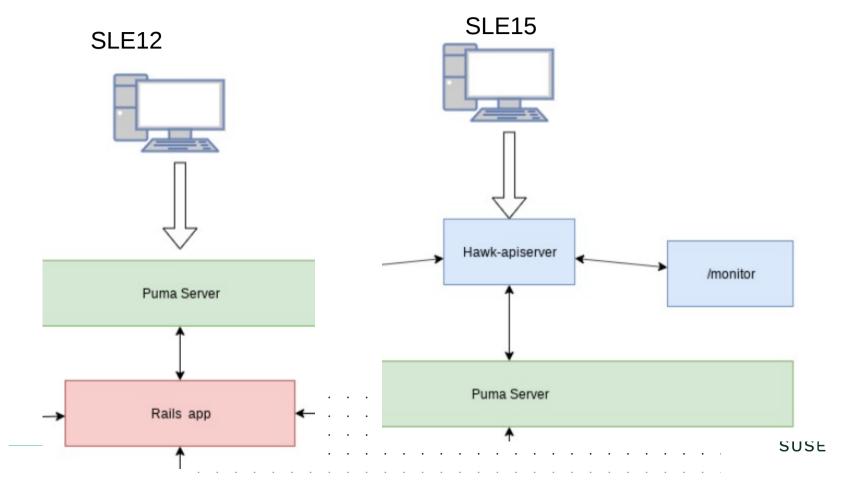

SLE15 and sle12 has different mechanism because the architecture differs.

(working togheter with suse doc team for documentation)

Different architecture

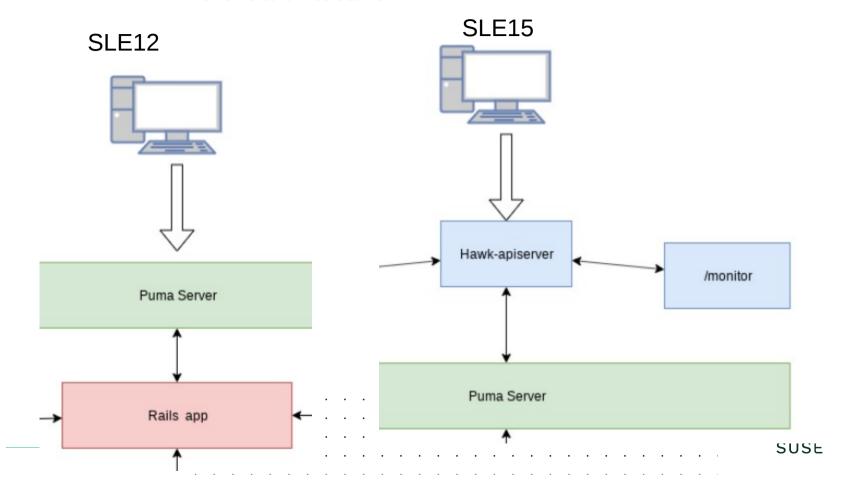

Thank you.

