

Code:index.jsp

```
<%@ page language="java" contentType="text/html; charset=ISO-8859-1"
pageEncoding="ISO-8859-1"%>
```

```
<%@ taglib prefix="core" uri="http://java.sun.com/jsp/jstl/core"%>
<%@ taglib prefix="fmt" uri="http://java.sun.com/jsp/jstl/fmt"%>
```

```
<title>JSPDirectivesDemo</title>
```

This is content from the main file (index.jsp) .

```
<%@ include file="file1.jsp"%>
```

```
<hr>
```

Example of using JSTL taglibs for formatting output

```
<br>
```

```
<p>
```

Currency =

```
<fmt:formatNumber value="145" type="currency" />
```

```
<p>
```

```
<p>
```


```
<core:set var="now" value="<%=new java.util.Date()%>" />
```

Current date and time is

```
<fmt:formatDate pattern="yyyy-MM-dd hh:mm:ss" value="${now}" />
```

```
</p>
```

Output:

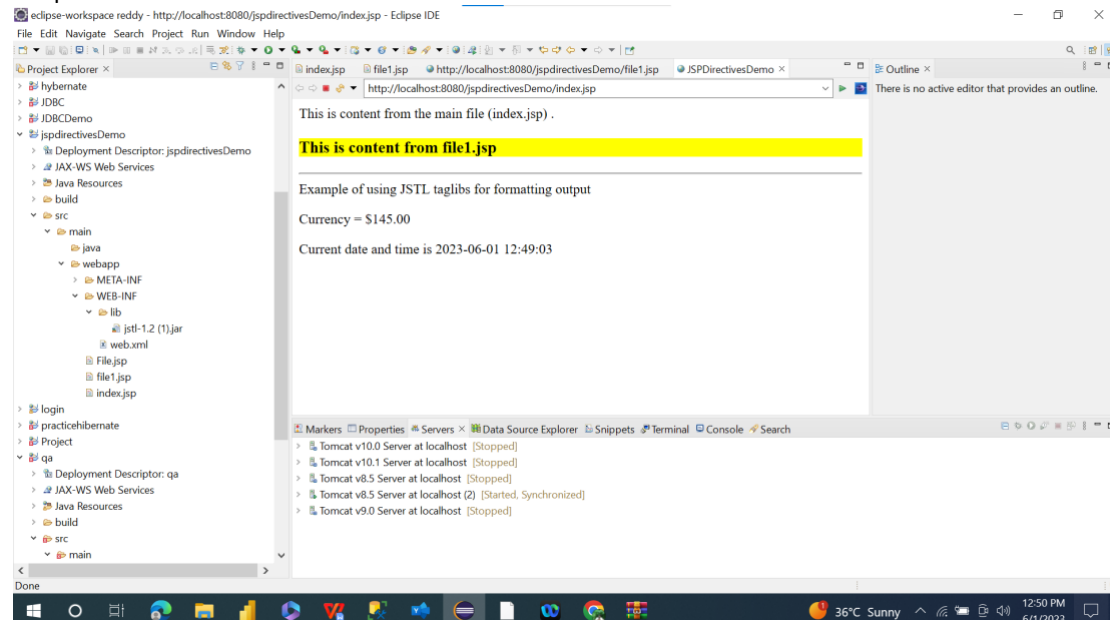

Code:file1.jsp

```
<%@ page language="java" contentType="text/html; charset=ISO-8859-1"
pageEncoding="ISO-8859-1"%>
<h3 style="background:yellow"> This is content from file1.jsp</h3>
```

