Bohara Subhash(2024991193)

1.

```cpp
#include <iostream>
using namespace std;

int main() {
    int x, count = 0; // Renamed from cout to count
    float sum = 0.0;

    cout << "Please enter some integers: " << endl;
    while (cin >> x) {
        sum += x;
        ++count; // Increment your new counter variable
    }

    // Use count for the calculation
    cout << "The average of the numbers: " << sum / count << endl;
    return 0;
}
```

```
c:\Users\user-46\Desktop\c++\week3>cd "c:\Users\user-46\Desktop\c++\week3\" && g++ 5.cpp -o 5 && "c:\Users\user-46\Desktop\c++\week3\"5

How often should the tone be output? 3
Now the tone!
Now the tone!
```

2.

```cpp
#include <iostream>
using namespace std;
int main() {
    double rate=1.15;
    cout <<fixed << setprecision(2);
    cout<<"\tEuro \tDollar\n";
    for (int euro=1;euro<=5;++euro)
    cout<<"\t"<<euro<<"\t"<<euro*rate<<endl;
    return 0;
}
```

```
c:\Users\user-46\Desktop\c++\week3>cd "c:\Users\user-46\Desktop\c++\week3\" && g++ 5.cpp -o 5 && "c:\Users\user-46\Desktop\c++\week3\"5

How often should the tone be output? 3
Now the tone!
Now the tone!
Now the tone!
End of the acoustic interlude!
```

Bohara Subhash(2024991193)

3.

```cpp
// for while loop
#include <iostream>
#include <iomanip>
using namespace std;
int main() {
    double rate = 1.15; // Make sure this is defined

    int euro = 1;
    while (euro <= 5) {
        cout << "\t" << euro << "\t" << euro * rate << endl;
        ++euro;
    }

    return 0;
}
```

4.

```cpp
#include <iostream>
#include <iomanip>
using namespace std;

int main()
{
    long euro, maxEuro; // Amount in Euros
    double rate;        // Exchange rate Euro <-> $

    cout << "\n* * TABLE OF EXCHANGE "
         << "\n* * Euro - US-$ * * \n\n";

    cout << "\nPlease give the rate of exchange: "
         << "one Euro in US-$: ";
    cin >> rate;

    cout << "\nPlease enter the maximum euro: ";
    cin >> maxEuro;

    // Outputs the table --
    // Titles of columns:
    cout << "\n"
         << setw(12) << "Euro" << setw(20) << "US-$"
         << "\tRate: " << rate << endl;

    // Formatting US-$:
    cout << fixed << setprecision(2) << endl;

    long lower, upper, step; // Lower and upper limit Step width

    // The outer loop determines the actual
    // lower limit and the step width:
    for (lower = 1, step = 1; lower <= maxEuro; step *= 10, lower = 2 * step)
    {
        // The inner loop outputs a "block":
        for (euro = lower, upper = step * 10; euro <= upper && euro <= maxEuro; euro += step)
        {
            cout << setw(12) << euro << setw(20) << euro * rate << endl;
        }
    }

    return 0;
}
```

```
How often should the tone be output? 3
Now the tone!
Now the tone!
Now the tone!
End of the acoustic interlude!

c:\Users\user-46\Desktop\c++\week3>
```

Bohara Subhash(2024991193)

5.

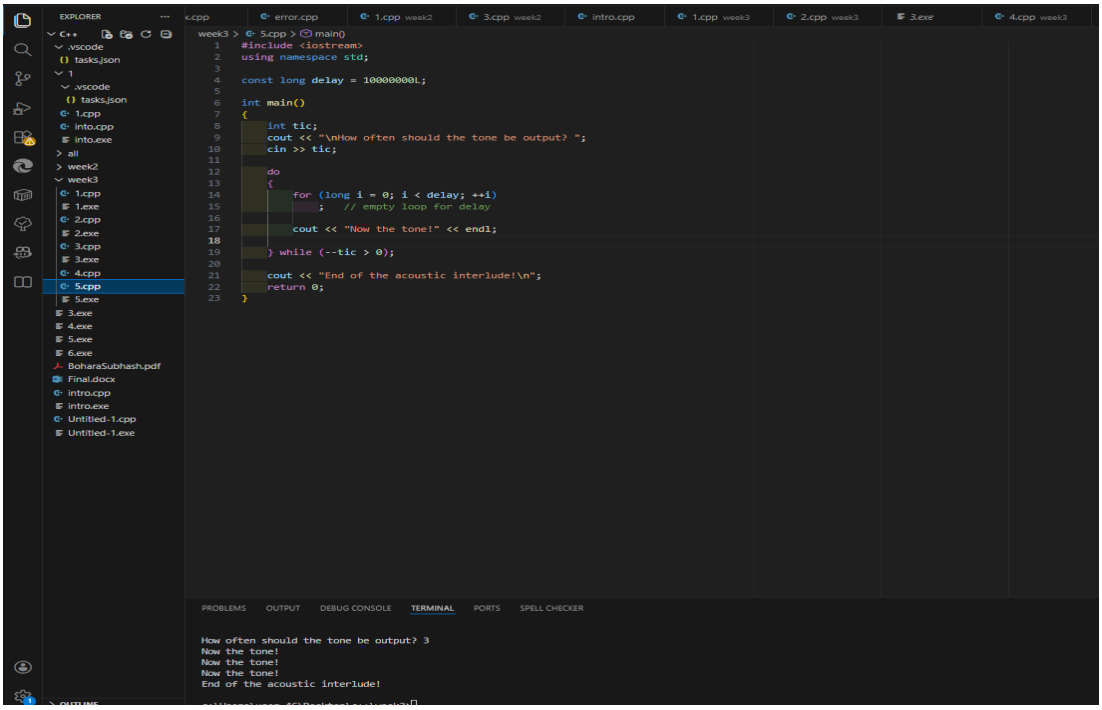

6.

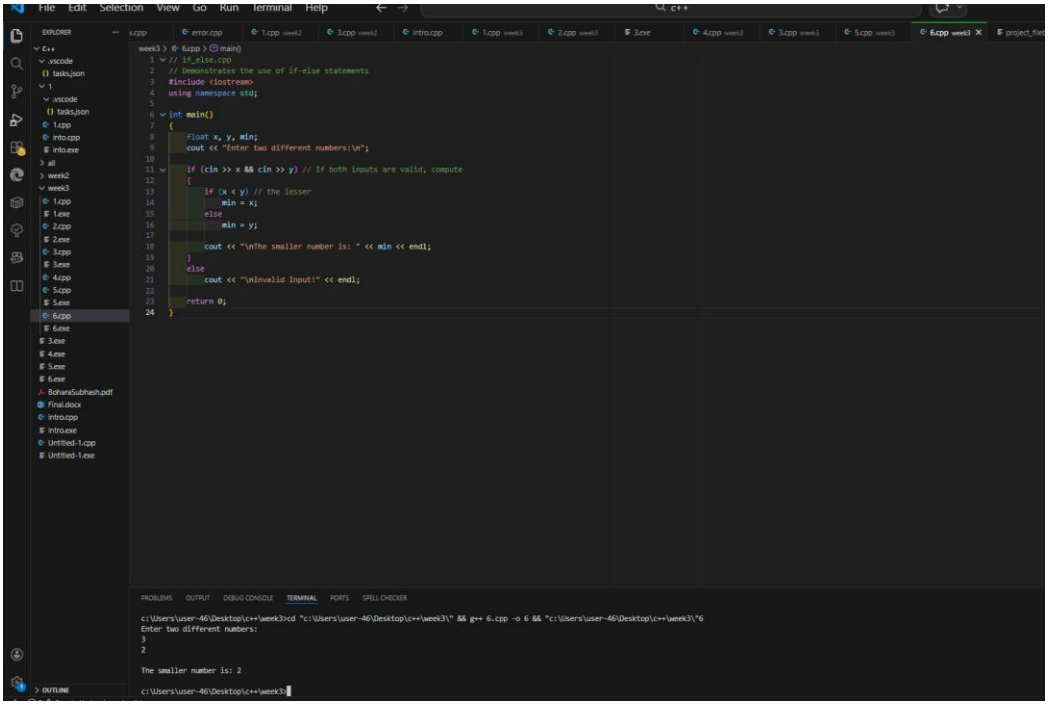

Bohara Subhash(2024991193)
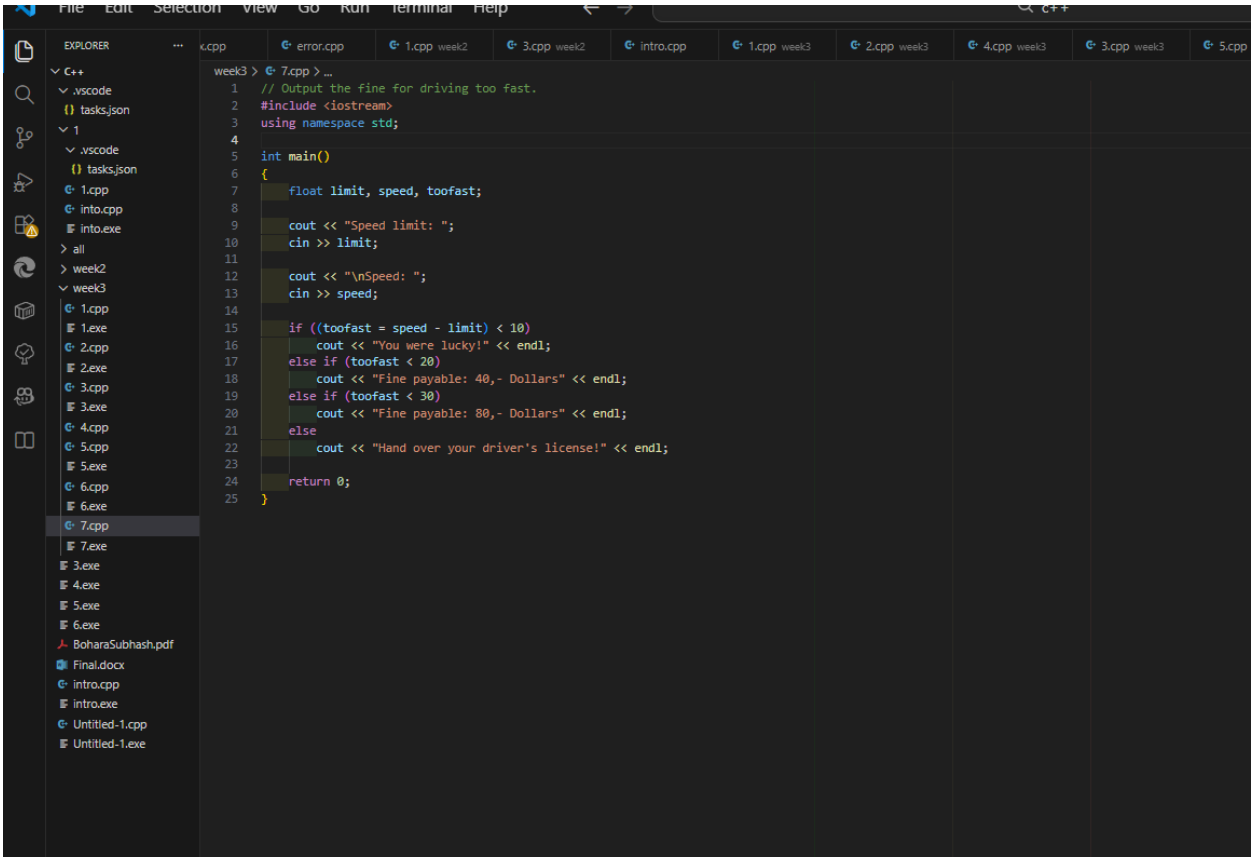
7.