

Action topography in the human brain



Tool-mediated

(3 arguments)


Intransitive

(1 argument; non object-directed)


Distal transitive

(2 arguments; object-directed)

- Univariate approaches define brain areas that specifically supply discrete features of finalized movements

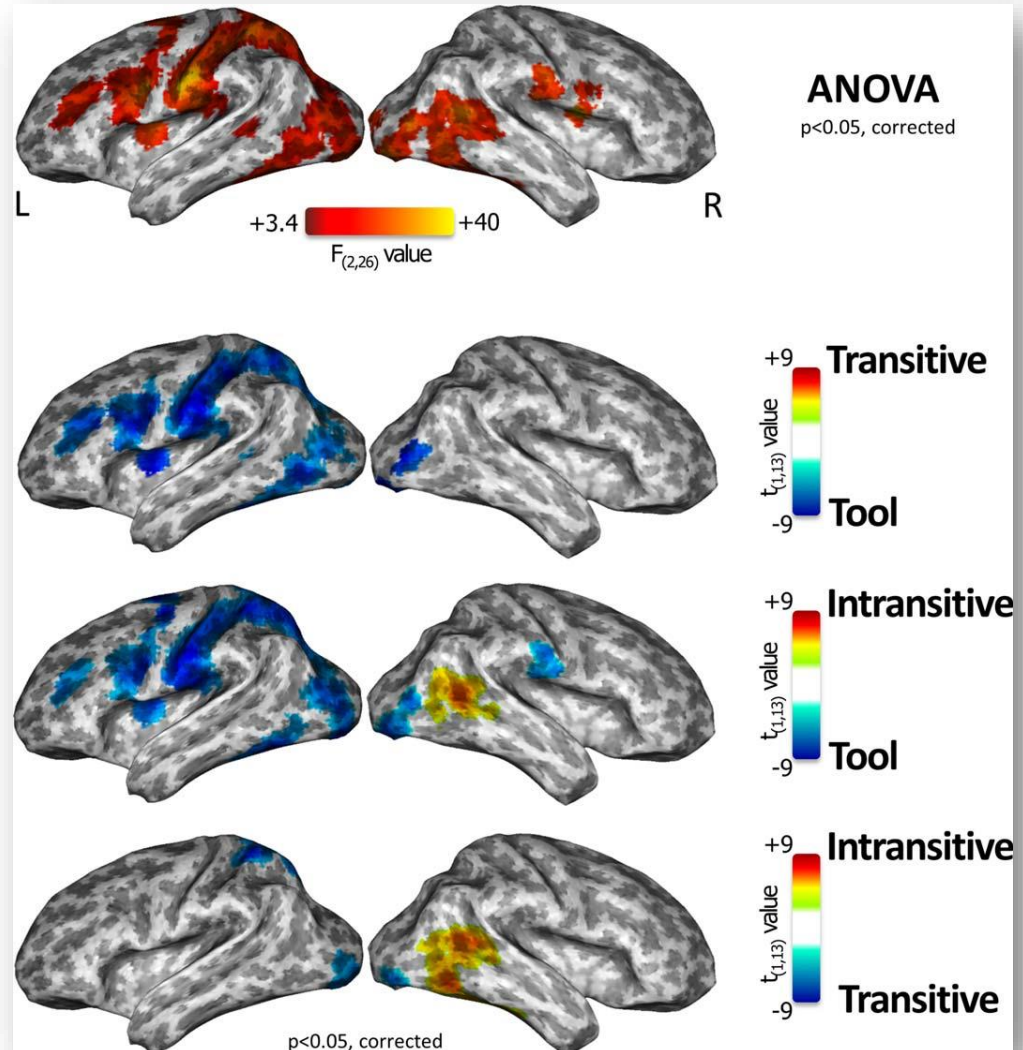


Action topography in the human brain

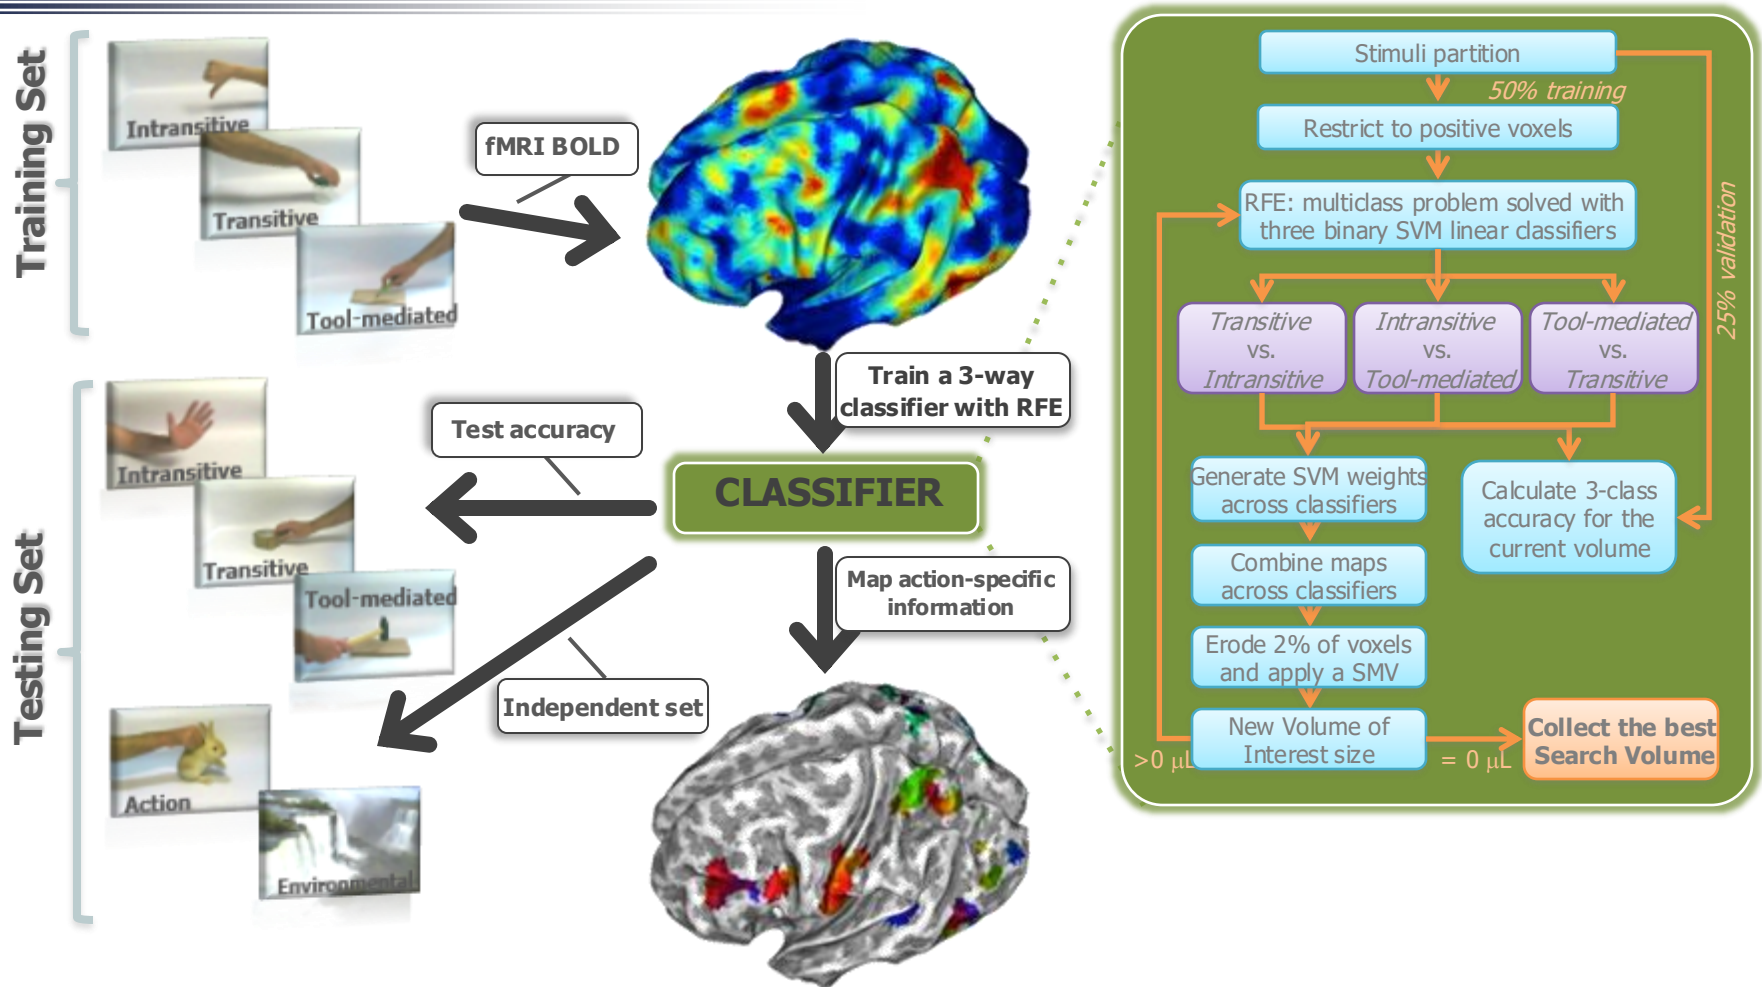



Multivariate approaches are suitable for the analysis of multidimensional representations (i.e., whether distinct patterns might subserve a topographically-organized coding of different action (semantic) classes)

Action topography in the human brain


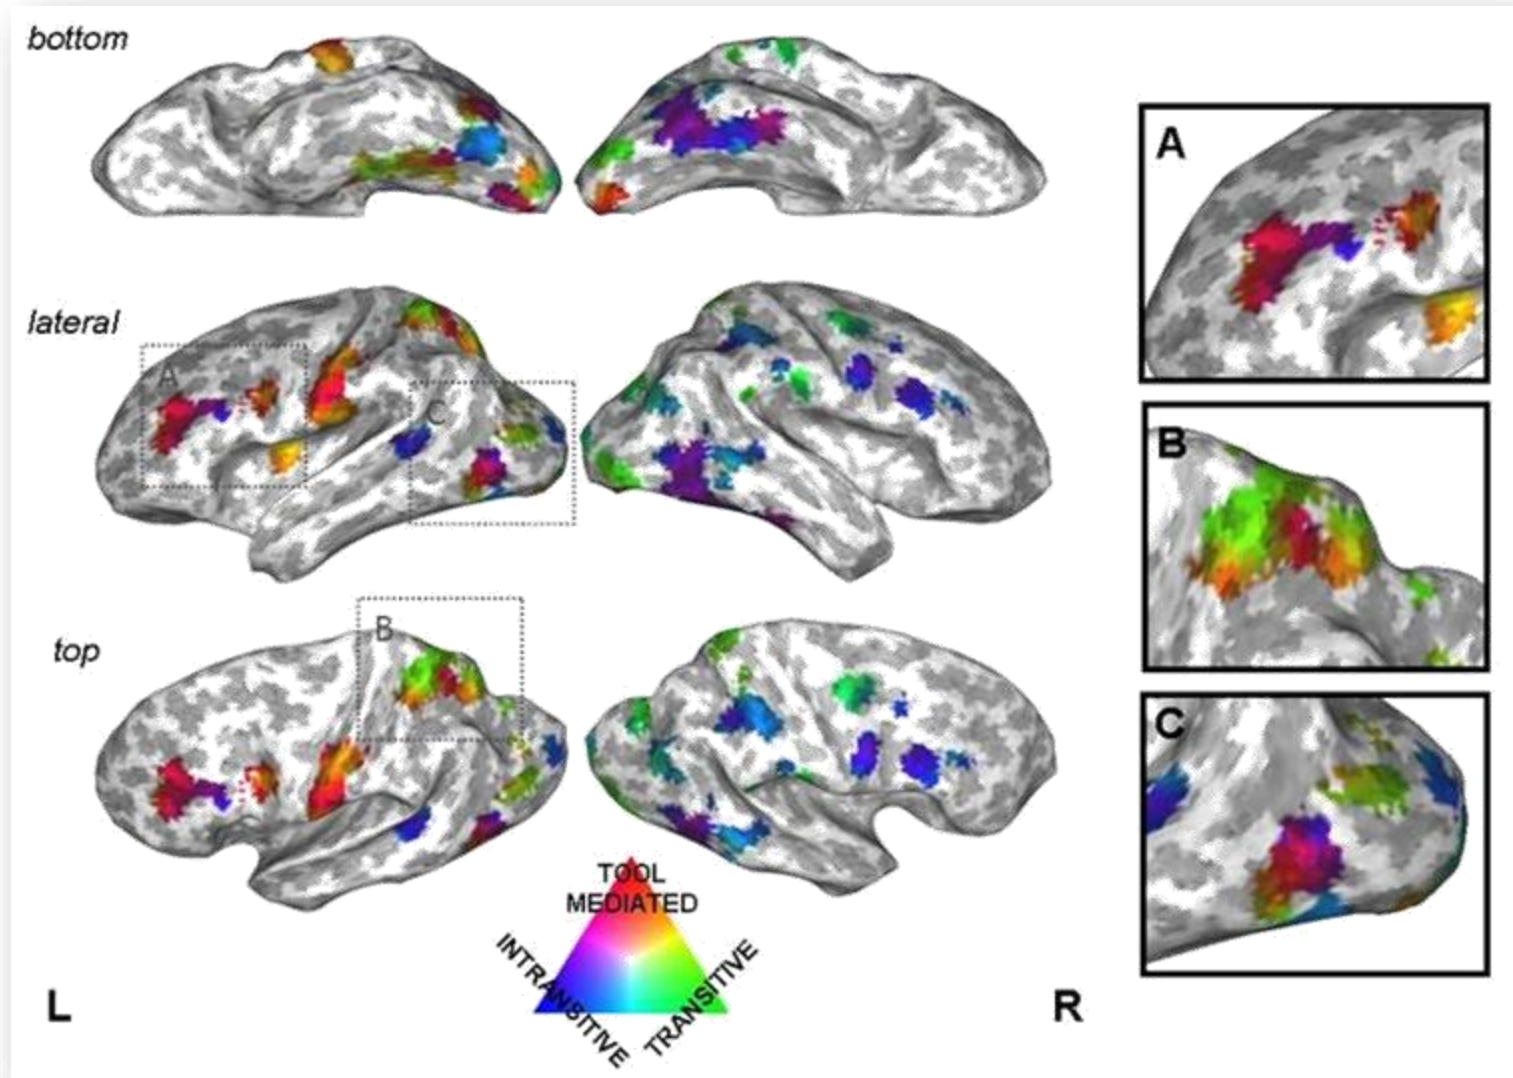


Action topography in the human brain



Multivariate

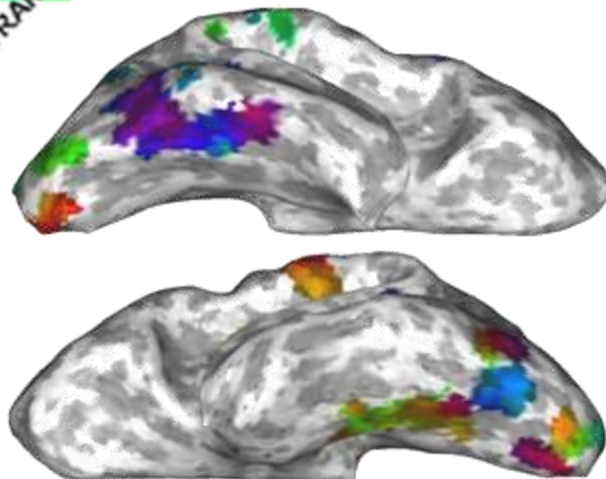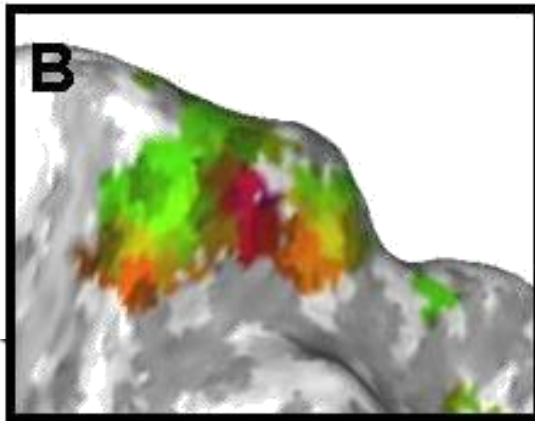

Mass-Univariate

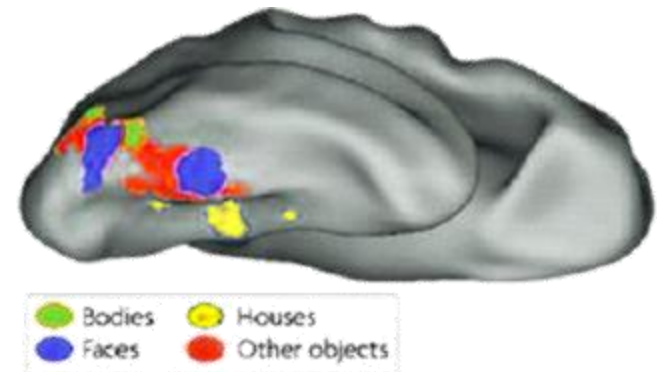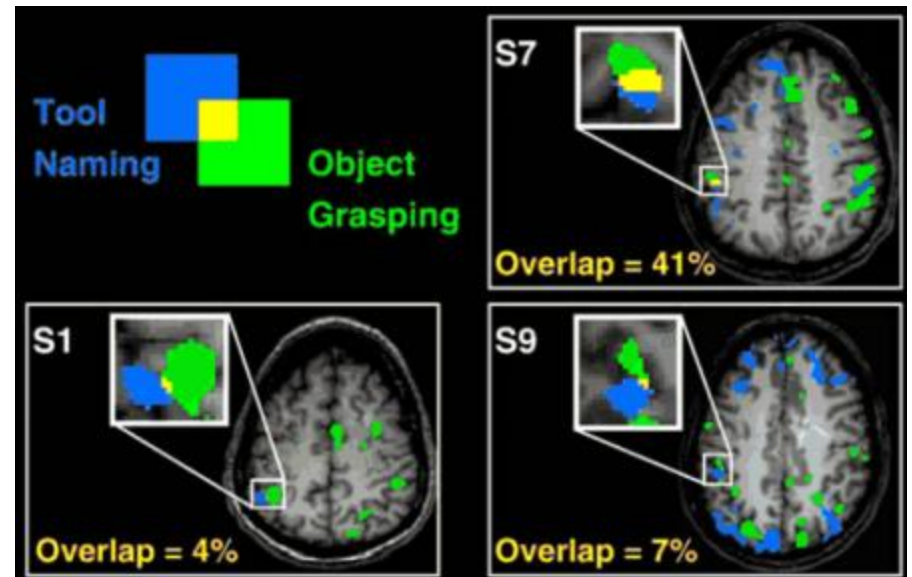

Action topography in the human brain

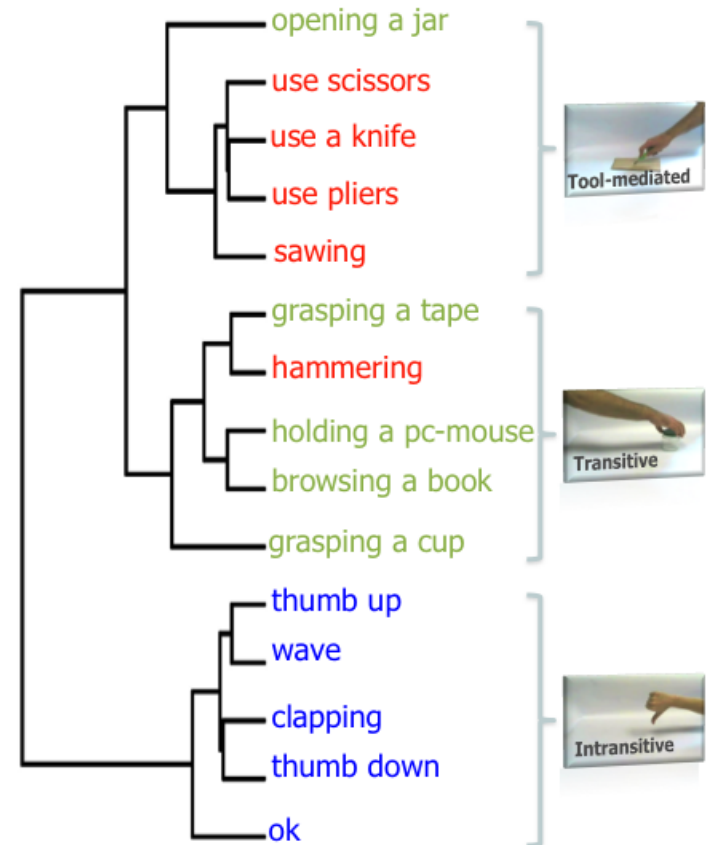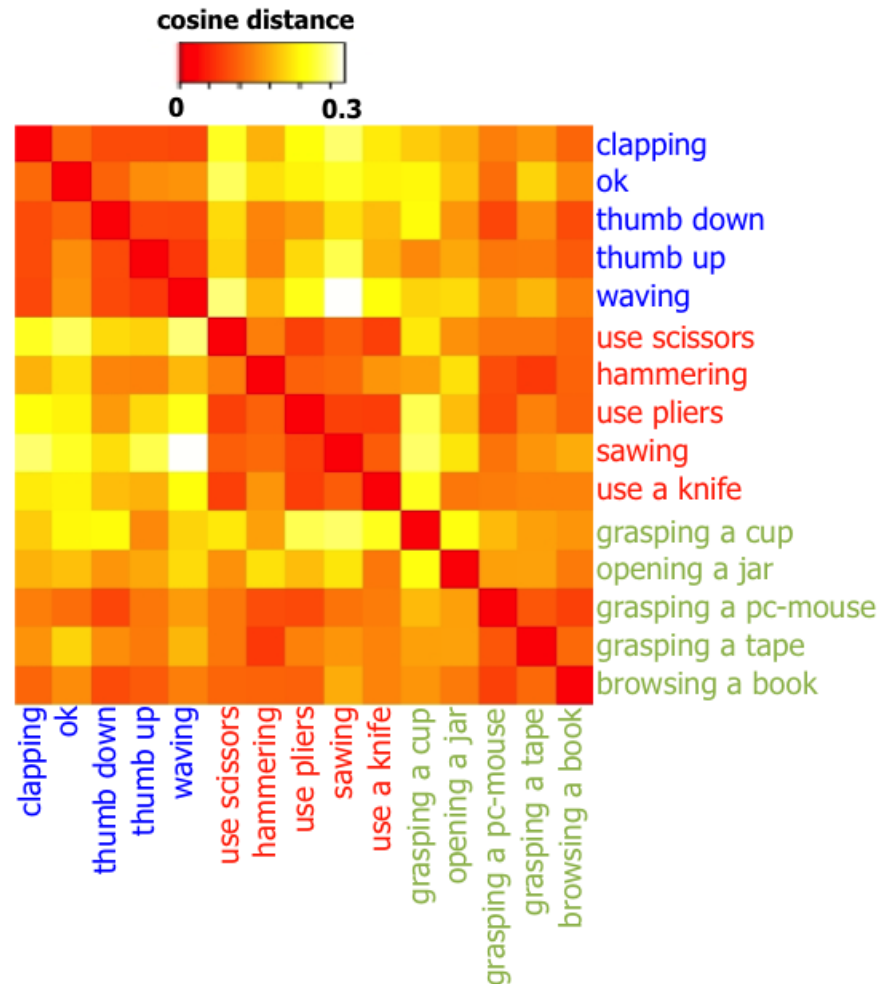

A specific and distributed representation of action categories