


Assignment No:12

Title: Deploy and run the project in AWS without using the port.


Step-1:

Upload required files to github

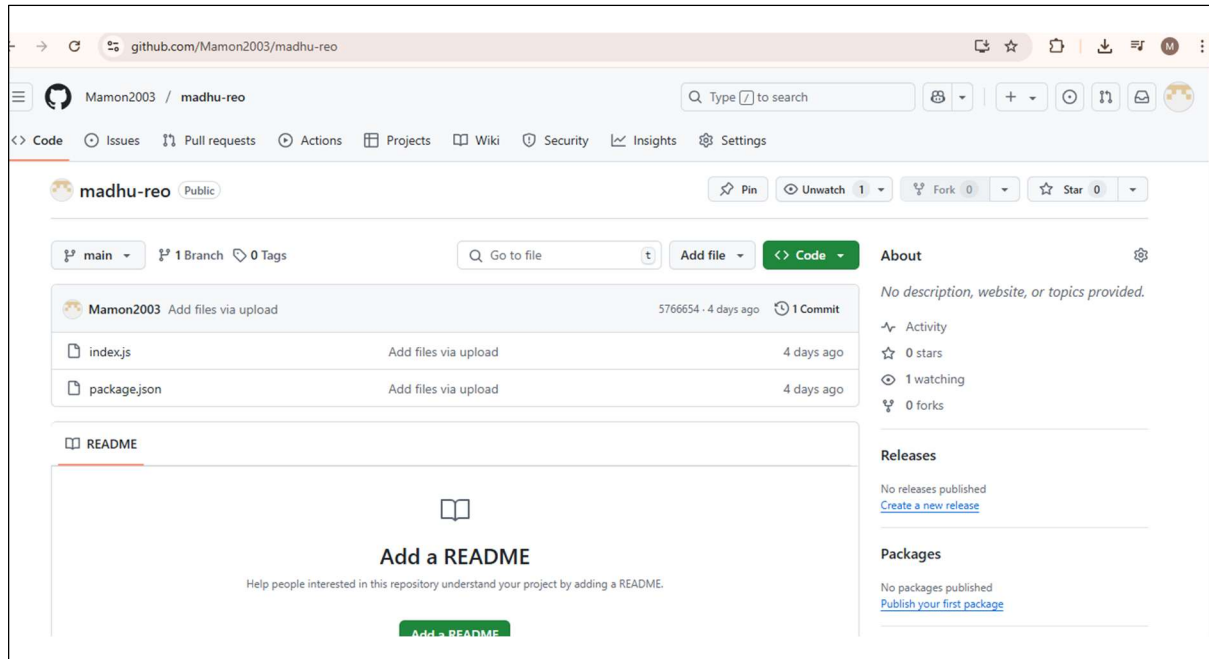


Step-2:

Log into AWS and open EC2.

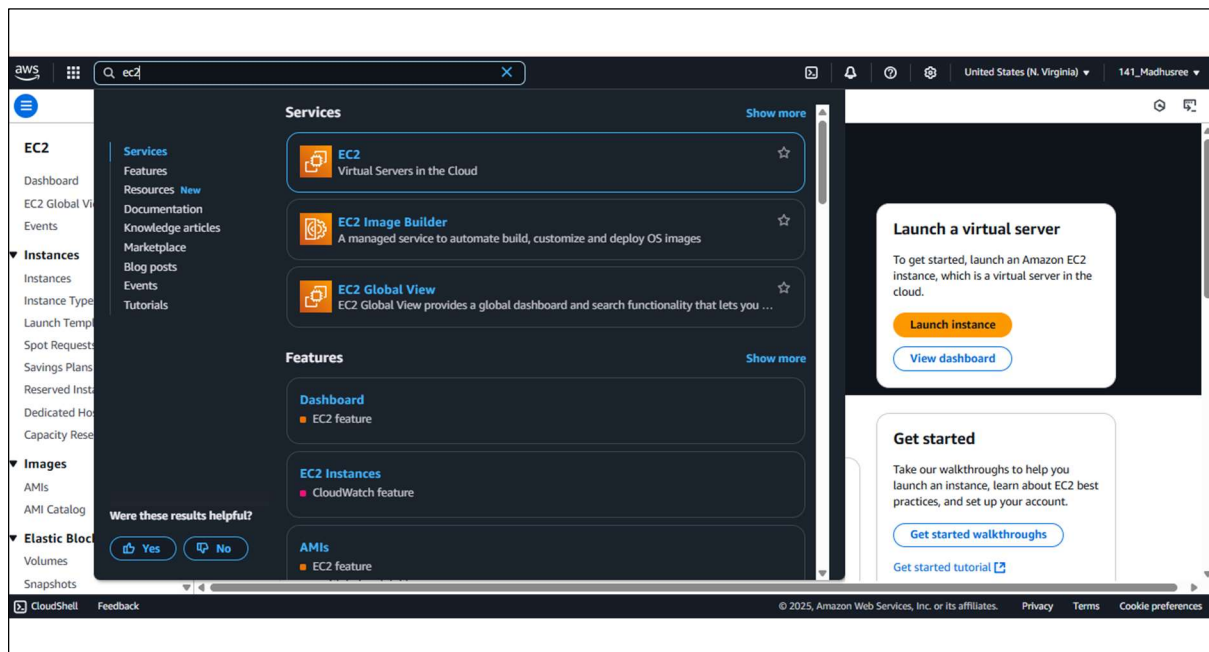


Step-3:


Open the EC2

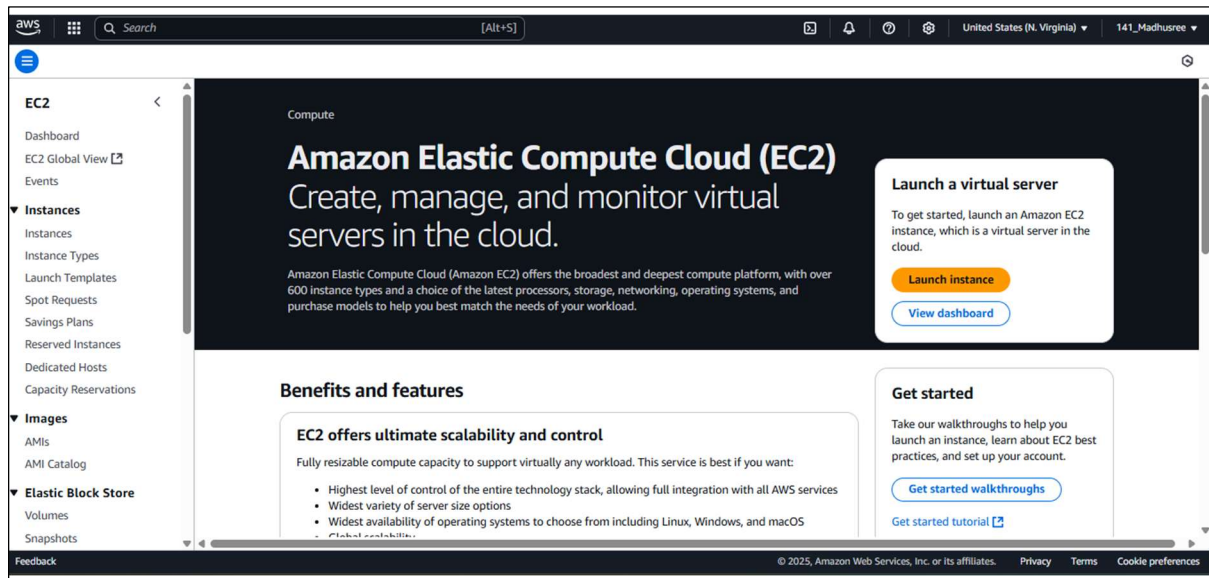

Step-4:


Create ec2 instance and add the below bash commands in user data section.

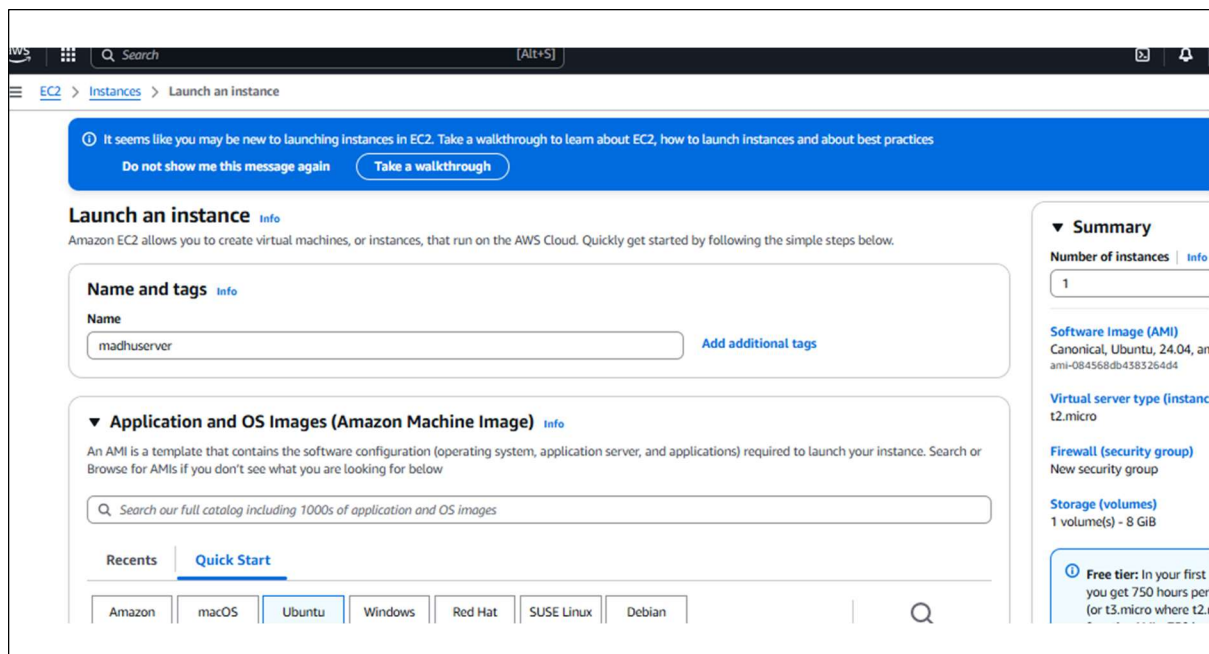

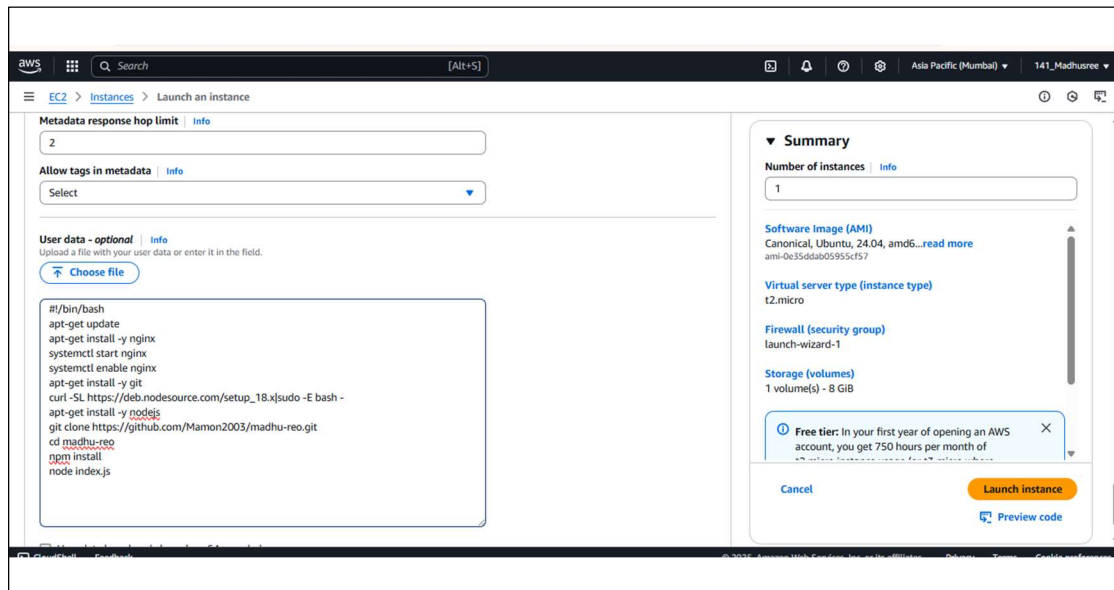

Step-5:

After creating instance the site should successfully run on the port 4000.



Step-6:

Now log into bitvise and cd ../.. to go to root directory then open etc with cd etc and nginx with cd nginx and sites-available with cd sites-available then change the permissions of the default file using sudo chmod 777 default. Then edit the default file with nano default and change the code to what is given below and close the editor then restart the nginx with sudo systemctl restart nginx.

```
ubuntu@13.201.80.38:22 - Bitwise xterm - ubuntu@ip-172-31-0-238: /etc/nginx/sites-available
ubuntu@ip-172-31-0-238:~$ cd ../../
ubuntu@ip-172-31-0-238:/$ ls
bin          dev          lib          lost+found  opt         run          snap        tmp
bin.usr-is-merged  etc        lib.usr-is-merged  media      proc        sbin        srv         usr
boot        home        lib64        mnt        root        sbin.usr-is-merged  sys         var
ubuntu@ip-172-31-0-238:/$ cd etc
ubuntu@ip-172-31-0-238:/etc$ cd nginx
ubuntu@ip-172-31-0-238:/etc/nginx$ ls
conf.d          koi-utf      modules-available  proxy_params  sites-enabled  win-utf
fastcgi.conf    koi-win      modules-enabled    scgi_params   snippets
fastcgi_params  mime.types  nginx.conf         sites-available  uwsgi_params
ubuntu@ip-172-31-0-238:/etc/nginx$ cd sites-available
ubuntu@ip-172-31-0-238:/etc/nginx/sites-available$ ls
default
ubuntu@ip-172-31-0-238:/etc/nginx/sites-available$ nano default
ubuntu@ip-172-31-0-238:/etc/nginx/sites-available$ sudo systemctl restart nginx
ubuntu@ip-172-31-0-238:/etc/nginx/sites-available$
```

```
GNU nano 7.2          default
server {
    listen 80;
    server_name _;

    location / {
        proxy_pass http://localhost:4000;
        proxy_http_version 1.1;
        proxy_set_header Upgrade $http_upgrade;
        proxy_set_header Connection 'upgrade';
        proxy_set_header Host $host;
        proxy_cache_bypass $http_upgrade;
    }
}

[ Directory '.' is not writable ]
^G Help      ^O Write Out  ^W Where Is   ^K Cut        ^T Execute    ^C Location   M-U Undo
^X Exit      ^R Read File  ^\ Replace    ^U Paste      ^J Justify    ^_ Go To Line  M-E Redo
```

Step-7:

Now the site runs on IP without giving the port.

