

ميد برمجة مرئية 471

Q1 :Find Output

```
11
12 public class average{
13     private static int average(String [] list)throws ExceptionEmpty{
14
15         int sum = 0, integer, nbNotes = 0;
16
17         for(int i=0; i<list.length; i++){
18             try{
19                 integer = Integer.parseInt(list[i]);
20                 if(integer<0)    throw new ExceptionRange("few");
21                 else if(integer >20) throw new ExceptionRange("large");
22             }else{
23                 sum += integer;
24                 nbNotes++;
25             }
26         }
27         catch (NumberFormatException nfe){
28             System.out.println("Note no."+(i+1)+" is not integr");
29         }
30         catch (ExceptionRange ei){
31             System.out.println("Note no."+(i+1)+" is too "+ei.getMessage());
32         }
33     } //Fin for
```

```
34
35     if(nbNotes == 0) throw new ExceptionEmpty();
36     return sum/nbNotes;
37 }
38 public static void main(String [] args){
39
40     //input الاولى نوجد هذا ال
41     String [] tab2 = {"-1", "2", "x", "30", "18"};
42
43     //input الثانية نوجد هذا ال
44     String [] tab3 = {"x", " ", "2.3", "/n"};
45
46     try{
47         System.out.println("The average is: "+average(tab3));
48     }
49     catch (ExceptionEmpty er){
50         System.out.println(er);
51     }
52 }
53 }
54
```

```
public class ExceptionRange extends Exception{  
public ExceptionRange (String s){  
    super(s);  
}  
}
```


```
11  
12     public class ExceptionEmpty extends Exception{  
13         public String toString(){  
14             return("No note is valid");  
15         }  
16     }
```

Q2 :Find Output

```
13 public class Devices {
14
15     void start() {
16         System.out.println("Device is starting");
17     }
18
19     void close() {
20         System.out.println("Device is closing");
21     }
22
23     class Phone extends Devices {
24         @Override
25         void start() {
26             System.out.println("Phone is starting");
27         }
28
29         void call() {
30             System.out.println("Phone is calling");
31         }
32     }
33
34     class Laptop extends Devices {
35         @Override
36         void start() {
37             System.out.println("Laptop is starting");
38         }
39     }
40 }
```

```
39
40
41     void compile() {
42         System.out.println("Laptop is compiling code");
43     }
44
45     public static void main(String[] args) {
46
47         Devices d1 = new Phone();
48         Devices d2 = new Laptop();
49
50         ((Phone)d1).call();
51         d2.start();
52         ((Phone)d1).start();
53         ((Laptop)d2).close();
54
55         Devices d3 = new Devices();
56         ((Phone)d3).call();
57     }
58 }
```

Q3:

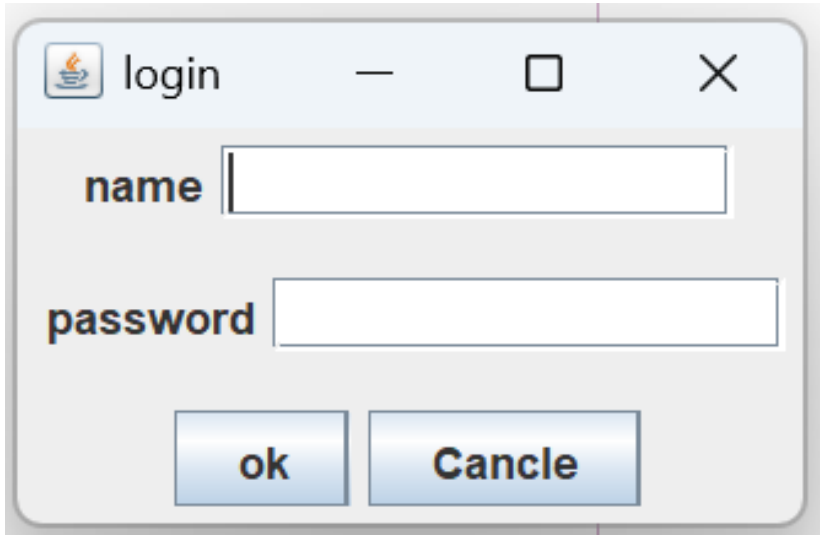

A screenshot of a login dialog box. The window has a title bar with a small icon, the text "login", and standard window controls (minimize, maximize, close). Inside the dialog, there are two text input fields. The first is labeled "name" and the second is labeled "password". Below the input fields are two buttons: "ok" and "Cance".

//مو نفس الامثله بالضبط بس نفس الفكره

// لا تنسونني من دعواتكم