

ميد برمجة مرئية 471

Q1 :Find Output

```
11
12 public class average{
13     private static int average(String [] list)throws ExceptionEmpty{
14
15         int sum = 0, integer, nbNotes = 0;
16
17         for(int i=0; i<list.length; i++){
18             try{
19                 integer = Integer.parseInt(list[i]);
20                 if(integer<0) throw new ExceptionRange("few");
21                 else if(integer >20) throw new ExceptionRange("large");
22             }else{
23                 sum += integer;
24                 nbNotes++;
25             }
26         }
27         catch (NumberFormatException nfe){
28             System.out.println("Note no. "+(i+1)+" is not integr");
29         }
30         catch (ExceptionRange ei){
31             System.out.println("Note no. "+(i+1)+" is too "+ei.getMessage());
32         }
33     } //Fin for
34
35     if(nbNotes == 0) throw new ExceptionEmpty();
36     return sum/nbNotes;
37 }
38 public static void main(String [] args){
39
40     //input الاولى نوجد هذا ال
41     String [] tab2 = {"-1", "2", "x", "30", "18"};
42
43     //input الثانية نوجد هذا ال
44     String [] tab3 = {"x", " ", "2.3", "/n"};
45
46     try{
47         System.out.println("The average is: "+average(tab3));
48     }
49     catch (ExceptionEmpty er){
50         System.out.println(er);
51     }
52 }
53
54
```

```
public class ExceptionRange extends Exception{  
    public ExceptionRange (String s) {  
        super(s);  
    }  
}
```

```
11  
12     public class ExceptionEmpty extends Exception{  
13         public String toString() {  
14             return ("No note is valid");  
15         }  
16     }
```

Output

Note no.1 is not integer
Note no.2 is not integer
Note no.3 is not integer
Note no.4 is not integer
No note is valid


Q2 :Find Output

```
13 public class Devices {
14
15     void start() {
16         System.out.println("Device is starting");
17     }
18
19     void close() {
20         System.out.println("Device is closing");
21     }
22
23     class Phone extends Devices {
24         @Override
25         void start() {
26             System.out.println("Phone is starting");
27         }
28
29         void call() {
30             System.out.println("Phone is calling");
31         }
32     }
33
34     class Laptop extends Devices {
35         @Override
36         void start() {
37             System.out.println("Laptop is starting");
38         }
39     }
40 }
```

```
41
42
43
44 void compile() {
45     System.out.println("Laptop is compiling code");
46 }
47
48
49
50 public static void main(String[] args) {
51
52     Devices d1 = new Phone();
53     Devices d2 = new Laptop();
54
55     ((Phone)d1).call();
56     d2.start();
57     ((Phone)d1).start();
58     ((Laptop)d2).close();
59
60     Devices d3 = new Devices();
61     ((Phone)d3).call();
62 }
63 }
```

Output:
Phone is calling
Laptop is starting
Phone is starting
Device is closing

Q3

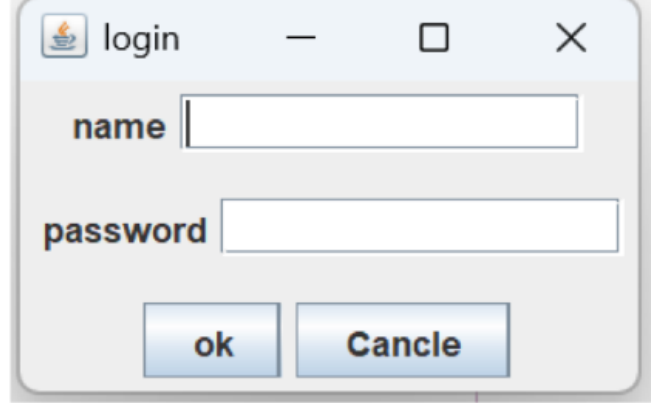

```
import javax.swing.*;
import java.awt.*;
```

```
public class Q3 extends JFrame {
```

```
    JLabel l1, l2;
    JTextField t1;
    JPasswordField t2;
    JButton b1, b2;
```

```
    public Q3() {
        setTitle("login");
        setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);
```

```
        Container p = getContentPane();
        p.setLayout(new GridLayout(3, 1));
```

```
        JPanel p1 = new JPanel(new FlowLayout(FlowLayout.CENTER));
        JPanel p2 = new JPanel(new FlowLayout(FlowLayout.LEFT));
        JPanel p3 = new JPanel(new FlowLayout(FlowLayout.CENTER));
```

```
        l1 = new JLabel("name");
        t1 = new JTextField(15);
```

```
        l2 = new JLabel("password");
        t2 = new JPasswordField(15);
```

```
        b1 = new JButton("ok");
        b2 = new JButton("Cancel");
```

```
        p1.add(l1);
        p1.add(t1);
```

```
        p2.add(l2);
        p2.add(t2);
```

```
        p3.add(b1);
        p3.add(b2);
```

```
        p.add(p1);
        p.add(p2);
        p.add(p3);
```

```
        pack();
        setVisible(true);
    }
```

```
    public static void main(String[] args) {
        new Q3();
    }
```

```
}
```