

Outputs

Name: Manan Rangoonwala

Sem: 7 Div: B

RollNo: 134



Question-1

NodeJS AJAX Example


[Click Here](#)
Hello NodeJS




Question- 2

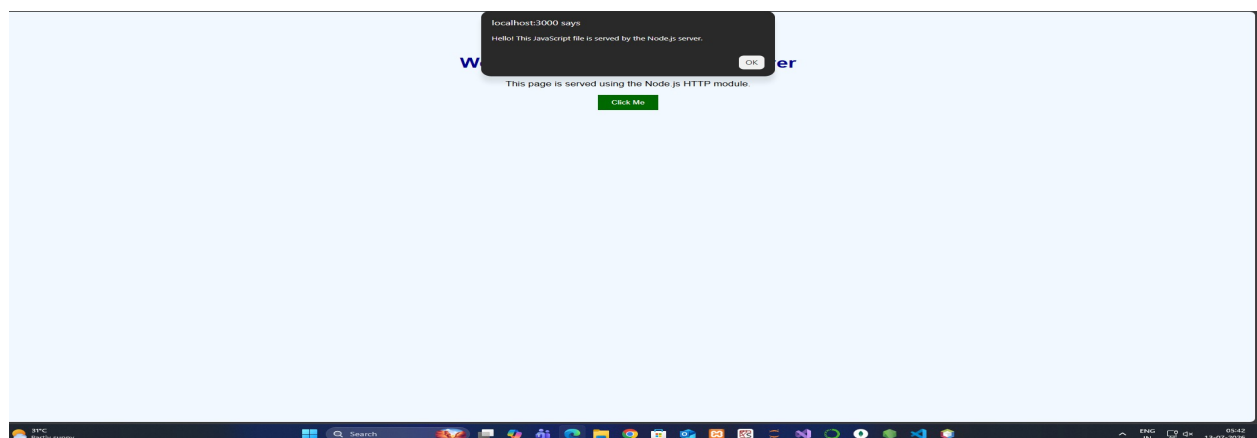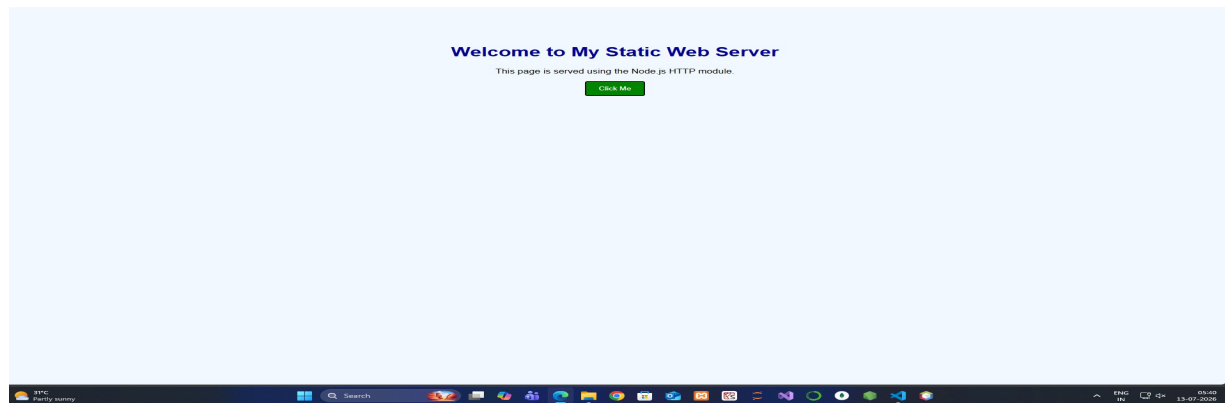


Question-3

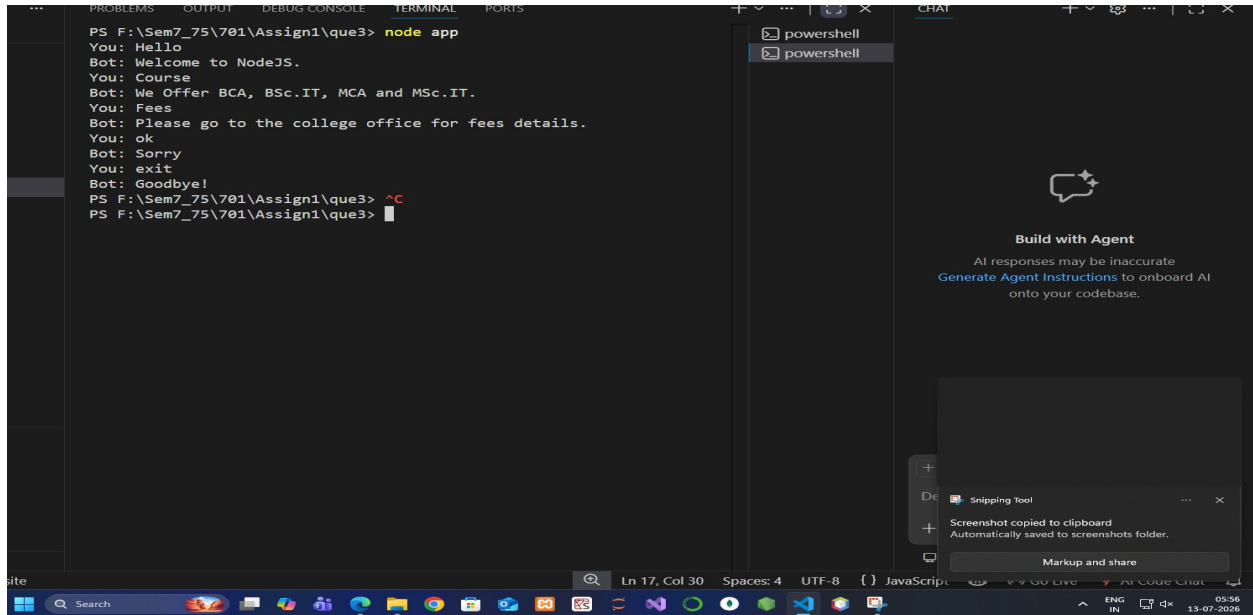


Question-4

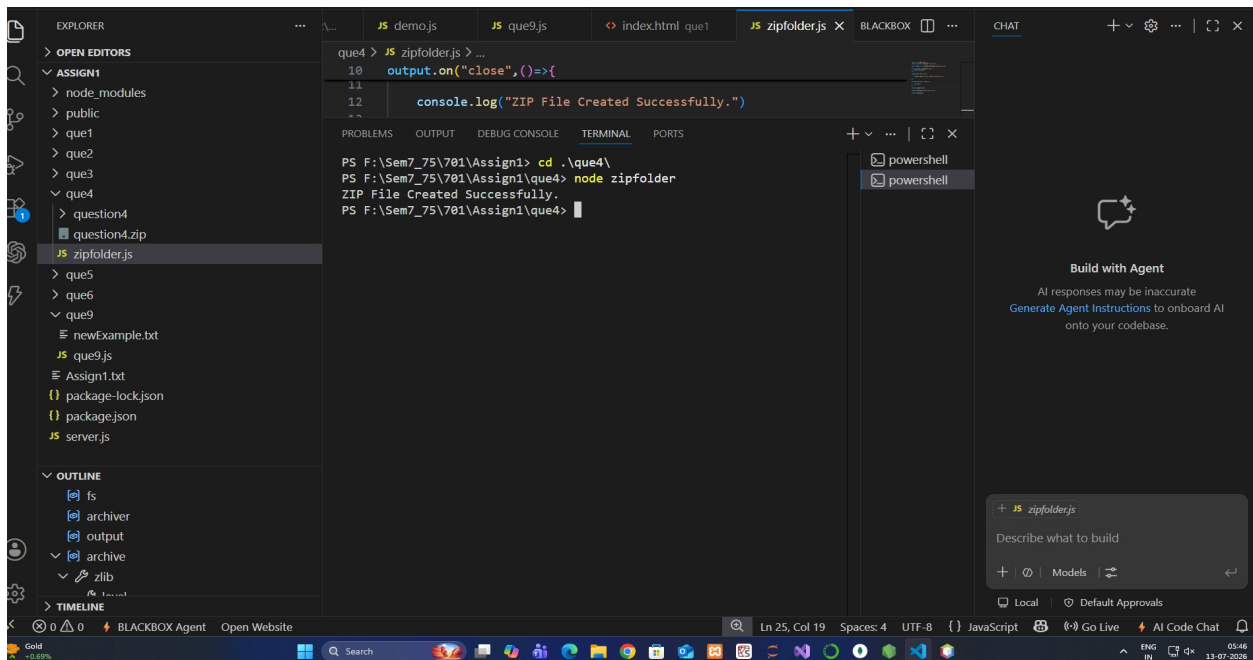

Question-5

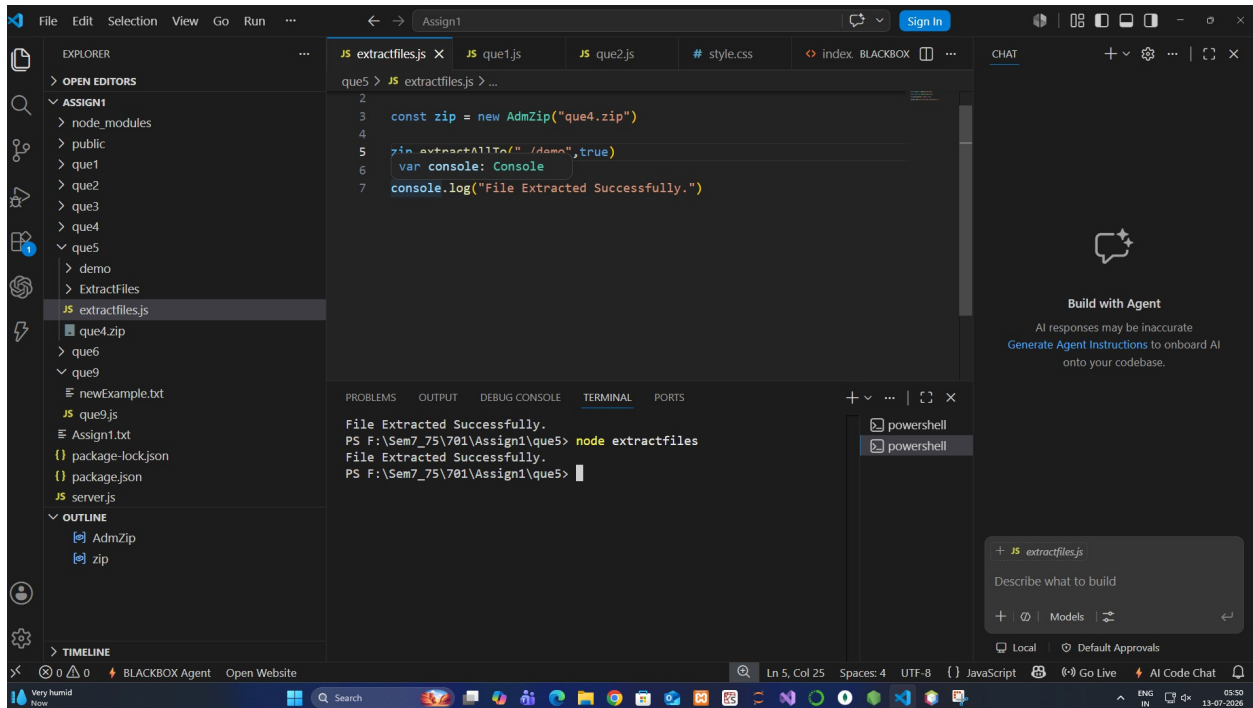

Question-6

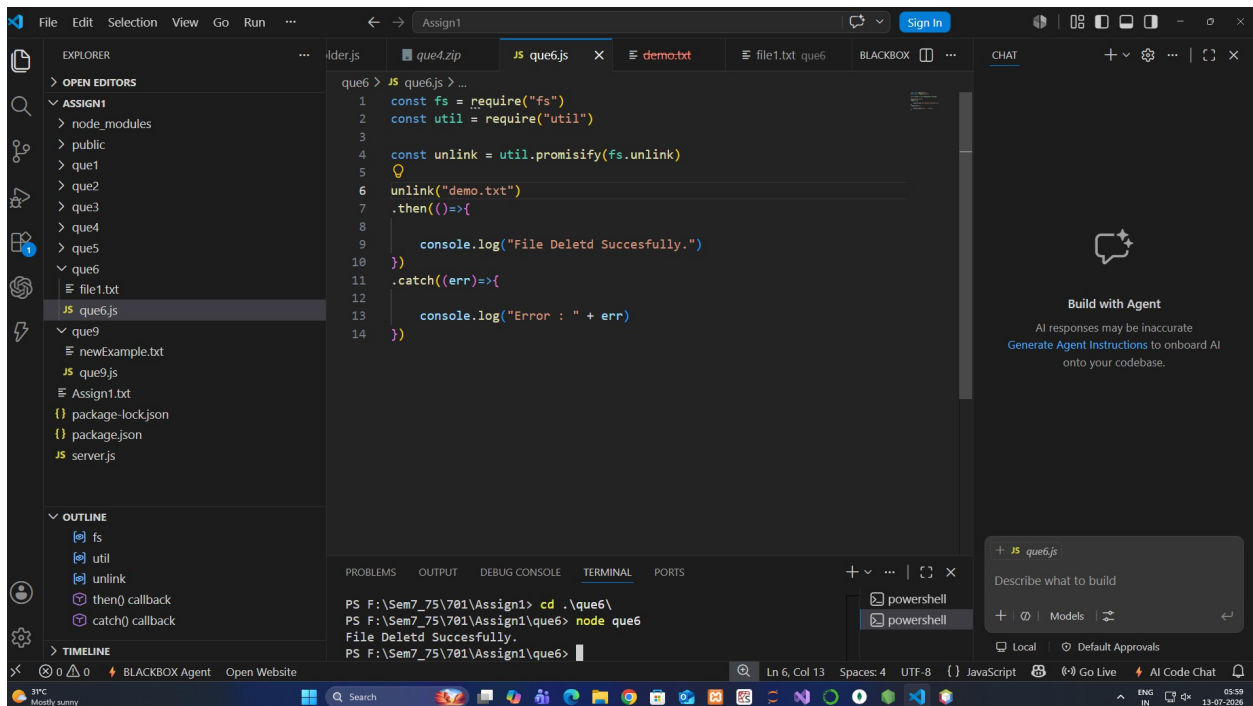

Question-7

The screenshot shows a VS Code editor with a project named 'Assign1'. The Explorer panel on the left shows a file tree with folders 'public', 'que1' through 'que9', and files 'file1.txt', 'que6.js', 'que7', 'server.js', 'que9.js', 'newExample.txt', 'Assign1.txt', 'package-lock.json', and 'package.json'. The 'OUTLINE' panel shows a list of functions: 'fetch', 'fetchGooglePage', 'response', 'data', and 'err'. The 'TIMELINE' panel is empty. The main editor shows the 'server.js' file with the following code:

```
3 async function fetchGooglePage() {
4   try {
5     const response = await fetch('https://www.google.com');
```

The terminal output shows the following commands and results:

```
added 4 packages, and audited 57 packages in 2s
5 packages are looking for funding
  run `npm fund` for details

found 0 vulnerabilities
PS F:\Sem7_75\701\Assign1\que7> node server
Status Code: 200
<doctype html><html itemscope="" itemtype="http://schema.org/WebPage" lang="en-IN"><head><meta content="text/html; charset=UTF-8" http-equiv="Content-Type"><meta content="/images/branding/google/1x/googleleg_standard_color_128dp.png" itemprop="image"><title>Google</title><script nonce="5WwEiwfPly3f7uDErBEiVw">(function(){var _g=(kEI: 'wYBUarqHOKb650UPkr3H-QQ', kEXPI: '0,1304203,2949953,425603,226411,2,74737,5231650,595,135,36810838,25381059,8944,56224,114382,23964,37805,107648,22464,18635,3050,2,48
PS F:\Sem7_75\701\Assign1\que7>
```

The chat panel on the right shows a 'Build with Agent' button and a text input field with the placeholder 'Describe what to build'. The status bar at the bottom shows 'Ln 13, Col 44', 'Spaces: 4', 'UTF-8', 'JavaScript', 'Go Live', 'AI Code Chat', and a system tray with '31°C Mostly sunny'.

Question-8

The screenshot shows a VS Code editor with a project named 'Assign1'. The Explorer panel on the left shows a file tree with folders 'public', 'que1' through 'que9', and files 'file1.txt', 'que6.js', 'que7', 'app.js', 'package.json', 'server.js', 'test.js', 'que9.js', 'newExample.txt', 'Assign1.txt', and 'scripts'. The 'OUTLINE' panel shows a list of functions: 'name q8', 'version 1.0.0', 'description', 'main index.js', and 'scripts'. The 'TIMELINE' panel is empty. The main editor shows the 'package.json' file with the following code:

```
{
  "name": "q8",
  "version": "1.0.0",
  "description": "",
  "main": "index.js",
  "scripts": {
    "start": "node app",
    "test": "node test",
    "build": "echo Building project...",
    "clean": "echo Cleaning project..."
  }
}
```

The terminal output shows the following commands and results:

```
PS F:\Sem7_75\701\Assign1\que8> node app
Application
PS F:\Sem7_75\701\Assign1\que8> npm run start
> q8@1.0.0 start
> node server

Server Started...
PS F:\Sem7_75\701\Assign1\que8> npm run test
> q8@1.0.0 test
> node test

Running Tests...
PS F:\Sem7_75\701\Assign1\que8> npm run build
> q8@1.0.0 build
> echo Building project...


Building project...
PS F:\Sem7_75\701\Assign1\que8> npm run dev
> q8@1.0.0 dev
> node app

Application
PS F:\Sem7_75\701\Assign1\que8> npm run clean
> q8@1.0.0 clean
> echo Cleaning project...

Cleaning project...
PS F:\Sem7_75\701\Assign1\que8>
```

The chat panel on the right shows a 'Build with Agent' button and a text input field with the placeholder 'Describe what to build'. The status bar at the bottom shows 'Ln 1, Col 1', 'Spaces: 2', 'UTF-8', 'JSON', 'Go Live', 'AI Code Chat', and a system tray with '31°C Mostly sunny'.

Question-9

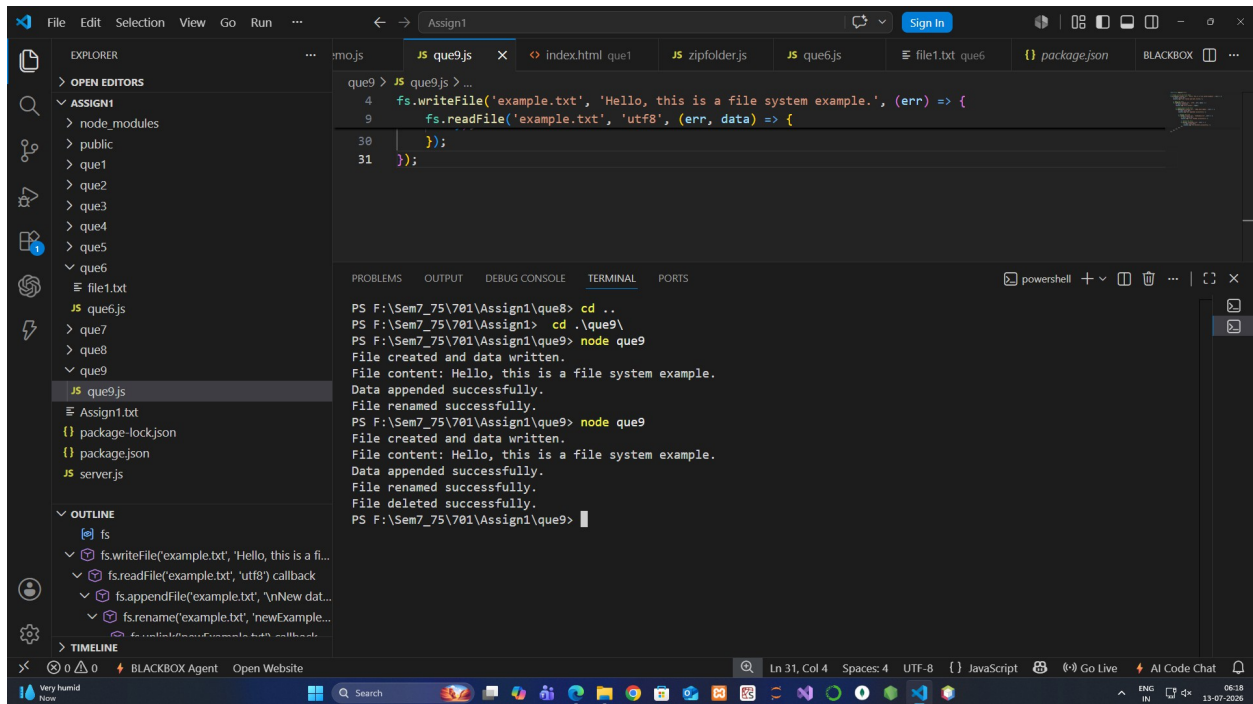


```
que9 > JS que9.js > ...
4 fs.writeFile('example.txt', 'Hello, this is a file system example.', (err) => {
9   fs.readFile('example.txt', 'utf8', (err, data) => {
30   });
31 });
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

```
PS F:\Sem7_75\701\Assign1\que8> cd ..
PS F:\Sem7_75\701\Assign1> cd .\que9\
PS F:\Sem7_75\701\Assign1\que9> node que9
File created and data written.
File content: Hello, this is a file system example.
Data appended successfully.
File renamed successfully.
PS F:\Sem7_75\701\Assign1\que9> node que9
File created and data written.
File content: Hello, this is a file system example.
Data appended successfully.
File renamed successfully.
File deleted successfully.
PS F:\Sem7_75\701\Assign1\que9> |
```

Question-10

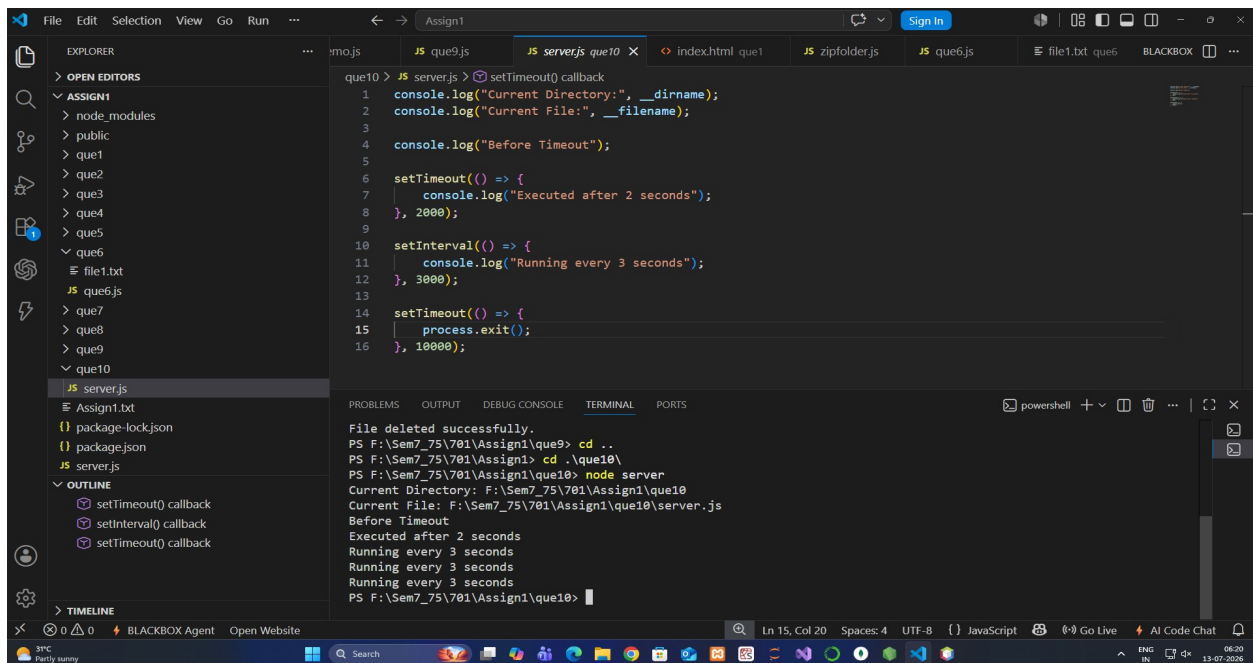


```
que10 > JS server.js > setTimeout() callback
1 console.log("Current Directory:", __dirname);
2 console.log("Current File:", __filename);
3
4 console.log("Before Timeout");
5
6 setTimeout(() => {
7   console.log("Executed after 2 seconds");
8 }, 2000);
9
10 setInterval(() => {
11   console.log("Running every 3 seconds");
12 }, 3000);
13
14 setTimeout(() => {
15   process.exit();
16 }, 10000);
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

```
File deleted successfully.
PS F:\Sem7_75\701\Assign1\que9> cd ..
PS F:\Sem7_75\701\Assign1> cd .\que10\
PS F:\Sem7_75\701\Assign1\que10> node server
Current Directory: F:\Sem7_75\701\Assign1\que10
Current File: F:\Sem7_75\701\Assign1\que10\server.js
Before Timeout
Executed after 2 seconds
Running every 3 seconds
Running every 3 seconds
Running every 3 seconds
PS F:\Sem7_75\701\Assign1\que10> |
```

Question-11

Question-12

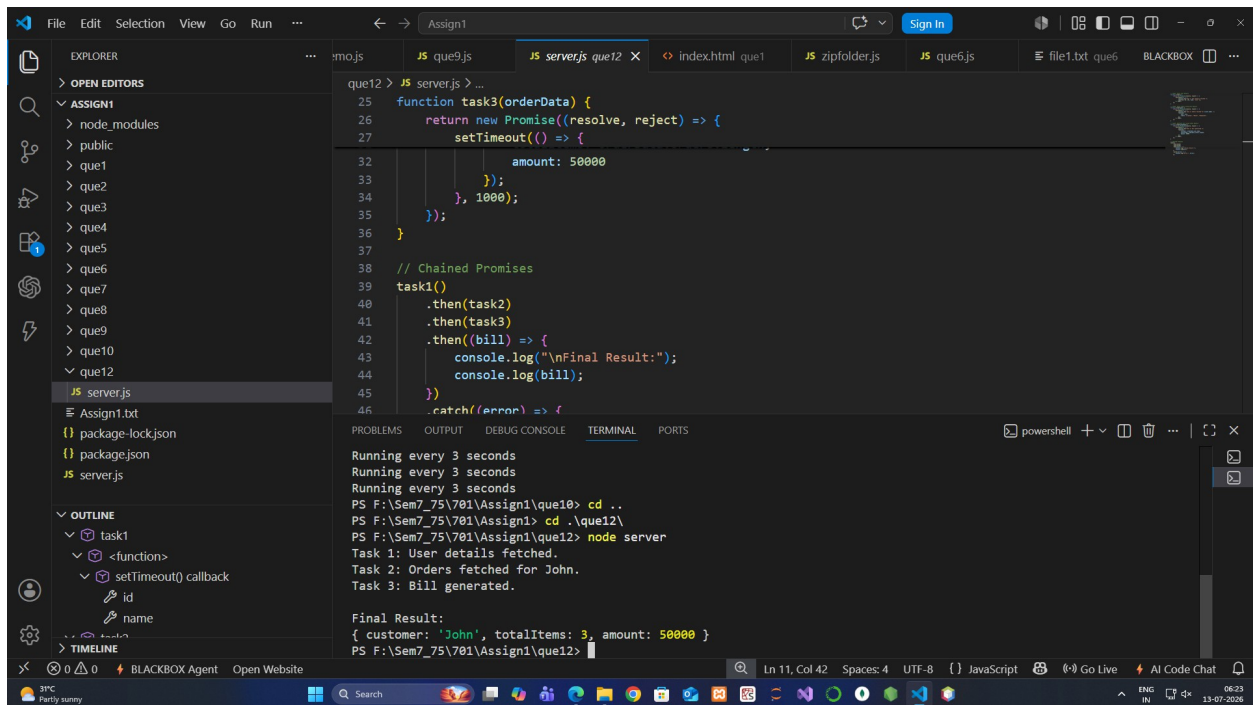

The screenshot shows a Visual Studio Code editor window with a file explorer on the left and a terminal at the bottom. The file explorer shows a project structure with a folder named 'ASSIGN1' containing several files, including 'server.js'. The 'server.js' file is open in the editor, showing a JavaScript function 'task3' that returns a Promise. The function uses 'setTimeout' to simulate a delay. The terminal window shows the output of running the 'node server' command, displaying the final result of the task.

```
25 function task3(orderData) {
26   return new Promise((resolve, reject) => {
27     setTimeout(() => {
32       amount: 50000
33     });
34   }, 1000);
35 });
36 }
37
38 // Chained Promises
39 task1()
40   .then(task2)
41   .then(task3)
42   .then((bill) => {
43     console.log("\nFinal Result:");
44     console.log(bill);
45   })
46   .catch((error) => {
```

Running every 3 seconds
Running every 3 seconds
Running every 3 seconds
PS F:\Sem7_75\701\Assign1\que10> cd ..
PS F:\Sem7_75\701\Assign1> cd .\que12\
PS F:\Sem7_75\701\Assign1\que12> node server
Task 1: User details fetched.
Task 2: Orders fetched for John.
Task 3: Bill generated.

Final Result:
{ customer: 'John', totalItems: 3, amount: 50000 }
PS F:\Sem7_75\701\Assign1\que12>