



Building Java Programs


Supplement 3G: Graphics

Chapter outline

- drawing 2D graphics
 - `DrawingPanel` and `Graphics` objects
 - drawing and filling shapes
 - coordinate system
 - colors
 - drawing with loops
 - drawing with parameterized methods
 - basic animation

Graphical objects

- We will draw graphics using these classes of objects:
 - `DrawingPanel`: A window on the screen.
 - This is not part of Java; it is provided by the authors.
 - `Graphics`: A "pen" that can draw shapes/lines onto a window.
 - `Color`: The colors that indicate what color to draw our shapes.

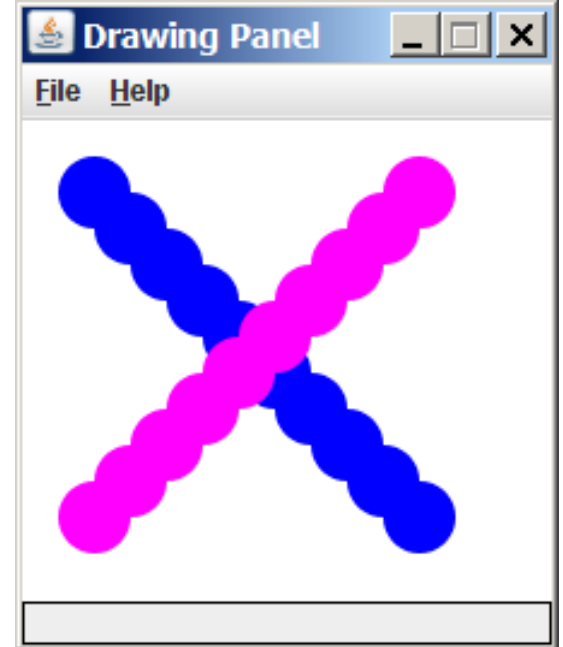

DrawingPanel


- To create a window, construct a `DrawingPanel` object:

```
DrawingPanel <name> = new DrawingPanel(<width>, <height>);
```

Example:

```
DrawingPanel panel = new DrawingPanel(300, 200);
```

- The window has nothing on it.
 - But we can draw shapes and lines on it using another object of a class named `Graphics`.

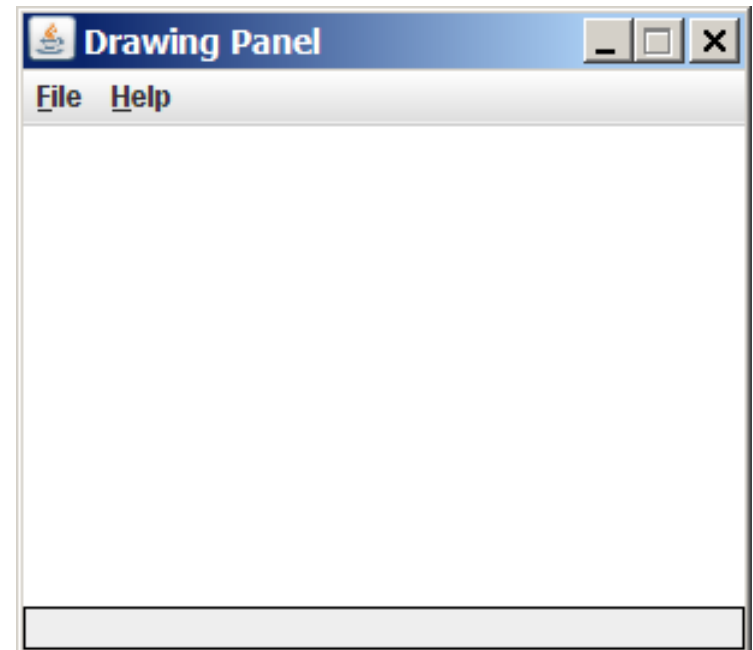

Graphics

- Shapes are drawn using an object of class `Graphics`.

- You must place an import declaration in your program:

```
import java.awt.*;
```

- Access it by calling `getGraphics` on your `DrawingPanel`.

- Example:


```
Graphics g = panel.getGraphics();
```

- Once you have the `Graphics` object, draw shapes by calling its methods.

- Example:

```
g.fillRect(10, 30, 60, 35);
```

```
g.fillOval(80, 40, 50, 70);
```

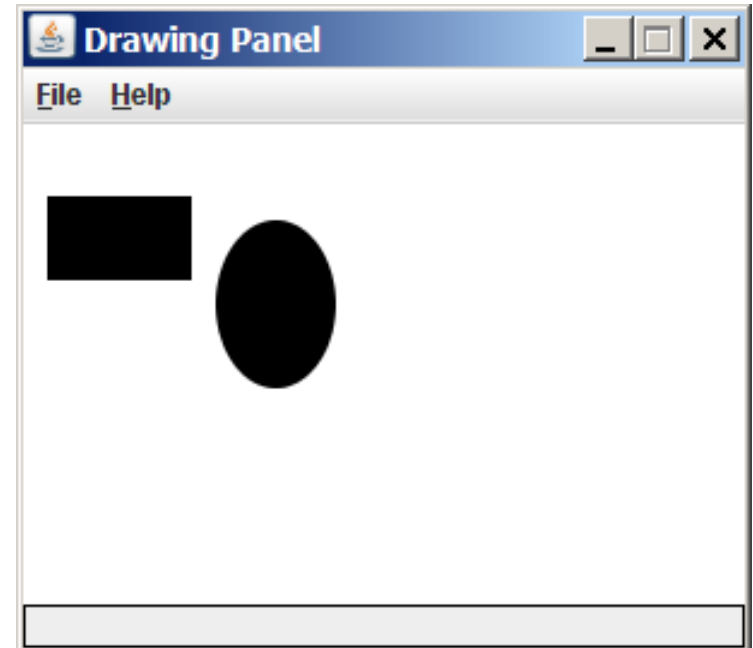


Graphics methods

Method name	Description
<code>drawLine(<i>x1</i>, <i>y1</i>, <i>x2</i>, <i>y2</i>)</code>	line between points (<i>x1</i> , <i>y1</i>), (<i>x2</i> , <i>y2</i>)
<code>drawOval(<i>x</i>, <i>y</i>, <i>width</i>, <i>height</i>)</code>	draws outline of largest oval that fits in a box of size <i>width</i> * <i>height</i> with top-left corner at (<i>x</i> , <i>y</i>)
<code>drawRect(<i>x</i>, <i>y</i>, <i>width</i>, <i>height</i>)</code>	draws outline of rectangle of size <i>width</i> * <i>height</i> with top-left corner at (<i>x</i> , <i>y</i>)
<code>drawString(<i>text</i>, <i>x</i>, <i>y</i>)</code>	writes text with bottom-left corner at (<i>x</i> , <i>y</i>)
<code>fillOval(<i>x</i>, <i>y</i>, <i>width</i>, <i>height</i>)</code>	fills largest oval that fits in a box of size <i>width</i> * <i>height</i> with top-left corner at (<i>x</i> , <i>y</i>)
<code>fillRect(<i>x</i>, <i>y</i>, <i>width</i>, <i>height</i>)</code>	fills rectangle of size <i>width</i> * <i>height</i> with top-left corner at (<i>x</i> , <i>y</i>)
<code>setColor(<i>Color</i>)</code>	Sets <code>Graphics</code> to paint subsequent shapes in the given color

Coordinate system


- Each (x, y) position on the `DrawingPanel` is represented by a *pixel* (short for "picture element").
- The origin $(0, 0)$ is at the window's top-left corner.
 - x increases rightward and the y increases downward
 - The y is reversed from what you may expect.
- The rectangle from $(0, 0)$ to $(200, 100)$ looks like this:

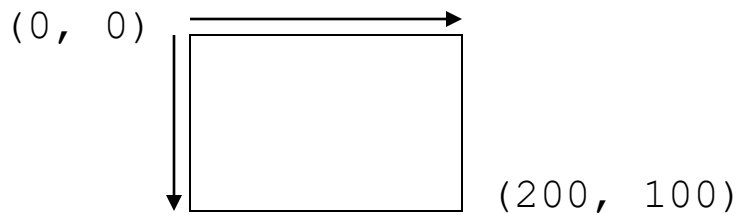

A complete program

```
import java.awt.*;

public class DrawingExample1 {
    public static void main(String[] args) {
        DrawingPanel panel = new DrawingPanel(300, 200);
        Graphics g = panel.getGraphics();
        g.fillRect(10, 30, 60, 35);
        g.fillOval(80, 40, 50, 70);
    }
}
```


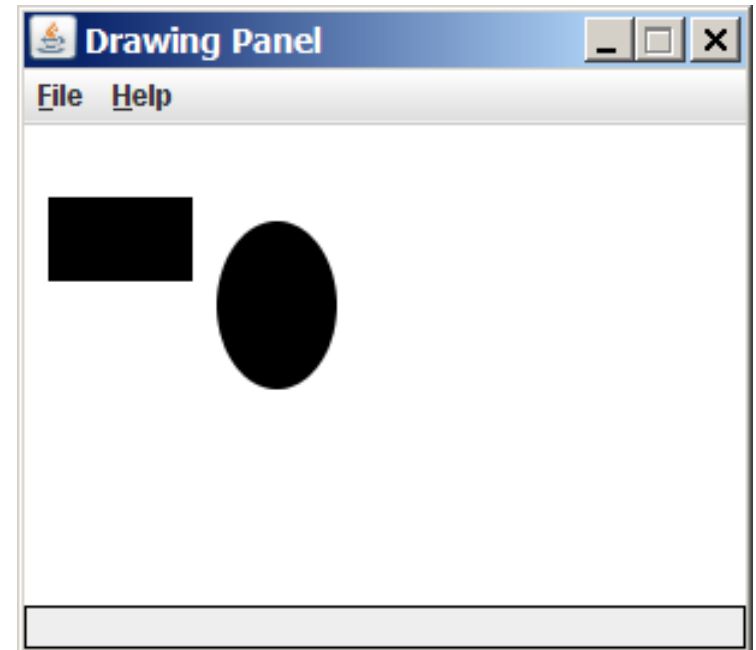


Colors

- Colors are specified by `Color` class constants named: `BLACK`, `BLUE`, `CYAN`, `DARK_GRAY`, `GRAY`, `GREEN`, `LIGHT_GRAY`, `MAGENTA`, `ORANGE`, `PINK`, `RED`, `WHITE`, `YELLOW`
 - Pass these to the `Graphics` object's `setColor` method.
 - Example:

```
g.setColor(Color.BLACK) ;  
g.fillRect(10, 30, 100, 50) ;  
g.setColor(Color.RED) ;  
g.fillOval(60, 40, 40, 70) ;
```
- The background color can be set by calling `setBackground` on the `DrawingPanel`:
 - Example:

```
panel.setBackground(Color.YELLOW) ;
```

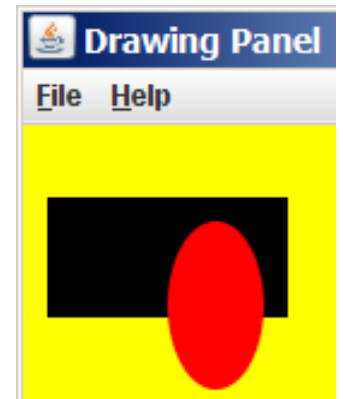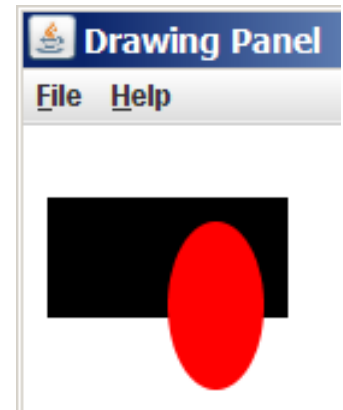

Superimposing shapes

- Drawing one shape on top of another causes the last shape to appear on top of the previous one(s).


```
import java.awt.*;

public class DrawCar {
    public static void main(String[] args) {
        DrawingPanel panel = new DrawingPanel(200, 100);
        panel.setBackground(Color.LIGHT_GRAY);
        Graphics g = panel.getGraphics();

        g.setColor(Color.BLACK);
        g.fillRect(10, 30, 100, 50);

        g.setColor(Color.RED);
        g.fillOval(20, 70, 20, 20);
        g.fillOval(80, 70, 20, 20);

        g.setColor(Color.CYAN);
        g.fillRect(80, 40, 30, 20);
    }
}
```

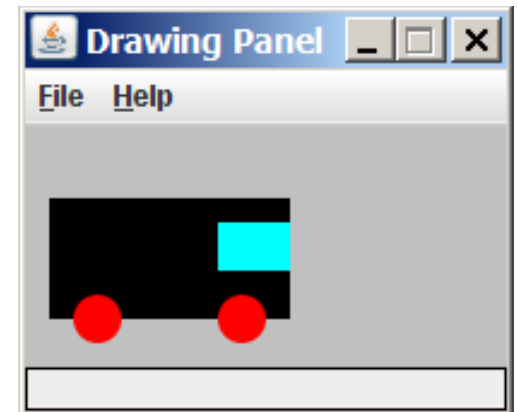

Custom colors


- It is also legal to construct a `Color` object of your own.
 - Colors are specified by three numbers (`ints` from 0 to 255) representing the amount of red, green, and blue.
 - Computers use red-green-blue or "RGB" as primary colors.

- Example:

```
DrawingPanel panel = new DrawingPanel(80, 50);
```

```
Color brown = new Color(192, 128, 64);
```

```
panel.setBackground(brown);
```

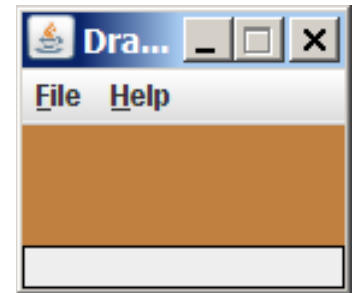

- or:

```
DrawingPanel panel = new DrawingPanel(80, 50);
```


```
panel.setBackground(new Color(192, 128, 64));
```

Drawing with loops

- We can draw many repetitions of the same item at different x/y positions with `for` loops.
 - The x or y expression contains the loop counter, `i`, so that in each pass of the loop, when `i` changes, so does x or y.

```
DrawingPanel panel = new DrawingPanel(400, 300);  
panel.setBackground(Color.YELLOW);  
Graphics g = panel.getGraphics();
```

```
g.setColor(Color.RED);  
for (int i = 1; i <= 10; i++) {  
    g.fillOval(100 + 20 * i,  
              5 + 20 * i, 50, 50);  
}  
  
g.setColor(Color.BLUE);  
for (int i = 1; i <= 10; i++) {  
    g.drawString("Hello, world!",  
                150 - 10 * i, 200 + 10 * i);  
}
```

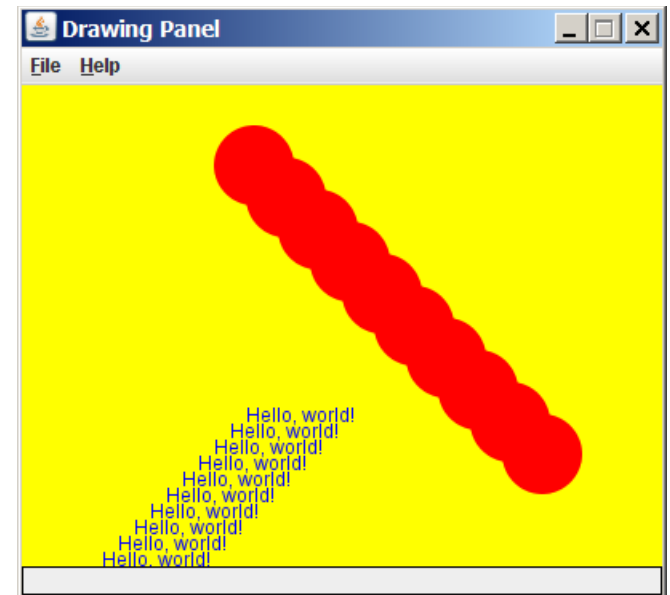


Loops to change shape's size

A for loop can also vary a shape's size:

```
import java.awt.*;


public class DrawCircles {
    public static void main(String[] args) {
        DrawingPanel panel = new DrawingPanel(250, 220);
        Graphics g = panel.getGraphics();
        g.setColor(Color.MAGENTA);
        for (int i = 1; i <= 10; i++) {
            g.drawOval(30, 5, 20 * i, 20 * i);
        }
    }
}
```

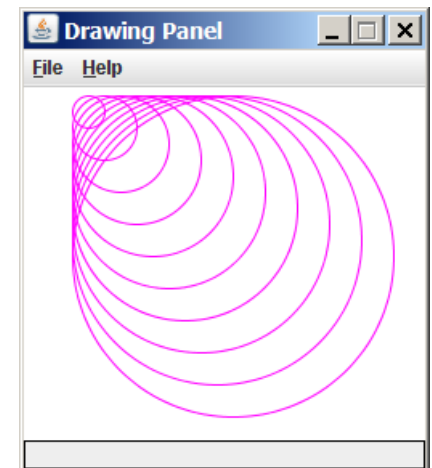

A loop that varies both

- The loop in this program affects both the size and shape of the figures being drawn.
 - Each pass of the loop, the square drawn becomes 20 pixels smaller in size, and shifts 10 pixels to the right.

```
DrawingPanel panel = new DrawingPanel(250, 200);
Graphics g = panel.getGraphics();
for (int i = 1; i <= 10; i++) {
    g.drawRect(20 + 10 * i, 5,
               200 - 20 * i, 200 - 20 * i);
}
```

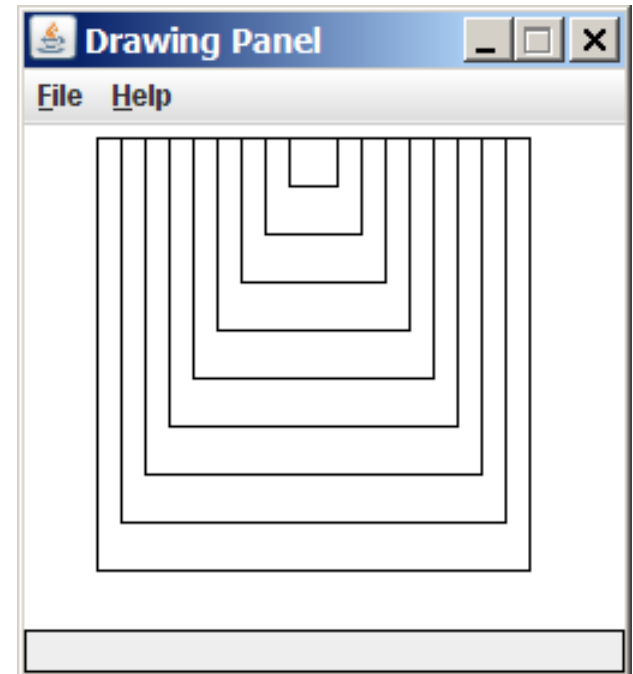

Drawing example 2

What sort of figure does the following code draw?


```
import java.awt.*;

public class DrawingExample2 {
    public static final int NUM_CIRCLES = 10;

    public static void main(String[] args) {
        DrawingPanel panel = new DrawingPanel(220, 200);
        Graphics g = panel.getGraphics();

        g.setColor(Color.BLUE);
        for (int i = 1; i <= NUM_CIRCLES; i++) {
            g.fillOval(15 * i, 15 * i, 30, 30);
        }

        g.setColor(Color.MAGENTA);
        for (int i = 1; i <= NUM_CIRCLES; i++) {
            g.fillOval(15 * (NUM_CIRCLES
                + 1 - i), 15 * i, 30, 30);
        }
    }
}
```

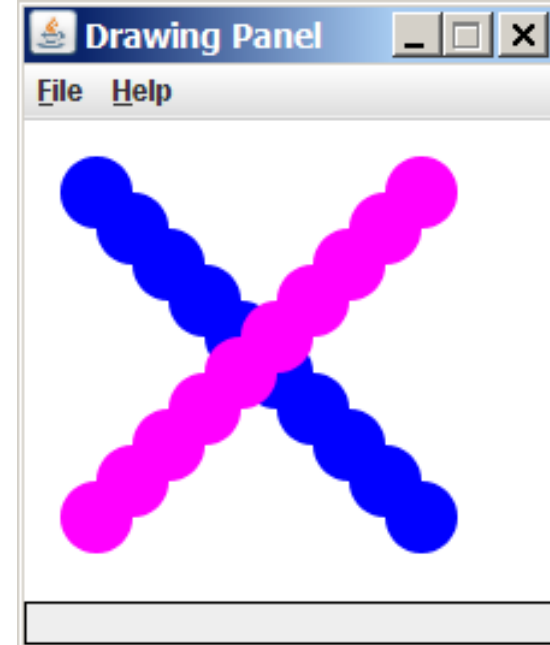


Loops that begin at 0

- Often with graphics (and loops in general), we begin our count at 0 and use `<` instead of `<=`.
 - A loop that repeats from 0 to `< 10` still repeats 10 times, just like a loop that repeats from 1 to `<= 10`.
 - But when the loop counter variable `i` is used to set the figure's coordinates, often starting at 0 gives the coordinates we want.
- Example: Draw ten stacked rectangles starting at (20, 20), height 10, with widths that start at 100 and decrease by 10 each time:



```
DrawingPanel panel = new DrawingPanel(160, 160);
Graphics g = panel.getGraphics();

for (int i = 0; i < 10; i++) {
    g.drawRect(20, 20 + 10 * i,
               100 - 10 * i, 10);
}
```

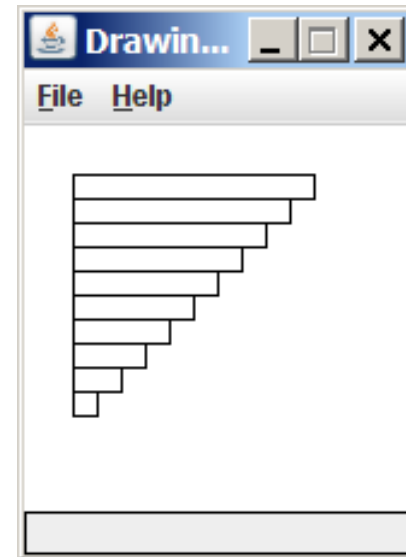

Drawing w/ loops questions


- Write variations of the preceding program that draw the figures at right as output.

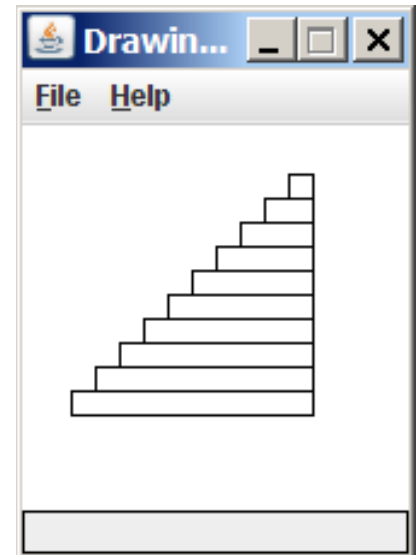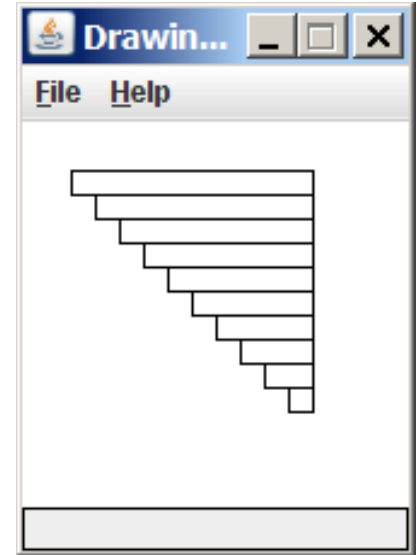

Drawing w/ loops answers


■ Solution #1:

```
Graphics g = panel.getGraphics();  
for (int i = 0; i < 10; i++) {  
    g.drawRect(20 + 10 * i, 20 + 10 * i,  
               100 - 10 * i, 10);  
}
```

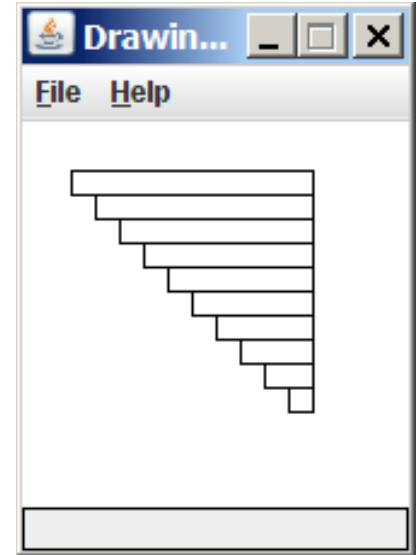

■ Solution #2:

```
Graphics g = panel.getGraphics();  
for (int i = 0; i < 10; i++) {  
    g.drawRect(110 - 10 * i, 20 + 10 * i,  
               10 + 10 * i, 10);  
}
```

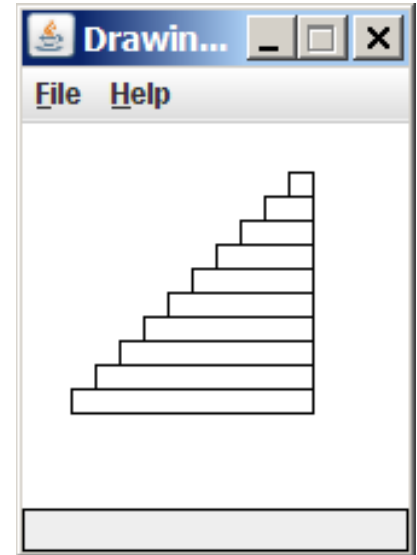

Drawing with methods

- It is possible to draw graphics in multiple methods.
 - Since you'll need to send commands to the `Graphics g` to draw the figure, you should pass `Graphics g` as a parameter.


```
import java.awt.*;

public class DrawCar {
    public static void main(String[] args) {
        DrawingPanel panel = new DrawingPanel(200, 100);
        panel.setBackground(Color.LIGHT_GRAY);
        Graphics g = panel.getGraphics();
        drawCar(g);
    }

    public static void drawCar(Graphics g) {
        g.setColor(Color.BLACK);
        g.fillRect(10, 30, 100, 50);


        g.setColor(Color.RED);
        g.fillOval(20, 70, 20, 20);
        g.fillOval(80, 70, 20, 20);

        g.setColor(Color.CYAN);
        g.fillRect(80, 40, 30, 20);
    }
}
```

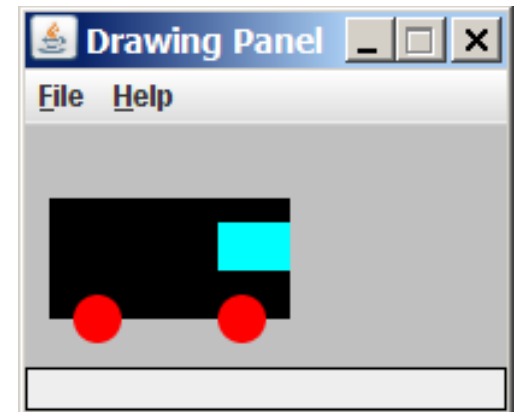

Parameterized figures

- If you want to draw the same figure many times, write a method to draw that figure and accept the x/y position as parameters.
 - Adjust the x/y coordinates of your drawing commands to take into account the parameters.
- Exercise:
Modify the previous car-drawing method to work at any location, so that it can produce an image such as the following:
 - One car's top-left corner is at (10, 30).
 - The other car's top-left corner is at (150, 10).

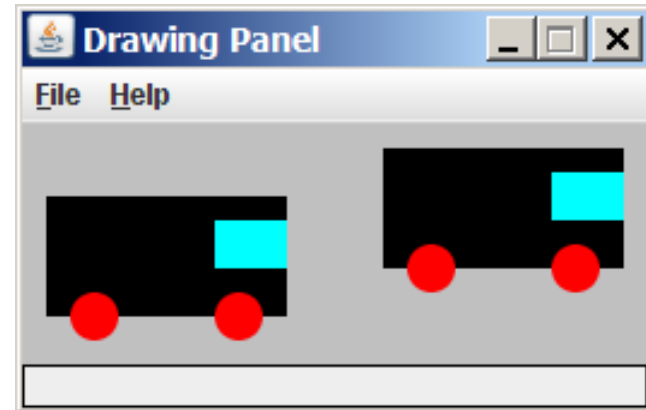

Drawing parameters answer


```
import java.awt.*;

public class DrawingWithParameters {
    public static void main(String[] args) {
        DrawingPanel panel = new DrawingPanel(260, 100);
        panel.setBackground(Color.LIGHT_GRAY);
        Graphics g = panel.getGraphics();
        drawCar(g, 10, 30);
        drawCar(g, 150, 10);
    }

    public static void drawCar(Graphics g, int x, int y) {
        g.setColor(Color.BLACK);
        g.fillRect(x, y, 100, 50);


        g.setColor(Color.RED);
        g.fillOval(x + 10, y + 40, 20, 20);
        g.fillOval(x + 70, y + 40, 20, 20);

        g.setColor(Color.CYAN);
        g.fillRect(x + 70, y + 10, 30, 20);
    }
}
```

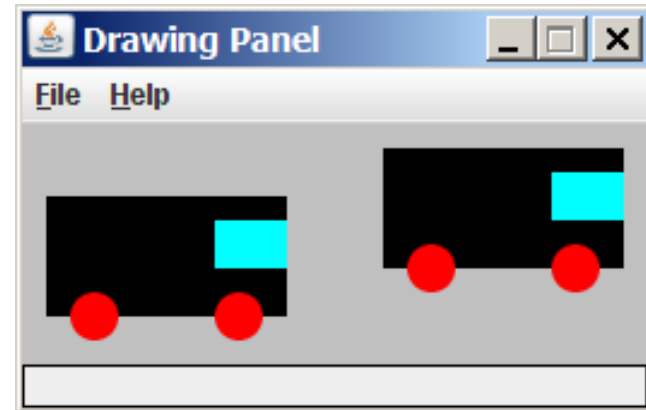

Drawing parameter question

- Methods can accept any number of parameters to adjust the figure's appearance.
- Exercise:
Write a new version of the `drawCar` method that allows the cars to be drawn at any size, such as the following:

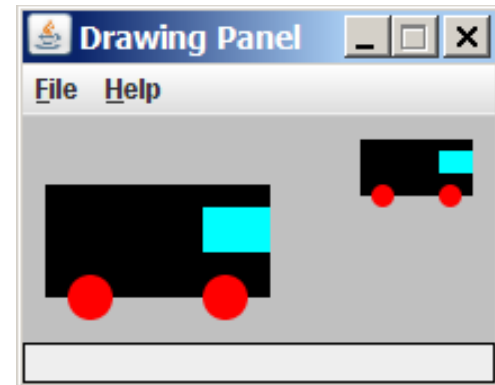

Drawing parameter solution

```
import java.awt.*;


public class DrawingWithParameters2 {
    public static void main(String[] args) {
        DrawingPanel panel = new DrawingPanel(210, 100);
        panel.setBackground(Color.LIGHT_GRAY);

        Graphics g = panel.getGraphics();
        drawCar(g, 10, 30, 100);
        drawCar(g, 150, 10, 50);
    }

    public static void drawCar(Graphics g, int x, int y, int size) {
        g.setColor(Color.BLACK);
        g.fillRect(x, y, size, size / 2);


        g.setColor(Color.RED);
        g.fillOval(x + size / 10, y + 2 * size / 5,
                  size / 5, size / 5);
        g.fillOval(x + 7 * size / 10, y + 2 * size / 5,
                  size / 5, size / 5);

        g.setColor(Color.CYAN);
        g.fillRect(x + 7 * size / 10, y + size / 10,
                  3 * size / 10, size / 5);
    }
}
```

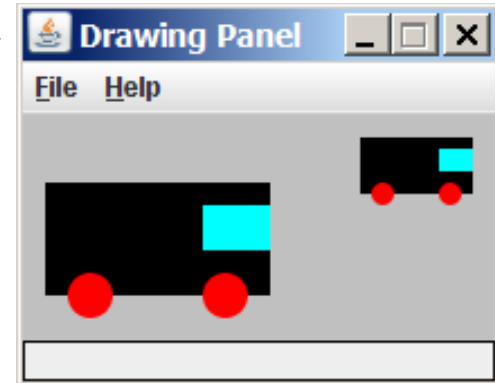

Parameterized figure exercise

- Write a program that will display the following figures on a drawing panel of size 300x400:
 - top-left figure:
 - overall size = 100
 - top-left corner = (10, 10)
 - inner rectangle and oval size = 50
 - inner top-left corner = (35, 35)
 - top-right figure:
 - overall size = 60
 - top-left corner = (150, 10)
 - inner rectangle and oval size = 30
 - inner top-left corner = (165, 25)
 - bottom figure:
 - overall size = 140
 - top-left corner = (60, 120)
 - inner rectangle and oval size = 70
 - inner top-left corner = (95, 155)

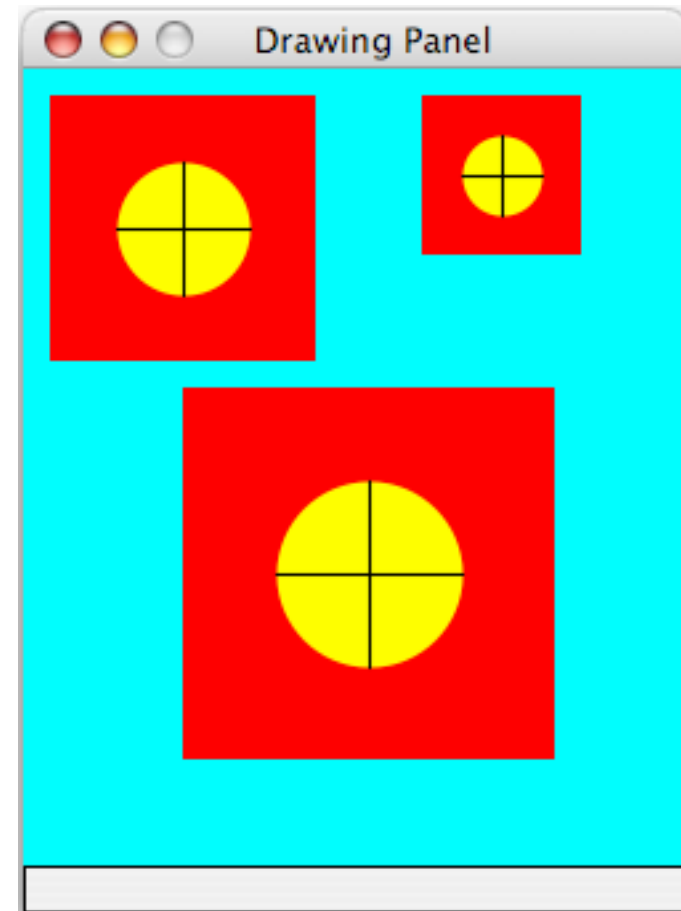

Parameterized figure answer

```
// Draws several parameterized circle figures.
import java.awt.*;

public class DrawFigures {
    public static void main(String[] args) {
        DrawingPanel panel = new DrawingPanel(400, 400);
        panel.setBackground(Color.CYAN);
        Graphics g = panel.getGraphics();
        drawFigure(g, 10, 10, 100);
        drawFigure(g, 150, 10, 60);
        drawFigure(g, 60, 120, 140);
    }

    // parameterize one piece at a time / one parameter at a time
    public static void drawFigure(Graphics g, int x, int y, int size) {
        g.setColor(Color.RED);
        g.fillRect(x, y, size, size);
        g.setColor(Color.YELLOW);
        g.fillOval(x + size / 4, y + size / 4, size / 2, size / 2);
        g.setColor(Color.BLACK);
        g.drawLine(x + size / 4, y + size / 2,
                  x + size * 3 / 4, y + size / 2);
        g.drawLine(x + size / 2, y + size / 4,
                  x + size / 2, y + size * 3 / 4);
    }
}
```

Animation with sleep

- `DrawingPanel` has a method named `sleep` that pauses your program for a given number of milliseconds.
- You can use `sleep` to produce simple animations.

```
DrawingPanel panel = new DrawingPanel(250, 200);  
Graphics g = panel.getGraphics();
```

```
g.setColor(Color.BLUE);  
for (int i = 1; i <= NUM_CIRCLES; i++) {  
    g.fillOval(15 * i, 15 * i, 30, 30);  
    panel.sleep(500);  
}
```

- Try adding `sleep` commands to loops in past exercises in this chapter and watch the panel draw itself piece by piece.

Drawing polygons

- Polygon objects represent arbitrary shapes.
 - Add points to a Polygon using its `addPoint(x, y)` method.

- Example:

```
DrawingPanel p = new DrawingPanel(100, 100);  
Graphics g = p.getGraphics();  
Polygon poly = new Polygon();  
poly.addPoint(10, 90);  
poly.addPoint(50, 10);  
poly.addPoint(90, 90);  
g.setColor(Color.GREEN);  
g.fillPolygon(poly);
```

