


String

205 Isomorphic String

s = egg, t = add

Rough

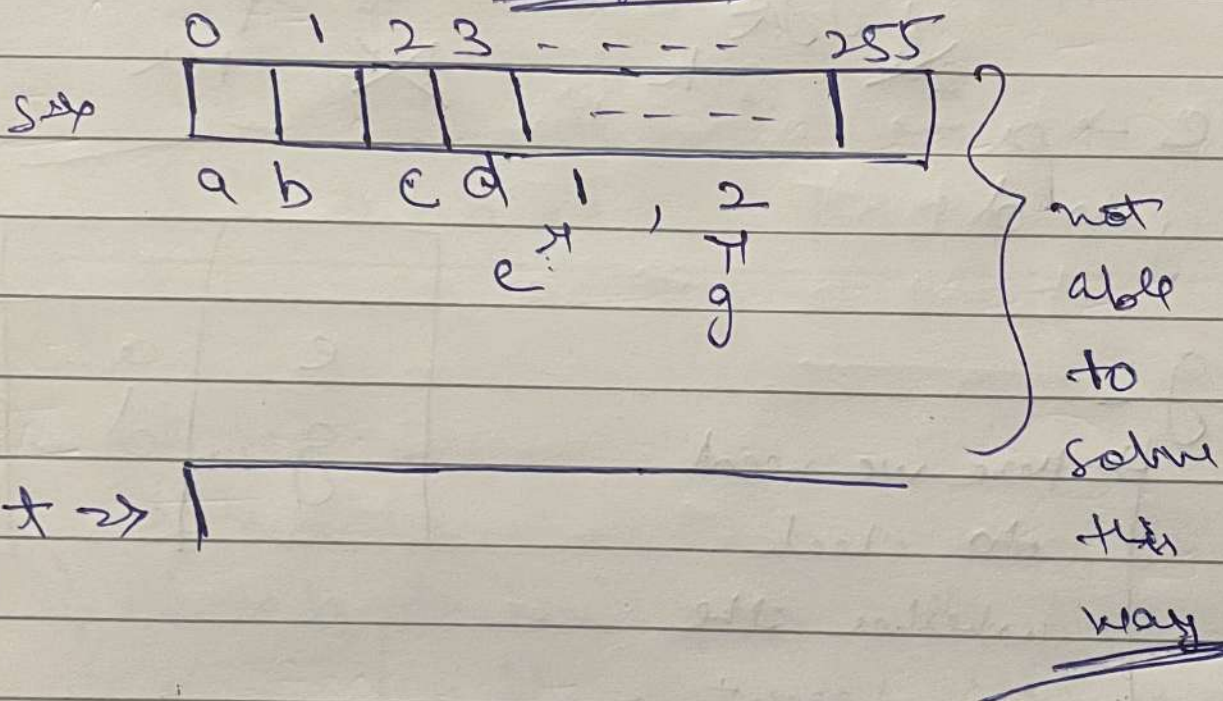

map

char	cnt		
e	1	a	1
g	2	d	2

if

Dry Run

IMP***

Case I

~~After study case~~

After study case
to submit the code
successfully
you need to

S → egg

~~sch~~ sch

T → adel

~~tch~~ tch

e → a

g → d

(I)

(II)

g

→ Here we need
to check
whether the
g is present
or not

→ In this case g is present
in the Map. so we need
to whether

tch == Map.get(sch)

d == d which is get
by Map?

if this is

true continue

e	a
g	d

else

if ch != Map.get(sch)

↳ return false;

Case II

Imp case where the
test case fail

S → a b a d c | T → b a b e

(I)

b → b

(II)

a → a

(III)

d → b

How to

solve

We need
to use

two map

and store

the relationship in

two way.

↳ here the code fail
if we use one Map.
Because they see only
one way relationship
But we need to check
two way Relationship



C

Map 1

char	char
b	b
a	a

Map 2

char	char
b	b
a	a

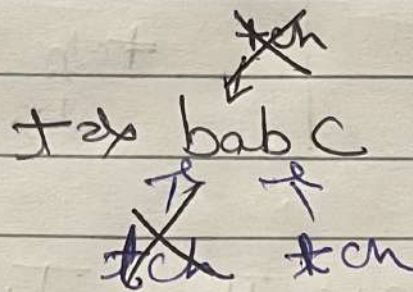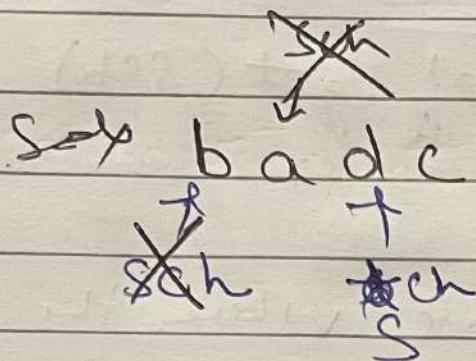

d → no relation

But

b → b

→ So we directly return false on this condition
→ In question also have condition

Edge Case

Code →

if (s.length() != t.length())
return false;

boolean helper (String s, String t) {
Map<Character, Character> mapS = new
HashMap<>();

Map<Character, Character> mapT = new
HashMap<>();

for (int i = 0; i < s.length(); i++) {

char sch = s.charAt(i);

char tch = t.charAt(i);

d = no relation

if ((mapS.containsKey(sch) && mapS.get(sch)
!= tch) ||

b → b

(mapT.containsKey(tch) && mapT.get(tch)
!= sch)) {

return false;

maps.put (sch, tch);

map & T.put (tch, sch);

return true;

2